Experiment - 8

AIM:

TO discover Live host using NMAP scans (ARP, ICMP, TCP/UDP) on tryhackme Platform

Introduction

When targeting a network we need an efficient tool to handle repetitive tasks

This room is first of four in NMAP series:

- # NMAP Live host discovery
- # NMAP basic Port scans
- # NMAP Advanced Port scans
- # NMAP Post Port scans.

Subnetworks:



This figure display two types of subnet

/16 subnets


/24 subnets


From Computer 1

TO Computer 1

Packet type "ARP Request"

Data Computer 6

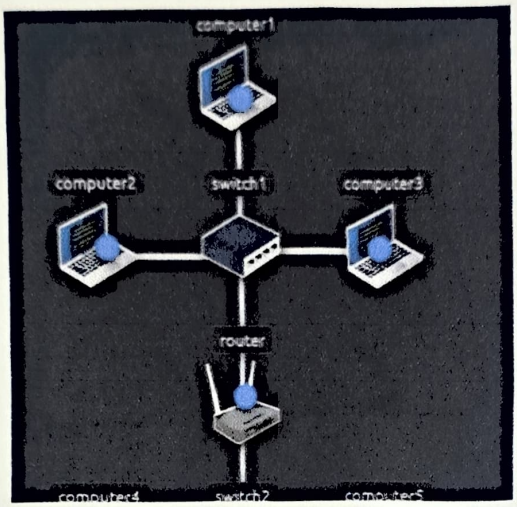

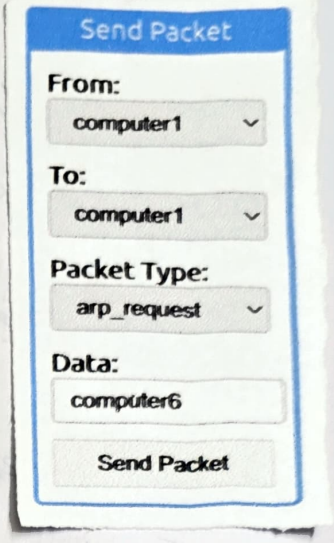



From computer 4

TO Computer 4

Packet Type : "ARP Request"


Data : Computer 6

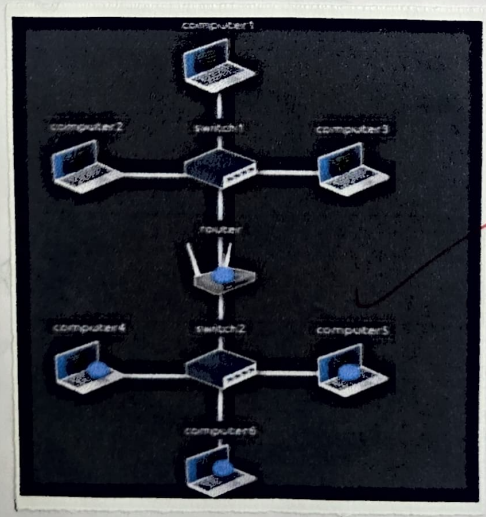

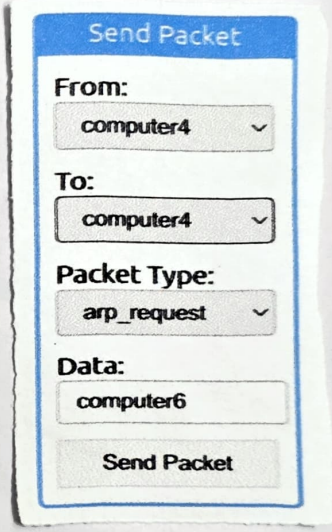


NMAP Host discovery using ARP

When a Privelaged user tries to scan target on local network, NMAP uses ARP request

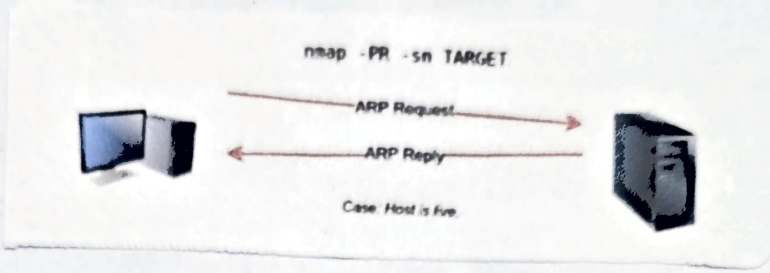

UDP PING:

While deciding UDP Packets to open UDP Port may not trigger a response sending them to closed UDP ports

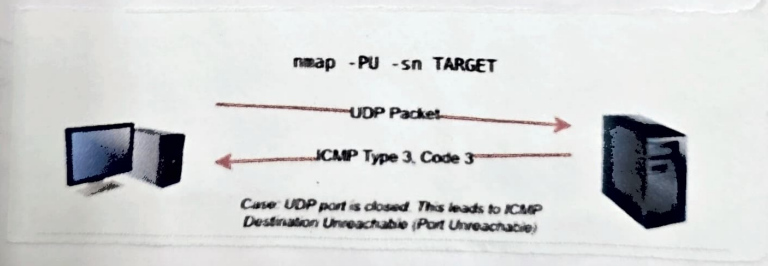

Result:

Thus the requirement has been completed Successfully using tryhackme