SELECTED WORK / RECRUITER READING COLLECTION

From a problem to a considered product.

Srinidhi Bhat / UX Designer

Nineteen studies of product ideas, UX direction, and interaction decisions, grounded in product artifacts and documentation.

I care about the decisions between a problem and an interface: what to prioritise, what a person needs to understand, and what the design asks of the system behind it.

Reading this collection

Each chapter explains the challenge, contribution, approach, three consequential decisions, the delivered scope, and the next evaluation. Early concepts are labelled as concepts. Research counts come from original artifacts; product counts describe product scope. Proposed studies are future work, and historical targets are not presented as achieved results.

A note on this edition

These are retrospective accounts written in October 2026. They connect visible decisions in the original artifacts with my current UX analysis. Product stories describe my ideation and design direction; they do not claim code authorship or framework selection. The original design files are preserved separately, and sources are listed in every chapter.

Read the individual stories online

CONTENTS / CHOOSE A STORY

Arkitype / Make a design system a set of connected decisions.

AppleCider / Keep early ideas easy to change.

PlanIt / Plan for the group without flattening everyone into one schedule.

Earthlog / Give a place a story, without hiding the uncertainty.

HexChess / Teach the unfamiliar board through play.

DashF1 / Keep the race understandable when the data is uneven.

Hued / Turn one colour into a reason to notice the world.

Yuva Panaji / Connect a community's public story to the work behind it.

DeckForge / Recover a deck's structure, then make it useful again.

Vansh Vriksha / Make family connections explorable, and their sources visible.

PreMoney / Make automatic expense tracking correctable.

SoundBox / Let the song wait for the learner.

Wheelie / Coordinate the ride before adding more to the rider's attention.

Matinee / Help a film list become a choice.

BirthSky / Turn a personal moment into a sky you can keep.

ScaleSee / Make a large number feel like a real difference.

Where Would I Be...? / Give deep time one personal point of reference.

The Blog / Make publishing feel like writing.

The Office Games / Make the next person's turn obvious.

Forma / Give every health reading its context.

OhCaptain / Make the next fleet decision clear.

Every chapter is also bookmarked in this PDF.

ARKITYPE / DESIGN SYSTEMS · WORKING PRODUCT

Make a design system a set of connected decisions.

A working design-system studio that links foundations, component behaviour, previews, and exports through one model.


MY CONTRIBUTION / Product idea, design-system UX & interaction direction

SCOPE / Public beta

90	8	Shared
components in the system registry	decision areas	token-to-export model

The challenge

A palette, a component library, and a handoff document can each look convincing while disagreeing with one another. I approached Arkitype as a connected workspace: decisions about colour, type, space, shape, and motion should remain visible in the components and artifacts they produce.

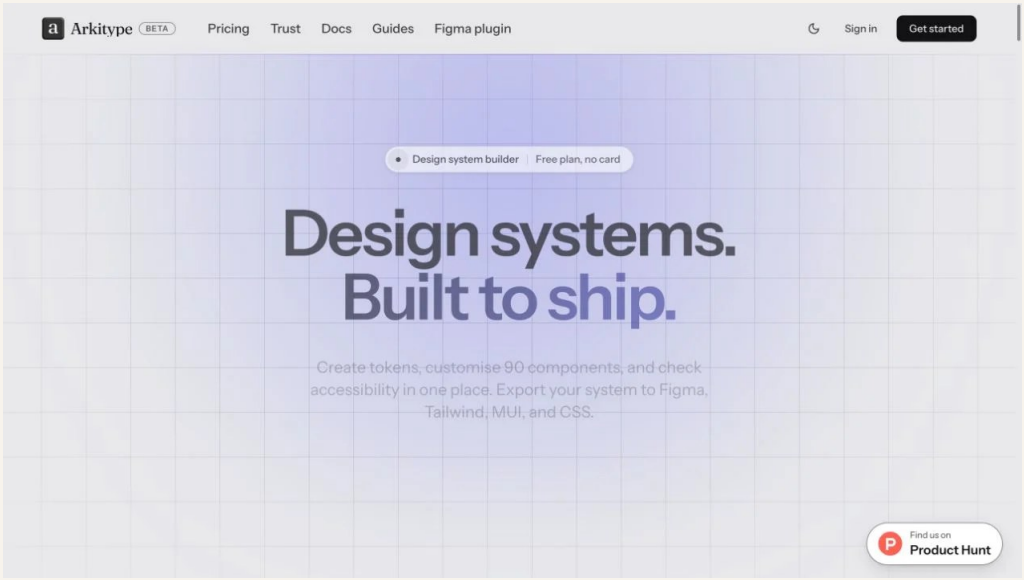

Existing product capture from my portfolio archive.

ARKITYPE / APPROACH & DECISIONS

How I approached it

I framed the workspace around eight connected design areas, rather than a compulsory wizard. A designer should be able to revisit a foundation while considering a component and still understand what depends on that decision.

The UX goal is continuity: foundations, component states, previews, and handoff should feel like parts of one system. The current 90-component library is product scope; it does not establish that a new user understands the workspace.

01 / Use dependencies to guide, rather than enforce a sequence

Foundations, assets, components, and preview remain accessible, with relationships expressed as Built from and Lands in links.

Why it matters. The navigation reflects iterative design work instead of pretending every system starts and ends in the same order.

The trade-off. An open workspace gives less automatic direction. First-use guidance must help a person find a useful starting point.

02 / Keep design changes consistent across surfaces

The preview, component workspace, and handoff reflect the same design decisions.

Why it matters. A change should carry through to the places a team actually uses, rather than depend on repeated manual updates.

The trade-off. A designer needs to know which properties carry through and which need review before handoff.

03 / Let people inspect appearance and behaviour

The studio distinguishes controlled component specimens from interactive previews.

Why it matters. A design system needs comparable states and realistic behaviour. One view cannot do both equally well.

The trade-off. Interactive examples add state and complexity; the underlying specimen must remain predictable for documentation and export.

ARKITYPE / OUTCOME & REFLECTION

What came out of it

The resulting beta connects editable foundations, a component studio, previews, contrast checks, and handoff. My case-study focus is the design continuity between those surfaces. The 90-component scope makes that direction tangible; first-use clarity remains to be evaluated.

What I would do next

The central lesson is that system quality comes from relationships, not inventory. I would evaluate whether a new designer can make a coherent change, understand where it lands, and hand it off without a second interpretation step.

Proposed study: ask a designer to start from one brand colour, adjust a component, and produce a usable handoff. Record confusion, corrections, and output mismatches.

Proposed measure: time to the first coherent system and the number of inconsistencies discovered after export, with a defined task and baseline.

Artifacts & evidence

Repository README and lib/systemAreas.ts
Eight-area navigation, dependency graph, specimen/interactive distinction, beta scope and export pipeline.

lib/componentLanes.ts and docs/GETTING_STARTED.md
Component registry and the documented first-use journey. Reviewed 15 October 2026.

Read the individual web case study

APPLECIDER / DESIGN TOOLS · WORKING PRODUCT

Keep early ideas easy to change.

A sketch-like wireframing workspace that carries rough screens into clickable prototypes and editable handoff artifacts.


MY CONTRIBUTION / Product idea, sketching workflow & interaction design

SCOPE / Working product

250	3	Local
documented library components	sketch styles	browser-owned files

The challenge

Early design conversations can become arguments about polish before the underlying idea is settled. I framed AppleCider around an intentionally unfinished visual language: the speed and social permission of a sketch, with the editing capabilities of a digital workspace.

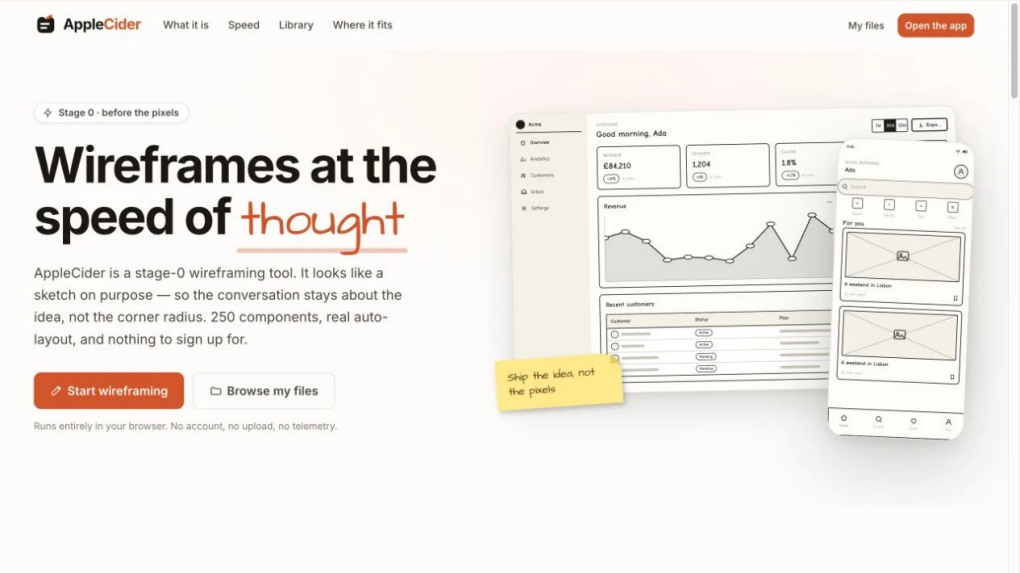

Existing product capture from my portfolio archive.

APPLECIDER / APPROACH & DECISIONS

How I approached it

I separated the experience into a welcoming introduction, a files workspace, and the editing canvas. This gives each moment a clear task: understand the tool, find the work, then explore an idea.

The design loop is sketch, revise, demonstrate, and hand off. Components, undo, snapping, links, and export matter because they let someone change their mind without starting again. Formal user validation remains a next step.

01 / Make the unfinished quality deliberate

Wobbly strokes, a sketch-like type treatment, and three visual styles preserve a low-fidelity feel.

Why it matters. The interface should invite changes to the idea before encouraging arguments about pixel-level finish.

The trade-off. A sketch aesthetic can also reduce legibility. Labels, focus states, and interactions still need the clarity of a serious tool.

02 / Keep the work portable

The files surface stores documents locally and supports a plain project-file export, alongside image and vector outputs.

Why it matters. A person should be able to keep and move their work without an account or a proprietary cloud workflow.

The trade-off. Browser storage is device-specific and can be cleared. File ownership needs an understandable backup and export path.

03 / Carry structure into the next artifact

The handoff offers editable output and a written specification, alongside the clickable prototype.

Why it matters. The transition from a rough screen to a working conversation should preserve the decisions already made.

The trade-off. Generated structure is a starting point. Placeholder copy and sketch styling should not be presented as finished product requirements.

APPLECIDER / OUTCOME & REFLECTION

What came out of it

The resulting product connects a sketch canvas, files workspace, clickable prototypes, and handoff formats. The documented 250-component scope supports exploration, while the deliberately unfinished visual language leaves room for revision. My contribution centres on that idea and experience direction.

What I would do next

The most valuable bridge is between fidelity and commitment. A rough interface can still have meaningful structure, and a useful handoff should preserve that structure without inventing design decisions the sketch never made.

Proposed evaluation: give participants an early product idea, ask them to revise it after feedback, and then explain the exported prototype to someone else.

Proposed measure: time to the first understandable screen, effort to revise its structure, and corrections needed after export.

Artifacts & evidence

Repository README and docs/architecture.md
Visual intent, component library, three surfaces, local file model and storage trade-off.

src/io/export.ts and src/store/store.ts
Export and document-state behaviour supporting the documented workflow. Reviewed 15 October 2026.

Read the individual web case study

PLANIT / GROUP PLANNING · WORKING PRODUCT

Plan for the group without flattening everyone into one schedule.

A browser-based itinerary workspace for overlapping plans, different travellers, and different time zones.

MY CONTRIBUTION / Product framing, group-planning journeys & interaction design

SCOPE / Working product


Shared
plan across multiple views

Explicit
board-to-time action

Local
no account required

The challenge

A group trip is not a single ordered checklist. Different people arrive at different times, attend parallel activities, and move between places. I approached PlanIt as several useful views of one plan, with a board for thinking and a time model for checking whether that plan can work.

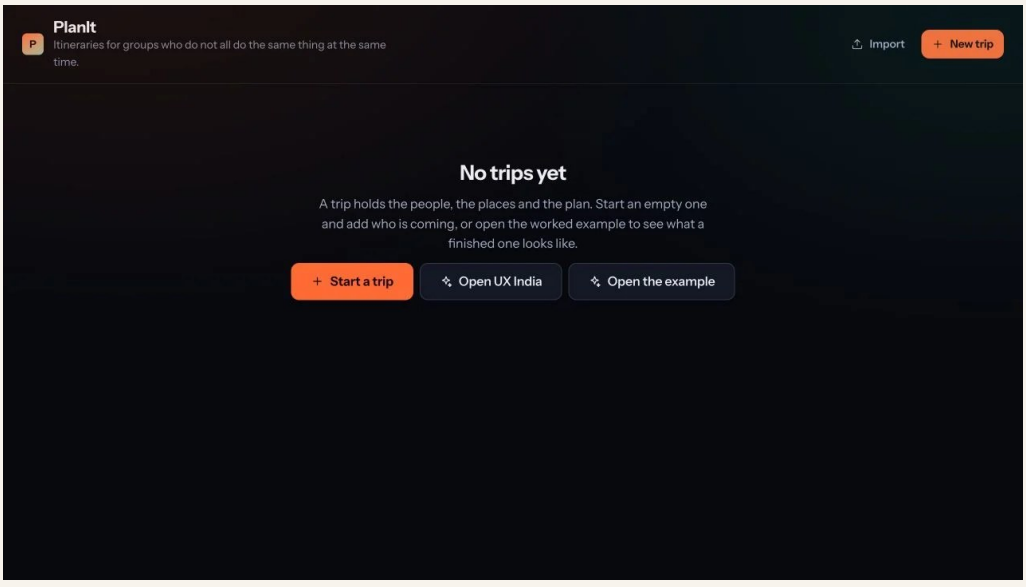

Existing product capture from my portfolio archive.

PLANIT / APPROACH & DECISIONS

How I approached it

I distinguished tentative ideas from scheduled commitments. The canvas supports exploration, while itinerary, timeline, map, and people views help the group understand the consequences of a plan.

The key interaction is the deliberate move from arrangement to schedule. Pins protect an existing commitment; loose ideas can stay undecided. The UX needs to explain what Resolve changes and make conflicts understandable.

01 / Give the board a clear but limited grammar

Day frames, ordering, and connectors convey meaning; loose cards can remain uncommitted ideas.

Why it matters. A planning surface needs room for uncertainty instead of assigning a date and time to everything immediately.

The trade-off. Spatial meaning must be taught. A frame or connector that looks decorative can otherwise change a plan unexpectedly.

02 / Make scheduling an intentional action

Tidy turns the existing itinerary into a board; Resolve reads the board back into the schedule.

Why it matters. A person should know when arrangement becomes a commitment. Automatic rearrangement would undermine the value of a free board.

The trade-off. Two explicit directions add a concept to learn, so the product needs visible feedback about what changed and why.

03 / Protect decisions the planner has already made

Pinned times win, untouched loose cards opt out, and resolution only moves times forward when constraints require it.

Why it matters. Automation should respect existing intent and explain an impossible plan rather than silently rewrite it.

The trade-off. A conservative resolver may leave conflicts unresolved. The interface must help the person decide what to relax.

PLANIT / OUTCOME & REFLECTION

What came out of it

The resulting product brings spatial planning, schedules, maps, and people into a shared trip. Its defining UX contract is deliberate scheduling, protected commitments, and visible conflicts. The next question is whether planners understand that contract when they first encounter it.

What I would do next

The main design contribution is the contract around automation. The useful question is not simply whether the app can assign a time, but whether a planner can predict the change and recover when it conflicts with a real commitment.

Proposed study: plan a trip with parallel sessions, a pinned departure, and travellers in two zones; ask participants to predict Resolve before using it.

Proposed measure: unexpected schedule changes, correctly identified conflicts, and confidence explaining the final plan.

Artifacts & evidence

Repository README
Planning views, board grammar, sharing model and scheduling constraints.

src/core/resolve.ts and src/core/store.ts
Priority of pins, opt-in cards and forward-only resolution. Reviewed 15 October 2026.

Read the individual web case study

EARTHLOG / DATA EXPLORATION · WORKING PRODUCT

Give a place a story, without hiding the uncertainty.

Explore earthquakes, weather, and the night sky from one place on a globe.


MY CONTRIBUTION / Experience framing, information hierarchy & map interactions

SCOPE / Working product

2	Place-led	Labelled
directions of exploration	event context	models and estimates

The challenge

A place can have recent earthquakes, old incident records, current weather, and predicted sky events. Bringing them onto one map makes exploration easier, but can also make very different information look equally current and reliable.

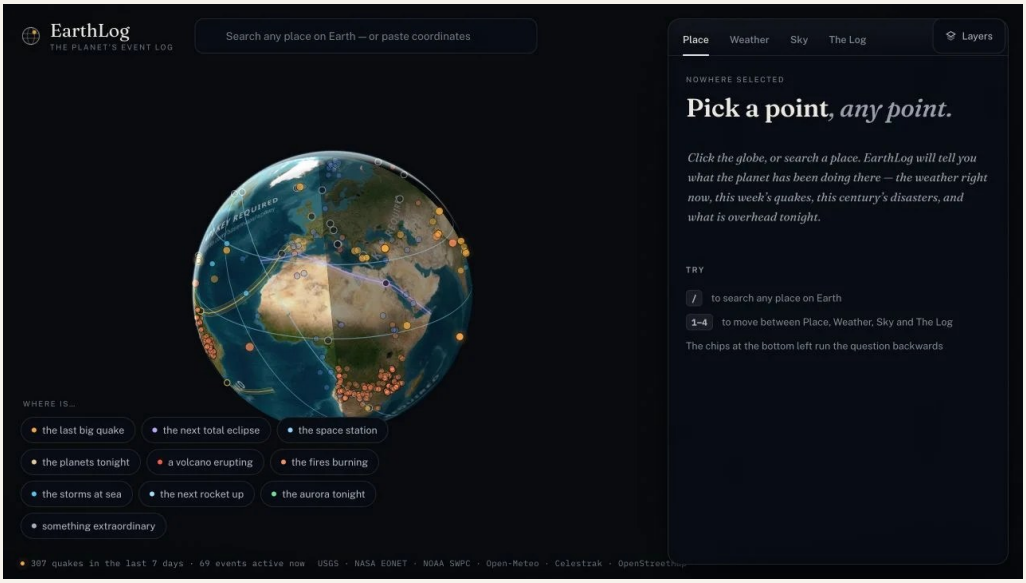

Existing product capture from my portfolio archive.

EARTHLOG / APPROACH & DECISIONS

How I approached it

I framed two ways into exploration: start from a place, or follow an interesting event to its location. Both routes should arrive at a readable local picture, rather than another layer to decode.

Freshness and uncertainty are part of the information hierarchy. An observation, an older open record, and a forecast need different labels so the map does not make them look equally current or certain.

01 / Start with a place or a question

People can search for a place, select the globe, or follow an event shortcut.

Why it matters. Someone may be curious about the latest earthquake without knowing where it happened.

The trade-off. Every route needs to lead back to the same place context.

02 / Show when the information was observed

The documented event model uses observation recency instead of treating every open incident as current.

Why it matters. A source's administrative status can outlive the actual event. The label should communicate what is known.

The trade-off. Freshness rules remain approximations; source links and timestamps must stay visible.

03 / Explain the limits beside the result

Eclipse paths, station passes, and aurora layers carry model limitations in the documented product.

Why it matters. A compelling map should not appear more precise than the calculation behind it.

The trade-off. Caveats can overwhelm the visual story, so they belong beside the relevant result rather than only in documentation.

EARTHLOG / OUTCOME & REFLECTION

What came out of it

The working globe supports both place search and event discovery. Dates, source links, and model limitations are part of the product direction. I would still need to test whether visitors understand those distinctions.

What I would do next

I would judge this experience by whether someone can explain what a result means and where it came from, as well as whether they can find it.

Proposed evaluation: ask visitors to distinguish a recent observation from a modelled forecast and locate the source behind each result.

Proposed measure: correct interpretation of freshness and uncertainty, alongside success finding a relevant local event.

Artifacts & evidence

Repository README, What it answers and Honesty notes
Bidirectional exploration, source freshness and model limitations. Reviewed 15 October 2026.

Read the individual web case study

HEXCHESS / LEARNING & PLAY · WORKING PRODUCT

Teach the unfamiliar board through play.

A 91-cell chess variant designed around guided learning, readable interaction, and games that survive interruptions.


MY CONTRIBUTION / Learning journey, onboarding & game interactions

SCOPE / Working product

91	6	Offline
board cells	guided piece lessons	after first successful load

The challenge

A hexagonal board changes movement patterns enough to make familiar chess knowledge unreliable. I designed HexChess around learning by trying: clear targets, feedback on moves, and a route into untimed practice instead of expecting a beginner to absorb a rules document first.

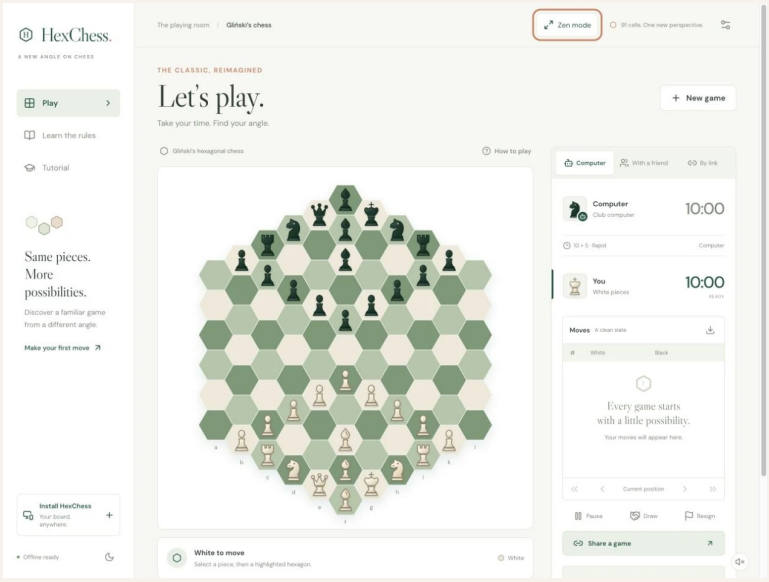

Existing product capture from my portfolio archive.

HEXCHESS / APPROACH & DECISIONS

How I approached it

I connected a six-part introduction to the first practice game. A learner should encounter a rule on the board, try a move, and carry that understanding into play.

I treated interruption and sharing as parts of the experience. A saved game needs a clear return path, and a correspondence link needs to explain that the other person replies with an updated game rather than joins a live room.

01 / Make movement teachable on the board

Lessons give a specific target, neutral markers, retries, and progress based on actual practice.

Why it matters. A learner can connect a rule to a move instead of memorising abstract directions.

The trade-off. Move previews and legal moves serve different purposes; the interface must explain when inspection ignores king safety.

02 / Keep assistance appropriate to the context

Hints and takebacks belong to computer practice; human games remove assistance and pause controls.

Why it matters. Learning support should not silently change the rules of a friendly competitive game.

The trade-off. Assistance rules need to be clear to both players; the interface is not evidence of tournament-grade enforcement.

03 / Describe sharing accurately

Correspondence links carry move history and require an updated reply after a turn.

Why it matters. People should understand whether they are entering a synchronized room or receiving a game snapshot.

The trade-off. Long histories create long URLs, and a shared snapshot is readable by anyone given the link.

HEXCHESS / OUTCOME & REFLECTION

What came out of it

The resulting game offers a 91-cell board, six guided lessons, practice, saved sessions, and correspondence sharing. The design contribution connects the first explanation to the first usable move; improved learning has not been measured.

What I would do next

Good teaching interaction makes a wrong move recoverable. I would evaluate whether someone can transfer what they learned into a first game, rather than treating tutorial completion alone as success.

Proposed study: observe a new player complete a piece lesson and use the same movement unaided in practice.

Proposed checks: reload during a game, resume offline, and exchange a correspondence reply while confirming both players understand the snapshot model.

Artifacts & evidence

Repository README
Learning, board interactions, saves, offline support, sharing boundaries and existing test scope. Reviewed 15 October 2026.

Read the individual web case study

DASHF1 / LIVE DATA · WORKING PRODUCT

Keep the race understandable when the data is uneven.

A race dashboard connecting timing, track context, and replay while distinguishing measured data from estimated positions.

MY CONTRIBUTION / Dashboard hierarchy, driver focus & information design

SCOPE / Working product

1	Live / replay	Estimated
driver focus across panels	distinct data modes	free-feed track positions

The challenge

A race weekend produces more signals than a person can follow at once, and the available feed changes between live and replay sessions. DashF1 uses one shared driver focus across the timing tower, map, and detail views so the dashboard supports a question rather than a wall of independent charts.

The online story links to the working product.

DASHF1 / APPROACH & DECISIONS

How I approached it

I organised the experience around one driver focus. Timing, track context, and detail panels should answer related questions without requiring the same selection repeatedly.

I separated live and replay expectations. When a position is estimated, the label belongs near the moving marker; missing coverage should be understandable at the moment someone tries to use it.

01 / Carry one selection through the dashboard

Choosing a driver updates the relevant map and telemetry context.

Why it matters. The person should not have to repeat the same selection in several panels.

The trade-off. The relationship must remain clear when the selected driver retires or a particular data channel is unavailable.

02 / Let the mode determine the promise

Live mode shows supported channels; fuller replay data becomes available through a separate path.

Why it matters. Missing data should change the interface's promise instead of being replaced with plausible-looking numbers.

The trade-off. A mode change can alter familiar panels, so the dashboard needs an understandable explanation.

03 / Label an estimate at the point of use

The documented free-feed map derives position from mini-sector timing and gaps, and calls it estimated.

Why it matters. Visual continuity is useful, but it should not be mistaken for location precision the feed does not provide.

The trade-off. Race interruptions and stale timing can challenge the estimate; smooth motion must not conceal those limits.

DASHF1 / OUTCOME & REFLECTION

What came out of it

The dashboard brings driver focus, track context, timing, and replay together. The UX direction keeps related panels in context and makes differences in data coverage visible. It does not establish improved race comprehension or precision.

What I would do next

The design lesson is that trust depends on making uneven coverage understandable. A useful dashboard can show less information when it knows less, while still helping a person follow the race.

Proposed study: ask a viewer to follow a battle and explain which values are observed, historical, or estimated.

Proposed checks: missing telemetry, stale updates, interrupted streams, safety-car periods, and the transition back to replay.

Artifacts & evidence

Repository README, What's on screen and Race mode
Layout, shared focus, data-source boundaries and position-estimation limitations. Reviewed 15 October 2026.

Read the individual web case study

HUED / CREATIVE HABITS · WORKING PRODUCT

Turn one colour into a reason to notice the world.

A daily photography prompt with a shared constraint, on-device scoring, and a warm visual language.


MY CONTRIBUTION / Product concept, creative loop & visual direction

SCOPE / Mobile beta

1	48	On-device
shared daily colour	colours in the documented palette	colour scoring

The challenge

A broad prompt to be creative can be harder to act on than a small constraint. Hued gives everyone the same daily colour and asks them to find and photograph it in the real world. The product connects a simple creative action to a repeatable daily rhythm.

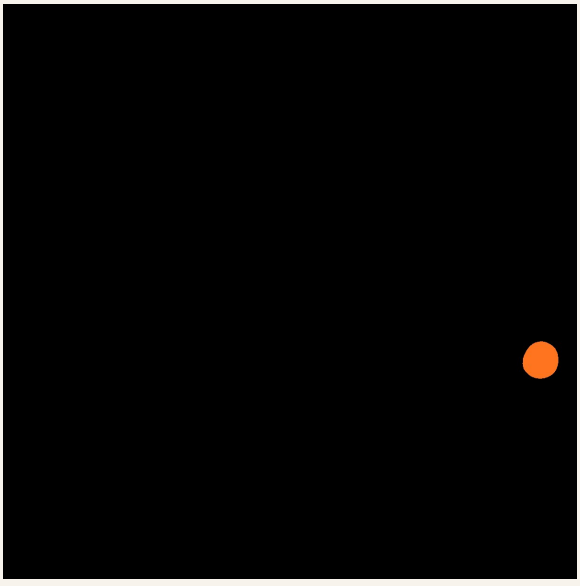

Product identity from my portfolio archive; the online story links to the interactive product.

HUED / APPROACH & DECISIONS

How I approached it

I shaped the concept around one shared colour and a small creative invitation: notice it in the world, photograph it, and see other interpretations. The daily boundary needs a clear local explanation.

A quiet, warm interface keeps the photographs in front. Scores and streaks are supporting feedback; whether they encourage curiosity or pressure is a question for evaluation, not an established habit-formation result.

01 / Make the prompt shared and specific

One date-derived colour creates a common constraint for the day.

Why it matters. A small, concrete invitation can make starting easier and make different responses interesting to compare.

The trade-off. A UTC boundary may feel surprising across time zones; the deadline needs to be understandable locally.

02 / Keep the creative result in the foreground

The feed emphasises photographs within a quiet, warm visual system.

Why it matters. The person's interpretation of the colour should carry more attention than surrounding interface decoration.

The trade-off. Ranking and streaks can compete with exploration; their value needs to be judged from behaviour and feedback.

03 / Treat scoring as guidance with limits

Colour matching runs locally; suspicious-image heuristics are documented as tentative rather than proof.

Why it matters. A score can provide feedback without pretending to reliably determine how an image was made.

The trade-off. Lighting, camera processing, and scene composition affect colour. An unexplained penalty can feel arbitrary.

HUED / OUTCOME & REFLECTION

What came out of it

The mobile beta makes the daily colour loop tangible through a prompt, photographs, feedback, and a shared feed. My contribution is the creative concept and experience direction. Repeat participation and perceived creative value remain to be evaluated.

What I would do next

I would judge this product by whether it encourages satisfying acts of noticing, not just a streak count. The score should help explain the colour challenge without becoming an unquestionable verdict on creativity.

Proposed study: compare how people interpret the prompt and score under different lighting conditions, including whether they understand a low score.

Proposed measure: repeat participation with self-reported creative value; evaluate deadline understanding across time zones.

Artifacts & evidence

Repository README and src/lib/dailyColor.ts
Daily prompt, palette and beta scope.

src/lib/scoring.ts and README limitations
On-device colour evaluation and best-effort heuristics. Reviewed 15 October 2026.

Read the individual web case study

YUVA PANAJI / COMMUNITY OPERATIONS · WORKING PRODUCT

Connect a community's public story to the work behind it.

A community website and operations portal linking event discovery with registration and committee workflows.


MY CONTRIBUTION / Information architecture, registration & volunteer workflows

SCOPE / Working system

2	Public	Private
connected surfaces	events and registration	committee operations

The challenge

A community organisation needs a public account of what it does and a practical way to run the next event. The reviewed Yuva source brings those responsibilities together: public discovery and registration on one side, event administration and committee workflows on the other.

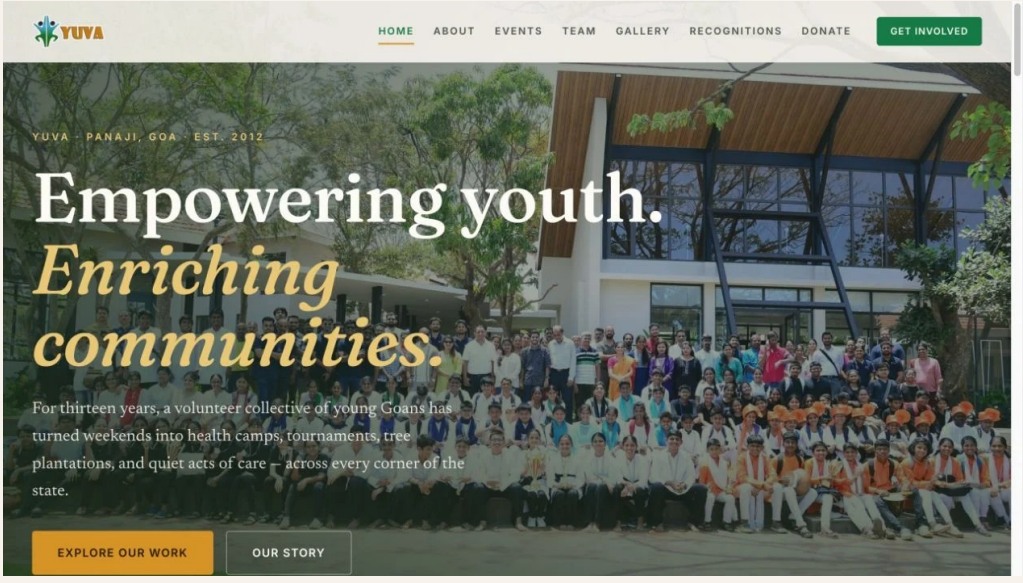

Existing product capture from my portfolio archive.

YUVA PANAJI / APPROACH & DECISIONS

How I approached it

I mapped the service from public event discovery and registration through committee review and the attendance desk. Participants and volunteers need different views of the same event information.

The design priority is continuity: information entered on a registration form should remain useful when a volunteer checks someone in, corrects a record, or prepares a printed list.

01 / Connect discovery to the event's operational record

The public registration journey and admin roster belong to the same event model.

Why it matters. A committee should not have to reinterpret a public sign-up into a separate attendance workflow.

The trade-off. Custom events need flexible fields without making every registration form equally complex.

02 / Give public and committee users different surfaces

Visitors see event and organisation information, while management workflows sit behind admin access.

Why it matters. The interface should reflect different responsibilities and information needs.

The trade-off. A clean separation in navigation is only part of the requirement; permissions and data handling must be verified independently.

03 / Include the work that happens away from the screen

The documented system supports desk attendance sheets and spreadsheet exports.

Why it matters. Community operations often happen at an event desk, where a printable list can be more useful than another dashboard.

The trade-off. Exported files can become stale. The workflow should explain when a printout was produced and how corrections return to the system.

YUVA PANAJI / OUTCOME & REFLECTION

What came out of it

The resulting service connects public information, event registration, and committee operations. The UX contribution follows information into rosters, corrections, exports, and attendance work, extending the journey beyond the public webpage.

What I would do next

The strongest contribution is continuity between a visitor's action and a committee member's next task. I would measure that continuity at real event handoffs, where duplicate entry, missing information, and stale lists become visible.

Proposed evaluation: follow one event from discovery through registration, roster correction, and check-in with both participant and committee perspectives.

Proposed measure: duplicate corrections, incomplete registrations, and handoff effort at the event desk, with a documented baseline.

Artifacts & evidence

Repository README and src/lib/db.js
Current public/admin architecture, event operations and Supabase-backed data layer. Reviewed 15 October 2026.

Read the individual web case study

DECKFORGE / PRESENTATION TOOLS · WORKING PRODUCT

Recover a deck's structure, then make it useful again.

A browser presentation tool that turns PDF drawing instructions into editable objects, animation, and presenting workflows.

MY CONTRIBUTION / Product idea, editing experience & presentation flows

SCOPE / Working product


Editable
reconstructed page objects

40
documented animation presets

Browser
core document processing

The challenge

A PDF preserves how a slide looks but usually loses the convenient objects a presenter wants to edit. DeckForge approaches that gap as a reconstruction problem: recover meaningful text, images, and vector objects, then let a person work with them rather than repainting a screenshot.

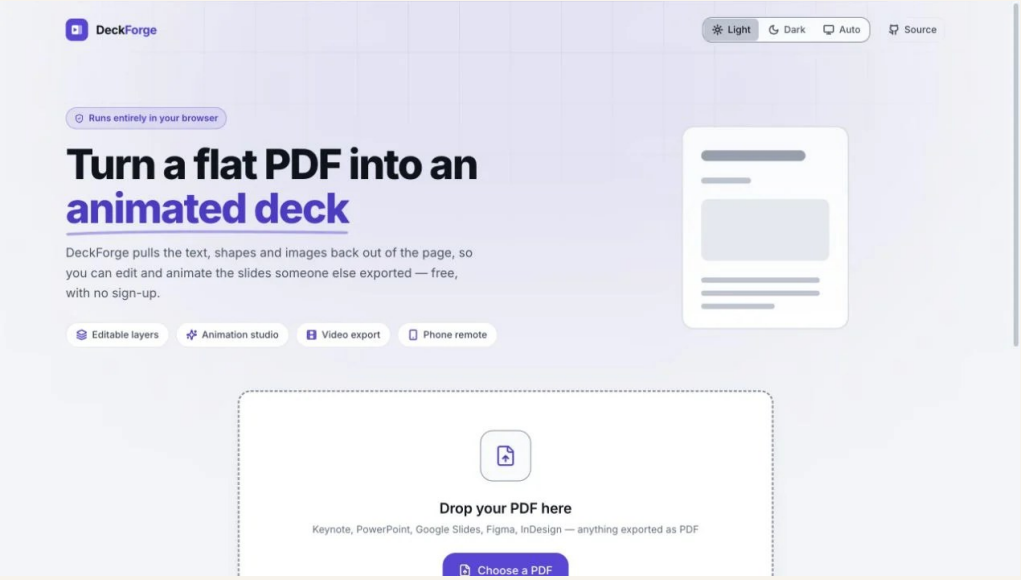

Existing product capture from my portfolio archive.

DECKFORGE / APPROACH & DECISIONS

How I approached it

I framed the editor around objects a presenter can recognise: a text block, a logo, a shape, or a chart. A technically selectable fragment is not useful if its meaning is unclear.

The flow needs to explain what can be edited, preserve a usable slide when recovery is limited, and distinguish live presentation pacing from an exported recording.

01 / Make layers correspond to recognisable objects

Paths are grouped into likely logos, dividers, shapes, and chart series, while text is reconstructed into blocks.

Why it matters. An editable layer is useful only if the person recognises what it represents.

The trade-off. Object recovery is heuristic. Preserving appearance can be more valuable than forcing misleading editability.

02 / Let a presenter control the pace

Animations can wait for an advance action, while timed outputs play sequentially.

Why it matters. A live talk and an exported recording need different behaviour from the same slide.

The trade-off. That difference must be visible before export so the presenter knows what an audience will receive.

03 / Keep the core document workflow local

PDF reconstruction and editing run in the browser; phone pairing has a separate connection mechanism.

Why it matters. Local processing supports a lightweight workflow and avoids requiring a document-upload service.

The trade-off. Phone pairing still uses signalling, and some remote features exchange preview frames. The privacy explanation should distinguish those paths.

DECKFORGE / OUTCOME & REFLECTION

What came out of it

The product connects recovered slide objects with editing, sequencing, presentation, and export. My UX focus is what someone can recognise and do with the recovered content, including the explanation of content that remains an image.

What I would do next

The useful boundary is between faithful recovery and an honest fallback. A tool that explains why part of a page remains an image can be more trustworthy than one that claims every object was successfully recovered.

Proposed benchmark: import a defined set of native-text, scanned, multi-column, and dense-vector PDFs; record editability and visible fidelity separately.

Proposed study: revise a real slide and present it, measuring manual corrections and surprises between editor, audience view, and exported output.

Artifacts & evidence

Repository README, How extraction works and Known limitations
Reconstruction pipeline, presentation model, export boundaries and remote-pairing caveat.

src/engine and src/store
Shared extraction, animation, export and document-state behaviour. Reviewed 15 October 2026.

Read the individual web case study

VANSH VRIKSHA / COMMUNITY KNOWLEDGE · WORKING PRODUCT

Make family connections explorable, and their sources visible.

A community genealogy archive that treats relationships, provenance, and contribution review as parts of the same experience.

MY CONTRIBUTION / Archive concept, relationship exploration & contribution UX

SCOPE / Working archive


Graph
relationship model

Provenance
per-record intent

Reviewed
contribution workflow

The challenge

A family archive is not simply a diagram of names. Relationships can be disputed, spellings vary, and historical records represent some people much better than others. Vansh Vriksha is structured around exploring those connections while preserving the basis for a record.

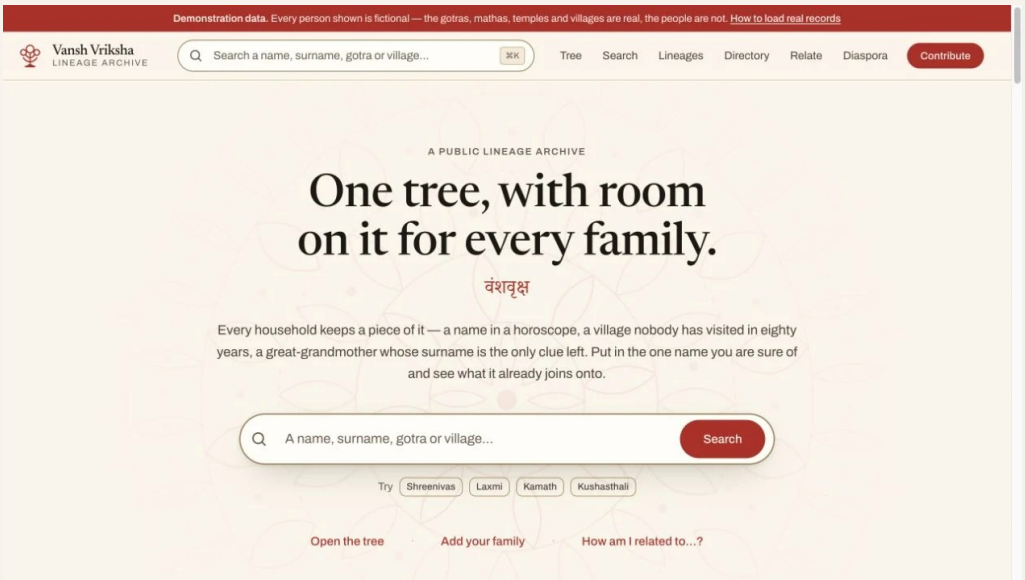

Existing product capture from my portfolio archive.

VANSH VRIKSHA / APPROACH & DECISIONS

How I approached it

I treated the archive as a set of connected records with several entry points: a person, a family, a village, or a relationship. The UX should help someone follow a connection without losing its source.

The demonstration content lets the experience be explored; it is not verified family evidence. Missing records, uncertain relationships, and contribution review need visible explanations.

01 / Model relationships beyond a simple tree

The graph includes family unions and parent links rather than forcing every connection into one hierarchy.

Why it matters. A plain tree can misrepresent remarriage and half-sibling relationships. The data model needs to preserve the actual relationship.

The trade-off. A more faithful model is harder to lay out and explain, especially on small screens.

02 / Keep a record's basis alongside the record

The documented model includes provenance and versioned family files.

Why it matters. Someone reading a family claim should have a way to understand where it came from and how it changed.

The trade-off. A source field does not guarantee accuracy. Disagreement and corrections still need a human review process.

03 / Separate contribution from publication

Visitors can submit without an account, while a maintainer reviews additions.

Why it matters. A low-friction contribution path can coexist with an accountable published archive.

The trade-off. Moderation becomes an operational commitment; the interface should communicate what happens while a submission waits.

VANSH VRIKSHA / OUTCOME & REFLECTION

What came out of it

The archive connects relationship exploration, sourced records, and contribution review. My UX focus is helping someone understand a connection and its basis. The demonstration dataset exercises the journey without establishing verified family claims.

What I would do next

The design is strongest when it makes the limits of the archive legible. Missing branches and uneven historical coverage should be visible context, not silently mistaken for missing people or social importance.

Proposed evaluation: ask a family contributor to submit a relationship, inspect its provenance, and correct a disputed connection.

Proposed review: distinguish demonstration records from sourced records in every public count and assess living-person privacy across search and sharing.

Artifacts & evidence

Repository README and src/lib/archive.ts
Versioned record storage, graph exploration, moderation, demonstration data and known biases. Reviewed 15 October 2026.

Read the individual web case study

PREMONEY / PERSONAL FINANCE · WORKING PRODUCT

Make automatic expense tracking correctable.

A personal-finance app that converts bank and UPI messages into reviewable transactions, categories, and summaries.

MY CONTRIBUTION / Product concept, transaction review & correction flows

SCOPE / Interactive app

SMS
transaction input

Confidence
visible in parser model

Review
unresolved merchants

The challenge

Manual expense entry asks people to repeat information already present in transaction alerts. PreMoney explores a more useful starting point: extract likely transactions from messages, then make uncertainty and correction part of the workflow.

The online story links to the working product.

PREMONEY / APPROACH & DECISIONS

How I approached it

I framed the core journey as evidence, suggested transaction, review, correction, and summary. A person should be able to understand why an alert became a record and recover when the interpretation is wrong.

Privacy explanations belong alongside optional categorisation and synchronisation. The experience needs to make those choices understandable without relying on a blanket claim that all processing stays on the device.

01 / Prefer an uncertain result to a fabricated detail

The parser lowers confidence when a field is uncertain and records when a merchant is unresolved.

Why it matters. A plausible but incorrect financial record can be harder to notice than a clear request for review.

The trade-off. Conservative parsing can miss legitimate alerts. The product needs a recoverable route for false rejections.

02 / Make correction useful beyond a single transaction

Transaction editing and review make suggested categories and corrections inspectable.

Why it matters. Repeated mistakes should become easier to diagnose than manually editing the same pattern forever.

The trade-off. A learned rule can also propagate a wrong assumption, so its effect must remain inspectable.

03 / Treat enrichment as a separate data decision

Optional categorisation and synchronisation need a separate explanation from reading a transaction alert.

Why it matters. People need an understandable account of which data is used by which feature.

The trade-off. The product documentation describes external processing paths; disclosures and controls need review before making privacy promises.

PREMONEY / OUTCOME & REFLECTION

What came out of it

The app connects message evidence, suggested transactions, review, correction, and reports. My UX focus is an inspectable financial record with a recoverable route for uncertainty. Transaction accuracy remains a question for a defined evaluation.

What I would do next

The important design question is how gracefully automation admits uncertainty. I would prioritise correcting a wrong financial entry and understanding its origin before adding more summary charts.

Proposed benchmark: use a consented, redacted alert corpus to measure false accepts, false rejects, duplicate errors, and corrections by bank format.

Proposed release review: document the external-processing and sync paths, then test whether a person understands and controls them.

Artifacts & evidence

lib/domain/sms/sms_parser.dart and lib/domain/categorize
Confidence model, rejection reasons and merchant categorisation.

lib/domain/ai/groq_service.dart and lib/ui/settings/sms_sandbox_sheet.dart
External enrichment payload and diagnostic review surface. Reviewed 15 October 2026.

Read the individual web case study

SOUNDBOX / MUSIC LEARNING · WORKING PRODUCT

Let the song wait for the learner.

A piano-learning app that connects familiar songs, visible keys, and listening-based progression at the player's pace.

MY CONTRIBUTION / Learning concept, practice flow & feedback design

SCOPE / Working app

3	Wait mode	On-device
arrangement levels	default practice rhythm	audio processing

The challenge

Someone who wants to play a familiar song may not yet read notation or keep up with a timed lesson. SoundBox starts from the song and a picture of the keyboard, then waits for the player to produce the expected note or chord.

The online story links to the working product.

SOUNDBOX / APPROACH & DECISIONS

How I approached it

I organised the learning experience around a song, an approachable arrangement, and a repeatable passage. The default practice mode waits for the learner instead of making the person chase a clock.

Listening feedback needs a clear ready, heard, and retry state. Recognition reliability has not been established across real instruments and rooms, so recovery deserves as much design attention as successful progression.

01 / Make progression depend on readiness

The default mode advances after the expected musical input rather than at a fixed tempo.

Why it matters. A beginner can concentrate on finding the right movement without constantly falling behind the interface.

The trade-off. Recognition errors can still interrupt the experience, so recovery and a clear input state are essential.

02 / Offer more than one way into a song

Chord, simplified, and full-melody arrangements support different levels of challenge.

Why it matters. A learner can begin with something recognisable and increase complexity when ready.

The trade-off. An automatically simplified arrangement still needs musical review; lower note density is not always easier to play.

03 / Support repetition without punishment

Section looping and restrained progress mechanics accompany local practice history.

Why it matters. Practice often means repeating one difficult passage, not completing a song from the beginning.

The trade-off. Streaks and XP can distract from learning if they reward activity without meaningful progress.

SOUNDBOX / OUTCOME & REFLECTION

What came out of it

The app makes paced practice, alternative arrangements, repetition, and progress visible. My design focus is letting a learner stay with a difficult passage and continue when ready. Recognition reliability and learning outcomes remain to be evaluated.

What I would do next

The strongest interaction is the absence of pressure from a clock. I would evaluate the complete loop-hear the song, locate a note, play, understand feedback, and retry-before judging the app from completion counts.

Proposed study: observe a beginner learning one short passage with the default wait mode, including how they recover from missed detections.

Proposed benchmark: test recognised notes and chords under varied room noise, microphones, and keyboards; report false advances separately from missed inputs.

Artifacts & evidence

Repository README, How the listening works and Practising
Arrangements, paced learning, recognition approach, local processing and practice loops. Reviewed 15 October 2026.

Read the individual web case study

WHEELIE / GROUP MOBILITY · WORKING PRODUCT

Coordinate the ride before adding more to the rider's attention.

A group-riding beta that connects rendezvous planning, rider location, helmet voice, and ride summaries.

MY CONTRIBUTION / Service idea, coordination journeys & interaction constraints

SCOPE / Beta · accessibility polish in progress

3	64px+	Beta
documented product pillars	primary target intent	not a safety validation

The challenge

Group riding begins before everyone reaches the same road. People start in different places, need a meeting point, and can lose contact after setting off. Wheelie brings planning, group location, and helmet voice into one service concept, with large, simple controls as an explicit design constraint.

The online story links to the working product.

WHEELIE / APPROACH & DECISIONS

How I approached it

I framed three moments: meeting before a ride, coordinating with the group, and looking back afterwards. Each moment needs a different level of detail and attention.

The constrained physical context informs large targets, restrained choices, and clear connection states. The next evaluation belongs in stationary or controlled settings; the beta is not evidence of safe in-motion interaction.

01 / Begin with a rendezvous, not just a destination

The service computes a meeting point for people starting from different places.

Why it matters. The group's coordination problem exists before shared navigation can begin.

The trade-off. A fair computed point may not be a suitable physical stopping place; people need to review the suggestion.

02 / Reduce reliance on precise gestures

The design calls for large primary targets and simple tap/drag interactions.

Why it matters. A constrained physical context should affect the interface model from the start.

The trade-off. Large buttons alone cannot establish safe in-motion use. Evaluation should begin in stationary or controlled settings.

03 / Separate coordination from reflection

Live map and voice support the current group; ride summaries serve the post-ride story.

Why it matters. Different moments deserve different information and levels of attention.

The trade-off. Social summaries can create incentives around speed; the content priorities deserve review before wider use.

WHEELIE / OUTCOME & REFLECTION

What came out of it

The beta brings meeting points, group location, voice, and ride summaries into one service. My UX focus separates preparation, coordination, and reflection. Accessibility polish and controlled evaluation of interaction demands remain next steps.

What I would do next

The next design decision is what to remove from the active-ride surface. Good coordination should reduce interaction demands, with planning and richer controls handled while stopped.

Proposed evaluation: test rendezvous planning and headset controls while stationary, then assess attention demands under an appropriately controlled protocol.

Proposed checks: poor connectivity, location permission changes, unavailable voice, battery use, and clarity about whether rider positions are stale.

Artifacts & evidence

Repository README and design.md
Product pillars, beta status, target-size intent and unfinished accessibility/glove review. Reviewed 15 October 2026.

Read the individual web case study

MATINEE / ENTERTAINMENT DISCOVERY · WORKING PRODUCT

Help a film list become a choice.

A cinema-tracking product connecting discovery, a personal watchlist, ratings, and locally generated recommendations.

MY CONTRIBUTION / Discovery concept, browsing journeys & responsive UX

SCOPE / Interactive app


2
media types: films and series

Local
recommendation scoring

Adaptive
phone and wider layouts

The challenge

Finding a title and choosing what to watch are related but different tasks. Matinee connects browsing with a personal record of saved and watched titles, using that history to shape the next set of suggestions.

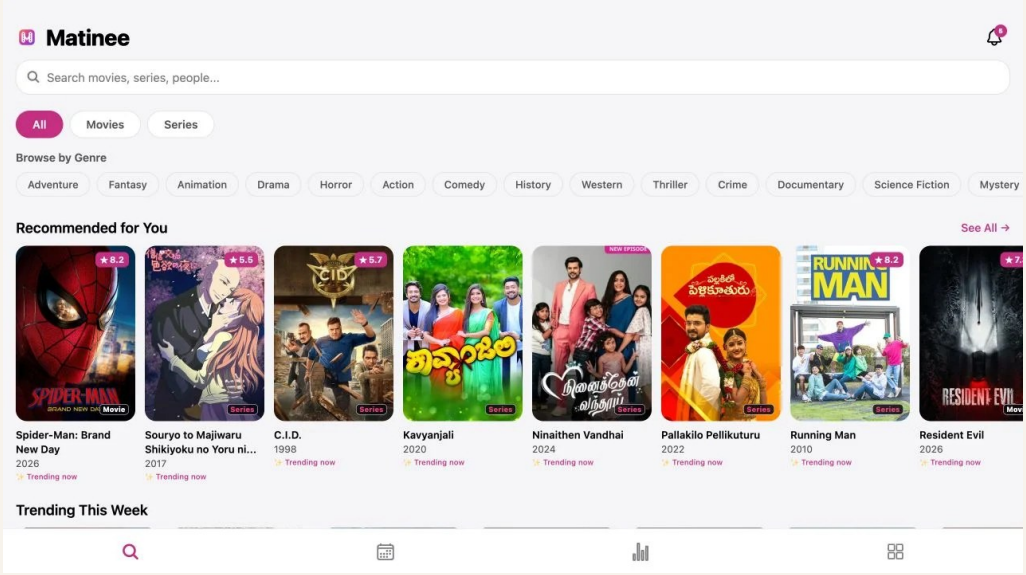

Existing product capture from my portfolio archive.

MATINEE / APPROACH & DECISIONS

How I approached it

I connected browsing with the personal record of saved, rated, and watched titles. The design question is how that history can make the next discovery session more relevant without becoming repetitive.

Language preferences, variety, and recognisable film/series labels inform the browsing experience. Navigation and poster density should adapt to the screen while keeping the selected title and next action clear.

01 / Keep a title's type visible

Movie/series identifiers appear in discovery and combined lists.

Why it matters. A person choosing a two-hour film has a different commitment from someone starting a series.

The trade-off. A badge helps scanning but does not replace runtime and season information near a decision.

02 / Let personal history influence discovery

Ratings and watch patterns feed a local scoring process, with controls against repetitive franchises or genres.

Why it matters. Recommendations should reflect preference without becoming a list of near-duplicates.

The trade-off. A scoring rule is not evidence of relevance. Cold-start and unexpected recommendations need separate evaluation.

03 / Adapt the structure to the screen

Phone navigation becomes a side rail at wider sizes, and poster grids expand.

Why it matters. The same task can use space differently without turning a larger screen into a stretched phone layout.

The trade-off. Density should still preserve readable text, meaningful focus order, and a clear selected title.

MATINEE / OUTCOME & REFLECTION

What came out of it

The app connects discovery, saved titles, watch history, and ratings. My UX focus carries that personal context into the next choice while leaving room for language preferences and variety. Recommendation relevance has not been measured with a defined method.

What I would do next

I would evaluate whether someone can make a satisfying choice, not whether a recommendation merely receives a click. Familiarity and diversity need to be judged together.

Proposed study: compare a new profile with a rated-history profile and ask participants why each suggestion feels relevant or repetitive.

Proposed measure: useful selections, unwanted repetition, and confidence choosing across preferred languages.

Artifacts & evidence

Repository README
Current mobile architecture, adaptive layout, watchlist rules and local recommendation factors. Reviewed 15 October 2026.

Read the individual web case study

BIRTHSKY / PERSONALISED VISUALISATION · WORKING PRODUCT

Turn a personal moment into a sky you can keep.

An astronomy-inspired experience that turns a time and place into a customisable star-map wallpaper.


MY CONTRIBUTION / Experience concept, input journey & visual direction

SCOPE / Working browser project

Time + place	3	2
core input	documented visual modes	wallpaper formats

The challenge

A star map can be a technical chart or a personal object. BirthSky connects a simple biographical prompt to a visual reveal, then gives the person control over labels and the final wallpaper format.

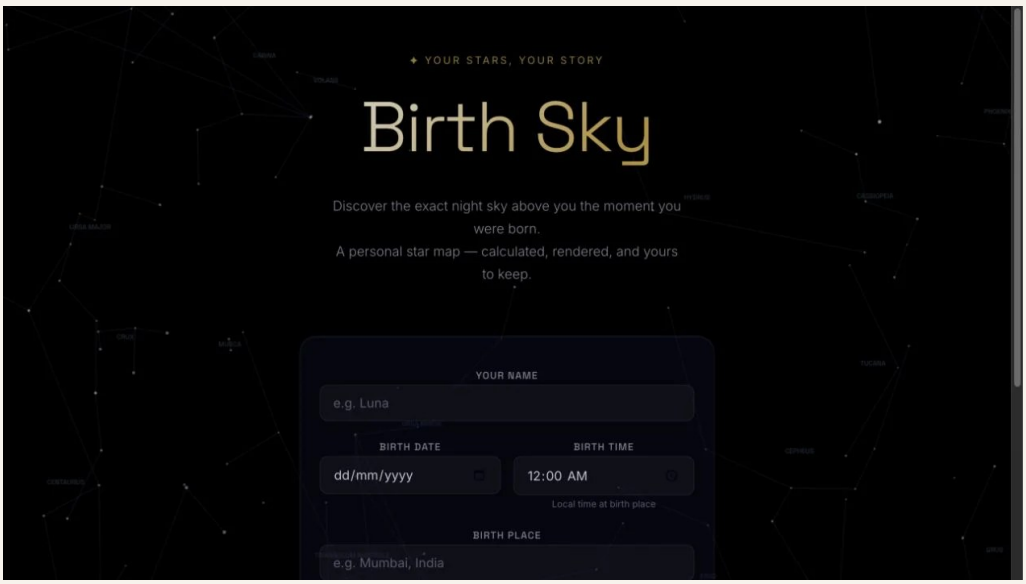

Existing product capture from my portfolio archive.

BIRTHSKY / APPROACH & DECISIONS

How I approached it

I organised the experience into a familiar prompt, a personal reveal, optional exploration, and a keepsake. Name, date, time, and place give the abstract sky a recognisable starting point.

The reveal needs understandable inputs. Unknown birth times, time zones, and any collection of personal details deserve clear explanations before a precise-looking image encourages confidence.

01 / Begin with a recognisable personal question

A short form collects the time and location before revealing the sky.

Why it matters. The input makes an otherwise abstract astronomical chart meaningful to the person requesting it.

The trade-off. Unknown birth times and historical time zones require careful explanation; a precise-looking map can still rest on uncertain inputs.

02 / Make annotation a choice

The result supports alternative modes and toggles for constellation lines and names.

Why it matters. A person may want to learn from the sky or simply use it as a visual keepsake.

The trade-off. Switches need clear effects without making the result feel like a complex scientific console.

03 / Design the output as part of the journey

Phone and desktop wallpaper downloads follow the reveal.

Why it matters. A useful result should fit where the person intends to use it.

The trade-off. Export must preserve legibility and composition across aspect ratios rather than just scale one screenshot.

BIRTHSKY / OUTCOME & REFLECTION

What came out of it

The browser experience connects personal inputs with a customisable sky and wallpaper exports. My UX focus carries someone from a familiar question to a result they can keep. Input uncertainty and data-handling explanations remain priorities for refinement.

What I would do next

The emotional reveal works best when the inputs remain understandable. Today I would put birth-time uncertainty, time-zone handling, and any collection of personal inputs ahead of additional visual modes.

Proposed validation: compare known dates and locations with an authoritative sky reference, including historical daylight-saving and time-zone cases.

Proposed iteration: explain any logging before submission and make uncertain birth-time choices visible in the final result.

Artifacts & evidence

StarMap/index.html and js/app.js
Input flow, result controls, modes, export entry points and configured logging integration.

StarMap/js/astronomy.js and js/exporter.js
Coordinate calculations and wallpaper generation. Reviewed 15 October 2026.

Read the individual web case study

SCALESEE / QUANTITATIVE EXPLANATION · WORKING PRODUCT

Make a large number feel like a real difference.

A visual comparison tool that turns quantities into scenes while keeping the meaning of scale explicit.


MY CONTRIBUTION / Visual explanation, comparison journeys & interaction design

SCOPE / Working browser product

11	2	Shareable
categories listed in the source	scale modes	comparison URLs

The challenge

A ratio can be mathematically clear and still be difficult to picture. ScaleSee turns two quantities into a shared visual comparison, choosing a representation that fits the kind of quantity instead of using the same chart for everything.

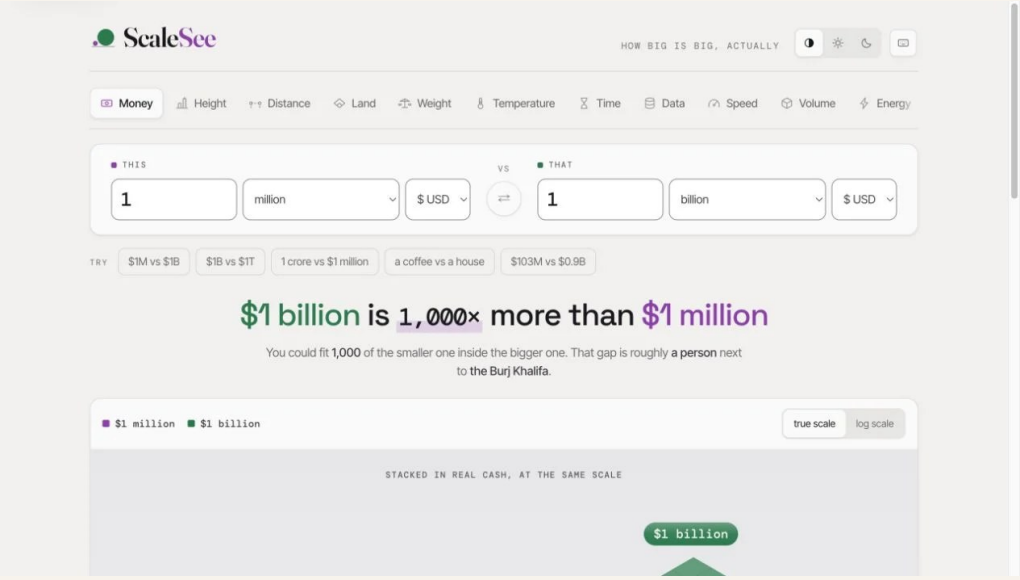

Existing product capture from my portfolio archive.

SCALESEE / APPROACH & DECISIONS

How I approached it

I selected a visual reference appropriate to each kind of quantity: a ground line for height, nesting for land, or a shared course for speed. The reference is part of the explanation.

An extreme ratio creates a useful design tension: showing true scale can make one quantity nearly disappear. A compressed alternative needs an explicit label that remains with a shared comparison or exported image.

01 / Choose the picture to fit the quantity

Height shares a ground line, land can be nested, and speed uses a common course.

Why it matters. A meaningful reference can make a ratio easier to interpret than a generic bar.

The trade-off. Every visual metaphor introduces assumptions; those assumptions need to be stated where they affect the comparison.

02 / Keep scale transformations explicit

True scale and logarithmic scale are separate modes.

Why it matters. When a small quantity almost disappears, that can be the honest answer; a compressed alternative should declare the change.

The trade-off. A log view can make a scene more legible while reducing intuitive proportionality.

03 / Let the comparison leave the tool

A URL carries the selected comparison and an image export preserves the current drawing.

Why it matters. An explanation is more useful when someone can bring it into the conversation that prompted it.

The trade-off. An exported image needs labels and scale context because it no longer has interactive controls beside it.

SCALESEE / OUTCOME & REFLECTION

What came out of it

The tool offers quantity-specific comparisons, explicit scale modes, sharing, and image export. My design focus makes a numerical relationship inspectable and portable. Correct interpretation of extreme ratios remains a question for user evaluation.

What I would do next

The design lesson is that legibility and proportional truth sometimes pull in different directions. The interface should help the reader understand which trade-off a view makes.

Proposed study: ask readers to estimate the ratio before and after each view, including an extreme comparison and a logarithmic one.

Proposed check: confirm labels, units, assumptions, and scale mode survive in every shared or exported artifact.

Artifacts & evidence

Repository README, What's in it and Notes on the numbers
Category inventory, visual metaphors, scale-mode distinction and sharing/export. Reviewed 15 October 2026.

Read the individual web case study

WHERE WOULD I BE...? / SCIENTIFIC STORYTELLING · WORKING PRODUCT

Give deep time one personal point of reference.

An interactive globe that lets a chosen place move with a plate-motion model and makes the model's limits part of the story.


MY CONTRIBUTION / Experience framing, interaction sequence & spatial explanation

SCOPE / Working browser product

1	Progressive	Modelled
place-led starting question	details on demand	extrapolation, not prediction

The challenge

Plate motion is slow enough to be invisible in everyday life and large enough to reshape a world over time. This project gives that scale a personal anchor: choose a place, move the clock, and follow the ground beneath it.

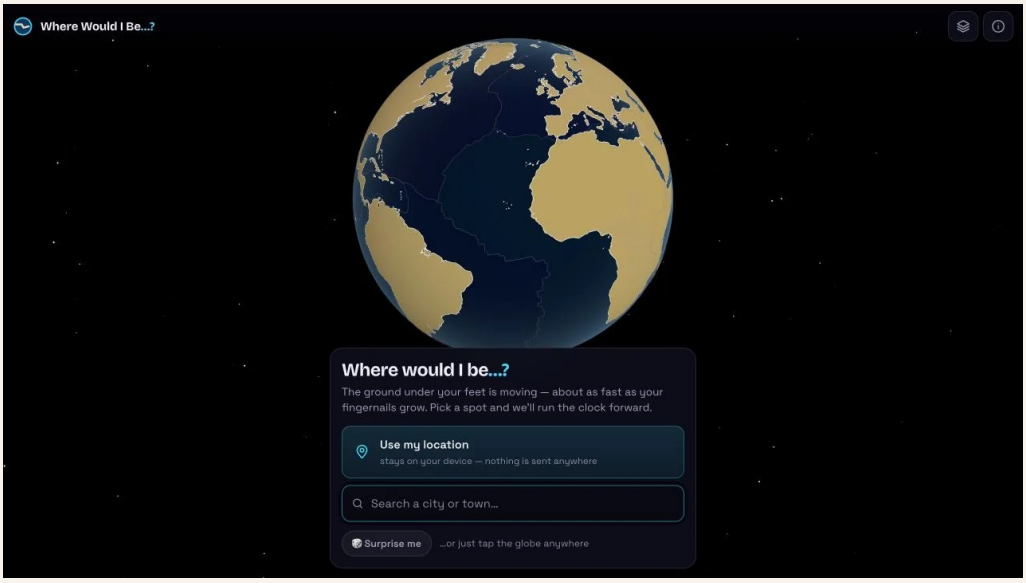

Existing product capture from my portfolio archive.

WHERE WOULD I BE...? / APPROACH & DECISIONS

How I approached it

I gave the opening one task: choose a place. A time control and a short result then introduce motion, with optional detail kept out of the main globe.

The visual story needs to carry its qualification with it. Constant-motion extrapolation can invite exploration, but the result should not read as a reconstruction or prediction of the continents.

01 / Give each stage one main task

Choose a place first, then explore time, with optional comparison later.

Why it matters. A clear sequence can make a complex subject approachable without presenting every control at once.

The trade-off. Progressive disclosure should not hide the model's most important qualification until after someone has formed a false impression.

02 / Protect the space where the answer is drawn

The design keeps the main globe clear and groups controls in a bottom dock.

Why it matters. The selected point and its path are the explanation; a floating panel over them would compete with the result.

The trade-off. A dock must adapt to available height so it does not consume the same space on a small screen.

03 / Make the scientific boundary legible

The source describes plate movement as a constant-motion extrapolation with increasing limits over long horizons.

Why it matters. Personal storytelling can encourage exploration without claiming to know the future shape of continents.

The trade-off. A smooth animation can still imply certainty, so the qualification belongs near the time result.

WHERE WOULD I BE...? / OUTCOME & REFLECTION

What came out of it

The globe connects location selection, time exploration, optional layers, and comparison. My UX direction gives deep time a personal entry point while keeping the model boundary near the result. Understanding that distinction still needs evaluation.

What I would do next

The interaction succeeds as a question someone can explore, not as a forecast. I would test whether the person leaves understanding both plate motion and why the long-term path is conditional.

Proposed study: ask a visitor to describe what changed and what assumptions the model makes after a short exploration.

Proposed checks: narrow-screen globe visibility, reduced-motion behaviour, keyboard interaction, and whether uncertainty stays visible at extreme dates.

Artifacts & evidence

Repository README, The layout rule and How much to trust it
Interaction sequence, unobstructed visual space and constant-motion model limitations. Reviewed 15 October 2026.

Read the individual web case study

THE BLOG / PUBLISHING EXPERIENCE · WORKING PRODUCT

Make publishing feel like writing.

An editorial site with a browser-based publishing workflow for poems, essays, fiction, and serial writing.


MY CONTRIBUTION / Editorial structure, reading experience & author workflow

SCOPE / Working publishing system

2	Drafts	Verse
reader and author workflows	explicit publishing control	preserved line breaks

The challenge

A personal writing practice should not require a technical deployment ritual for every post. The Blog connects a reading experience with a browser editor that handles content, images, drafts, and publishing through a familiar form.

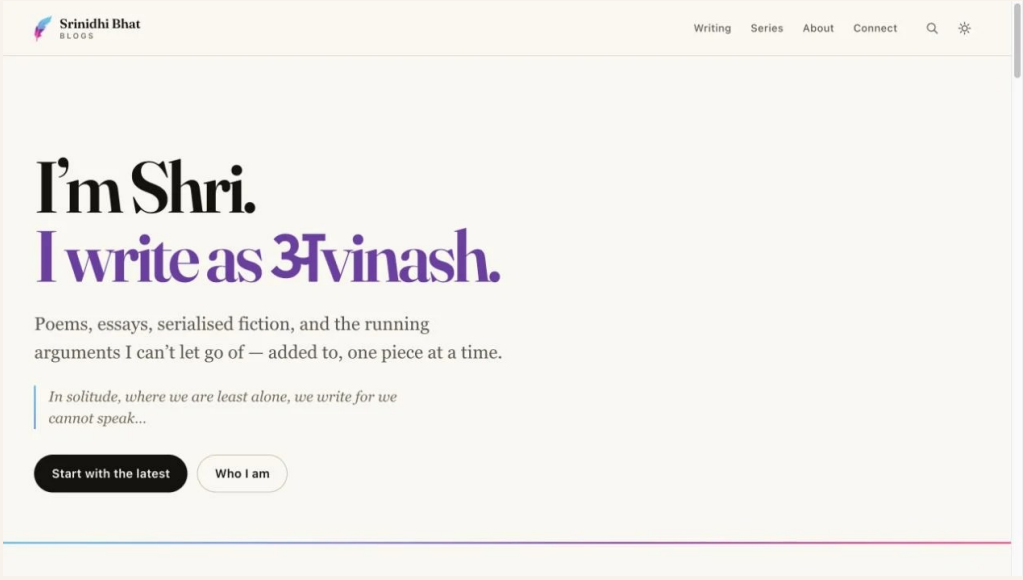

Existing product capture from my portfolio archive.

THE BLOG / APPROACH & DECISIONS

How I approached it

I framed writing, reviewing, and publishing as separate commitments. The editor should support the author's work without requiring technical knowledge of how a post reaches the website.

The reading experience follows the form of the writing: poetry keeps its line breaks, while topics and series help a reader continue. Publication feedback should make draft and live states easy to distinguish.

01 / Give publishing a clear state

Draft and published are separate states, with a deliberate release action.

Why it matters. Writing and releasing a piece are different commitments and should remain distinguishable.

The trade-off. Publishing can take time. The author needs clear confirmation of what is saved and what is live.

02 / Let the content form affect the layout

Poetry preserves line breaks and an appropriate verse treatment, while ordinary articles retain a reading layout.

Why it matters. The way a piece is written can be part of its meaning.

The trade-off. Formatting conventions must be discoverable in the editor rather than depend on hidden technical knowledge.

03 / Make ongoing writing navigable

Topics and series connect related pieces within the editorial structure.

Why it matters. A reader should be able to follow a thread without knowing the order it was published.

The trade-off. The documented title-based series matching is convenient but implicit; a visible series field would make mistakes easier to avoid.

THE BLOG / OUTCOME & REFLECTION

What came out of it

The site connects a reading experience with an editorial publishing path. The UX contribution makes room for poems, essays, series, drafts, and release feedback, so the author can focus on the writing and the reader can follow it.

What I would do next

The important shift is from making content fit the tool to making the tool respect the writing. I would next make publishing status and series membership more visible to the author.

Proposed evaluation: publish a draft, update an existing post, and add a series instalment without using development tools.

Proposed measure: accidental publication, broken links after slug edits, and clarity about whether the latest save is live.

Artifacts & evidence

Repository README, Writing a post and Things worth knowing
Browser editor, draft/build publishing path, verse formatting and title-based series conventions. Reviewed 15 October 2026.

Read the individual web case study

THE OFFICE GAMES / SOCIAL PLAY · WORKING PRODUCT

Make the next person's turn obvious.

A team-trivia experience exploring quick room entry, visible roles, and shared game state for a short social break.


MY CONTRIBUTION / Social game concept, room journey & turn-taking UX

SCOPE / Working project · trivia module

4	Team-based	Explicit
letters in a room code	turn and score model	local or network mode

The challenge

A short team game loses momentum when people are unsure how to join or whose turn it is. The reviewed Office Games module centres on a simple room flow, a lobby, team roles, and a visible answering/stealing sequence.

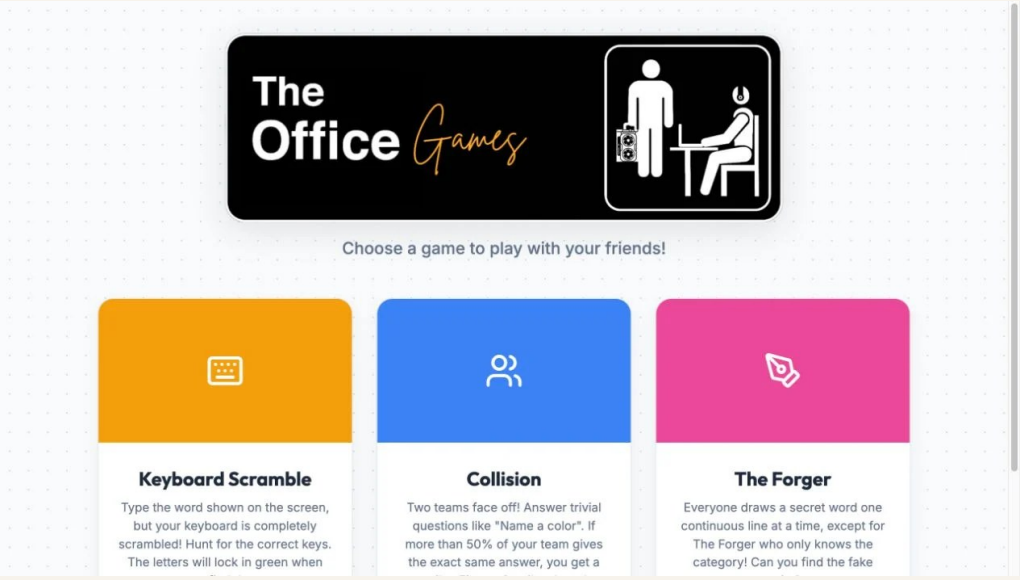

Existing product capture from my portfolio archive.

THE OFFICE GAMES / APPROACH & DECISIONS

How I approached it

I mapped the reviewed trivia journey from joining a room to understanding teams, turns, answering, and stealing. The broader games catalogue is outside the evidence available for this case study.

The UX needs to explain the connection mode before a group commits to a game. Trying a local demonstration and joining colleagues on separate devices are different experiences.

01 / Make joining a small action

A four-letter room code and a player name provide a concise entry path.

Why it matters. A social break should spend more of its time playing than explaining setup.

The trade-off. A short code still needs clear invalid-room and full-room handling, and does not establish secure identity.

02 / Expose responsibility in the game state

The interface distinguishes answering and stealing teams, active players, and scores.

Why it matters. People need to see who can act and why the round is waiting.

The trade-off. Role-based interaction becomes confusing if waiting states or connection loss are not explained.

03 / Keep connection mode understandable

The setup distinguishes a local demonstration from connected play.

Why it matters. A demo can help someone try the game, but should not promise multi-device play it cannot provide.

The trade-off. A connected game needs clear waiting, conflict, reconnection, and host-recovery states.

THE OFFICE GAMES / OUTCOME & REFLECTION

What came out of it

The reviewed trivia module connects joining, teams, round state, scoring, and chat. My UX focus makes the social sequence and responsibility for the next action visible. Local demonstration and connected play need distinct expectations.

What I would do next

The design opportunity is a shared understanding of what happens next. I would assess joining, waiting, and recovery as carefully as the answer-selection screen.

Proposed study: run a short trivia session with several participants and record setup explanations, confused turns, and waiting time.

Proposed checks: separate-device joining, reconnection, duplicate actions, host departure, and a clearly labelled local demo mode.

Artifacts & evidence

src/App.jsx and src/gameService.js
Reviewed room/lobby/trivia journey, short codes, team state, local-storage mock service and Firebase path. Reviewed 15 October 2026.

Read the individual web case study

FORMA / PERSONAL HEALTH

Give every health reading its context.

A native Android health app that brings activity, sleep and personal trends together while making sources, missing data and experimental estimates visible.

MY CONTRIBUTION / Product concept, health-data journeys & interaction design

SCOPE / Native Android app · experimental wellness estimates

5	44	Recorded
main destinations	native metric views	measurement times retained

The challenge

A watch can collect more measurements than a person can comfortably interpret. A number also changes meaning when it is old, incomplete, imported or estimated. I framed Forma around a daily overview that stays useful without making uncertain data look more reliable than it is.



Archived native Today screen with clearly marked demo values. This capture predates the later Health-tab and personal-tool cleanup.

FORMA / APPROACH & DECISIONS

How I approached it

I organised the experience around five destinations: Today for a daily overview, Sleep for the recorded night, Move for activity and workouts, Trends for comparison, and Health for the measurement library. The native app is the product; the React version in the repository is a design preview.

The data constraints shaped the UX. Samsung Health must share records through Health Connect, permissions can be partial, and not every watch measurement is available. Connection setup therefore needs to explain availability rather than treat an empty reading as a failure or a zero.

The later function audit separated Devices from Your data, moved optional personal tools into settings, removed controls without a working purpose, and put formulas behind expandable details. The archived screens illustrate the native visual direction; the audit and current source establish the later navigation and scope. This is an artifact-based retrospective, without a participant study or clinical validation.

01 / Distinguish recorded, missing and estimated values

Keep source labels and measurement times attached to readings. Preserve gaps in histories, identify sample data, and distinguish sleeping heart rate from a recorded resting-heart-rate value.

Why it matters. A recent refresh does not mean a sensor reading is recent. People need to understand what a value represents before comparing it with yesterday or using it to interpret their day.

The trade-off. These labels add density. The hierarchy has to keep essential provenance visible while leaving longer explanations available on demand.

02 / Let a score open into its explanation

Show the score and its contributing values first, then offer the calculation and diagnostics in an expandable sheet. Recovery requires recorded sleep and a usable baseline vital; missing inputs can leave the estimate unavailable.

Why it matters. An unexplained score can look authoritative. Showing its inputs makes the estimate inspectable and lets the interface explain why the same score can accompany different activity records.

The trade-off. Transparency does not validate the model. Sleep, recovery and body-energy estimates remain experimental wellness interpretations, distinct from Samsung proprietary scores and medical assessment.

03 / Separate connecting a device from managing data

Devices leads with connection state and the next available action. Your data contains coverage, export, optional import and local reset. Targets and personal tools have their own settings paths.

Why it matters. Someone trying to connect a watch should not have to interpret a coverage report or navigate file-management controls before granting access.

The trade-off. Separating the tasks adds destinations. Clear names and back paths matter, particularly when permissions are partial or a watch has not synced.

FORMA / OUTCOME & REFLECTION

What came out of it

Forma offers a native daily overview, dedicated sleep and movement views, inspectable histories and a searchable health library. The UX contribution is a hierarchy that connects an overview to the evidence behind it. The repository documents native and emulator checks; physical Samsung sharing remains device-dependent, and the score models are not clinically validated.


What I would do next

The most useful simplification was giving each kind of detail a clear home. Connection help belongs with Devices; coverage belongs with Your data; a calculation belongs behind its score. I would next check whether people can explain an unavailable or older reading as confidently as a complete one.

Proposed study: ask people to distinguish sample, shared, direct-watch, older and unavailable readings, then explain what an experimental recovery score does and does not mean.

Proposed device checks: follow granted, denied and partial-permission journeys on a Samsung phone and watch, including delayed sync, expired direct readings and corrected history.

Proposed measures: connection-task completion, mistaken interpretations of missing data, and success finding a score explanation or exporting records.

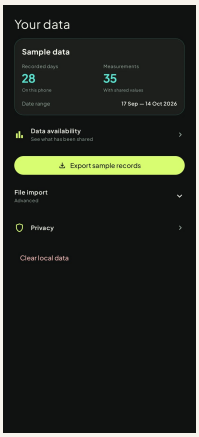

The later Your data panel groups coverage and file controls separately from device setup. All values shown are sample data.

Artifacts & evidence

Forma README and native interface source
Reviewed 16 October 2026. Native Android scope, five destinations, Samsung Health/Health Connect integration, measurement timestamps and experimental score limits. The web project is a design preview.

docs/DESIGN.md and docs/UX-AUDIT.md
The later 1.5 audit supersedes the older 46-measurement design note: 44 native metric views, distinct Devices/Your data flows, optional personal tools and expandable score explanations.

Archived native captures · sample data
Today rings and vitals captures from the project output illustrate the native visual system. The Today capture predates the Health tab rename and personal-tool cleanup; the later Your data capture shows the separated data-management flow. Values are demonstration data.

Read the individual web case study

OHCAPTAIN / NAVAL CAPTURE-AND-HOLD · OPERATION BLACKWATER

Make the next fleet decision clear.

A 3-v-3 naval game exploring shared command, role-specific decisions and a combat interface that keeps the sea in view.


MY CONTRIBUTION / Game concept, captain/operator journeys & tactical interface design

SCOPE / Playable browser prototype · keyboard & mouse

3 v 3	8	10 min
captain and two operators per crew	capture-and-hold relays	maximum match window

The challenge

In OhCaptain, sailing and firing are only part of the job. Each crew shares supplies, but its captain decides how to spend them. Operators need to request help while both roles keep track of a changing battle. I framed the interface around the next decision a player can actually make.

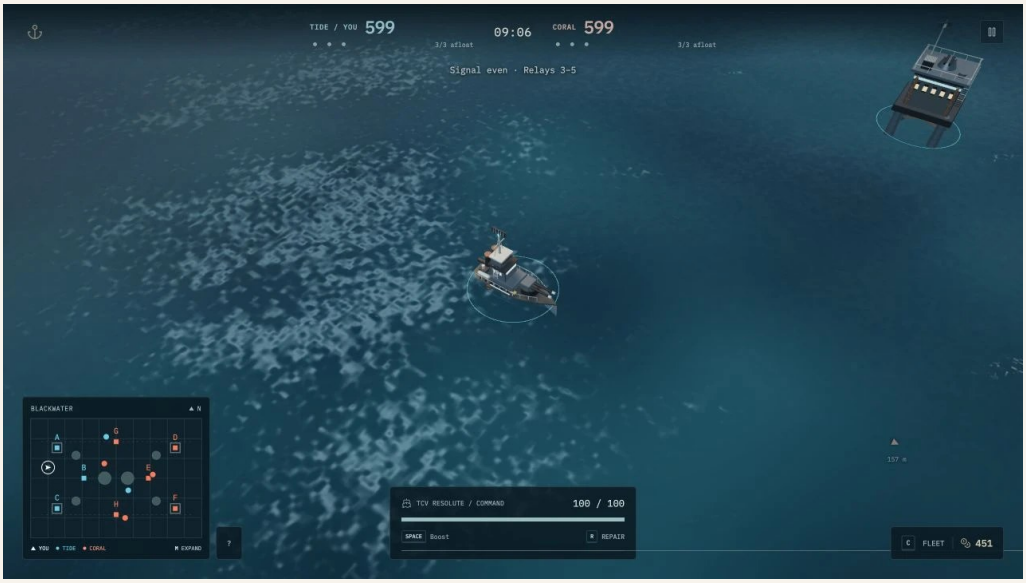

Actual local gameplay with an AI-filled crew: compact battle status, a persistent map, the Fleet control and the player's hull.

How I approached it

I separated the crew journey into choosing a station, entering solo play or assembling a room, deploying, and managing the battle. A captain still sails and fights; the extra responsibility is distributing shared supplies. Operators request upgrades or repairs rather than spending the treasury themselves.

The documented Clear Deck revision gives combat a compact score/clock, fleet-alive counts, hull status and a persistent map. Spending moves into the Fleet drawer, while the expanded overview holds rosters, recent events and relay details. Warnings compete for a small number of attention slots instead of becoming a wall of banners.

I reviewed the local playable build, documentation and awareness rules. Solo play with AI fill and peer-to-peer rooms are distinct product paths. Online scope depends on a host keeping the page open; the prototype has no dedicated match service or host migration. Rule checks and seeded scenarios do not establish balance or usability with human crews.

01 / Make responsibility visible before deployment

Offer Captain and Vessel Operator as distinct stations. Captains distribute shared supplies through the Fleet drawer; operators use the same crew context to request an upgrade or repair.

Why it matters. A shared resource needs a clear decision owner. Role-specific actions let people understand why they can request something but cannot buy it directly.

The trade-off. The captain can become a bottleneck while also sailing and fighting. Pending requests need to remain discoverable without forcing a panel over combat.

02 / Keep essential battle state on the field

Keep the score, clock, relay balance, fleet-alive counts, hull and corner map available. Put spending in a drawer and detailed rosters, events and defenses in the expanded overview.

Why it matters. The map helps connect local action to the relay objective. Separating routine awareness from deliberate inspection leaves room to aim and navigate.

The trade-off. An overview can interrupt action. Solo overview pauses the match; online play continues, so players need to understand that distinction. The prototype targets keyboard and mouse rather than claiming a touch-control experience.

03 / Give urgent feedback a limited attention budget

Show at most one off-screen enemy bearing and reserve one text cue for critical hull, safe healing or an endangered home relay. Limit outgoing damage feedback to two numbers and keep routine radio outside combat.

Why it matters. An alert is useful only if it helps a player choose an action. A priority order makes a received hit or low hull easier to notice among effects, ships and objectives.

The trade-off. A quieter interface can hide context that an experienced player wants. The map and overview must provide a dependable route to that detail, and the priority policy needs human playtesting.

OHCAPTAIN / OUTCOME & REFLECTION

What came out of it

The prototype connects role selection, solo AI-filled matches, room-based crew play and a single capture-and-hold arena. Its combat interface separates immediate awareness, spending and tactical inspection. The portfolio captures show the actual local game, rather than presenting the cinematic menu artwork as gameplay. Multi-device reliability, competitive balance and player comprehension remain evaluation work.


What I would do next

A fleet game needs coordination as much as combat. The clearest direction was to make responsibility explicit and reduce the number of things demanding attention at once. I would judge the next iteration by whether a new crew understands who can act, what is urgent and why control of a relay matters.

Proposed playtest: form two crews and ask players to explain their role, request or buy a repair, and identify the relay that matters next without coaching.

Proposed checks: invitation and room entry, role reassignment, a guest disconnecting, restrictive peer-to-peer networks, and an honest explanation when a host leaves.

Proposed observations: missed requests, map-to-world confusion, unnoticed critical alerts and time spent in the overview. Compare these before changing the attention policy.

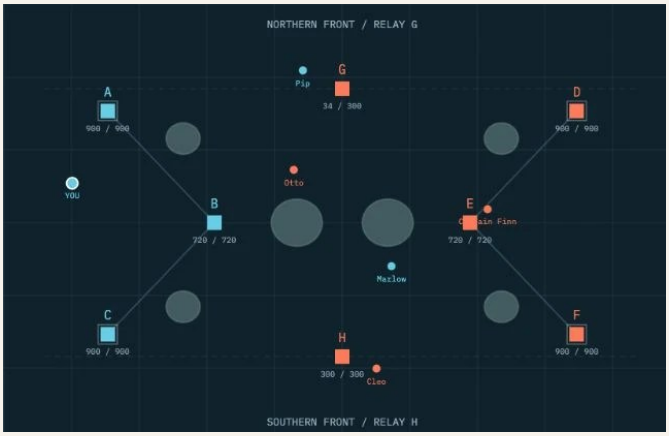

A detail of the actual expanded tactical map. Both fronts, ship positions and relay ownership share the same view; the solo overview pauses play.

Artifacts & evidence

OhCaptain README · Play, online limits and Clear Deck interface
Reviewed 16 October 2026. Captain/operator responsibilities, AI fill, peer-to-peer rooms, eight-relay objectives, ten-minute match window and host/network limitations.

src/awareness.js, src/main.js and src/combat.css
Battle interpretation, role-specific controls, attention priority, local damage feedback and the single off-screen enemy-bearing policy.

Local playable build and docs/BLACKWATER-ART.md
Actual solo combat and expanded-map captures from 16 October 2026. The harbor capture includes the project's generated cinematic key art; it is menu presentation, distinct from the procedural playable arena.

Read the individual web case study