


DATABASE SYSTEMS ENGINEERING AND DISTRIBUTED BACKEND DEVELOPMENT

Spring Boot with Rest API and CRUD Operations

- Name :M.Srinikitha
- Roll Number :2520030161
- Section :8

Project Structure:

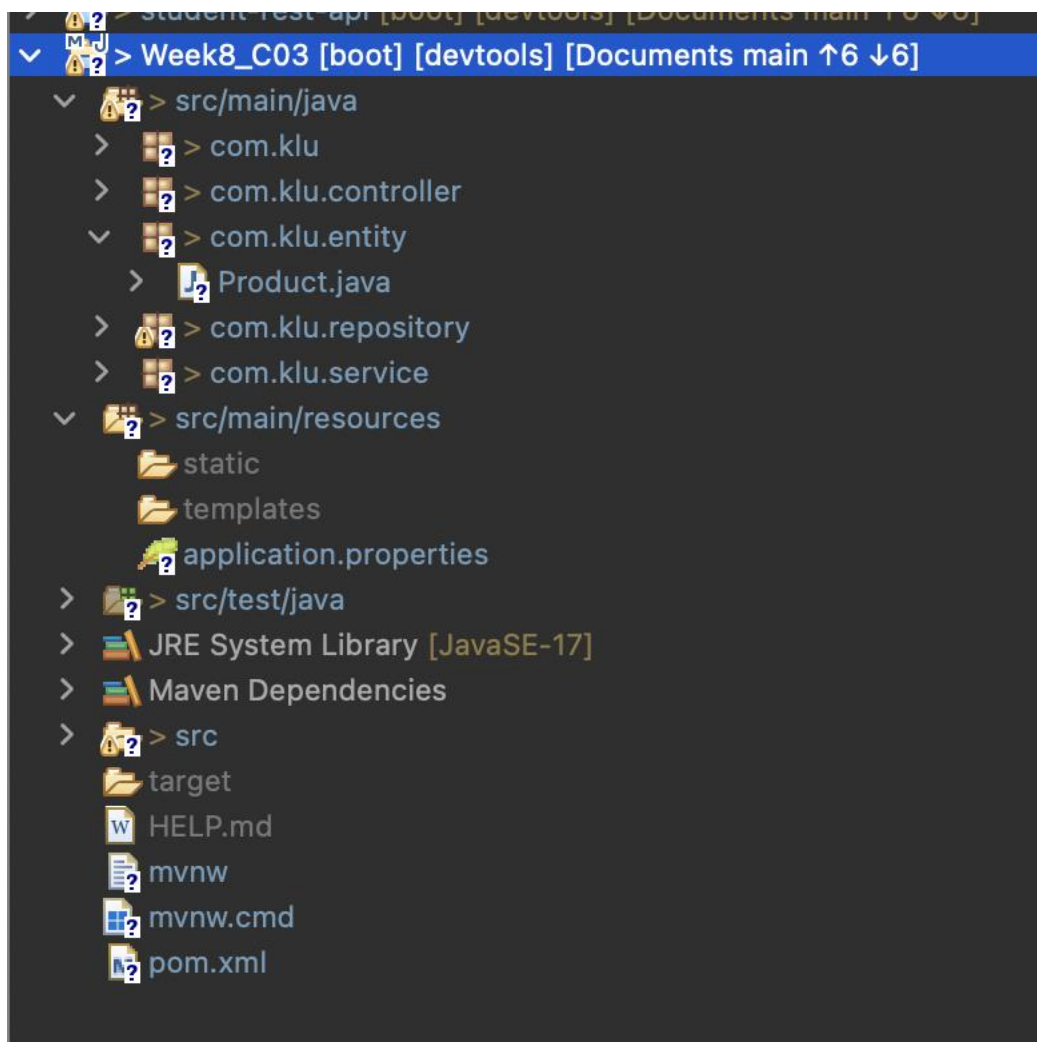

MySQL Server:


```
[mothenikhitha@Mothes-MacBook-Air ~ % ls /usr/local/mysql/bin/mysql
/usr/local/mysql/bin/mysql
[mothenikhitha@Mothes-MacBook-Air ~ % /usr/local/mysql/bin/mysql -u root -p
[Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 9
Server version: 9.7.1 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

[mysql> CREATE DATABASE studentdb;
Query OK, 1 row affected (0.019 sec)
```

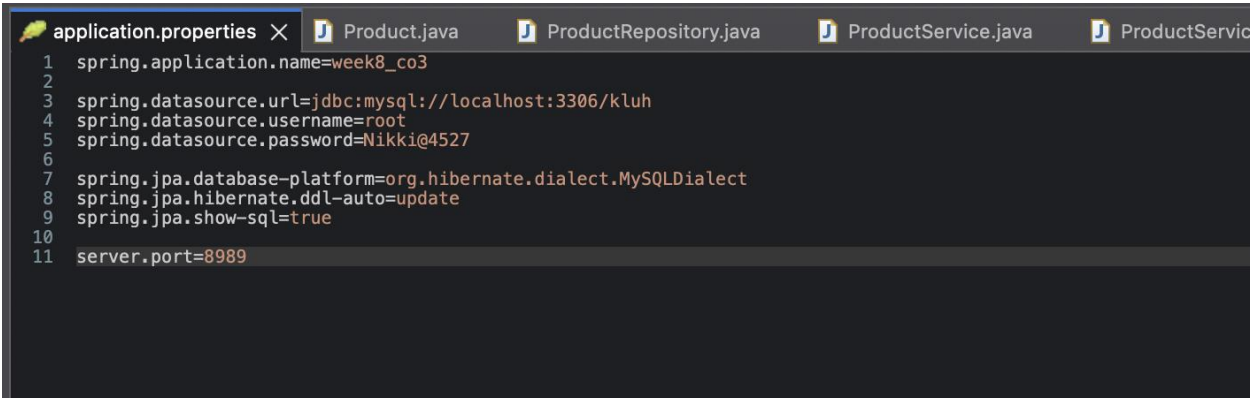A screenshot of an IDE window showing the 'application.properties' file. The window has several tabs at the top: 'application.properties' (active), 'Product.java', 'ProductRepository.java', 'ProductService.java', and 'ProductService.java'. The properties file contains the following configuration:

```
1 spring.application.name=week8_co3
2
3 spring.datasource.url=jdbc:mysql://localhost:3306/kluh
4 spring.datasource.username=root
5 spring.datasource.password=Nikki@4527
6
7 spring.jpa.database-platform=org.hibernate.dialect.MySQLDialect
8 spring.jpa.hibernate.ddl-auto=update
9 spring.jpa.show-sql=true
10
11 server.port=8989
```

Postman:

GET Get data

My Collection

GET GET http://l

GET http://localh

No environment

+

⌵

+

⌵

COLLECTIONS

My Collection

POST Get data

GET

http://localhost:8989/api/products

Save

Share

Docs

Params

Authorization

Headers 8

Body

Scripts

Settings

Cookies

Body

200 OK

23 ms

414 B

⌵

{ } JSON

Preview

Visualize

```
1  [  
2    {  
3      "name": "Laptop",  
4      "description": "Dell XPS 13",  
5      "price": 1200.0,  
6      "quantity": 10,  
7      "id": 1  
8    },  
9    {  
10     "name": "Smartphone",  
11     "description": "Samsung Galaxy S21",  
12     "price": 999.0,  
13     "quantity": 20,  
14     "id": 2  
15   },  
16   {  
17     "name": "Tablet",  
18     "description": "Apple iPad Pro",  
19     "price": 799.0,  
20     "quantity": 15,  
21     "id": 3  
22   }  
23 ]
```

COLLECTIONS

My Collection

POST Get data

GET Get data

My Collection

GET GET http://l

POST http://local

+

No environment

http://localhost:8989/api/products

Save

Share

POST

http://localhost:8989/api/products

Send

Docs

Params

Authorization

Headers 8

Body

Scripts

Settings

Cookies

raw

JSON

Schema

Beautify

```
1 {
2   "name": "Headset",
3   "description": "Wireless Bluetooth Headphones",
4   "price": 1499.00,
5   "quantity": 25
6 }
```

Body

200 OK

10 ms

262 B

...

{ } JSON

Preview

Visualize

```
1 {
2   "name": "Headset",
3   "description": "Wireless Bluetooth Headphones",
4   "price": 1499.0,
5   "quantity": 25,
6   "id": 5
7 }
```

+

+

+

+

My Collection

POST Get data

PUT http://localhost:8989/api/products/1

Save

Share

PUT

http://localhost:8989/api/products/1

Send

Docs

Params

Authorization

Headers 8

Body

Scripts

Settings

Cookies

raw

JSON

Schema

Beautify

```
1 {
2   "name": "pods",
3   "description": "Wireless Bluetooth Headphones",
4   "price": 1499.00,
5   "quantity": 25
6 }
```

Body


200 OK • 20 ms • 259 B •

{ } JSON

Preview

Visualize

```
1 {
2   "name": "pods",
3   "description": "Wireless Bluetooth Headphones",
4   "price": 1499.0,
5   "quantity": 25,
6   "id": 1
7 }
```

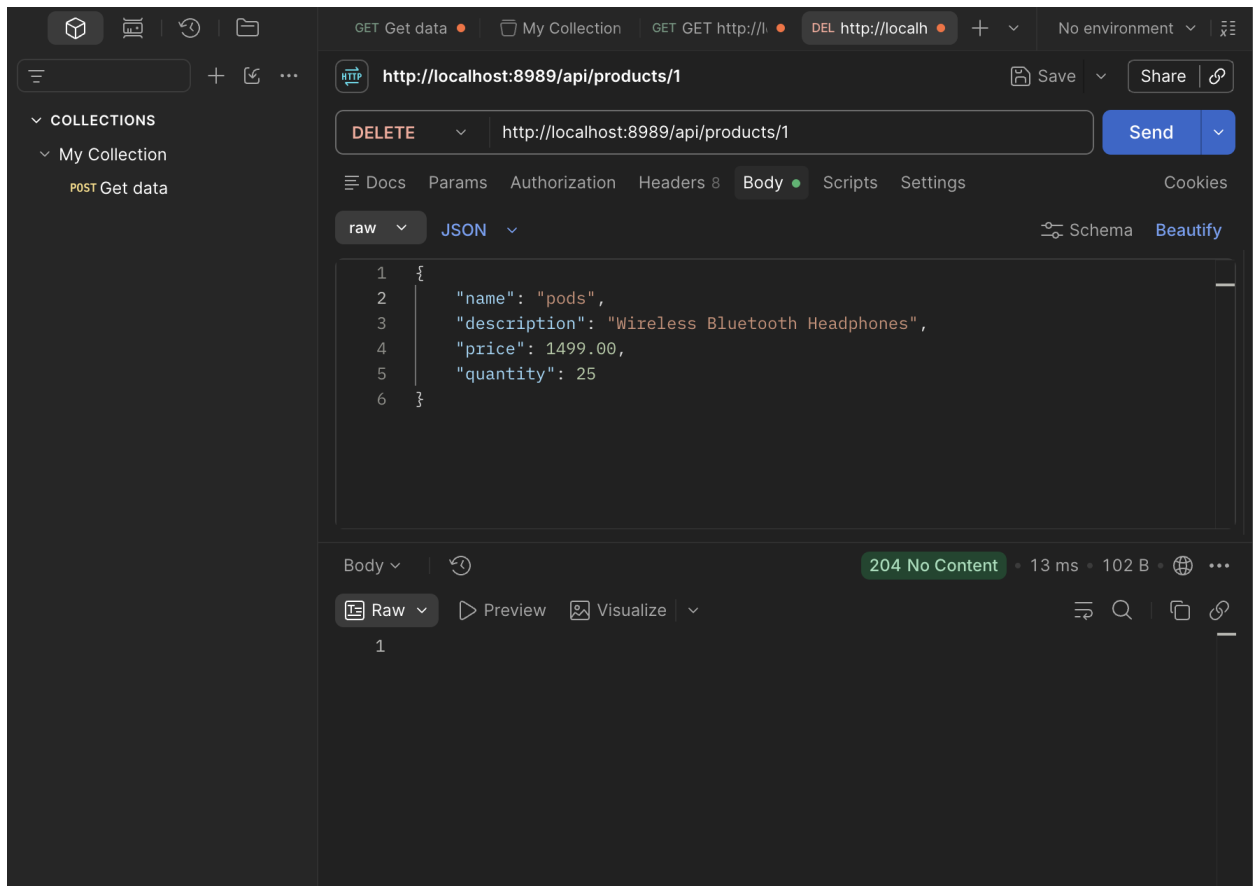

Test it with MySQL Server:

```

Last login: Fri Sep 18 09:17:36 on console
[mothenikhitha@Mothes-MacBook-Air ~ % /usr/local/mysql/bin/mysql -u root -p
[Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 9
Server version: 9.7.1 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

[mysql> Use kluh;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
[mysql> SELECT * FROM products;
+-----+-----+-----+-----+-----+
| id | name      | description          | price | quantity |
+-----+-----+-----+-----+-----+
| 1  | Laptop    | Dell XPS 13          | 1200  | 10       |
| 2  | Smartphone| Samsung Galaxy S21    | 999   | 20       |
| 3  | Tablet    | Apple iPad Pro        | 799   | 15       |
| 4  | Pods      | Wireless Bluetooth Headphones | 1499  | 25       |
+-----+-----+-----+-----+-----+
4 rows in set (0.000 sec)

[mysql> SELECT * FROM products;
+-----+-----+-----+-----+-----+
| id | name      | description          | price | quantity |
+-----+-----+-----+-----+-----+
| 1  | Laptop    | Dell XPS 13          | 1200  | 10       |
| 2  | Smartphone| Samsung Galaxy S21    | 999   | 20       |
| 3  | Tablet    | Apple iPad Pro        | 799   | 15       |
+-----+-----+-----+-----+-----+
3 rows in set (0.000 sec)

mysql> █

```