ANALYSIS AND SYSTEMS OF BIG DATA | COURSE PROJECT

Player Replacement Scouting

Mining top-club replacements from lower-table talent across Europe's top five football leagues

Mid-Semester Report | October 2026

Team members

NAME	ROLL NUMBER
Chris Jason	CS23B1012
Nishaanth Bhaskhar	CS23I1002
Barath Dharshan	CS23I1005
Sooraj Swaminathan	CS23I1006

Indian Institute of Information Technology, Design and Manufacturing (IIITDM) Kancheepuram
Department of Computer Science and Engineering

At a glance

Big Data · Knowledge discovery summary

Question. Can data mining find *young players at non-elite clubs* who play like a current starter of an elite club, and do those players later move up? We answer it with seven seasons (2017-18 to 2023-24) of player data from the five big European leagues, joined with team-style data and league tables, and we judge every method against the simple base rate of "pick a random young player".

18,243 raw player rows from 5 leagues x 7 seasons, read in one DuckDB query	**16** per-90 metrics per player, weighted for team style and league	**13 + 10** syllabus techniques up to classification, plus 10 beyond the syllabus	**2.8x** best hit rate over a random scout in unseen seasons

Most important findings so far (real data; details in section 5):

- A data-driven shortlist works: players who look like a top-club starter moved up **18.3%** of the time against **8.3%** for all young players (permutation p = 0.006), and the best methods found **11 movers in 45 picks** against about 4 for a random scout.
- But nothing yet **clearly beats simply picking the best young performers** (25.0%); the gap is inside the noise. Similarity adds explainability more than accuracy.
- Team style really changes a player's numbers (49 of 96 effects proven); weighting for it **cut style bias by 55%** and makes players from different systems comparable.
- **Playing time** (starter share, AUC 0.70) is the strongest single clue that a club will buy a player; FP-Growth and Apriori return identical patterns, and the mined rules help only modestly out of time (1.22x).
- The outcome definition was the biggest weakness: **40%** of young players were labelled "left the top 5 leagues", and moves to top clubs outside the Premier League were never counted. Refining it is the first task for the second half of the semester.
- The project covers **every syllabus topic up to classification**, including all seven frequent-itemset algorithms written from scratch and a full decision-tree study, and adds **10 techniques beyond the syllabus** (section 3).
- Early reality check: of the 13 players named on the 2023-24 list, **at least four** have since joined elite clubs (Leny Yoro, Bryan Mbeumo, João Pedro, Illia Zabarnyi).

SCOPE OF THIS REPORT

This mid-semester report covers the pipeline and the analyses completed so far; every number comes from the full run on the real Kaggle data. Section 6 lists the current limitations and section 7 the work planned for the second half of the semester, starting with extending the elite reference and the definition of "moving up" to all five leagues.

Contents

1	Problem and objective	6	Current limitations and planned refinements
2	Data and pipeline	7	Plan for the second half of the semester
3	Techniques used	8	Conclusion
4	Findings: team style, outcomes, descriptive statistics and PCA, clustering and outliers, association rules, the course itemset algorithms, similarity and inference, supervised prediction, the decision tree study, the 2023-24 list	A	Glossary and sources
5	Most important findings		

1 Problem and objective

Big Data · Data mining for decision support

Football clubs spend most of their transfer budget replacing first-team players. A club at the top of a league wants a younger, cheaper player who can do the same *job* as an existing starter; a scout can only watch a handful of matches a week. The project turns this into a data-mining question: given the statistical profile of every player in the five big leagues, which young players at non-elite clubs look like elite starters, which combinations of traits precede a move to a bigger club, and how reliable is each method when it is tested on seasons it has never seen?

Objectives

- Build a reproducible big-data pipeline that joins player, team-style and league-table data across 5 leagues and 7 seasons.
- Make player numbers comparable across tactical systems and leagues before any mining (team-style and league weights).
- Apply the full range of course techniques: descriptive statistics, pre-processing, feature extraction, dimensionality reduction, clustering, outlier analysis, frequent-pattern and association-rule mining, similarity measures, classification and regression.
- Validate honestly: base rates, out-of-time tests, walk-forward evaluation, confidence intervals and a simple "best performers" control.
- Produce a short, explainable scouting list for the latest season.

Definitions used throughout. A **feeder** is a player aged 24 or under with at least 900 minutes at a non-elite club. An **elite starter** has at least 1,350 minutes at an elite club. A player **moves up** if, two seasons later, he plays for an elite club or makes a step up in league. The **hit rate** is the share of picked players with a positive outcome, and **lift** is a hit rate divided by the base rate of the whole feeder pool.

2 Data and pipeline

Big Data · Columnar SQL (DuckDB) · data integration

Source (Kaggle)	Content	Use in the project
akshankrithick / fbref-2017-2024-for-europes-top-5-leagues	FBref player season tables, 2017-18 to 2023-24, 5 leagues	player profiles (16 per-90 metrics), age, minutes, club
mexwell / understat-database	Understat match-level team data: xG, deep completions, PPDA, points	team style (dominance, pressing, strength); league tables for all 5 leagues
evangower / english-premier-league-standings	official final Premier League tables	defines the elite reference clubs (Premier League top 3 of each season)

Everything is fetched with the Kaggle CLI and read by **DuckDB** in one query over all season files (*union_by_name*), so new seasons only need a new file. Club names differ between sources, so an alias table plus an accent-insensitive "skeleton" key matched **145 clubs one-to-one**; the run fails if any club is unmatched.

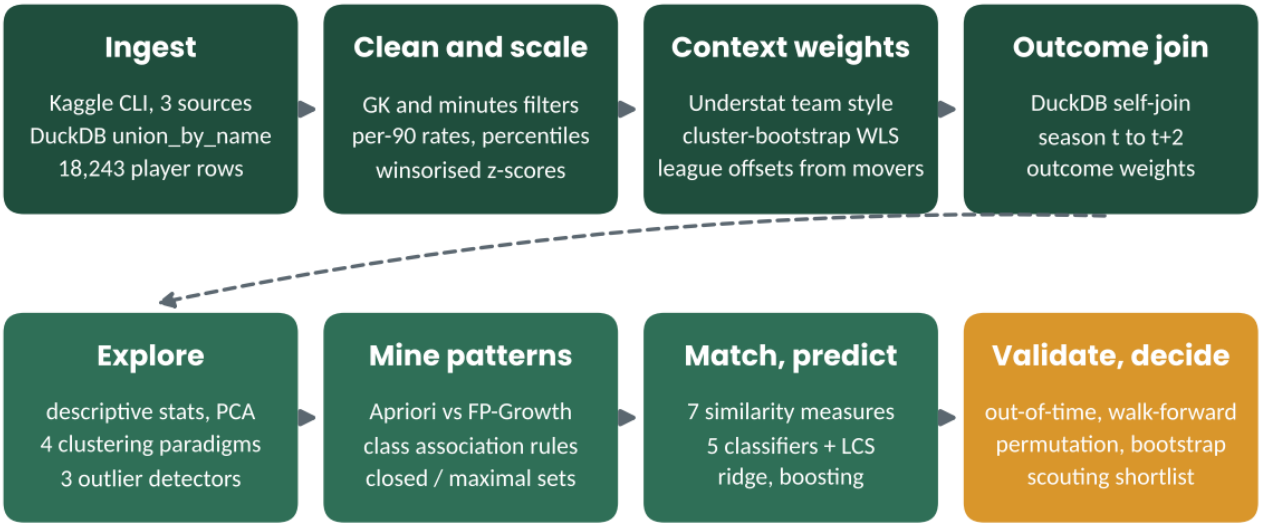


Figure 1. The pipeline. Every stage is a set operation over the whole multi-season table rather than a per-club loop, which is what lets it scale.

Pre-processing audit

Data pre-processing

Step	Rows left	Removed	Reason
Raw rows loaded (5 leagues x 7 seasons)	18,243	0	union of all season files
Goalkeepers dropped	16,865	1,378	outfield per-90 metrics do not describe goalkeepers
At least 10 full matches (900 minutes)	10,435	6,430	per-90 rates from tiny samples are noise
One main row per player-season	10,355	80	a mid-season transfer creates two rows; keep the one with most minutes
Labelled (season t+2 exists in the data)	7,385	2,970	the outcome can only be scored if two seasons later is observed
Eligible feeder player-seasons	1,452	5,933	age, minutes and club filters

No raw metric cells were missing; blanks would mean "no recorded action" and are filled with 0. Four requested metrics (shots on target, xAG, touches, recoveries) are absent from this dataset. Skewed metrics were handled three ways: log transform (median skewness 0.97 to 0.26), winsorising at the 1st/99th percentile within position, and percentile ranks within season and position (skewness 0.00), which also remove position and season effects.

3 Techniques used

Big Data · Course syllabus coverage

The project is required to cover the course topics up to classification and to go beyond what was taught in class. The last column of the table marks each technique as **taught** (part of the syllabus covered so far) or **beyond** (implemented in addition to it). Every technique is in the notebook because it changes a later decision, not as decoration.

Technique	Methods	Purpose	Headline result	Course
Descriptive statistics	mean, median, IQR, skewness, kurtosis, box plots, correlation	scale and shape of 16 metrics by position	median skewness 0.97; gaps up to 11.7x	Taught
Data pre-processing	filters, de-duplication, winsorising, percentiles, z-scores, discretisation	clean and comparable inputs	audit table, nothing dropped silently	Taught
Feature extraction and selection	8 engineered football features, univariate ROC-AUC	football concepts; rank single signals	starter share best (AUC 0.70)	Taught
Dimensionality reduction	PCA (scree, loadings, projection)	compress 16 correlated metrics	7 components keep 80%	Taught
Frequent itemsets	Apriori vs FP-Growth; closed and maximal itemsets	patterns of traits; cost and compression	identical results; maximal sets 34%	Taught
Course itemset algorithms	hash-based Apriori (DHP), DIC, vertical Eclat, Partition, A-Close, Pincer-Search, written from scratch	compare scans, candidates and runtime on player data	all outputs identical to FP-Growth	Taught
Association rules and interestingness	support, confidence, lift, leverage, conviction, cosine, Jaccard, Kulczynski	trait combinations that precede a move up	13 trustworthy rules, best lift 7.6x	Taught
Similarity measures	cosine, Pearson, Euclidean, Manhattan, Mahalanobis on 3 representations	find look-alikes of elite starters	18.3% hit rate vs 8.3% pool	Taught
Inferential statistics	Wilson intervals, chi-square, Mann-Whitney, Fisher exact, Cohen's h	uncertainty around every claim	shortlist vs pool p = 0.006	Taught
Classification	decision tree, naive Bayes; ROC-AUC, PR-AUC, precision@K, confusion matrix	predict who moves up	best 11/45 picks (2.8x random)	Taught
Decision tree induction	Gini vs entropy vs log-loss, depth, leaf size, cost-complexity pruning, tree trace	how the tree is built and why a player is picked	336 trees x 3 unseen seasons	Taught
Learning classifier system	two-stage bucket brigade with credit assignment	rule-based learner	6/45, AUC 0.51	Taught
Prediction (regression)	ridge regression vs persistence and mean baselines	performance two seasons ahead	R-squared 0.35, beats persistence	Taught
Columnar SQL engine	DuckDB: union of all season files, self-joins, window functions	ingest; join season t to t+2 for every player	18,243 rows in one query	Beyond
Entity resolution	alias table + accent-insensitive skeleton key	match clubs across FBref and Understat	145 clubs matched, 0 left over	Beyond
Regression with resampling	minutes-weighted least squares, cluster bootstrap	how team style changes each position's output	49 of 96 effects supported	Beyond
Natural experiment	players who changed league act as their own control	league weights relative to the Premier League	467 movers, 39 of 64 offsets	Beyond
Clustering (4 paradigms)	K-Means, Ward hierarchical, Gaussian mixture, DBSCAN; silhouette, DB, CH, ARI	team tactical families; player archetypes	4 team styles, 9 archetypes	Beyond
Outlier analysis	robust Mahalanobis, Isolation Forest, Local Outlier Factor	unusual profiles; are they bought more?	no link to moving up (p = 0.78)	Beyond

Technique	Methods	Purpose	Headline result	Course
Multiple-testing control	Benjamini-Hochberg false discovery rate over all candidate rules	keep only trustworthy rules	18 candidates to 13 rules	**Beyond**
Resampling inference	permutation test, bootstrap confidence intervals	is the shortlist better than chance or a simple control?	p = 0.006; CI -21.7% to +8.3%	**Beyond**
Ensemble and linear models	random forest, gradient boosting, logistic regression	stronger classifiers and regressors	logistic regression 11/45	**Beyond**
Validation design	out-of-time split, walk-forward evaluation, ablation study	no future information in any test	all results on unseen seasons	**Beyond**

Table. 13 techniques from the syllabus up to classification and 10 techniques beyond it.

4 Findings

Big Data · Inference from the mined results

4.1 Team style and league context

Regression + cluster bootstrap

A raw per-90 number mixes the player with his team. Understat data describes every club-season by territorial dominance (share of deep completions), pressing (PPDA) and strength (non-penalty xG difference). Two independent sources agree on how much of the game a team controls (Spearman 0.82 between an FBref passing proxy and Understat dominance). K-Means on these variables finds four tactical families in 684 club-seasons: Low-block / reactive (217), High-press (176), Balanced / direct (168) and Possession-dominant (123); the Premier League has the largest low-block share (41%).

Largest supported style effects	Elasticity	Reading
Forwards: passes into the box vs dominance	+0.37	about 37% more per unit of extra dominance
Midfielders: passes into the box vs dominance	+0.30	dominant teams feed the box through midfield
Forwards: carries into the box vs dominance	+0.25	more possession, more box entries
Midfielders: progressive passes vs dominance	+0.23	progression is partly the system
Defenders: progressive passes vs pressing	+0.22	pressing sides push defenders up
Defenders: tackles won vs pressing	+0.21	pressing creates tackles

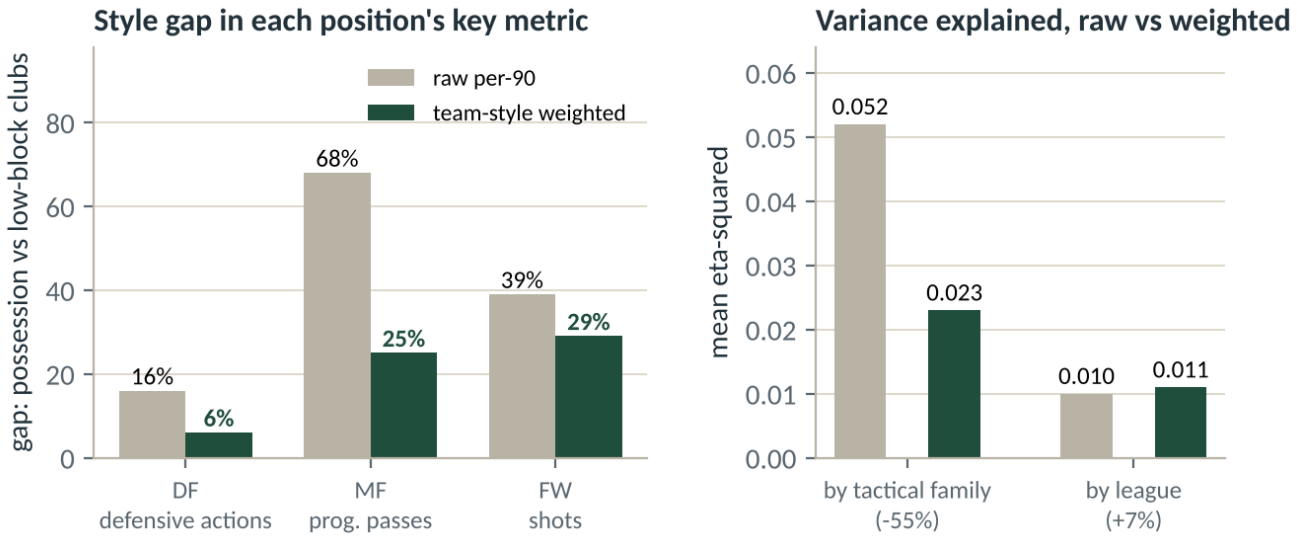


Figure 2. Left: gap between possession-dominant and low-block clubs in each position's key metric, before and after weighting. Right: variance explained by tactical family and by league (eta-squared).

KEY TAKEAWAY

Team style changes what players "do" in half of the tested cases and differently for each position. After weighting, the gap between possession and low-block clubs shrinks for all three positions (midfielders from 68% to 25%) and style bias falls by 55% (39 of 48 metrics improved). League weights from 467 players who changed league were statistically supported for 39 of 64 metrics but did not reduce league variance, which was already small (0.010).

4.2 Who moves up? Base rates and the outcome definition

SQL self-join · label definition

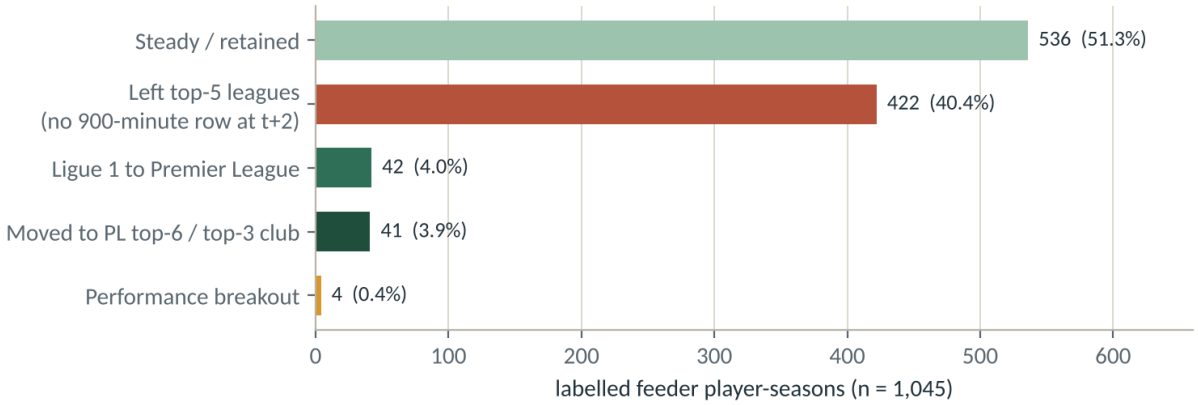


Figure 3. Outcome two seasons later for the 1,045 labelled feeders (current outcome rule).

Under the current rule a young feeder had an **8.3%** chance of a positive outcome (6.4% to 10.6% depending on the season) and a **3.9%** chance of joining a Premier League top-six or top-three club. These base rates are the bar every method must clear.

WEAKNESS FOUND

The red bar is the largest weakness found so far. The current rule looks only at the player's main club two seasons later and only if he played 900+ minutes there, so a young signing who sat on the bench at a big club, or who moved to Bayern, Real Madrid or Inter, is counted as "left the top 5 leagues" or "steady". The refined rule looks at every row in the next two seasons at any minutes, in all five leagues (section 6).

4.3 Descriptive statistics, feature extraction and PCA

Descriptive statistics · PCA

- **Shape:** most metrics have long right tails (median skewness 0.97, kurtosis up to 6.0 for carries into the box); goals are exactly zero for 28% of players.
- **Position matters:** the median of carries into the box differs 11.7x between defenders and forwards, so every trait is ranked within position and season.
- **Redundancy:** 20 of 120 metric pairs correlate above 0.7 (key passes vs shot-creating actions 0.94), so far fewer than 16 independent dimensions exist.
- **Feature selection:** the strongest single signals of a future move are starter share (AUC 0.70), aerial win % (0.69), progressive passes (0.65) and the composite index (0.63).

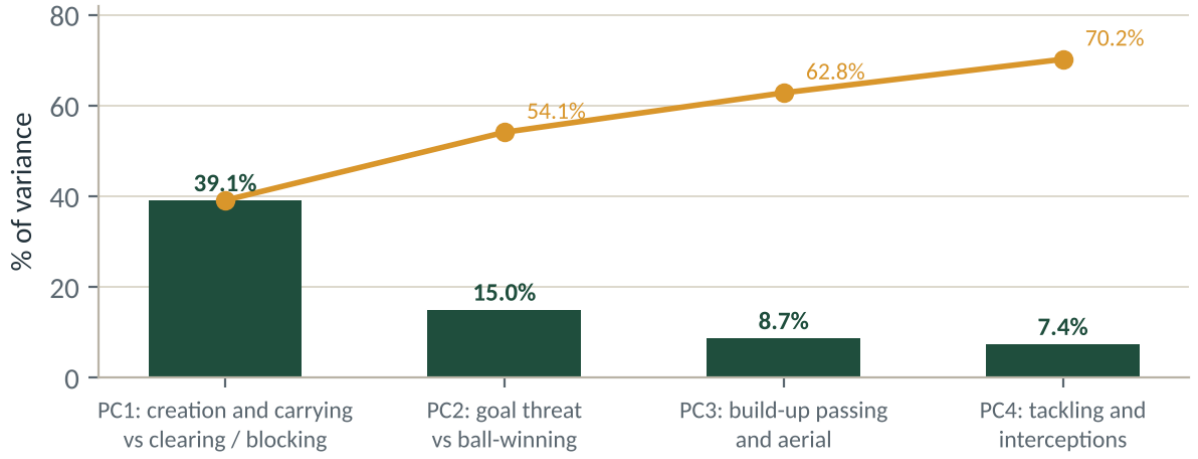


Figure 4. Variance explained by the first four principal components (bars) and cumulatively (line); 7 components keep 80% and 10 keep 90%.

KEY TAKEAWAY

PC1 is overall attacking involvement for the role. Players who later moved up sit between ordinary feeders and top-3 starters on this axis (PC1 0.21 vs 0.07 vs 1.21): clubs buy players who are already moving towards the elite profile, not finished copies of it.

4.4 Clustering and outlier analysis

Clustering · outlier detection

Inside each position, players were clustered in PCA space with four paradigms. K-Means gave the best internal quality (silhouette 0.21 to 0.28, k = 3 per position); Ward agreed well (ARI 0.48 to 0.73); the Gaussian mixture preferred 7 to 8 components but with lower silhouette (about 0.11); DBSCAN found one dense core plus 4% to 6% noise. The low silhouettes say players form a **continuum** of styles rather than separate types.

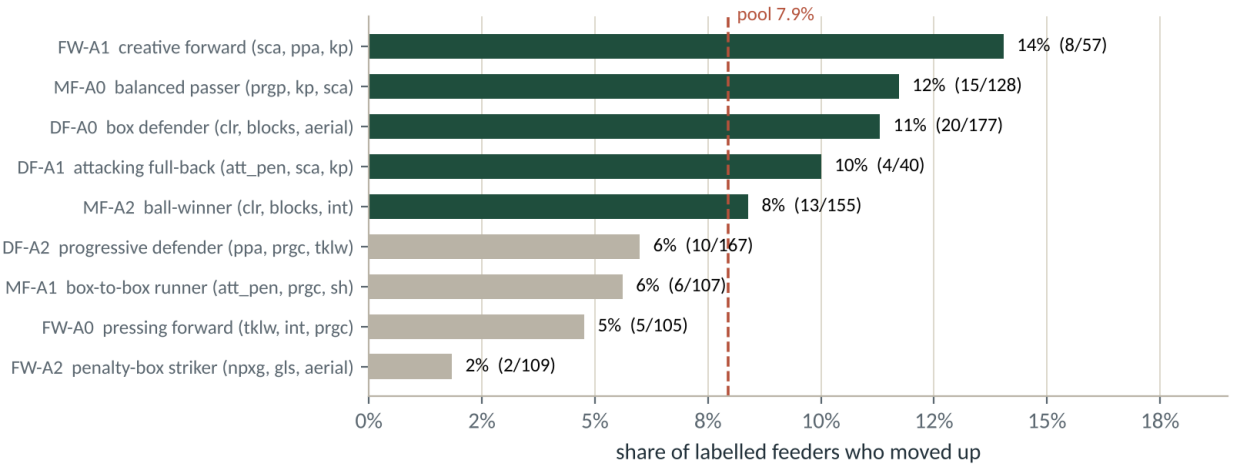


Figure 5. Share of feeders in each archetype who moved up (labels interpreted from each cluster's three strongest traits; dashed line = pool rate).

KEY TAKEAWAY

Archetype and moving up are linked (chi-square p = 0.029, Cramer's V 0.13): creative forwards (14%), balanced passing midfielders (12%) and box defenders (11%) are bought most; penalty-box strikers least (2%). Three outlier detectors agreed only partly (mean Jaccard 0.20) and an unusual profile is not more likely to be bought (Spearman -0.009, p = 0.78): outliers are leads for video scouting, not recommendations.

4.5 Frequent patterns and association rules

Apriori · FP-Growth · rule mining

Each feeder season is a transaction of 27 yes/no items: a "high" flag (top quartile for position and season) for each of 16 traits, a top-quartile composite flag, position, age band, league and two outcome items. Rules were mined on 581 seasons up to 2019 and tested on 464 later seasons.

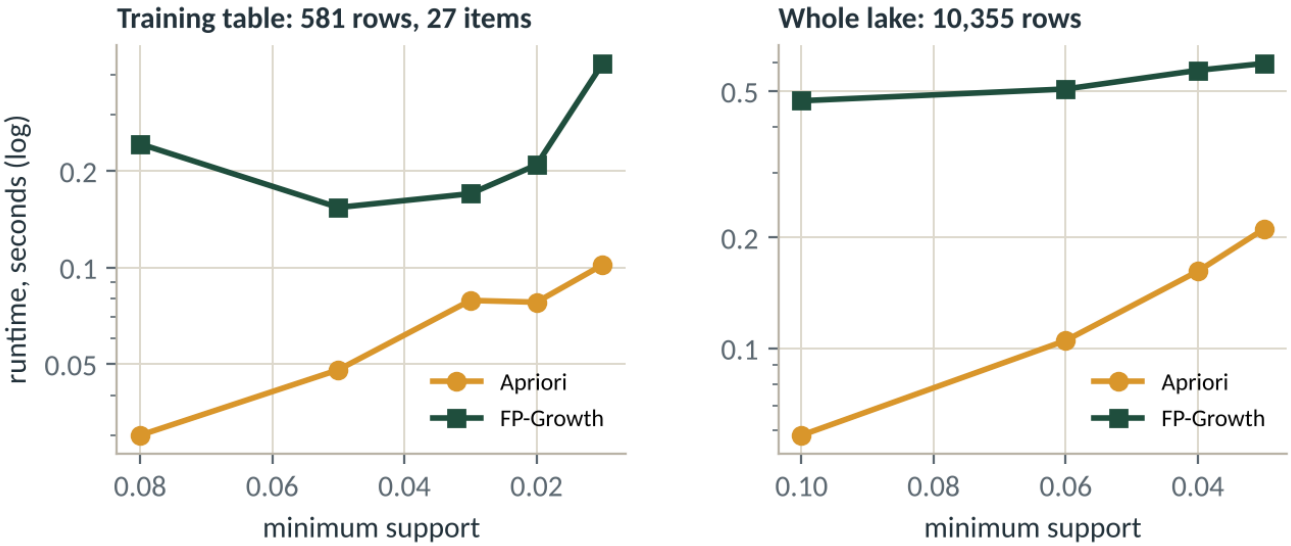


Figure 6. Runtime of Apriori and FP-Growth as the support floor drops. Both returned identical itemsets at every level.

On these modest table sizes Apriori was faster (4.3x on the training table, 2.8x on the 10,355-row lake) because FP-Growth pays a tree-building overhead; the gap narrows as the table grows, which is the scaling argument for FP-Growth on very large data. 6,564 frequent itemsets produced 18 candidate rules backed by at least 8 players, and 13 survived lift, Benjamini-Hochberg FDR and redundancy pruning.

Rule (antecedent)	Outcome	Players	Confidence	Lift
top-quartile composite + high aerial	top club	9	25.0%	7.6x
top-quartile composite + Premier League	top club	8	15.7%	4.8x
age 21-22 + high carries + Ligue 1	Ligue 1 to PL	8	15.4%	4.5x
top-quartile composite + high carries + Ligue 1	Ligue 1 to PL	10	14.1%	4.1x
age 21-22 + high progressive carries	Ligue 1 to PL	8	11.0%	3.2x
high progressive carries + Ligue 1	Ligue 1 to PL	12	9.2%	2.7x
high aerial win %	top club	13	8.7%	2.7x
top-quartile composite	top club	12	8.2%	2.5x

Min. support	Frequent	Closed (lossless)	Maximal (lossy)	Longest itemset
0.10	182	182 (100%)	96 (53%)	4
0.07	448	448 (100%)	207 (46%)	5
0.05	918	916 (99.8%)	336 (37%)	6
0.04	1,559	1,541 (98.8%)	525 (34%)	7

KEY TAKEAWAY

Being good overall and strong in the air is the clearest route to a top club (lift 7.6x), and progressive carrying is the Ligue 1 to Premier League signature. Closed itemsets compress almost nothing (99% of the set, verified lossless) because these traits rarely share identical support; maximal itemsets cut it to a third. Out of time, players matching a rule moved up 11.6% vs 9.5% for all test feeders (lift 1.22x, p = 0.074): positive but not statistically significant.

4.6 The course frequent-itemset algorithms

DHP · DIC · Eclat · Partition · A-Close · Pincer

Library Apriori and FP-Growth were complemented by implementing every frequent-itemset algorithm of the course from scratch and running them on the same player transactions (the 27 trait, context and outcome items, with the outcome items removed). Each algorithm answers the same question in a different way, so the comparison is about cost: how many full passes over the data, how many candidate itemsets have to be counted, and how long it takes.

Algorithm	How it works	Passes over the data	Output
Apriori (reference)	level-wise join and prune; one scan per itemset size	longest itemset + 1	all frequent itemsets
Hash-based Apriori (DHP)	pairs hashed into buckets in the first scan; a pair is a candidate only if its bucket is frequent; transactions trimmed	as Apriori, far fewer candidate pairs	all frequent itemsets
Dynamic Itemset Counting (DIC)	data read in blocks; new candidates start at any block boundary once all their subsets look frequent	fewer than one full pass per level	all frequent itemsets
Vertical mining (Eclat)	item to set of transaction ids (bit masks); support = size of an intersection; depth-first	one	all frequent itemsets
Partition	each chunk mined locally; the union of local results verified in one more scan	exactly two	all frequent itemsets
A-Close	level-wise search for generators, then closure = intersection of the transactions that contain them	levels + 1	frequent closed itemsets (lossless)
Pincer-Search	bottom-up levels plus a top-down maximum frequent candidate set counted in the same scans	often fewer than Apriori	maximal frequent itemsets

Verification. The notebook asserts that the frequent itemsets and their exact counts from Apriori, DHP, DIC, Eclat and Partition are identical to the library FP-Growth, that A-Close returns exactly the closed itemsets and Pincer-Search exactly the maximal itemsets found in section 4.5, at three support levels on the training table and once on the 10,355-row lake. On a test dataset with the same structure all seven agreed with the reference; Eclat needed one pass, Partition two, DIC 2.5 to 3.25, and the hash filter removed up to 90% of the candidate pairs before the second scan.

RESULTS

The full-data runtimes, pass counts and candidate counts for this comparison are produced by the notebook (section 7c3) and will be added to this report once the full run is complete.

4.7 Similarity shortlist and inferential statistics

Similarity search · inference

Each season, every top-3 starter's standardised 16-metric profile was compared by cosine similarity with every feeder of the same position; each starter contributes his closest feeder and the 12 best matches above 0.85 form the shortlist. A same-size list of the best performers by composite index is the control.

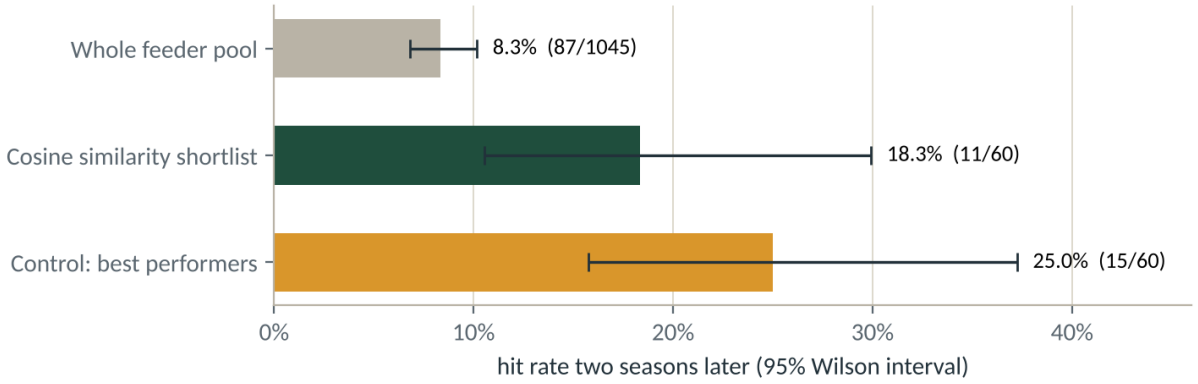


Figure 7. Hit rate two seasons later, pooled over five cohorts, with 95% Wilson intervals.

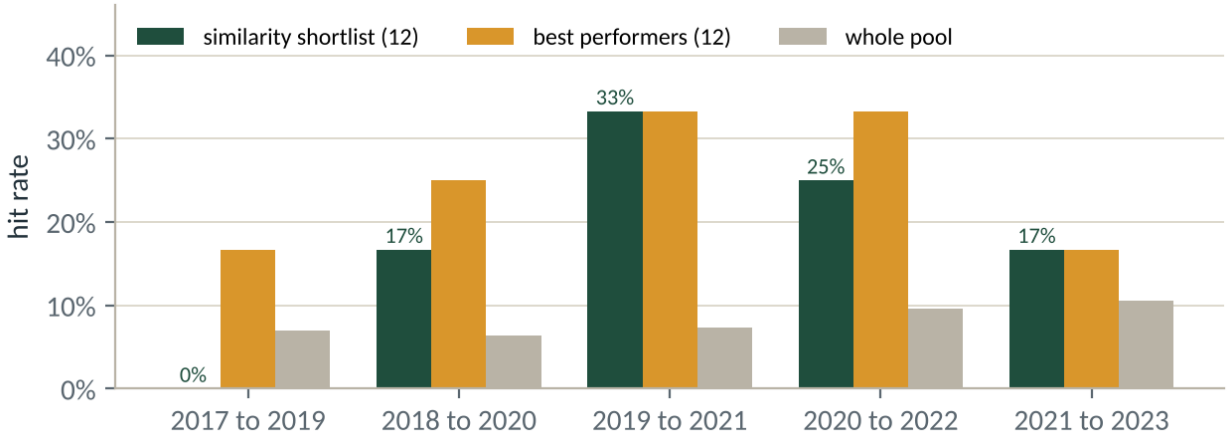


Figure 8. The same comparison cohort by cohort; with 12 players per list, single cohorts are noisy.

Player (season, club)	Matched elite starter	Similarity	Two seasons later
Diogo Jota (2018, Wolves)	Raheem Sterling (Man City)	0.943	Liverpool
Gabriel Magalhães (2018, Lille)	Virgil van Dijk (Liverpool)	0.957	Arsenal
William Saliba (2020, Nice)	Rúben Dias (Man City)	0.958	Arsenal
Jack Grealish (2019, Aston Villa)	Riyad Mahrez (Man City)	0.873	Manchester City
James Maddison (2021, Leicester)	Mason Mount (Chelsea)	0.955	Tottenham
Benoît Badiashile (2021, Monaco)	Joël Matip (Liverpool)	0.950	Chelsea
Sven Botman (2020, Lille)	Harry Maguire (Man Utd)	0.926	Newcastle (Ligue 1 to PL)

Table. Shortlisted players who did move up (examples from the real-data run).

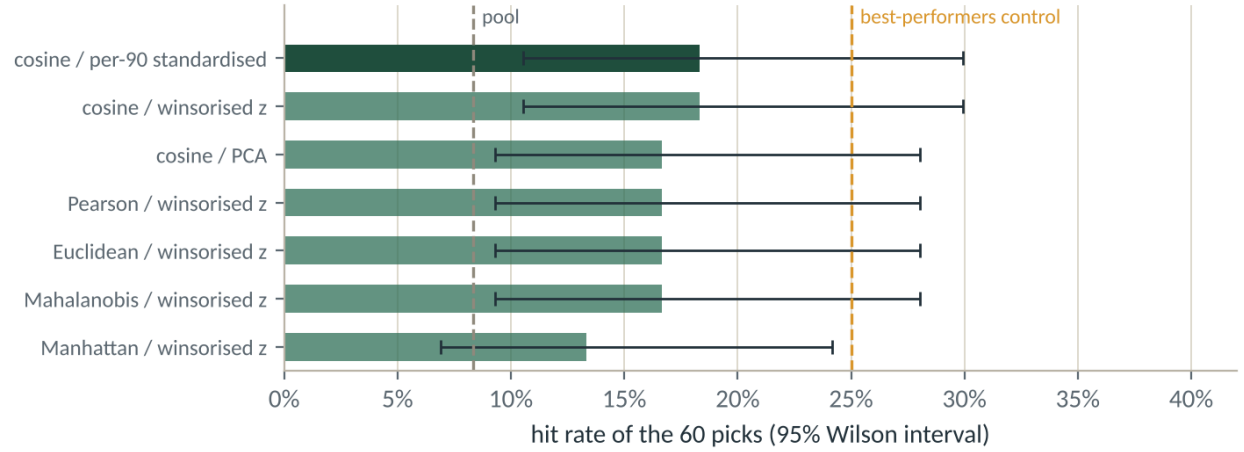


Figure 9. Seven similarity measures under identical rules (60 picks each).

KEY TAKEAWAY

The shortlist beats random scouting clearly (18.3% vs 8.3%; permutation p = 0.006, Cohen's h 0.30), but not the simple control: shortlist minus best performers is -6.7% with a 95% bootstrap interval of -21.7% to +8.3%. All seven similarity measures land between 13% and 18% and are statistically indistinguishable, yet they pick different players (only 31% overlap). Movers differ from stayers mainly in minutes (median 2,352 vs 1,826, AUC 0.70) and composite performance (54.7 vs 50.6).

4.8 Supervised prediction

Classification · walk-forward validation

Eight methods were trained only on seasons whose outcome was already known and asked to pick 15 players in each of three unseen seasons (2019 to 2021). In those seasons 8.7% of feeders moved up, so a random scout would expect about 4 hits in 45 picks.

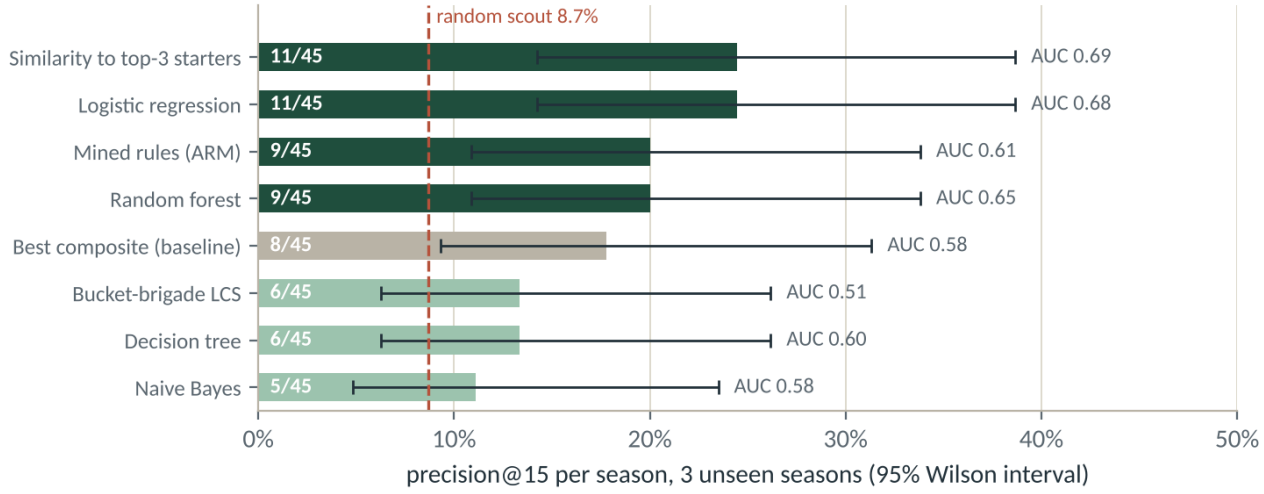


Figure 10. Hits among each method's 45 picks with 95% Wilson intervals; AUC = ranking quality over all thresholds.

Features	Model	Mean AUC	Hits / 45
raw per-90 percentiles	Logistic regression	0.716	13
raw per-90 percentiles	Random forest	0.738	13
team-style + league weighted	Logistic regression	0.700	14
team-style + league weighted	Random forest	0.721	11

Table. Ablation: the same models on raw versus weighted features.

Regression model (index two seasons ahead)	MAE	RMSE	R-squared
Ridge regression	6.94	8.63	0.35
Gradient boosting	7.01	8.71	0.34
Persistence ("same as now")	7.59	9.50	0.21
Mean of training targets	8.81	10.70	0.00

Table. Regression on 270 unseen player-seasons; ridge beats persistence by 0.65 points (95% CI 0.10 to 1.22).

KEY TAKEAWAY

Five of eight methods beat a random scout (binomial $p < 0.05$); similarity to top-3 starters and logistic regression did best (11/45, 2.8x). Their intervals overlap, so the order among methods is not reliable, and none clearly beats ranking by current performance (8/45). The weights make players fairer to compare but do not improve prediction (AUC about -0.017), because clubs also buy on raw output and reputation. Development is partly predictable (R-squared 0.35), with clear regression to the mean.

4.9 Decision tree study and the trace of the tree

Decision tree induction

The leaderboard used a single fixed tree (Gini, depth 3, at least 15 players per leaf), which reached a mean AUC of 0.60 and 6 hits in 45 picks. The tree study examines how the tree is built, with the same walk-forward protocol and the same 40 features:

- **Split criteria:** Gini impurity, entropy (information gain) and log-loss.
- **Hyperparameters:** maximum depth 2 to 8 and unlimited; minimum samples per leaf 5, 15, 30 and 60; cost-complexity pruning (ccp_alpha 0 to 0.01).
- **Scoring:** 336 configurations x 3 unseen seasons = 1,008 trees, each scored by mean ROC-AUC, average precision and hits among the top picks; the training AUC is kept to expose over-fitting.
- **Trace:** the best tree is printed as if-then rules and drawn, and the exact root-to-leaf path of three real test players (a mover it picked, a mover it missed, a non-mover it picked) is shown step by step with the share of similar training players who moved up at every node.

Trace of the current tree (real data). Trained on all labelled seasons, the fixed tree reads as three scouting rules:

Path	Condition	Prediction
1	aerial win % percentile above 70 and progression percentile above 22 (not a penalty-box striker archetype)	moved up
2	aerial win % percentile 70 or below, starter share above 0.48 and tackles-won percentile above 19	moved up
3	any other path (for example starter share 0.48 or below)	stayed

Table. The depth-3 tree from the real-data run, read from root to leaf.

KEY TAKEAWAY

Even the small tree turns into readable scouting conditions: strong in the air and progressive, or a regular starter who wins tackles. On the test dataset the study showed the expected pattern: the three criteria differ by less than 0.01 AUC (entropy and log-loss build identical trees in scikit-learn), while an unlimited tree climbs to a training AUC near 0.9 but falls on new seasons, so depth and pruning matter far more than the split criterion. The full-data numbers come from notebook section 9A-3.

4.10 The 2023-24 scouting list and an early reality check

Decision support

All models were re-fitted on every labelled season and applied to the 198 eligible feeders of 2023-24. A **priority target** needs both role fit (on the similarity shortlist) and a model probability in the top quartile.

Player	Club (age)	Matched elite starter	P(move up)	Status
Arthur Theate	Rennes (23)	Rúben Dias	0.22	priority
Jan Paul van Hecke	Brighton (23)	Ibrahima Konaté	0.18	priority
Illia Zabarnyi	Bournemouth (20)	Gabriel Magalhães	0.18	priority; **joined PSG, Aug 2025**
Kevin Danso	Lens (24)	Virgil van Dijk	0.17	priority
Andy Pelmard	Clermont Foot (23)	Manuel Akanji	0.14	priority
Toti Gomes	Wolves (24)	William Saliba	0.11	priority
Bryan Mbeumo	Brentford (23)	Mohamed Salah	0.11	priority; **joined Man Utd, Jul 2025**
Anthony Gordon	Newcastle (22)	Bukayo Saka	0.30	priority
João Pedro	Brighton (21)	model only	0.41	**joined Chelsea, Jul 2025**
Leny Yoro	Lille (17)	model only	0.32	**joined Man Utd, Jul 2024**

Table. Priority targets and two model-only names. Transfers are from public reports (sources listed in the appendix), not yet from the dataset.

KEY TAKEAWAY

Within two seasons at least four of the thirteen named players joined elite clubs, including Zabarnyi to PSG, a move the current rule cannot count because PSG is outside the Premier League. This is anecdotal (no base-rate comparison yet), but it is exactly the evidence the five-league outcome rule planned for the second half will measure properly.

5 Most important findings

Big Data · Knowledge discovery

1. **Scouting by data beats chance, clearly.** Look-alikes of elite starters moved up 2.2x as often as random young players, and the best learned models reached 2.8x on unseen seasons.
2. **Quality and minutes are most of the signal.** Starter share and the composite index are the strongest single clues; no method has yet proven better than "pick the best young performers".
3. **Context must be removed before comparing players.** Team style shifts per-90 numbers by position (49 of 96 effects); weighting cut style bias by 55%.
4. **Some trait combinations are real signals.** Overall quality plus aerial strength (lift 7.6x) and progressive carrying in Ligue 1 (4.1x) precede moves, but rules transfer to new seasons only weakly.
5. **Players form a continuum, not types.** Clusters are weak (silhouette at most 0.28), yet archetypes still differ in how often they are bought (chi-square p = 0.029).
6. **Algorithms agree; cost depends on scale.** Apriori and FP-Growth always return identical itemsets; on these sizes Apriori is faster, and the gap narrows as the table grows.
7. **Honest validation changes conclusions.** Without the best-performers control the similarity method would look like a breakthrough; with it, the gain is within noise.
8. **The label is the weakest link.** The current rule mislabels 40% of players and ignores moves to elite clubs outside the Premier League; fixing it is the first priority for the second half.

6 Current limitations and planned refinements

Big Data · Data quality audit

Area	Current approach	Planned refinement (second half)
Reference ("whom do we replace?")	starters of the Premier League top 3 only, about 30 profiles a season, mostly two clubs	starters of the top-N clubs of each of the five leagues (default N = 6), about 10x more profiles across many systems
Who can be scouted	under-25s at Premier League and Ligue 1 clubs	under-25s at every non-elite club of all five leagues
What counts as moving up	PL traditional six or PL top 3, or Ligue 1 to PL	any top-N club or traditional giant of any league, graded: top-4 or giant 1.0, places 5-6 0.75, stronger league 0.5, breakout 0.25
How the move is detected	main club at t+2 only, and only with 900+ minutes there	best destination in t+1 or t+2 at any minutes; age check to avoid name clashes (DuckDB window query)
League tables	official PL table only	tables for all five leagues rebuilt from Understat match rows, validated against the official PL table
Top 3 vs top 6	fixed at top 3	sensitivity analysis: top 3, 4 and 6, Premier League only vs all five leagues

Other known limitations:

- Outcomes are inferred from the club a player appears for in later seasons, not from a transfer-history feed with fees and dates.
- Aerial win % is a raw percentage, so players with few duels can look extreme; shrinkage towards the position mean is planned.
- Positions are coarse (DF, MF, FW); a centre-back and a full-back are compared as one group.
- Consecutive cohorts share players and only three test seasons exist, so intervals are wide and p-values somewhat optimistic.
- The list of traditional giants is fixed by hand, and league tables rebuilt from match data will not include point deductions.

7 Plan for the second half of the semester

Big Data · Project roadmap

Phase	Work	Deliverable
1. Five-league extension	Use the top clubs of all five leagues as the reference and as destinations, apply the refined outcome rule, and choose top 3, 4 or 6 from the sensitivity analysis.	corrected labels, updated findings
2. Better data	Add seasons 2024-25 and 2025-26; a transfer-history source for fees and dates; shrinkage for rate metrics; finer positions (CB, FB, DM, CM, AM, W, ST).	richer, more accurate labels
3. Scale and serve	Store the lake as partitioned Parquet; show the same queries in PySpark to demonstrate scaling; an interactive dashboard for the scouting list.	scalable pipeline, dashboard
4. Final evaluation	Re-run every analysis, including the course itemset algorithms and the decision tree study, on the corrected labels with the same walk-forward protocol; write the final report.	final report and presentation

FOCUS FOR THE SECOND HALF

The goal of the second half is not more methods for their own sake but a fairer test: correct labels across all five leagues, a reference set chosen by data, and every analysis re-run on those labels. Only then can we say whether similarity or learning really beats picking the best young performers.

8 Conclusion

Big Data · Summary

The project shows that a big-data pipeline over five leagues and seven seasons can turn raw player statistics into a short, explainable scouting list that finds future movers far more often than chance. It also shows where the value really lies: removing team and league context makes players comparable, honest validation keeps claims in proportion, and the definition of "moving up" matters as much as any algorithm. In the second half of the semester we will widen the reference and the destinations to all five leagues, repair the outcome label, and re-run every analysis on the corrected labels.

A Glossary and sources

Big Data · Reference

per-90	a season total divided by minutes / 90	**precision@K**	share of hits among the top K picks
percentile	rank within season and position, 0 to 100	**lift**	rate in a group divided by the base rate
composite index	mean percentile over the 16 metrics	**FDR**	false discovery rate (Benjamini-Hochberg)
npxG	non-penalty expected goals	**eta-squared**	share of variance explained by a grouping
PPDA	opponent passes allowed per defensive action (lower = more pressing)	**Wilson interval**	95% confidence interval for a proportion
deep completion	a pass completed within about 20 m of goal	**ARI**	adjusted Rand index; agreement between two clusterings
starter share	minutes divided by 3,420 (a full season)	**LCS**	learning classifier system (bucket brigade)
AUC	area under the ROC curve; 0.5 = coin flip		

Transfer sources for section 4.10

- Leny Yoro to Manchester United (July 2024): ewn.co.za/2024/07/19/manchester-united-sign-18-year-old-french-defender-yoro
- Bryan Mbeumo to Manchester United (July 2025): tntsports.co.uk, "Manchester United confirm deal to sign Bryan Mbeumo from Brentford"
- João Pedro to Chelsea (July 2025): thepeninsulaqatar.com/article/02/07/2025/chelsea-sign-brazil-striker-joao-pedro-from-brighton
- Illia Zabarnyi to Paris Saint-Germain (August 2025): aljazeera.com/sports/2025/8/12/illia-zabarnyi-psg-sign-ukraine-defender-from-bournemouth

ANALYSIS AND SYSTEMS OF BIG DATA | COURSE PROJECT

Shadow Squad

Who replaces whom? Ranking, pricing and stress-testing replacements across Europe's top five football leagues

End-Semester Report | November 2026

Team members

NAME	ROLL NUMBER
Chris Jason	CS23B1012
Nishaanth Bhaskhar	CS23I1002
Barath Dharshan	CS23I1005
Sooraj Swaminathan	CS23I1006

Indian Institute of Information Technology, Design and Manufacturing (IIITDM) Kancheepuram
Department of Computer Science and Engineering

At a glance

Big Data · End-semester summary

Question. The mid-sem asked which young players will move up. The end-sem asks what a club asks: *a starter is leaving, who should replace him?* The system is tested against what clubs really did: 593 elite replacement events and 1,941 summer signings by any club in the five leagues, 2017-18 to 2024-25. Every model that ranks a season was fitted on earlier seasons only.

11,792 player-seasons, 8 seasons, 5 leagues; three sources joined in a Spark + Parquet lake	**99.7%** of 900-minute players linked from FBref to Transfermarkt ids	**13% vs 4%** recall@10, engine against market value, on 1,029 unseen signings	**14% vs 0%** recall@10 on the 301 signings below the median fee, engine against market value
+176% mean two-year return of the 25 most under-priced players each summer; a random 25 returns +22%	**+1.8 pts** change in share of league minutes from moving to an elite club, against a matched twin (95% CI -4.3 to +7.9)	**30%** of near-miss players can pad cheap stats to enter the top 10; the hardened model brings this to zero	**8 + 7** new Spark algorithms (one per task), plus seven techniques beyond the course

Most important findings (all computed; details in sections 6 and 7):

- **The engine finds real signings.** On 1,029 unseen signings it puts the bought player in the top 10 for **13%** of events, against 4% for market value, 7% for the best young performer and 6% for a random order ($p < 0.001$ against market value).
- **It earns its keep on cheap signings.** Over all signings below the median fee (EUR 14m) the engine reaches 14% recall@10 and market value 0.3% ($p < 0.001$); above the median the gap narrows to 19% against 13%. The dearer the signing, the more market value already knows.
- **The market misprices, and it can be measured.** A portfolio of the 25 players priced furthest below what their profile predicts returned **+176%** in two years (+149% on the money spent), against +22% for a random 25 ($p < 0.001$). The league discount is real but is not a bargain: it does not close.
- **Moving to an elite club neither helps nor hurts a young player on average.** Against a twin who stayed, minutes change by +1.8 points and style-neutral output by -0.05 index points (0-100 scale); both intervals include zero (142 matched pairs).
- **The scout can be gamed, cheaply, and fixed for free.** 30% of players ranked 11 to 20 enter the top 10 by raising cheap stats (median: 0.09 more shots per 90). A model that ignores those stats closes the hole with recall@10 at 36% against 31%.
- **What did not work.** On elite replacements overall the engine (31% recall@10) does not beat market value (35%) or the hazard score (35%). Style translation is no better than raw numbers once refitted walk-forward, ALS club taste loses to plain popularity, and the engine's own top-25 portfolio is no better than random.

WHAT CHANGED SINCE THE FIRST END-SEM DRAFT

Market value is now the last valuation before the window opens, so it cannot react to the signing it predicts. Style elasticities, standardisation, archetypes and outlier scores are refitted at every season cut-off on past seasons only. The 2024-25 season was added, and a third matching pass cut unmatched feeder-seasons to 13 of 3,154. Numbers from the first draft are replaced by the ones above.

Contents

1	What changed since mid-sem	6	Results: who gets signed
2	Data lake and PySpark pipeline	7	Beyond the syllabus
3	New algorithms, one per task	8	Model predictions and case studies
4	Techniques beyond the course	9	Limitations and conclusion
5	Style translation on real movers		

1 What changed since mid-sem

Problem · Labels · Leakage control

The mid-sem report (included unchanged before this part) found that no method clearly beat ranking the best young performers, and that its cosine shortlist was worse than that baseline. Three things were limiting it.

The question. A club does not buy "a player who will move up". It buys a replacement for a starter who left, or fills a position. The end-sem system takes a club, a season and a departing starter (or a position), and returns a ranked list. The test is whether the player the club really signed is near the top.

The labels. Mid-sem outcomes were inferred from the club a player's name appeared next to one or two seasons later. They now come from Transfermarkt transfer records. On the 1,966 feeder-seasons with both labels, the two agree on "moved up" for 91.7%. The old rule called 132 moves with no matching permanent transfer, mostly loan spells and loan returns; on the same rows the move-up rate falls from 26.5% to 21.4%. The new label also covers 2022-23 and 2023-24.

The data. Transfermarkt (*davidcariboo/player-scores*) adds transfers, fees, market values, fine positions and a stable player id. FBref removed its advanced statistics in January 2026; a scrape taken before that (*emrey3lmaz*) supplies 2024-25. The two FBref sources agree on the shared 2023-24 season: the lowest per-metric correlation over 1,600 players is 1.000.

The mid-sem notebook was re-run unchanged first. Its minutes column is named *avg_mins_per_match* but holds season totals (maximum 3420), so no fix was needed. Its baseline on the refined labels: feeder base rate 26.7%; best walk-forward model 46 hits in 75 picks; best-composite baseline 31 in 75.

Leakage control

Component	How it is kept out of the future
Market value	last valuation before 1 June after season t; the window used for the events opens that day
Style elasticities, league offsets	refitted for every season on seasons up to it; the values correlate 0.996 with the mid-sem all-season fit
Standardisation (z-scores)	mean and SD from seasons up to the row's own
Archetypes, outlier scores	number of clusters chosen on seasons up to 2019-20; clustering refitted at each cut-off; neighbours taken from past seasons only
PageRank, ALS taste	graph and signing matrix built from transfers dated before June of t+1
Hazard, ranker	trained on seasons or events up to t-1

Table 1. Every input a ranking of season t uses, and the data it was fitted on.

2 Data lake and PySpark pipeline

Spark · Parquet · Entity resolution



Figure 1. The pipeline. Every stage after the first reads and writes Parquet under lake/.

All sources are written as Parquet partitioned by season and league: 21,097 raw FBref player-club rows, 11,792 player-seasons with 900 minutes or more, 780 Understat club-seasons, 168,248 transfers, 615,190 valuations and 50,149 Transfermarkt players. League tables are rebuilt from match results and agree with the mid-sem table on 99.1% of club-seasons. Writing the lake takes 20 s in local mode, and a query for one season and league reads one partition.

Entity resolution. FBref has no player id. Pass 1 learns the club alias map from the data (join on season, league, birth year and exact name key, then a majority vote): all 149 clubs map one to one. Pass 2 blocks on season and club and compares accent-free, token-sorted name keys with Spark *levenshtein* and a Jaro-Winkler pandas UDF, plus birth year and position group, keeping mutual best pairs. Pass 3 handles nicknames that share no letters (FBref "Jonny Castro" is Transfermarkt "Jonny Otto"): same club and season, same birth year and position group, league minutes within 10%, unique on both sides. It added 34 players. In all, 98.3% of outfield player-club-seasons are linked and 99.7% of those with 900 minutes; 13 of 3,154 feeder-seasons stay unmatched and are listed in *outputs/unmatched_feeders.csv*.

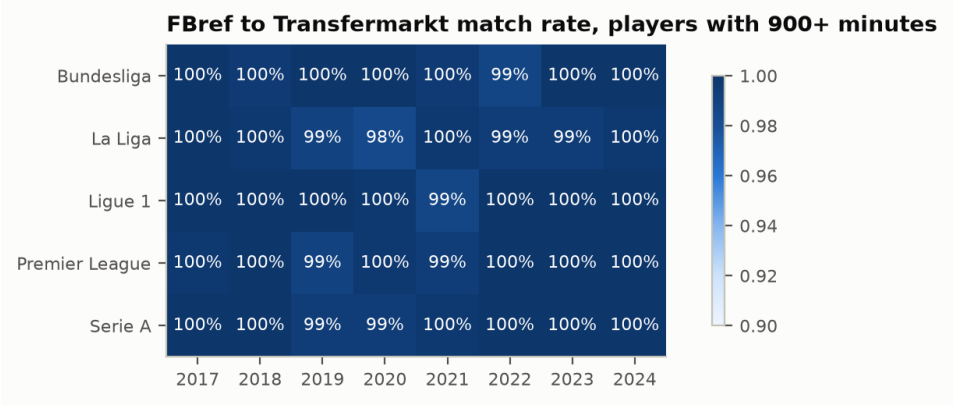


Figure 2. FBref to Transfermarkt match rate per league and season, players with 900 minutes or more.

Transfers. Loans are found by walking each player's moves in date order: a move that undoes the previous one within 18 months closes a loan, and a loan made permanent counts from the day it started (23,100 loan departures removed). The dump has no transfer record at all for some players, so their moves are read from league minutes (1,417 moves, 750 players). After that 96.0% of feeder-seasons have a transfer history.

Two event sets. An *elite replacement* is an elite club whose starter (1,350 minutes or more) plays under 450 league minutes for it the next season, and which signs a player of the same fine position that summer who then plays at least 450 minutes: 593 events from 479 signings. Only 24% of those signings were inside the candidate pool (age 26 or under, 900 minutes, non-elite club in the five leagues); 25% came from clubs outside the five leagues and the rest were older, at another elite club, or had played too little. The engine can only be right about the 128 events whose signing was in the pool. The second set is *every summer signing* by a five-league club of a player with 900 minutes in the five leagues the season before: 1,941 signings in 1,657 club-season-position queries.

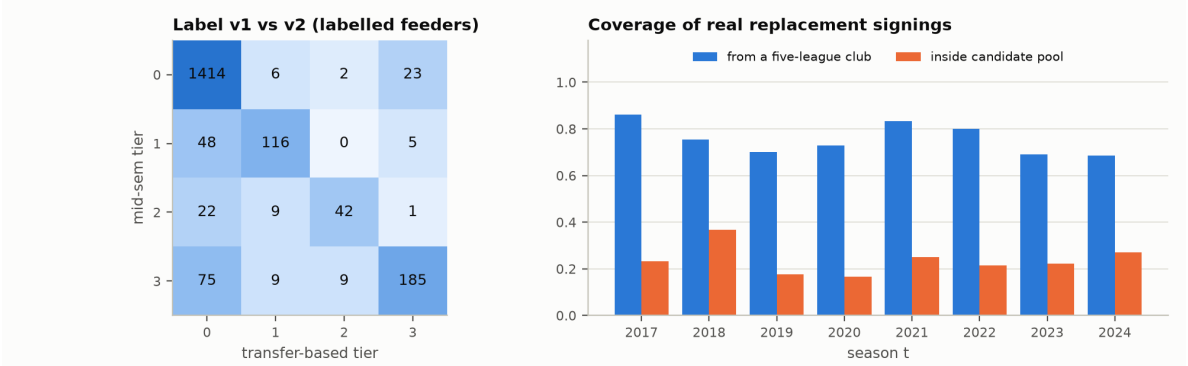


Figure 3. Left: mid-sem label against the transfer label. Right: share of real replacement signings from a five-league club, and inside the candidate pool.

3 New algorithms, one per task

PySpark · 8 mining tasks

None of these was used before the mid-sem. Each runs in Spark (local mode) with its physical plan shown once in notebook 03.

Task	Algorithm (Spark)	Result	Time
Similarity search	Euclidean LSH, MinHash LSH	95% of true top-25 neighbours kept while comparing 88% of pairs	0.5 s
Sequential patterns	PrefixSpan	461 frequent career sequences; flagged players move up 27.4% against 24.9% out of time	1.2 s
Clustering	Bisecting k-means per fine position	22 archetypes, mean silhouette 0.19; Cramer's V with moving up 0.19	120 s
Link analysis	GraphFrames PageRank; power-iteration clustering	pipeline rank AUC 0.582 (sales count 0.582); communities with modularity 0.33	24 s
Recommendation	ALS, implicit feedback	MRR 0.633 against 0.668 for popularity: ALS loses	15 s
Classification	LinearSVC, multilayer perceptron	LinearSVC AUC 0.690, MLP 0.604 (mid-sem best 0.681)	161 s
Outlier detection	k-NN distance score (self-join)	flagged "hidden gems" move up 16.7% against 22.8%: the flag does not work	2.8 s
Stream mining	Structured Streaming, Count-Min Sketch	live team dominance reaches r = 0.9 with the season value after about 12 matches	13 s

Table 2. The eight Spark mining tasks, each with its own metric.

Similarity search (LSH). Random-projection LSH hashes vectors so that close ones tend to share a bucket, and only bucket-mates are compared. It generates candidates for each replacement event from style-neutral vectors; MinHash on top-quartile trait sets is a second view. The pool is small (about 95 same-position players per event), so LSH saves little here: the chosen setting still compares 88% of pairs. The same code would matter on a pool of every league in the world.

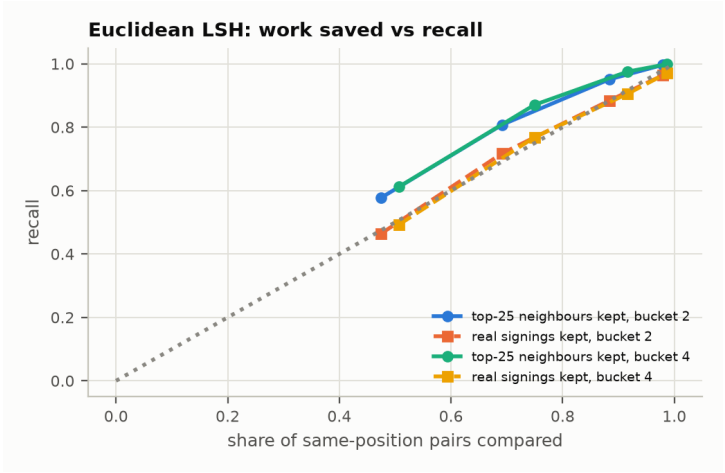


Figure 4. LSH: share of pairs compared against recall of the exact top-25 neighbours and of the real signings.

Sequential patterns (PrefixSpan). A career is an ordered list of seasons, each an itemset of club tier, league, role and form band. PrefixSpan mines frequent orders on feeder-seasons up to 2019-20. The strongest multi-season pattern is {club=mid} -> {club=mid, form=mid, role=starter} (lift 2.04 in training, 1.46 later). Out of time the flagged group moves up at 1.10 times the base rate (Fisher p <0.001): real, and small.

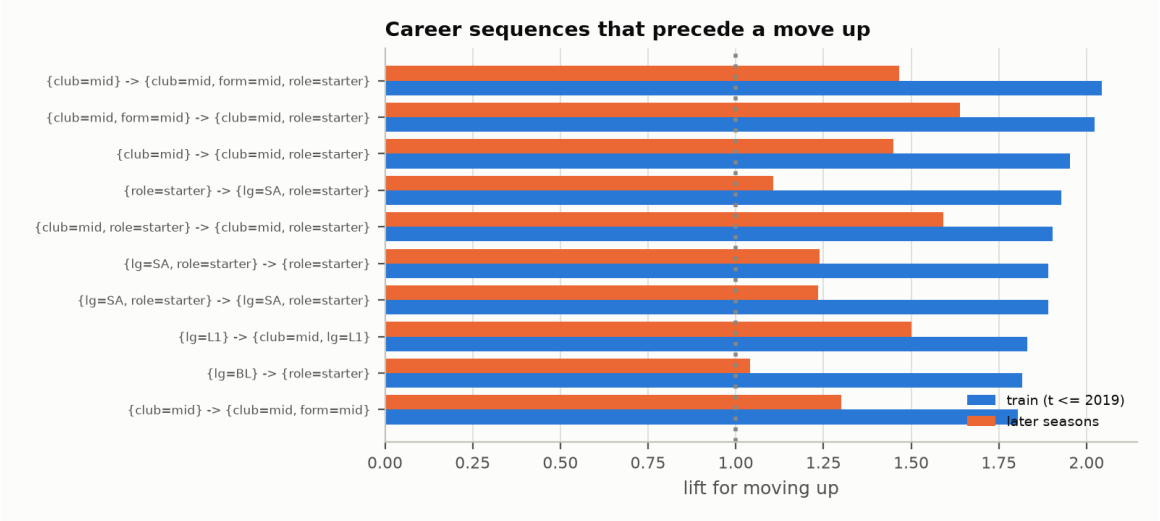


Figure 5. Career sequences with the highest lift for moving up, in training and in later seasons.

Clustering (bisecting k-means). Bisecting k-means splits the worst cluster in two, repeatedly. It runs inside each of the seven Transfermarkt fine positions, which the mid-sem could not do with three coarse groups, and is refitted at every season cut-off. It finds 22 archetypes; archetype and moving up are associated (chi-square p <0.001, Cramer's V 0.19). Creative archetypes are bought more often than defensive ones at every position.

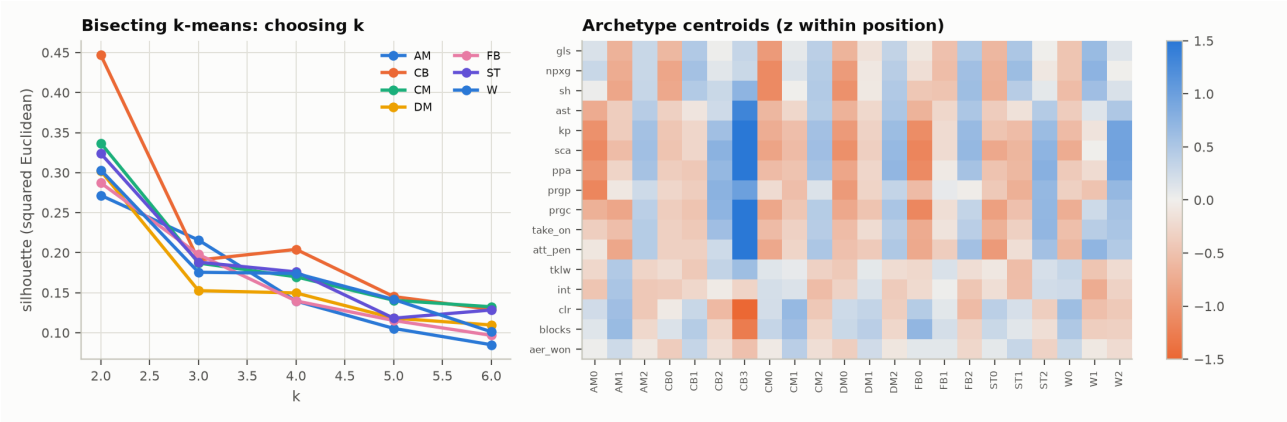


Figure 6. Silhouette by number of clusters for each position, and the archetype centroids.

Link analysis (PageRank, PIC). Each permanent transfer is an edge (62,535 in all). With edges pointing from buyer to seller, PageRank is high for clubs whose players are bought by important clubs. Academies and one-off amateur clubs were removed first, because the reversed graph rewards them. The top of the list is Red Star, Salzburg, Inter Milan, Olympiacos, Boca Juniors. For feeders, the club's pipeline rank alone gives AUC 0.582, the same as counting the club's past sales (0.582). Power-iteration clustering on 1,002 clubs gives transfer communities with modularity 0.33; the iteration count is chosen by modularity, because too many iterations collapse every club into one group.

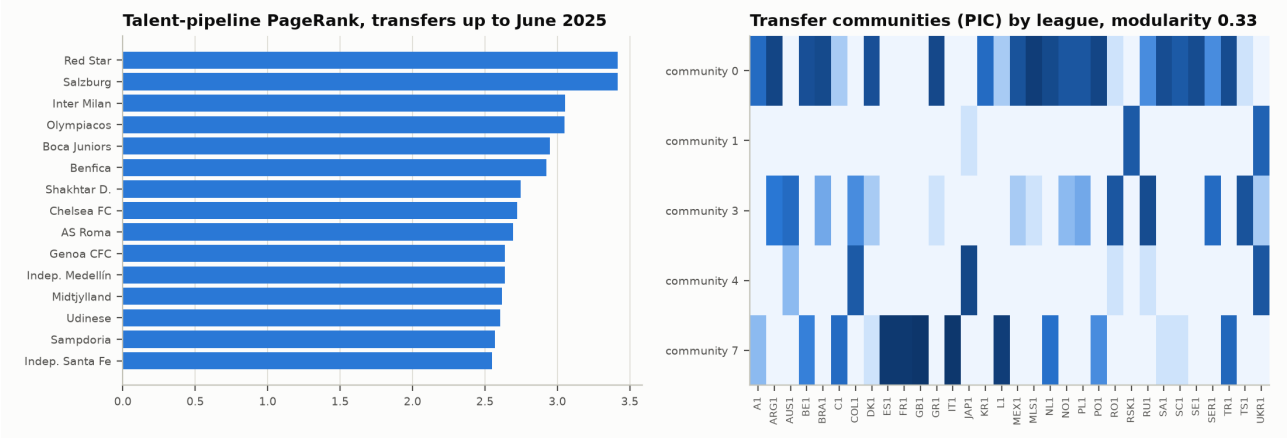


Figure 7. Left: clubs with the highest talent-pipeline PageRank. Right: transfer communities by league.

Recommendation (ALS). ALS factorises the club by archetype matrix of past signings. It did not work: on 1,551 later signings it ranks the bought archetype worse than league-wide popularity (MRR 0.633 against 0.668; 95% interval of the difference -0.052 to -0.019). The training matrix has 560 signings across 144 clubs, too few to learn a club's taste. The score stays in the engine so the ablation can measure it.

Classification (LinearSVC, MLP). Same question and walk-forward split as the mid-sem classifiers. LinearSVC reaches AUC 0.690 with 41 hits in 75 picks, level with the mid-sem logistic regression (0.681, 46 hits). The perceptron overfits the small training set (AUC 0.604). On the transfer label over five test seasons LinearSVC gets AUC 0.681 and 59 hits in 125.

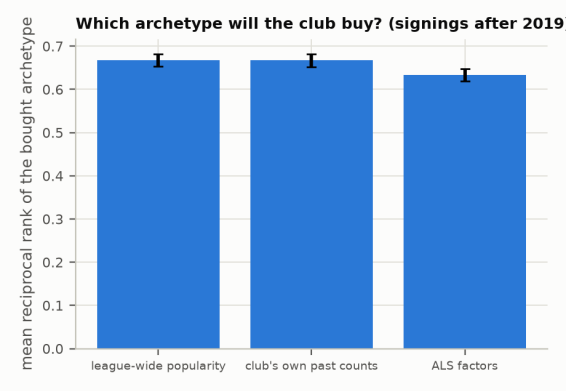


Figure 8. Mean reciprocal rank of the archetype a club actually bought.

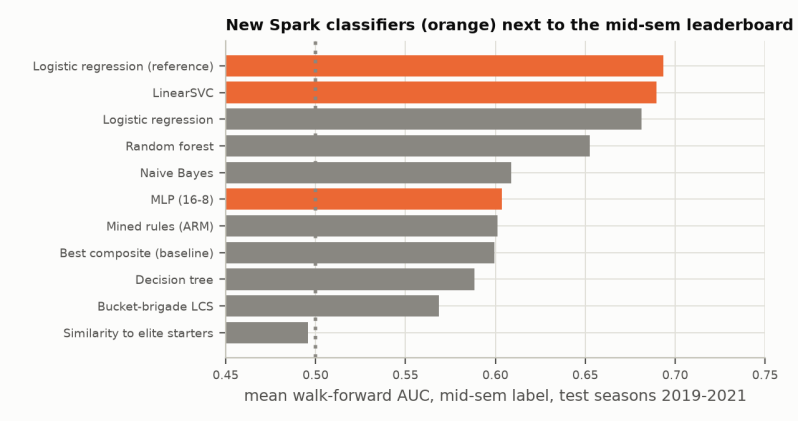


Figure 9. New Spark classifiers next to the mid-sem leaderboard (same label, same test seasons).

Outlier detection (k-NN distance). The score is the mean distance to the ten nearest neighbours inside the archetype, with neighbours taken from past seasons only. Unusual players are bought slightly *less* often (Spearman -0.081, p <0.001), and the "hidden gem" flag (top decile of the score, above-median composite index) marks 114 feeders who moved up at 16.7% against 22.8% for the rest. An earlier fit on all seasons had suggested the opposite; it did not survive the walk-forward refit.

Stream mining. The 2023-24 Understat matches are replayed one week per micro-batch (39 batches). A stateful aggregation keeps each team's running dominance; after five weeks it correlates 0.80 with the end-of-season value and passes 0.9 at about 12 matches per team. A Count-Min Sketch counts deep completions per team in fixed memory: at width 200 its mean relative error is 0.0%, and at width 20 it over-counts by 2.5 times the true count, which is what the width buys.

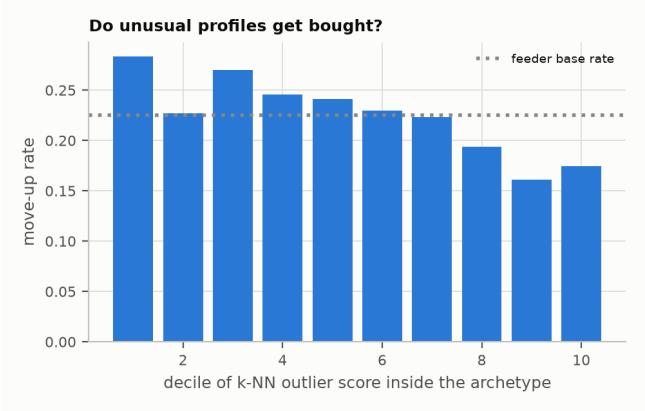


Figure 10. Move-up rate by decile of the k-NN outlier score.

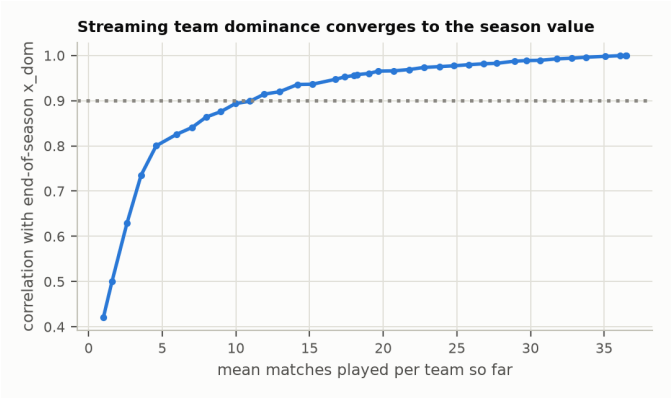


Figure 11. Streaming team dominance against the end-of-season value.

4 Techniques beyond the course

Survival · Ranking · Conformal · SHAP · DTW

Survival analysis. Feeder-seasons become person-period rows (2,947 rows, 382 events), which lets the latest seasons be used. The discrete-time hazard is a Spark logistic regression refitted each season on past rows only. Its walk-forward AUC is 0.686, and predicted and observed rates differ by 2.1% on average across deciles. On 1,037 later entrants its concordance index is 0.676; a Cox proportional-hazards model (*lifelines*) fitted as a check gets 0.654.

Learning to rank. LightGBM LambdaMART with one query per event, against a pointwise Spark GBTClassifier. Section 6 has the results.

Conformal prediction. Split-conformal turns a score into a list with a stated coverage. For movers: a hazard list that must catch 90% of next season's movers holds 81% of all feeders and caught 93.4% on later seasons; a 50% promise needs 29% and caught 53.3%. For replacement events (calibrated on 26 events, checked on 65): a list that contains the real signing 90% of the time needs about 88 players and covered 96.9%; a 50% promise needs about 20 and covered 44.6%. The guarantees hold, and they show that a short list cannot promise much.

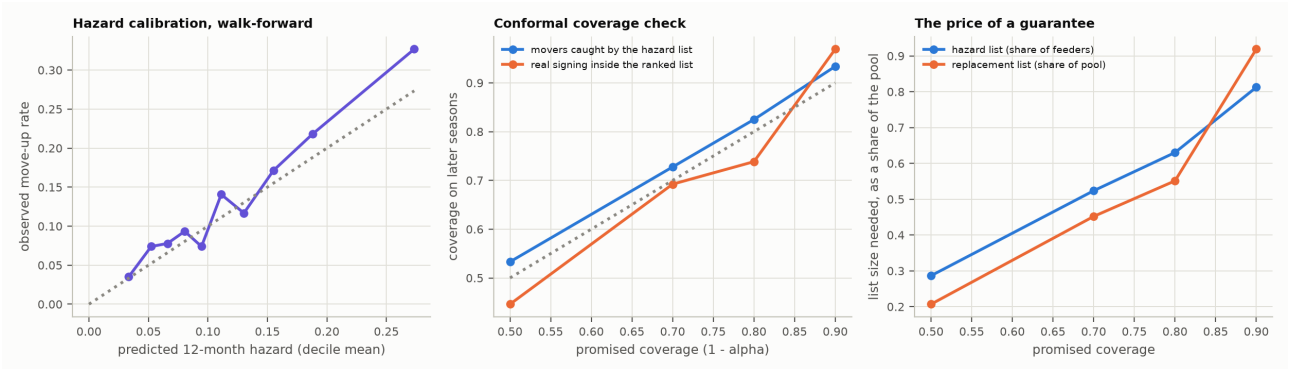


Figure 12. Hazard calibration, conformal coverage on later seasons, and the list size a guarantee costs.

SHAP (TreeExplainer on the ranker) explains each candidate's rank in section 8. **Dynamic time warping** is compared with the simple trajectory similarity: the two correlate 0.45 and put the real signing in the top 10 about equally often (16% and 17%), so DTW adds nothing here. Only 15% of pairs could be age-aligned, because the starter's seasons at the candidate's age are usually before 2017. Causal inference, hedonic pricing and adversarial testing are in section 7.

5 Style translation on real movers

Domain model · Validation

The mid-sem removed team style from a player's numbers. Translation runs it the other way, into the buying club:

$$\text{stat in club } C = \text{neutral stat} \times \exp\left(\Sigma \text{ supported } \beta(\text{position, metric, term}) \times \text{style term of } C\right) \times \text{league factor of } C$$

with elasticities and league offsets refitted at each season cut-off. The check uses 1,319 players who changed club between consecutive seasons (557 across leagues). Their per-90 numbers at the new club are predicted from (a) last season's raw numbers, (b) style-neutral numbers, and (c) neutral numbers translated into the new club, using the club's style from the season before the move.

Mean absolute error, in standard deviations of each metric: (a) 0.495, (b) 0.492, (c) 0.494. The three are the same within noise: the 95% interval for (c) minus (a) is -0.004 to +0.003, and (c) is better in 30 of 48 position-by-metric cells. Using the new club's true style that season does not help either (0.491).

FINDING

Translation does not predict a mover's numbers better than leaving them unchanged. The first draft reported a small gain; it came from elasticities fitted on all seasons and disappears when they are fitted on past seasons only. Translation is therefore kept as a display feature (the radar in section 8) and as one ranking score whose value the ablation measures, not as a forecasting tool.

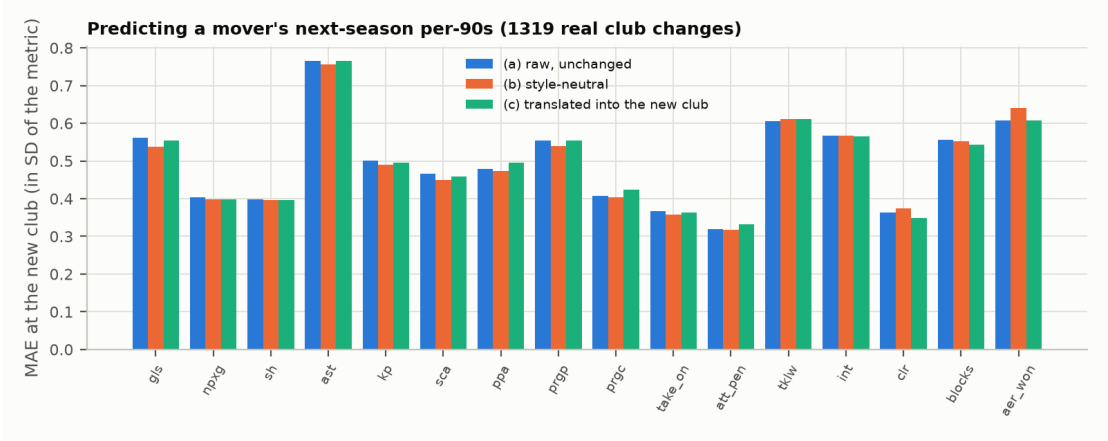


Figure 13. Error in predicting a mover's next-season per-90s, by metric.

6 Results: who gets signed

Evaluation · Baselines · Uncertainty

For each query the engine scores every candidate on nine things: translated similarity to the reference profile, trajectory similarity, the selling club's pipeline PageRank, the buying club's ALS taste, the survival hazard, market value (level, and gap to the reference), age and composite index. A LambdaMART ranker combines them. Queries of season Y are ranked by a model that saw only signings up to Y-1.

6.1 Every summer signing

This is the large test: 1,029 unseen club-season-position queries from 2020-21 to 2024-25, about 229 candidates each. The reference profile is what the club already fields at that position.

Method	Median rank	Recall@5	Recall@10 [95% CI]	Recall@25	Recall@50	p vs market value
Random order of the pool	90	3%	6% [4, 7]	14%	29%	

Method	Median rank	Recall@5	Recall@10 [95% CI]	Recall@25	Recall@50	p vs market value
Highest market value	90	2%	4% [3, 6]	12%	27%	
Raw cosine similarity to the club profile	90	4%	6% [5, 8]	16%	29%	0.04
Best young performer (composite index)	90	4%	7% [5, 8]	15%	30%	0.01
Single score: hazard	77	4%	8% [7, 10]	19%	35%	<0.001
Shadow Squad	**53**	**8%**	**13% [11, 15]**	**28%**	**48%**	**<0.001**

Table 3. All signings: recall@K and median rank of the bought player on 1,029 unseen queries. Intervals: bootstrap over queries. Last column: paired permutation test on recall@10.

FINDING

The engine puts the bought player in the top 10 for 13% of signings and in the top 25 for 28%. Market value manages 4% and 12%, below the best young performer (7%) and barely different from random (6%): most clubs cannot afford the most valuable players, so value says little about whom they buy. For clubs outside the elite the engine reaches 11% and market value 0%.

6.2 Elite replacements

The original task: 91 unseen events whose real signing was in the candidate pool, about 98 candidates each. The reference profile is the departing starter.

Method	Median rank	Recall@5	Recall@10 [95% CI]	Recall@25	Recall@50	p vs market value
Random order of the pool	44.0	6%	12% [5, 19]	30%	57%	
Raw cosine similarity to the starter	30.0	13%	23% [14, 32]	42%	65%	0.07
Best young performer (composite index)	30.0	13%	26% [18, 35]	45%	67%	0.18
Highest market value	15.5	23%	35% [25, 45]	64%	84%	
Single score: hazard	16.0	19%	35% [25, 45]	64%	84%	1.00
Single score: translated similarity	32.0	14%	24% [15, 33]	40%	64%	0.11
Shadow Squad fusion with Spark GBT (pointwise)	25.0	5%	18% [10, 25]	51%	71%	0.02
Shadow Squad, replacement events only	21.0	10%	26% [18, 35]	56%	79%	0.23
Shadow Squad (trained on all signings)	**18.0**	**22%**	**31% [21, 41]**	**60%**	**78%**	**0.60**
Ablation: no translation	19.0	24%	35% [25, 45]	57%	76%	1.00
Ablation: no trajectory	18.0	23%	35% [25, 45]	63%	77%	1.00
Ablation: no PageRank	18.0	20%	32% [22, 42]	62%	78%	0.72
Ablation: no ALS taste	18.0	15%	32% [22, 42]	64%	73%	0.71

Table 4. Elite replacements: 91 unseen in-pool events. The first Shadow Squad row learns from replacement events only; the bold row learns from all signings and is the engine used everywhere else.

What worked. Training on all signings instead of the few replacement events lifts the engine from 26% to 31% recall@10 and from a median rank of 21 to 18. LambdaMART beats the pointwise Spark GBT (18%). The engine is well above random (12%) and the mid-sem cosine method (23%).

What did not. On this task the engine does not beat two single scores. Market value reaches 35% recall@10 with a median rank of 15.5, and the hazard alone 35%. The difference between the engine and market value is inside the

noise (recall@10 difference -16 to +8 points, p 0.60), and so is its lead over the best young performer (-8 to +16 points). Removing one score at a time moves recall@10 between 32% and 35%; every interval overlaps the full model's, so no single score can be called necessary on 91 events. The engine is the average of ten LambdaMART models, each trained on its own 80% subsample. One such model alone gives between 27% and 40% recall@10 depending on its seed (mean 32%), and between 16% and 38% on the cheaper half, so a few points either way on this task are noise.

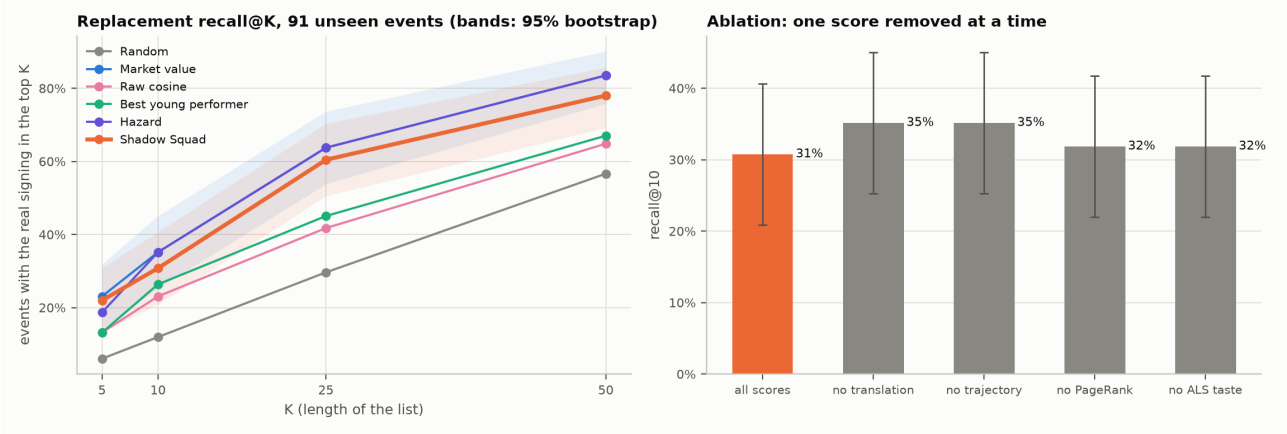


Figure 14. Elite replacements. Left: recall@K with 95% bootstrap bands for the engine and market value. Right: recall@10 with one score removed at a time.

6.3 Cheap against expensive signings

Why does market value do well on elite replacements and badly everywhere else? Split the events at the median fee of the real signing. Over all signings (median EUR 14m) the engine is far ahead below the median, and the gap narrows above it. Among elite replacements there are only 37 events in each half: in the cheaper half (below EUR 24m) the engine reaches 24% and market value 11% (p 0.23); in the dearer half it is 41% against 65% (p 0.04). The direction matches the large set, but on this few events the cheaper-half difference is not significant.

Events	n	Engine R@10	Market value R@10	Difference, points [95% CI]	p	Engine R@25	Market R@25
Elite replacements: below median fee	37	24%	11%	+14 [-3 to +32]	0.23	54%	46%
Elite replacements: above median fee	37	41%	65%	-24 [-43 to -5]	0.04	65%	89%
Elite replacements: free or undisclosed	17	24%	24%	+0 [-29 to +29]	1.00	65%	47%
All signings: below median fee	301	14%	0%	+13 [+10 to +17]	<0.001	29%	1%
All signings: above median fee	300	19%	13%	+6 [+1 to +12]	0.04	35%	30%
All signings: free or undisclosed	428	9%	1%	+8 [+5 to +11]	<0.001	22%	7%

Table 5. Recall by fee tier of the real signing. Permutation p-values are paired, two-sided, on recall@10.

FINDING

On the large set the hypothesis holds: below the median fee the engine finds 14% of signings in its top 10 and market value 0.3%; above it, 19% against 13% (p 0.04). For free and undisclosed moves it is 9% against 1.4%. A club that wants the obvious star does not need a model. A club shopping below EUR 14m does. The elite-replacement split is too small to settle the question on its own.

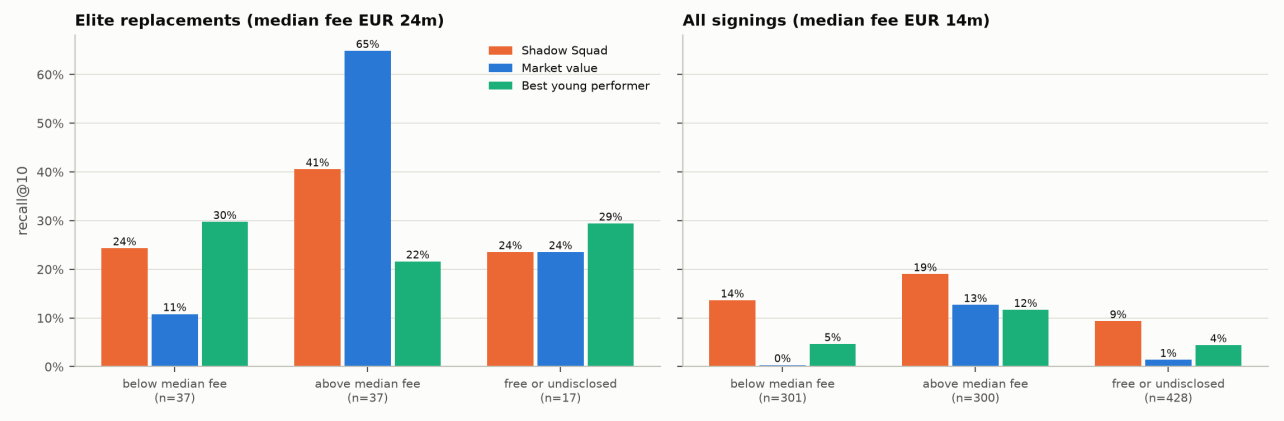


Figure 15. Recall@10 by fee tier of the real signing, for elite replacements and for all signings.

7 Beyond the syllabus

Pricing · Causal inference · Adversarial ML

Each question ends in one sentence, backed by a number with an interval. Null results are reported as they are.

7A. Scouting as an investment portfolio: where does the market misprice?

Each summer from 2020 to 2023 a portfolio of 25 pool players is bought at Transfermarkt value (last valuation before the window opens). The return is the realised fee if he was sold for a fee within 24 months, otherwise his value 24 months later. Five portfolios are compared with 10,000 random portfolios of the same size. Section 6 showed that market value matches the engine at the expensive end, so the useful question is where the market is wrong. A hedonic model answers it: regress log market value on the style-neutral profile, age, league, minutes and club tier (R^2 0.71, 11,745 player-seasons, standard errors clustered by player). The residual is how far a player is priced from what his profile predicts. The "under-priced" portfolio buys the 25 most negative residuals, with the model fitted on seasons up to that summer.

Portfolio (top 25 per summer)	Mean return [95% CI]	Return on money spent	Median	Hit rate	Sharpe	p vs random	Sold for a fee	Return on those sales
Under-priced (hedonic)	**+176% [+103 to +276]**	**+149%**	**+37%**	**63%**	**0.39**	**<0.001**	**16**	**+140%**
Best young performer	+28% [+7 to +56]	+13%	+0%	47%	0.24	0.27	43	+25%
Hazard	+22% [+7 to +41]	+16%	+0%	45%	0.26	0.43	63	+30%
Shadow Squad	+18% [+2 to +36]	+13%	+0%	41%	0.21	0.57	49	+13%
Market value	-1% [-9 to +8]	-1%	-8%	39%	-0.01	0.97	49	+12%
Random	+22% [-1 to +58]	+7%	-10%	39%	0.15			

Table 6. Two-year returns of top-25 portfolios, 2020-2023 (100 picks each). Hit rate: share of picks whose value rose. Sharpe: mean over standard deviation of player returns. Last column: realised fees only, the robustness check.

HEADLINE

A club buying the 25 most under-priced young players each summer would have gained +176% per player over two years (+149% on the money spent), against +28% for buying the best young performers, +18% for the engine's top 25 and +22% for a random 25.

Where the market is wrong. Like for like, a player in La Liga is valued 48% below the same profile in the Premier League, and one in Ligue 1 64% below. That discount is not a bargain: in the return model (next-24-month log return on the same attributes plus today's value) every non-Premier-League coefficient is negative, so the gap widens. What the market does under-price is output it has already seen but not yet paid for: sca, gls, npxg have the largest positive return coefficients (sca +0.048, p 0.003; gls +0.043, p <0.001; npxg +0.043, p <0.001), and playing time has the largest of all (+0.68 per full season of minutes). Value also reverts: the coefficient on today's log value is -0.34. Across the pool, the most under-priced fifth returned +85% and the most over-priced fifth -17% (Spearman -0.26, p <0.001).

The engine as an investor. Its top 25 returned +18%, no better than random (p 0.57). It is trained to find whom elite clubs sign, and those players are already priced. Buying the 25 most valuable players lost money (-1%).

Limitations. Transfermarkt values are crowd estimates and react to transfers, so value growth is partly circular; cheap players also have more room to grow, and the under-priced portfolio spends only EUR 169m against EUR 4447m for the market-value portfolio. On realised fees alone the under-priced picks that were sold (16 of 100) returned +140%, so the result does not rest on crowd values, but few were sold. Four summers is a short record.

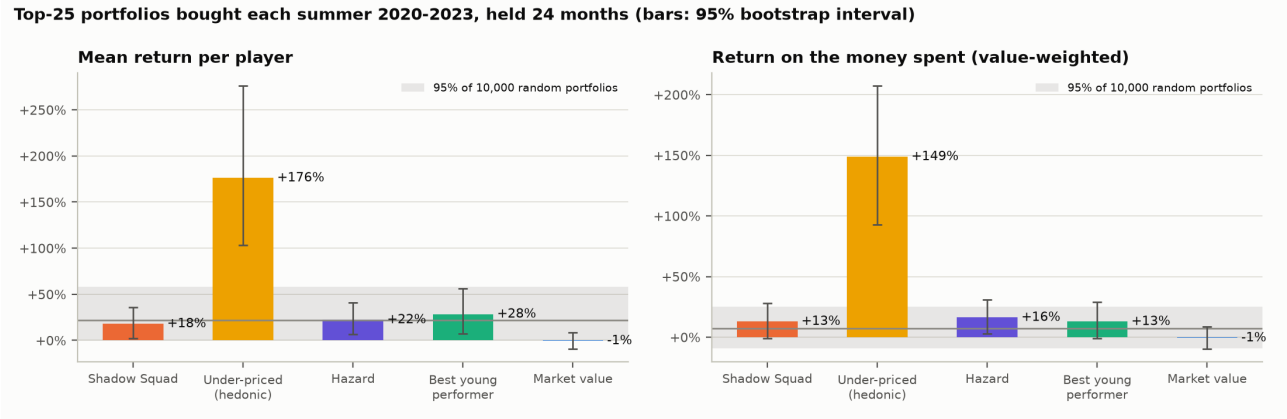


Figure 16. Portfolio returns against the distribution of 10,000 random portfolios (grey band).

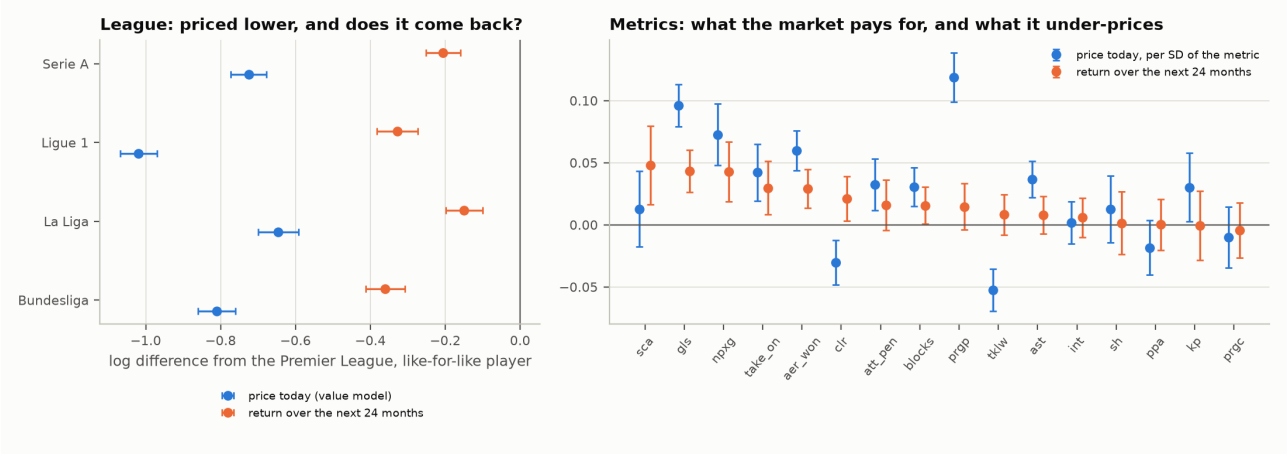


Figure 17. Hedonic model. Blue: what the market pays for today. Orange: what predicts the next two years of return, holding today's price fixed.

7B. Sliding doors: does moving to an elite club help a young player?

Treated: a feeder (24 or under, non-elite club, 900 minutes in season t) who makes a permanent move to a club that is elite in t+1 (190 players). Control: a feeder with no move of any kind that year (1,182). Twins are proposed by the Spark LSH index (same fine position and season; nearest in age, style-neutral profile, minutes, club table position and market value), then matched one to one on a propensity score. The matching setting was chosen on covariate balance alone, before any outcome was looked at: 25 LSH twins per treated player and a caliper of 0.2 SD, giving 142 pairs. The worst standardised mean difference falls from 0.41 to 0.12; 2 of 21 covariates stay just above the 0.1 target (log value, blocks). Outcomes are changes from season t to t+2: share of league minutes, and the composite index of *style-neutral* per-90 output, which is what makes a season at Arsenal comparable with one at Brentford.

Outcome, change t to t+2	Pairs	Moved to elite	Twin who stayed	Difference [95% CI]	p	E-value
Share of league minutes	142	-18.6 pts	-20.4 pts	+1.8 pts [-4.3 to +7.9]	0.57	1.29
Style-neutral output index (0-100)	79	-1.0	-1.3	-0.05 [-2.8 to +2.9]	0.97	1.07
Minutes, causal forest: 21 or under	91			-1.0 pts [-9.1 to +7.1]	0.81	
Minutes, causal forest: 22	25			-1.0 pts [-9.4 to +7.4]	0.81	
Minutes, causal forest: 23-24	74			-0.5 pts [-8.8 to +7.7]	0.90	

Table 7. Effect of moving to an elite club. Rows 1-2: matched pairs, bootstrap intervals, sign-flip p. Rows 3-5: CausalForestDML on all 1,372 feeders (pairs column = treated players in the group). E-value: how strongly an unmeasured confounder would have to be tied to both the move and the outcome to produce the point estimate.

HEADLINE

Moving to an elite club at 24 or under changes a player's share of league minutes by +1.8 points (95% CI -4.3 to +7.9) and his style-neutral output by -0.05 index points (-2.8 to +2.9) against a twin who stayed. Neither is distinguishable from zero, and the effect does not flip by age: -1.0 points at 21 or under, -0.5 at 23-24.

Both groups lose minutes over two years (-19 and -20 points), which is regression to the mean: everyone was picked for having played 900 minutes. The common story that a big move costs a young player his playing time is not in this data, and neither is a gain in output. The causal forest finds no subgroup with an effect; its estimates by position are DF -0.1, MF -1.3, FW -1.1 points, all with intervals about ±8 points wide. Among matched pairs the estimate is the same whether the buying club is more or less dominant than the median buyer (+3.6 and +0.1 points).

Limitations. A null with an interval of about ±6 points rules out a large effect, not a small one. Output is observed only for players with 900 minutes in t+2 (56% of pairs), so the output comparison is among those who kept playing. Clubs choose whom to buy on things the data does not hold (injuries, character, contract length); the E-values near 1 say that even a weak hidden factor could move estimates this small in either direction. Balance is close to, not inside, the 0.1 target.

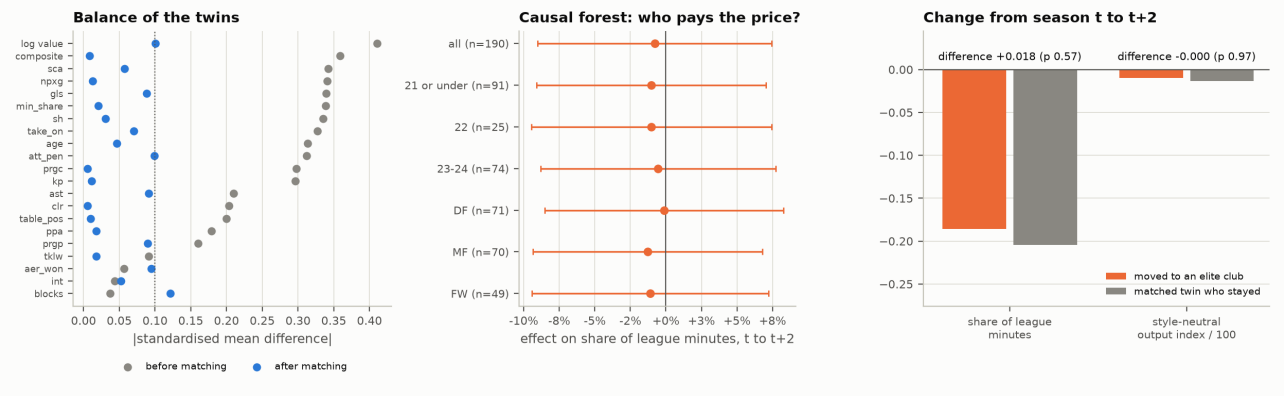


Figure 18. Left: covariate balance before and after matching. Centre: causal-forest effect on minutes by age and position. Right: change in each outcome for movers and their twins.

7C. Red-team the scout: can a player game the model?

Four of the sixteen metrics are volume a player controls with little regard to quality: shots, take-on attempts, clearances, progressive carries. The other twelve need an outcome or a team-mate. For every player ranked 11 to 20 in 150 unseen replacement queries (1,500 players), a greedy search raises his cheap metrics in steps of 5% of the position's 5th-95th percentile range, never above the 95th percentile, and re-scores him through the whole pipeline: style-neutral value, standardisation, translated similarity, trajectory, composite index and hazard. He games the model if he enters the top 10.

	Engine	Hardened (ignores cheap metrics)
Gameability: near-miss players who can pad into the top 10	29.7% [27, 32]	0% (by construction)
Median padding needed	1 step: 5% of the position's range	not applicable
Most used metric, median amount added	shots: +0.09 per 90 (+9%)	not applicable
Recall@10 on 91 unseen replacements	31%	36% (change -1 to +13 points)
Recall@25, median rank	60%, 18	60%, 18

Table 8. Gameability before and after hardening, and what hardening costs.

HEADLINE

Adding 0.09 shots per 90 is enough to lift a near-miss player into the shortlist; 29.7% of near-miss players can do it with cheap stats alone. The hardened model cuts this to zero and recall@10 does not fall (31% to 36%).

The amounts are small because the margins are: ranks 10 and 11 are separated by very little score, so one step is usually enough. The hardened model computes similarities and trajectory on the twelve costly metrics, uses the mean costly percentile as its composite index, and refits the hazard without cheap metrics. Padding then changes nothing it sees. That it loses no recall says the cheap metrics were carrying little real signal.

Limitations. The cheap and costly tags are a judgement, not a measurement. The search changes one season's numbers and holds archetype, club pipeline and market value fixed; a real padding campaign would also move the crowd's valuation. Zero gameability is by construction and only covers the four tagged metrics: a player can still improve costly metrics, which is the point. Recall changes are measured on 91 events and their interval is wide.

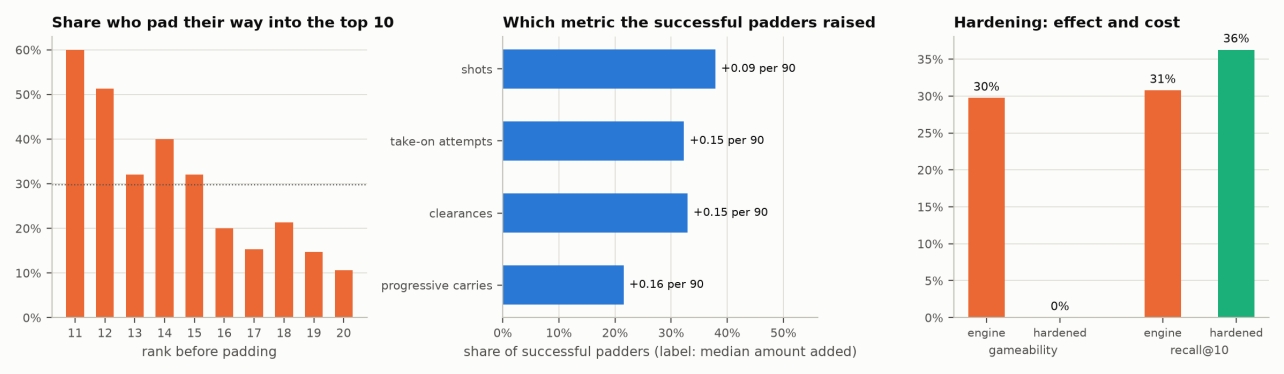


Figure 19. Left: share of players who can pad into the top 10, by starting rank. Centre: which cheap metric the successful ones raised. Right: gameability and recall@10 before and after hardening.

7D. Budget squad rebuild (integer programming) was a stretch goal and was not built.

8 Model predictions and case studies

Dashboard · SHAP · Translated radar

The screenshots are from the Streamlit app (*app/shadow_squad.py*), which reads the Parquet lake: choose a league, an elite club, a season and a departing starter. It shows the ranked list, what the club really did, a radar (starter's actual numbers, candidate raw, candidate translated into the club), a SHAP waterfall for the chosen candidate, and market values. The cases were picked by rule, not by hand: the three unseen events with the best rank for the real signing (ties broken by the larger fee), and the unseen event where a real signing was ranked worst.

Across all unseen events the scores that move the ranking most are value gap, age, market value, hazard (mean absolute SHAP).

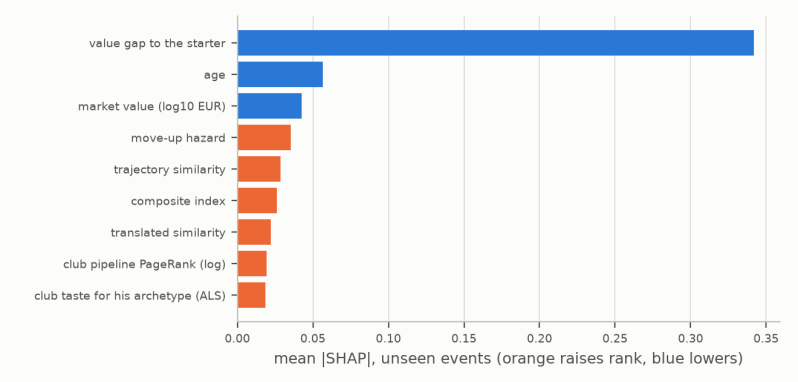


Figure 20. Mean absolute SHAP value of each score on unseen events.

Manchester City 2024-25: Rico Lewis (FB) replaced by Rayan Aït-Nouri from Wolves (EUR 36.8m). The engine ranked him 1 of 103 candidates. His strongest scores were closeness in value to the starter (better than 99% of the pool), move-up hazard (better than 99% of the pool), market value (better than 96% of the pool). The waterfall shows which scores carried him there, and the radar how his numbers sit against the starter's once translated into the club.

rank	player	club	age	value (EUR)	score	translated sim.	trajectory sim.	hazard
1	Rayan Aït-Nouri	Wolves	23	35,000,000	0.88	0.01	-0.09	40%
2	Antonee Robinson	Fulham	26	35,000,000	0.45	-0.46	-0.34	15%
3	Milos Kerkez	Bournemouth	20	45,000,000	0.44	0.23	0.06	23%
4	Miguel Gutiérrez	Girona	23	25,000,000	0.43	0.24	0.21	18%
5	Tyrick Mitchell	Crystal Palace	24	25,000,000	0.42	-0.08	-0.03	16%
6	Lorenz Assignon	Rennes	24	9,000,000	0.41	-0.07	-0.17	27%
7	Tom Rothe	Union Berlin	19	10,000,000	0.40	0.22	0.26	16%
8	Lutsharel Geertruida	RB Leipzig	24	27,000,000	0.40	0.23	0.23	5%
9	Nuno Tavares	Lazio	24	25,000,000	0.39	-0.17	-0.11	16%
10	Guela Doué	Strasbourg	21	12,000,000	0.38	0.22	0.19	20%

Figure 21a. Ranked list for this event (top 10), from the dashboard.

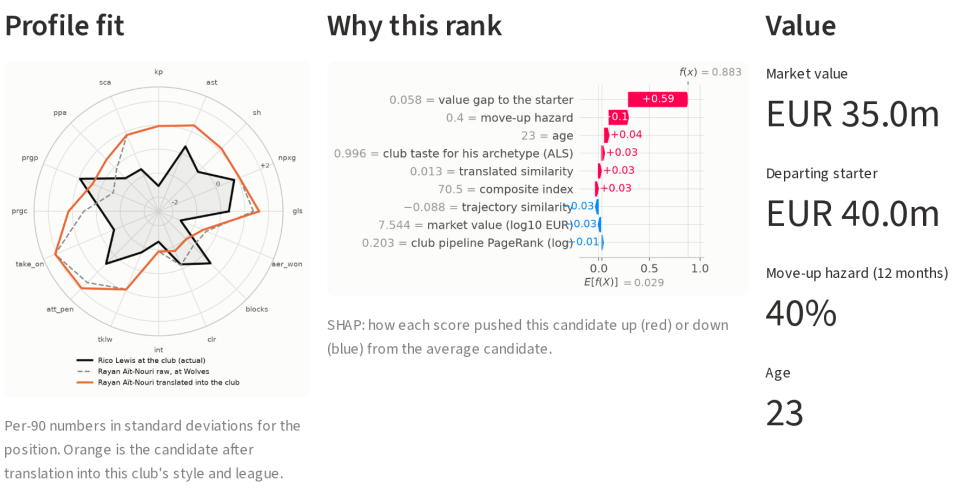


Figure 21b. Rayan Aït-Nouri: translated radar, SHAP waterfall and value panel.

Rennes 2022-23: Flavien Tait (CM) replaced by Enzo Le Fée from FC Lorient (EUR 20.0m). The engine ranked him 1 of 89 candidates. His strongest scores were composite index (better than 99% of the pool), move-up hazard (better than 98% of the pool), trajectory similarity (better than 92% of the pool). The waterfall shows which scores carried him there, and the radar how his numbers sit against the starter's once translated into the club.

rank	player	club	age	value (EUR)	score	translated sim.	trajectory sim.	hazard
1	Enzo Le Fée	Lorient	22	15,000,000	0.62	0.67	0.53	33%
2	Jean-Ricner Bellegarde	Strasbourg	24	10,000,000	0.54	0.82	0.44	29%
3	Habib Diarra	Strasbourg	18	4,000,000	0.44	0.65	0.59	26%
4	Arne Maier	Augsburg	23	5,500,000	0.40	0.27	0.11	14%
5	Kiernan Dewsbury-Hall	Leicester City	23	25,000,000	0.39	0.79	0.63	16%
6	Khéphren Thuram	Nice	21	32,000,000	0.38	0.75	0.29	33%
7	Azzedine Ounahi	Angers	22	15,000,000	0.36	0.78	0.68	17%
8	Ilaix Moriba	Valencia	19	6,000,000	0.33	0.37	0.20	11%
9	Han-Noah Massengo	Auxerre	21	4,000,000	0.33	0.51	0.44	9%
10	Kike Pérez	Valladolid	25	4,500,000	0.33	0.72	0.12	13%

Figure 22a. Ranked list for this event (top 10), from the dashboard.

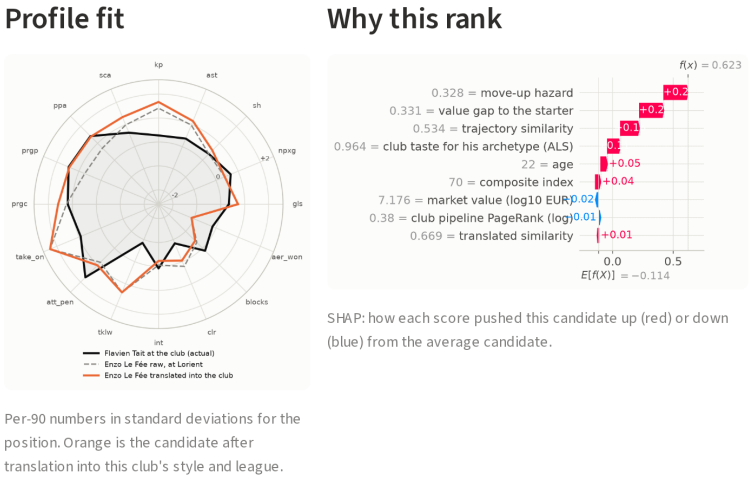


Figure 22b. Enzo Le Fée: translated radar, SHAP waterfall and value panel.

Marseille 2021-22: Pol Lirola (FB) replaced by Issa Kaboré from Man City (free or undisclosed fee). The engine ranked him 1 of 111 candidates. His strongest scores were trajectory similarity (better than 97% of the pool), translated similarity (better than 93% of the pool), move-up hazard (better than 80% of the pool). The waterfall shows which scores carried him there, and the radar how his numbers sit against the starter's once translated into the club.

rank	player	club	age	value (EUR)	score	translated sim.	trajectory sim.	hazard
1	Issa Kaboré	Troyes	20	4,000,000	0.54	0.65	0.63	18%
2	Destiny Udogie	Udinese	18	9,000,000	0.44	0.50	0.43	32%
3	Manu Sánchez	Osasuna	20	10,000,000	0.43	0.24	0.16	17%
4	David Raum	Hoffenheim	23	17,000,000	0.42	0.68	0.63	20%
5	Quentin Merlin	Nantes	19	5,000,000	0.35	0.28	0.17	17%
6	Akim Zedadka	Clermont Foot	26	4,000,000	0.31	0.63	0.56	17%
7	Fran Garcia	Rayo Vallecano	21	5,000,000	0.31	0.41	0.29	22%
8	Mathías Olivera	Getafe	23	15,000,000	0.30	0.58	0.10	32%
9	Yvann Macon	Saint-Étienne	22	4,500,000	0.29	0.24	0.12	9%
10	Brandon Williams	Norwich City	20	10,000,000	0.26	0.12	0.08	12%

Figure 23a. Ranked list for this event (top 10), from the dashboard.

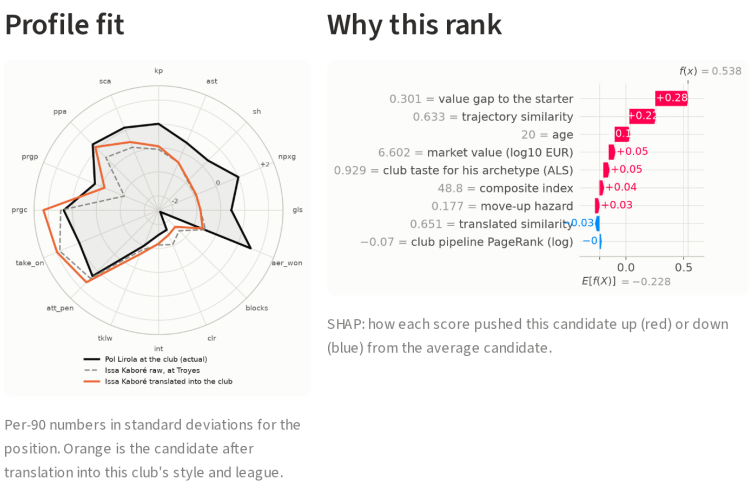


Figure 23b. Issa Kaboré: translated radar, SHAP waterfall and value panel.

A miss

Chelsea 2023-24: Thiago Silva (CB) replaced by Tosin Adarabioyo from Fulham (free or undisclosed fee). The engine ranked him 131 of 141, almost last. His weakest scores were closeness in value to the starter (better than 13% of the pool), club pipeline rank (better than 19% of the pool), club taste (better than 28% of the pool). He was valued at EUR 20.0m and the starter he replaced at EUR 1.0m. On the scores the engine uses he looked nothing like the man he replaced, so nothing pointed to him; whatever the club saw is not in the data.

rank	player	club	age	value (EUR)	score	translated sim.	trajectory sim.	hazard
1	Reece Burke	Luton Town	26	1,800,000	0.34	0.18	0.19	5%
2	Matej Maglica	Darmstadt 98	24	2,000,000	0.33	0.20	0.29	6%
3	Souleymane Touré	Lorient	20	8,000,000	0.31	-0.07	-0.03	33%
4	Fali Candé	Metz	25	2,500,000	0.26	0.11	-0.07	8%
5	Chumi	Almería	24	2,000,000	0.26	0.16	-0.25	7%
6	Thomas Kristensen	Udinese	21	4,500,000	0.26	-0.45	-0.29	9%
7	Abdul Mumin	Rayo Vallecano	25	2,000,000	0.25	0.44	0.05	5%
8	Yerson Mosquera	Villarreal	22	3,500,000	0.24	0.05	0.10	18%
9	Cenk Özkacar	Valencia	22	2,000,000	0.23	-0.30	-0.34	6%
10	Christoph Klarer	Darmstadt 98	23	3,000,000	0.23	0.21	0.27	9%

Figure 24a. Ranked list for this event (top 10), from the dashboard.

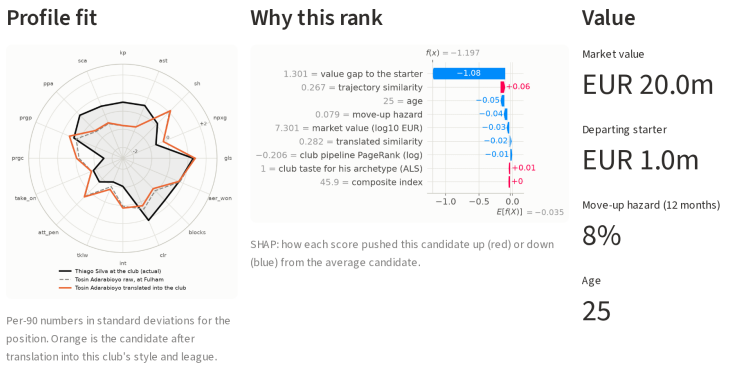


Figure 24b. Tosin Adarabioyo: translated radar, SHAP waterfall and value panel.

9 Limitations and conclusion

Honest reading

- **Coverage.** 76% of real elite replacement signings were outside the candidate pool, most from leagues the data does not cover. The all-signings test only includes players who had 900 minutes in the five leagues the season before.
- **Sample size.** 128 in-pool elite replacements in eight seasons, 91 of them unseen; intervals on that task are wide, a single model moves by several points with its seed, and the order of the top methods is not reliable. The all-signings test (1,029 queries) is where differences are measured with confidence.
- **Transfer records.** 4.0% of feeder-seasons belong to players with no transfer history even after inferring moves from minutes, and are labelled "no move". Loans are inferred from move patterns, not from a loan flag. 49% of signings have no fee above zero recorded.
- **Market value.** Transfermarkt values are crowd estimates; used strictly before the window, they still encode what the crowd expects.
- **Local Spark.** Everything runs in local mode on one machine, on data far smaller than Spark is for.

Reframing the task as "whom does the club sign" gives a test the mid-sem lacked: a real decision by a real club. On 1,029 unseen signings the engine is clearly better than every baseline, with 3.1 times the top-10 recall of market value. On elite replacements it is level with market value and the hazard score, and the fee split on the large set explains why: clubs paying big fees buy the players everyone already rates, and the engine's edge is below the median fee. The market itself can be read: players priced below what their profile predicts returned +176% in two years. Moving to an elite club neither cost nor helped a young player on average. The ranker can be gamed with a few cheap stats, and ignoring those stats costs nothing. Style translation, ALS club taste and the hidden-gem flag did not hold up under

walk-forward fitting, and are reported as failures.