
UI FLUTTER LAB

Stateless Widget

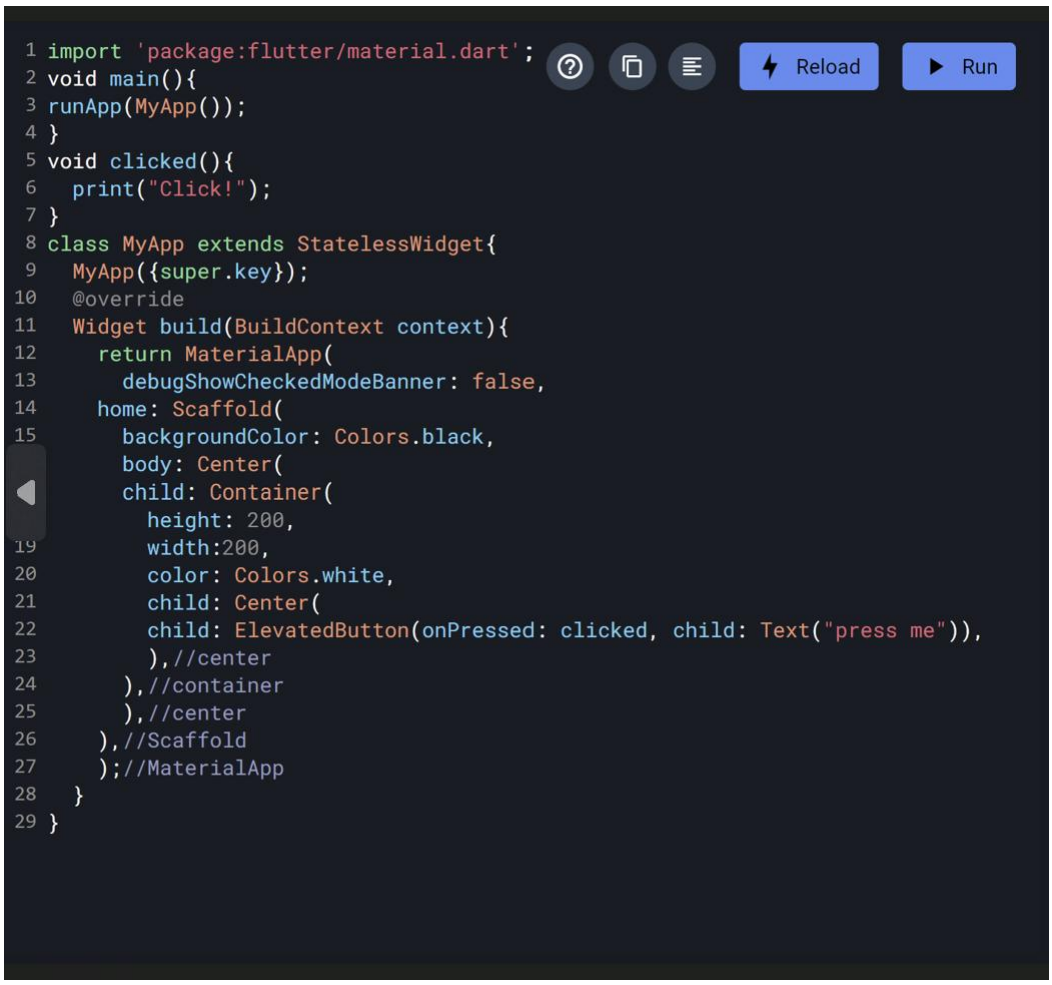


```dart
import 'package:flutter/material.dart';
void main(){
runApp(MyApp());
}
void clicked(){
  print("Click!");
}
class MyApp extends StatelessWidget{
  MyApp({super.key});
  @override
  Widget build(BuildContext context){
    return MaterialApp(
      debugShowCheckedModeBanner: false,
    home: Scaffold(
      backgroundColor: Colors.black,
      body: Center(
      child: Container(
        height: 200,
        width:200,
        color: Colors.white,
        child: Center(
        child: ElevatedButton(onPressed: clicked, child: Text("press me")),
        ),//center
      ),//container
      ),//center
    ),//Scaffold
    );//MaterialApp
  }
}
```

Stateful Widget and Floating Action Button

```dart
import 'package:flutter/material.dart';

void main() {
  runApp(MaterialApp(home: MyApp()));
}

class MyApp extends StatefulWidget {
  @override
  State<MyApp> createState() => MyAppState();
}

class MyAppState extends State<MyApp> {
  int count = 0;

  @override
  Widget build(BuildContext context) {
    return Scaffold(
      appBar: AppBar(title: Text("Counter")),
      body: Center(child: Text("$count")),
      floatingActionButton: FloatingActionButton(
        onPressed: () {
          setState(() {
            count++;
          });
        },
        child: Icon(Icons.add),
      ),
    );
  }
}
```

Row / Column Widget (just change the placeholder to row or column)

```dart
import 'package:flutter/material.dart';

void main() {
  runApp(MyApp());
}

class MyApp extends StatelessWidget {
  Widget build(BuildContext context) {
    return MaterialApp(
      home: Scaffold(
        backgroundColor: Colors.blue[100],
        appBar: AppBar(
          title: Text("Column Widget Demo"),
          backgroundColor: Colors.blue[300],
        ),
        body: Center(
          child: Column(
            mainAxisAlignment: MainAxisAlignment.spaceEvenly,
            children: [
              Container(
                padding: EdgeInsets.all(30),
                color: Colors.blueGrey[900],
                child: Text("Flutter", style: TextStyle(color: Colors.white)),
              ),
              Container(
                padding: EdgeInsets.all(30),
                color: Colors.blueGrey[900],
                child: Text("Dart", style: TextStyle(color:Colors.white)),
              ),
              Container(
                padding: EdgeInsets.all(30),
                color: Colors.blueGrey[900],
                child: Text("Dart", style: TextStyle(color:Colors.white)),
              ),
            ],
          ),
        ),
      ),
```

Popup Menu Button

```dart

import 'package:flutter/material.dart';

void main() {
  runApp(MyApp());
}

class MyApp extends StatelessWidget {
  @override
  Widget build(BuildContext context) {
    return MaterialApp(
    debugShowCheckedModeBanner: false,
    home: Scaffold(
      appBar: AppBar(
        title: Text("Popup Menu"),
        actions: [
          PopupMenuButton(
            itemBuilder: (context) => [
              PopupMenuItem(child: Text("Home")),
              PopupMenuItem(child: Text("Settings")),
              PopupMenuItem(child: Text("Logout")),
            ],
          ),
        ],
      ),
      body: Center(child: Text("Welcome")),
      ),
    );
  }
}

```

Displaying Images

```dart
import 'package:flutter/material.dart';

void main()=> runApp(MyApp());

class MyApp extends StatelessWidget{
  Widget build(BuildContext context){
    return MaterialApp(
      home:Scaffold(
        appBar: AppBar(
          title: Text("My Portofoliolololo"),
          backgroundColor: Colors.indigoAccent,
        ),
        body:Center(
          child:Column(
            children: <Widget> [Image.asset('Profile.png'),
            Text("I AM GREATTTTTT AND I LIKE ROBLOX AMONGUS SUSSYBAKA 420 69 67")],
          ),
        ),
      ),
    );
  }
}
```

Animation

```dart
//animation
import 'package:flutter/material.dart';

void main() {
  runApp(MaterialApp(home: MyApp()));
}

class MyApp extends StatefulWidget {
  @override
  State<MyApp> createState() => MyAppState();
}

class MyAppState extends State<MyApp> {
  double size = 100;

  @override
  Widget build(BuildContext context) {
    return Scaffold(
      appBar: AppBar(title: Text("Animation")),
      body: Center(
        child: AnimatedContainer(
          duration: Duration(seconds: 1),
          width: size,
          height: size,
          color: Colors.pink,
        ),
      ),
      floatingActionButton: FloatingActionButton(
        onPressed: () {
          setState(() {
            size = size == 100 ? 200 : 100;
          });
        },
        child: Icon(Icons.play_arrow),
      ),
    );
  }
}
```

TextField

```dart
import 'package:flutter/material.dart';

void main() {
  runApp(MaterialApp(
    home: Scaffold(
      appBar: AppBar(
        title: Text("Login Form"),
        backgroundColor: Colors.pink,
      ),
      body: Center(
        child: Container(
          padding: EdgeInsets.all(20),
          margin: EdgeInsets.all(20),
          child: Column(
            mainAxisSize: MainAxisSize.min,
            children: [
              TextField(
                decoration: InputDecoration(
                  labelText: "Username",
                  border: OutlineInputBorder(),
                ),
              ),
              SizedBox(height: 15),
              TextField(
                obscureText: true,
                decoration: InputDecoration(
                  labelText: "Password",
                  border: OutlineInputBorder(),
                ),
              ),
            ],
          ),
        `
```