Status	Finished
Started	Wednesday, 21 October 2026, 7:29 PM
Completed	Wednesday, 21 October 2026, 7:49 PM
Duration	20 mins 20 secs
Grade	**9.00** out of 10.00 (**90**%)

Question **1**

Correct

Mark 1.00 out of 1.00

Given an array of integers `nums` which is sorted in ascending order, and an integer `target`, write a function to search `target` in `nums`. If `target` exists, then return its index. Otherwise, return `-1`.

You must write an algorithm with `O(log n)` runtime complexity.

Example 1:

```
Input: nums = [-1,0,3,5,9,12], target = 9
Output: 4
Explanation: 9 exists in nums and its index is 4
```

Example 2:

```
Input: nums = [-1,0,3,5,9,12], target = 2
Output: -1
Explanation: 2 does not exist in nums so return -1
```

Constraints:

- `1 <= nums.length <= 10^4`
- `-10^4 < nums[i], target < 10^4`
- All the integers in `nums` are **unique**.
- `nums` is sorted in ascending order.

For example:

Test	Result
`print(search([-1,0,3,5,9,12],9))`	4

Answer: (penalty regime: 0 %)

Reset answer

```
def search(nums, target):
    low, high = 0, len(nums) - 1

    while low <= high:
        mid = (low + high) // 2
        if nums[mid] == target:
            return mid
        elif nums[mid] < target:
            low = mid + 1
        else:
            high = mid - 1

    return -1

```

	Test	Expected	Got	
✓	`print(search([-1,0,3,5,9,12],9))`	4	4	✓
✓	`print(search([-1,0,3,5,9,12],2))`	-1	-1	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **2**

Incorrect

Mark 0.00 out of 1.00

String should contain only the words are not palindrome.

Sample Input 1

Malayalam is my mother tongue

Sample Output 1

is my mother tongue

Answer: (penalty regime: 0 %)

```
import sys
import re

text = sys.stdin.read().strip()

if not text:
    print("")
else:
    words = text.split()
    result = []
    for w in words:
        clean = re.sub(r'[^A-Za-z0-9]', '', w).lower()
        # palindrome check - case insensitive
        if clean and clean == clean[::-1]:
            continue
        result.append(w)
    print(" ".join(result))
```

	Input	Expected	Got	
✓	Malayalam is my mother tongue	is my mother tongue	is my mother tongue	✓

Your code failed one or more hidden tests.
Your code must pass all tests to earn any marks. Try again.

Incorrect

Marks for this submission: 0.00/1.00.

Question **3**

Correct

Mark 1.00 out of 1.00

Given an list, find peak element in it. A peak element is an element that is greater than its neighbors.

An element a[i] is a peak element if

A[i-1] <= A[i] >=a[i+1] for middle elements. [0<i<n-1]

A[i-1] <= A[i] for last element [i=n-1]

A[i]>=A[i+1] for first element [i=0]

Input Format

The first line contains a single integer n , the length of A .
The second line contains n space-separated integers,A[i].

Output Format

Print peak numbers separated by space.

Sample Input

5

8 9 10 2 6

Sample Output

```
10 6
```

For example:

Input	Result
4 12 3 6 8	12 8

Answer: (penalty regime: 0 %)

```
import sys

data = sys.stdin.read().strip().split()
if not data:
    sys.exit()

nums = list(map(int, data))

# If first number is n and matches count
if len(nums) >= 2 and nums[0] == len(nums) - 1:
    arr = nums[1:]
else:
    arr = nums

n = len(arr)
peaks = []

for i in range(n):
    if n == 1:
        peaks.append(arr[i])
    elif i == 0:
        if arr[i] >= arr[i+1]:
            peaks.append(arr[i])
    elif i == n-1:
        if arr[i] >= arr[i-1]:
            peaks.append(arr[i])
    else:
        if arr[i] >= arr[i-1] and arr[i] >= arr[i+1]:
            peaks.append(arr[i])

print(" ".join(map(str, peaks)))
```

	Input	Expected	Got	
✓	7 15 7 10 8 9 4 6	15 10 9 6	15 10 9 6	✓
✓	4 12 3 6 8	12 8	12 8	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **4**

Correct

Mark 1.00 out of 1.00

Given an array `nums` containing `n` distinct numbers in the range `[0, n]`, return *the only number in the range that is missing from the array.*

Example 1:

```
Input: nums = [3,0,1]
Output: 2
Explanation: n = 3 since there are 3 numbers, so all numbers are in the range [0,3]. 2 is the missing number in the range since it does not appear in nums.
```

Example 2:

```
Input: nums = [0,1]
Output: 2
Explanation: n = 2 since there are 2 numbers, so all numbers are in the range [0,2]. 2 is the missing number in the range since it does not appear in nums.
```

Example 3:

```
Input: nums = [9,6,4,2,3,5,7,0,1]
Output: 8
Explanation: n = 9 since there are 9 numbers, so all numbers are in the range [0,9]. 8 is the missing number in the range since it does not appear in nums.
```

For example:

Test	Result
print(missingNumber([3,0,1]))	2
print(missingNumber([0,1]))	2

Answer: (penalty regime: 0 %)

Reset answer

```
def missingNumber(nums):
    n = len(nums)
    expected = n * (n + 1) // 2
    return expected - sum(nums)

```

	Test	Expected	Got	
✓	print(missingNumber([3,0,1]))	2	2	✓
✓	print(missingNumber([0,1]))	2	2	✓
✓	print(missingNumber([9,6,4,2,3,5,7,0,1]))	8	8	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **5**

Correct

Mark 1.00 out of 1.00

Two string values S1, S2 are passed as the input. The program must print first N characters present in S1 which are also present in S2.

Input Format:

The first line contains S1.
The second line contains S2.
The third line contains N.

Output Format:

The first line contains the N characters present in S1 which are also present in S2.

Boundary Conditions:

2 <= N <= 10
2 <= Length of S1, S2 <= 1000

Example Input/Output 1:

Input:

abcbde
cdefghbb
3

Output:

bcd

Note:

b occurs twice in common but must be printed only once.

Answer: (penalty regime: 0 %)

```
import sys

lines = sys.stdin.read().splitlines()
# Remove empty lines at start/end but keep content
lines = [l for l in lines if l.strip() != '' or True]
# Filter out completely empty lines if more than 3
lines = [l for l in lines if l != ''] if len(lines) > 3 else lines

if len(lines) < 3:
    # try split by whitespace
    parts = sys.stdin.read().strip().split()
    if len(parts) >= 3:
        S1, S2, N = parts[0], parts[1], int(parts[2])
    else:
        sys.exit()
else:
    S1 = lines[0]
    S2 = lines[1]
    N = int(lines[2].strip())

set2 = set(S2)
```

```
seen = set()
result = []

for ch in S1:
    if ch in set2 and ch not in seen:
        seen.add(ch)
        result.append(ch)
        if len(result) == N:
            break

print("".join(result[:N]))
```

	Input	Expected	Got	
✓	abcbde cdefghbb 3	bcd	bcd	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **6**

Correct

Mark 1.00 out of 1.00


You are given an `m x n` integer matrix `matrix` with the following two properties:

- Each row is sorted in non-decreasing order.
- The first integer of each row is greater than the last integer of the previous row.

Given an integer `target`, return `True` *if* `target` *is in* `matrix` *or* `False` *otherwise*.


You must write a solution in `O(log(m * n))` time complexity.

Example 1:

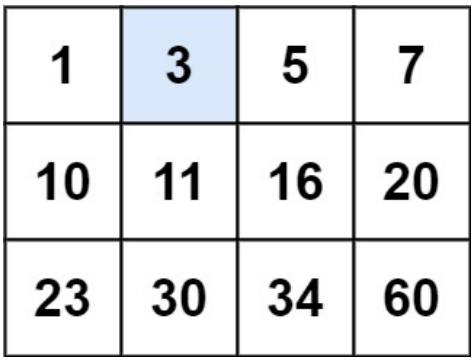


```
Input: matrix = [[1,3,5,7],[10,11,16,20],[23,30,34,60]], target = 3
Output: True
```

Example 2:

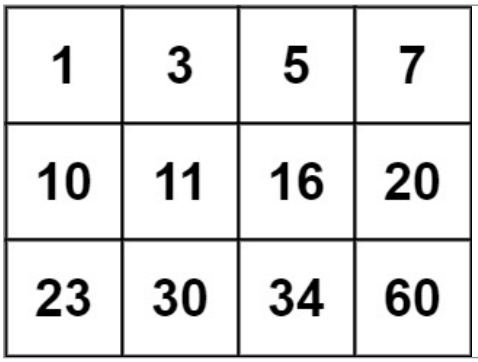


```
Input: matrix = [[1,3,5,7],[10,11,16,20],[23,30,34,60]], target = 13
Output: False
```

For example:

Test	Result
print(searchMatrix([[1,3,5,7],[10,11,16,20],[23,30,34,60]], 13))	False
print(searchMatrix([[1,3,5,7],[10,11,16,20],[23,30,34,60]], 3))	True

Answer: (penalty regime: 0 %)

Reset answer

```
def searchMatrix(matrix, target):
    if not matrix or not matrix[0]:
        return False
    m, n = len(matrix), len(matrix[0])
    low, high = 0, m * n - 1
    while low <= high:
        mid = (low + high) // 2
        val = matrix[mid // n][mid % n]
        if val == target:
            return True
        elif val < target:
            low = mid + 1
        else:
```

```
14              high = mid - 1
15      return False
16
```

	Test	Expected	Got	
✓	print(searchMatrix([[1,3,5,7],[10,11,16,20],[23,30,34,60]], 13))	False	False	✓
✓	print(searchMatrix([[1,3,5,7],[10,11,16,20],[23,30,34,60]], 3))	True	True	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **7**

Correct

Mark 1.00 out of 1.00

Balanced strings are those that have an equal quantity of 'L' and 'R' characters.

Given a balanced string s, split it in the maximum amount of balanced strings.

Return the maximum amount of split balanced strings.

Example 1:

Input:

RLRRLLRLRL

Output:

4

Explanation: s can be split into "RL", "RRLL", "RL", "RL", each substring contains same number of 'L' and 'R'.

Example 2:

Input:

RLLLLRRRLR

Output:

3

Explanation: s can be split into "RL", "LLLRRR", "LR", each substring contains same number of 'L' and 'R'.

Example 3:

Input:

LLLLRRRR

Output:

1

Explanation: s can be split into "LLLLRRRR".

Constraints:

1 <= s.length <= 1000

s[i] is either 'L' or 'R'.

s is a balanced string.

For example:

Test	Result
`print(BalancedStrings('RLRRLLRLRL'))`	4
`print(BalancedStrings('RLLLLRRRLR'))`	3

Answer: (penalty regime: 0 %)

Reset answer

```
def BalancedStrings(s):
    count = 0
    balance = 0
    for ch in s:
        if ch == 'R':
            balance += 1
        else:  # 'L'
            balance -= 1
        if balance == 0:
            count += 1
    return count
```

	Test	Expected	Got	
✓	`print(BalancedStrings('RLRRLLRLRL'))`	4	4	✓
✓	`print(BalancedStrings('RLLLLRRRLR'))`	3	3	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **8**

Correct

Mark 1.00 out of 1.00

An list contains N numbers and you want to determine whether two of the numbers sum to a given number K. For example, if the input is 8, 4, 1, 6 and K is 10, the answer is yes (4 and 6). A number may be used twice.

Input Format

The first line contains a single integer n , the length of list

The second line contains n space-separated integers, list[i].

The third line contains integer k.

Output Format

Print Yes or No.

Sample Input

7

0 1 2 4 6 5 3

1

Sample Output

Yes

For example:

Input	Result
5 8 9 12 15 3 11	Yes
6 2 9 21 32 43 43 1 4	No

Answer: (penalty regime: 0 %)

```
import sys

data = sys.stdin.read().strip().split()
if not data:
    sys.exit()
nums = list(map(int, data))

n = nums[0]
# Take exactly n numbers after first, next is K
if len(nums) >= 2:
    arr = nums[1:1+n]
    if len(nums) > 1+n:
        k = nums[1+n]
    else:
        # No explicit K, use last as K? fallback
        k = nums[-1]
        arr = nums[1:-1]
else:
    arr = []
    k = 0

seen = set()
found = False
for x in arr:
    if (k - x) in seen:
        found = True
        break
    seen.add(x)

print("Yes" if found else "No")
```

	Input	Expected	Got	
✓	5 8 9 12 15 3 11	Yes	Yes	✓
✓	6 2 9 21 32 43 43 1 4	No	No	✓
✓	6 13 42 31 4 8 9 17	Yes	Yes	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **9**

Correct

Mark 1.00 out of 1.00

Write a Python program for binary search.

For example:

Input	Result
1,2,3,5,8 6	False
3,5,9,45,42 42	True

Answer: (penalty regime: 0 %)

```
import sys

data = sys.stdin.read().strip().splitlines()
data = [line.strip() for line in data if line.strip() != '']

if not data:
    sys.exit()

# First line: numbers separated by comma / space
first = data[0].replace(',', ' ')
arr = list(map(int, first.split()))

if len(data) >= 2:
    target = int(data[1].strip().split()[0])
else:
    target = arr[-1]
    arr = arr[:-1]

arr.sort()

low, high = 0, len(arr) - 1
found = False
while low <= high:
    mid = (low + high) // 2
    if arr[mid] == target:
        found = True
        break
    elif arr[mid] < target:
        low = mid + 1
    else:
        high = mid - 1

print(found)
```

	Input	Expected	Got	
✓	1,2,3,5,8 6	False	False	✓
✓	3,5,9,45,42 42	True	True	✓
✓	52,45,89,43,11 11	True	True	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **10**

Correct

Mark 1.00 out of 1.00

Given two Strings s1 and s2, remove all the characters from s1 which is present in s2.

Constraints

1<= string length <= 200

Sample Input 1

experience
enc

Sample Output 1

xpri

Answer: (penalty regime: 0 %)

```
import sys

lines = sys.stdin.read().splitlines()
lines = [l.rstrip('\n') for l in lines]

if len(lines) >= 2:
    s1 = lines[0]
    s2 = lines[1]
elif len(lines) == 1:
    parts = lines[0].split()
    s1, s2 = parts[0], parts[1] if len(parts) > 1 else ''
else:
    s1 = s2 = ''

remove = set(s2)
print(''.join(ch for ch in s1 if ch not in remove))
```

	Input	Expected	Got	
✓	experience enc	xpri	xpri	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.