

Experiment :- 6

AIM: Create Product Catalog Application using ASP.NET MVC Architecture. (Controllers, Models, Views, Routing).

Source:- Controllers/ProductController.cs

Code:-

```
using System.Web.Mvc;
using WebApplication2.Models;
namespace
    WebApplication2.Controllers
{
    public class ProductController :
Controller
    {
        // Product Catalog
        public ActionResult Index()
        {
            return View();
        }
        // Product Details
        public ActionResult
Details(int id)
        {
            if (id == 1)
            {
                ViewBag.ProductId=1;
                ViewBag.ProductName="Laptop";
                ViewBag.Description
                ="HP Laptop with 16GB RAM and
                512GB SSD";
                ViewBag.Price =
                80000;
            }
            else if (id == 2)
```

```
{  
    ViewBag.ProductId = 2;  
  
    ViewBag.ProductName = "Mobile";  
  
    ViewBag.Description  
    = "Samsung Mobile with 8GB RAM and  
    128GB Storage";  
    ViewBag.Price = 30000;  
  
}  
else if (id == 3)  
{  
    ViewBag.ProductId = 3;  
  
    ViewBag.ProductName  
    = "Headphones";  
    ViewBag.Description  
    = "Wireless Headphones";  
    ViewBag.Price = 5000;  
  
}  
  
return View();  
}  
}
```

Source:- Models/Products.cs

Code:

```
using System;  
using System.Collections.Generic;  
using System.Linq;  
using System.Web;
```

```
namespace WebApplication2.Models
{
    public class Products
    {
        public int Id { get; set; }
        public string Name { get;
set; }
        public string Description
{ get; set; }

    }
}
```

Source:- Views/Product/Details.cshtml

Code:

```
@{
    ViewBag.Title    =    "Product
Details";
}
<style>
    .details-box {
        border: 1px solid #ccc;
        width: 500px;
        padding: 25px;
        border-radius: 8px;
        box-shadow: 0 2px 5px #ccc;
        background-color: #f9f9f9;
    }
    .price {
        color: green;
        font-size: 20px;
        font-weight: bold;
    }
}
```

```
.back-button {
    padding: 8px 12px;
    background-color: #555;
    color: white;
    text-decoration: none;
    border-radius: 5px;
}
</style>
<h2>Product Details</h2>
<div class="details-box">
    <h3>@ViewBag.ProductName</h3>
    <p>
        <b>Product ID:</b>
        @ViewBag.ProductId
    </p>
    <p>
        <b>Description:</b>
        @ViewBag.Description
    </p>
    <p class="price">
        Price: ₹@ViewBag.Price
    </p>
    <br />
    <a class="back-button"
        href="@Url.Action("Index",
        "Product")">
        Back to Products
    </a>
</div>
```

Source:- Views/Product/Index.cshtml

Code:

```
@model
WebApplication2.Models.Products

@{
    ViewBag.Title = "Products";
}

<style>
    .product-box {
        border: 1px solid #ccc;
        width: 250px;
        padding: 20px;
        margin: 15px;
        display: inline-block;
        vertical-align: top;
        border-radius: 8px;
        box-shadow: 0 2px 5px #ccc;
        background-color: #f9f9f9;
    }

    .product-box h3 {
        color: #333;
    }



    .price {
        color: green;
        font-weight: bold;
    }



    .details-button {
        display: inline-block;
        padding: 8px 12px;
        background-color: #007bff;
        color: white;
        text-decoration: none;
        border-radius: 5px;
    }
}
```

```
.details-button:hover {  
    background-color:  
#0056b3;  
}  
</style>  
<h2>Product Catalog</h2>  
<hr />  
<div class="product-box">  
    <h3>Laptop</h3>  
    <p>  
        HP Laptop with 16GB RAM and  
512GB SSD  
    </p>  
    <p class="price">  
        Price: ₹80000  
    </p>  
    <a class="details-button"  
        href="@Url.Action("Details",  
"Product", new { id = 1 })">  
        View Details  
    </a>  
</div>  
<div class="product-box">  
    <h3>Mobile</h3>  
    <p>  
        Samsung Mobile with 8GB RAM  
and 128GB Storage  
    </p>  
    <p class="price">  
        Price: ₹30000  
    </p>  
    <a class="details-button"
```

```
        href="@Url.Action("Details",
"Product", new { id = 2 })">
            View Details
        </a>
    </div>
    <div class="product-box">
        <h3>Headphones</h3>
        <p>
            Wireless          Bluetooth
Headphones
        </p>
        <p class="price">
            Price: ₹5000
        </p>
        <a class="details-button"
            href="@Url.Action("Details",
"Product", new { id = 3 })">
            View Details
        </a>
    </div>
```

Output/ Screenshot:

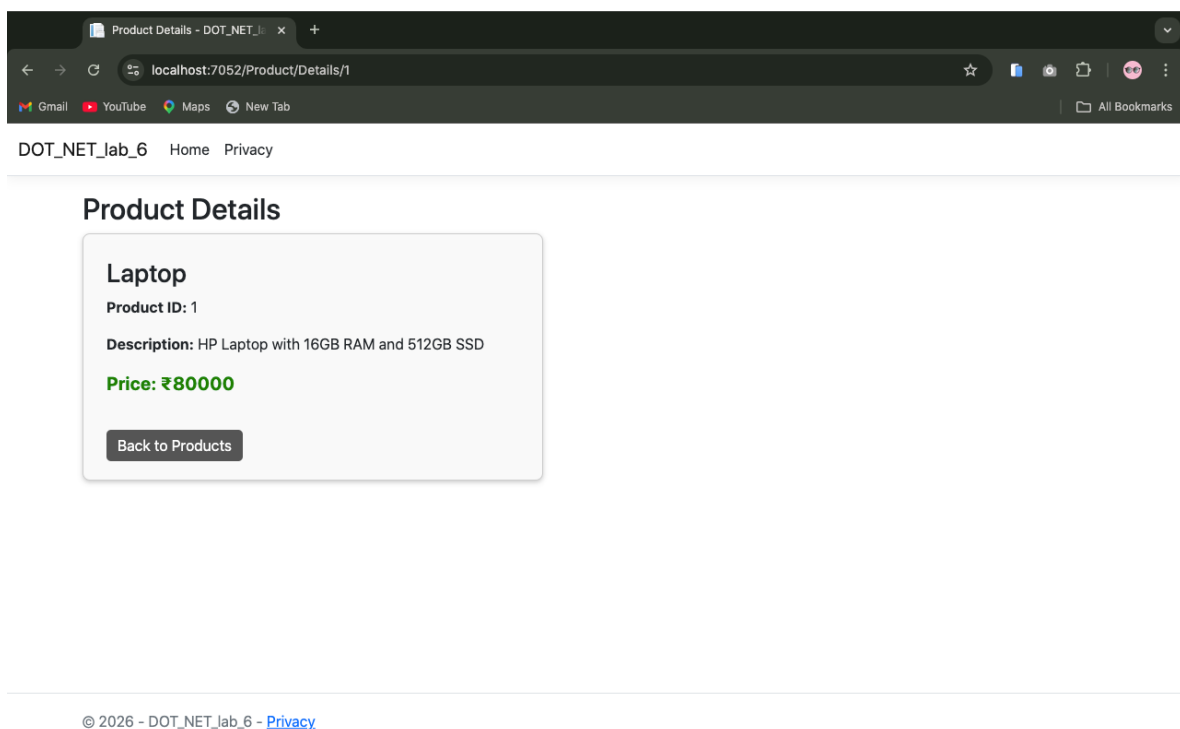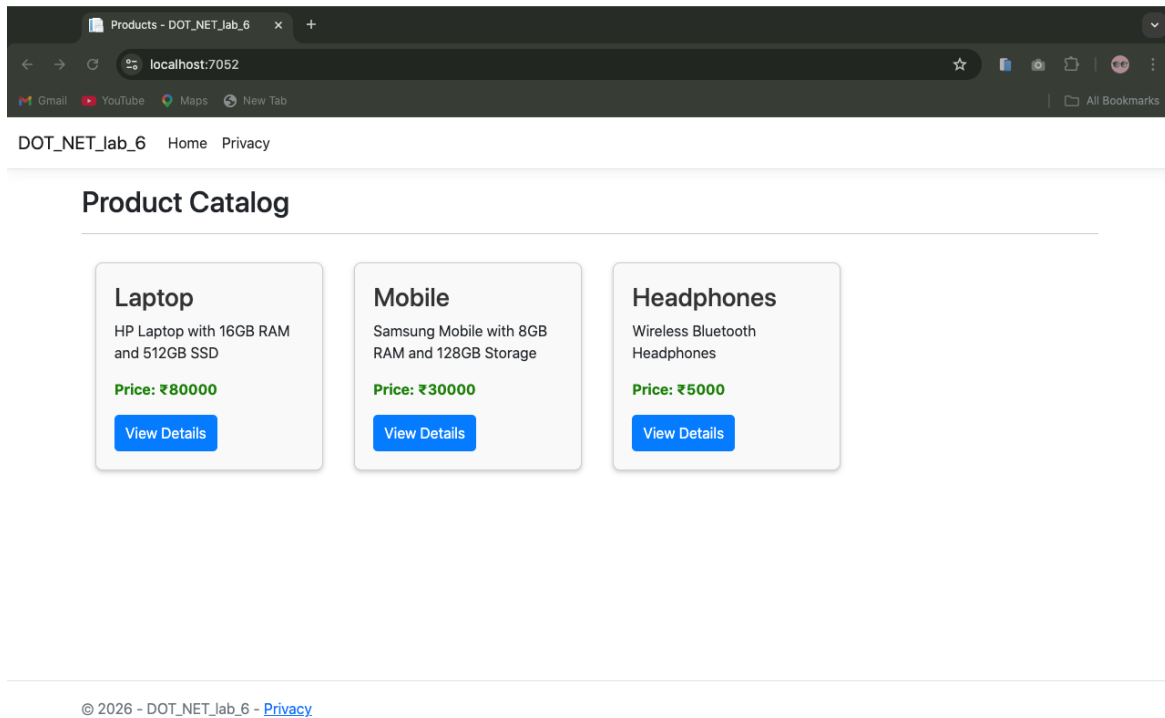

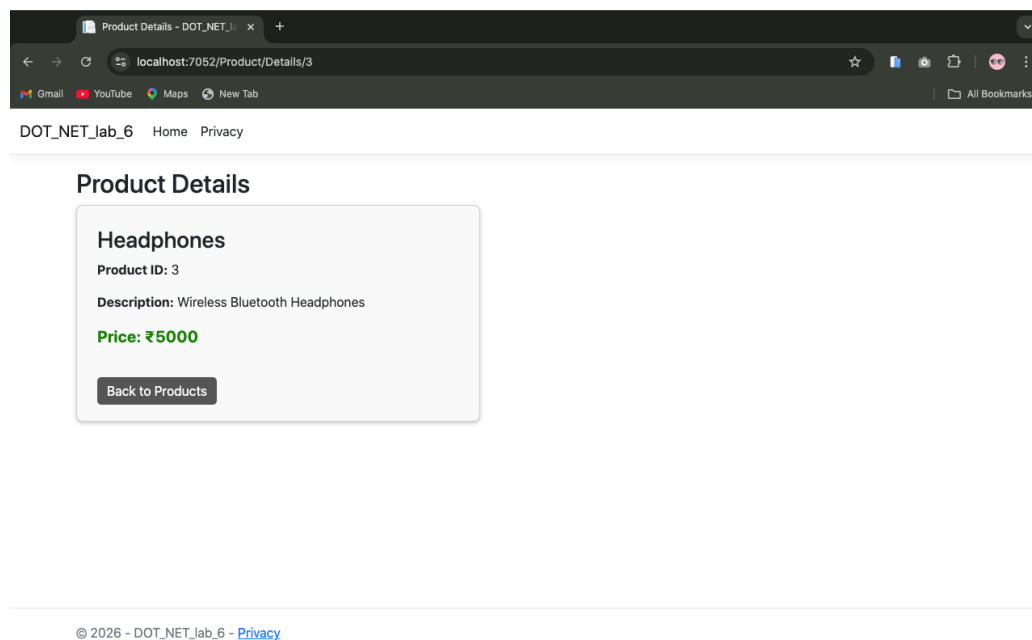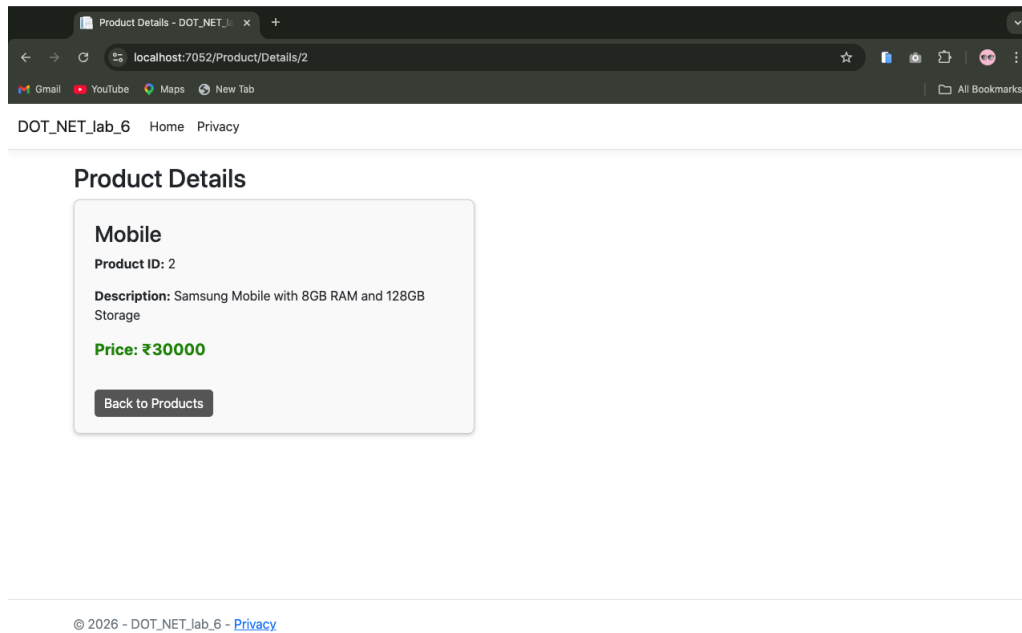

GitHub Link : https://github.com/m-sajid83/NET-Labwork/tree/main/DOT_NET_lab_6