




1.

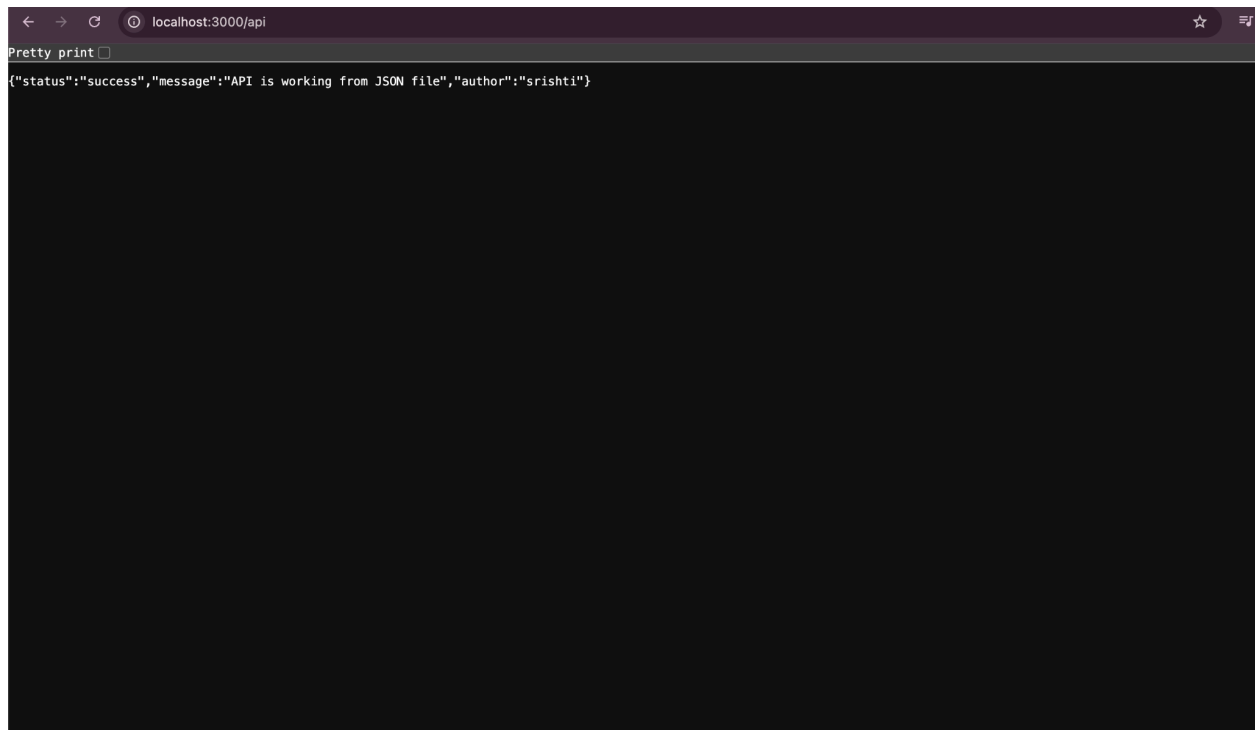

Solution 2.created branch srishti_new , install node , [index.js](#) file ., data.json -> response reflected on browser .

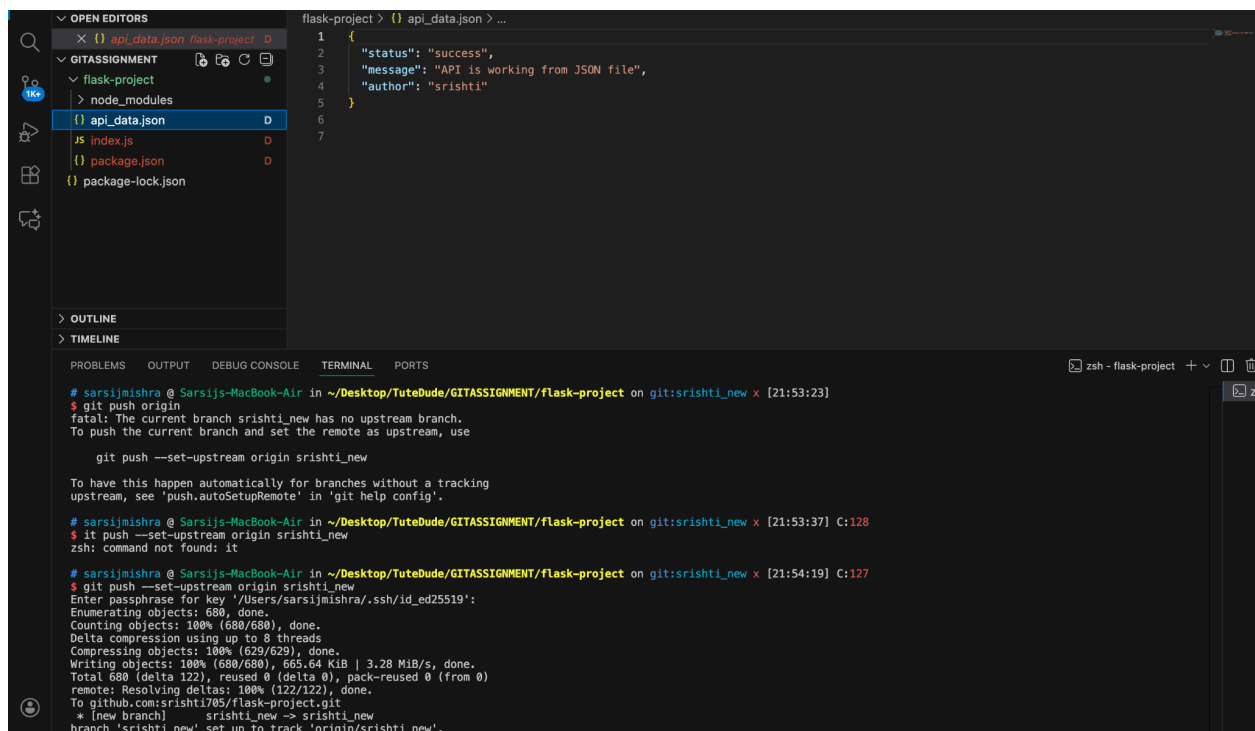

- Add the resolved changes to the staging area, commit them, and push the updates to the remote repository.

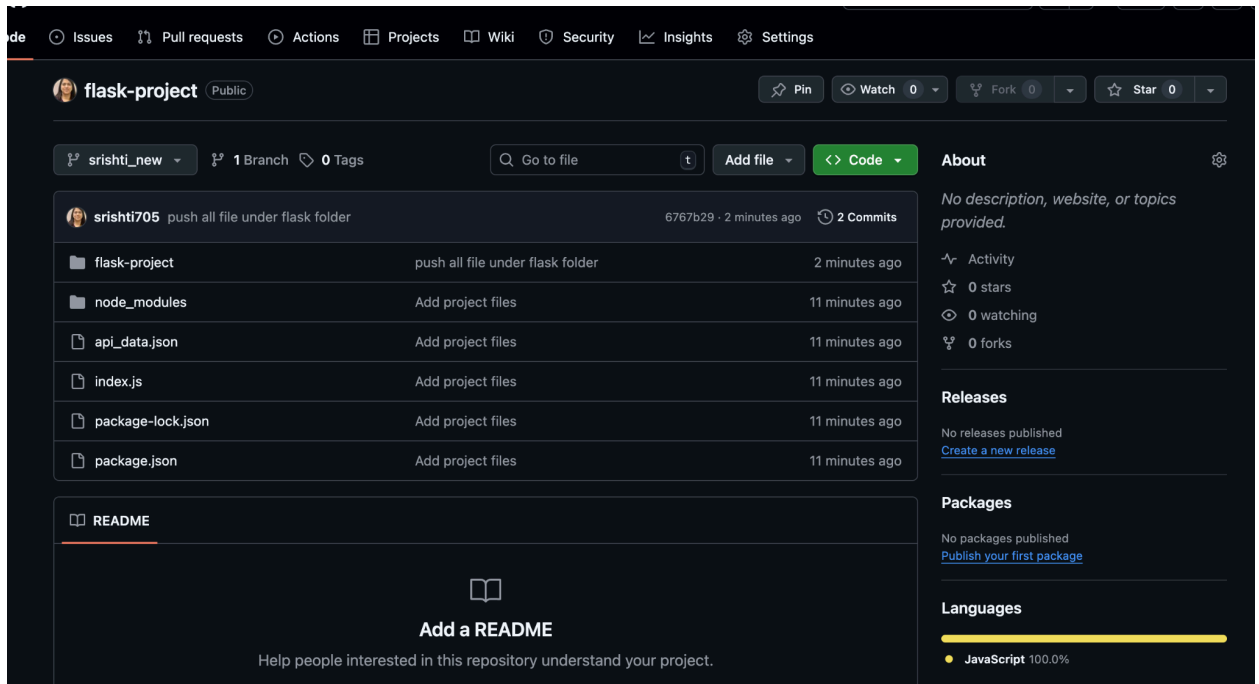

Branch Creation :

Add Item UUID field.

file:///Users/sarsijmishra/Desktop/TuteDude/GITASSIGNMENT/todo.html

To-Do Page

open2.html

Submit To-Do Item

Item Name:

Item ID:

Item UUID:

Item Description:

Submit

file:///Users/sarsijmishra/Desktop/TuteDude/GITASSIGNMENT/todo.htm

To-Do Page open2.html

Submit To-Do Item

Item Name:

Item ID:

Item UUID:

Item Hash:

Item Description:

- **Merging to `main`:**
- Merge the `master_1` branch into the `main` branch.
- **Git Reset and Commit Deletion:**
- In the `main` branch, use **Git Reset** to roll back to the commit where only the **Item ID** field was added.
- Use `git reset --soft` to ensure changes remain staged.
- Re-commit this state to the `main` branch.
- Merge this updated state to the `main` branch.
- **Rebasing Changes:**
- Rebase the updated changes in the `main` branch to the `master_1` branch.

Clarification:

- During rebasing, **preserve individual commits** to maintain the commit history for each change (i.e., do not squash commits).
- Use `git rebase main master_1` to integrate changes from the `main` branch back into the `master_1` branch.

SOURCE CONTROL

CHANGES

Message (⌘Enter to comm...)

Commit

GR...

Reset main to lte... @master_1

Add Item ID field. srishti705

original form srishti705

frontend updated srishti705

push all file under flask folder sris...

Add project files srishti705

todo.html X JS server.js {} package-lock.json

todo.html > ...

2 <html>

6 <body>

10 <form id="todoForm">

19

20 <label>Item Hash:</label>

21 <input type="text" id="itemHash" readonly>

22

23

24

25 <label>Item Description:</label>

26 <textarea id="itemDescription" required></textarea>

27

28 <button type="submit">Submit</button>

29 </form>

30

31 <p id="response"></p>

32

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

640 git status

641 git commit -m "Add Item UUID field."

642 open todo.html

643 git add .

644 git commit -m "Add Item hash"

645 open todo.html

646 git push origin master_1\n

647 git checkout main\ngit pull origin main\n

648 git merge master_1\n

649 git log --online\n

650 git reset --soft 17b5b77\n

651 git status

652 git commit -m "Reset main to Item ID field state"\n

653 git checkout master_1

654 git rebase main

655 git rebase main master_1

656 git rebase main

657 git rebase main master_1

658 git status\n

659 git rebase --abort\n

660 git rebase main

661 git add todo.html

662 git rebase --continue

663 open todo.html

664 git rebase --continue\n


665 git push origin master_1 --force\n

666 git log --online main..master_1\n

sarsijmishra @ Sarsijs-MacBook-Air in ~/Desktop/TuteDude/GITASSIGNMENT on git:master_1 o [18:49:37]

\$

3.

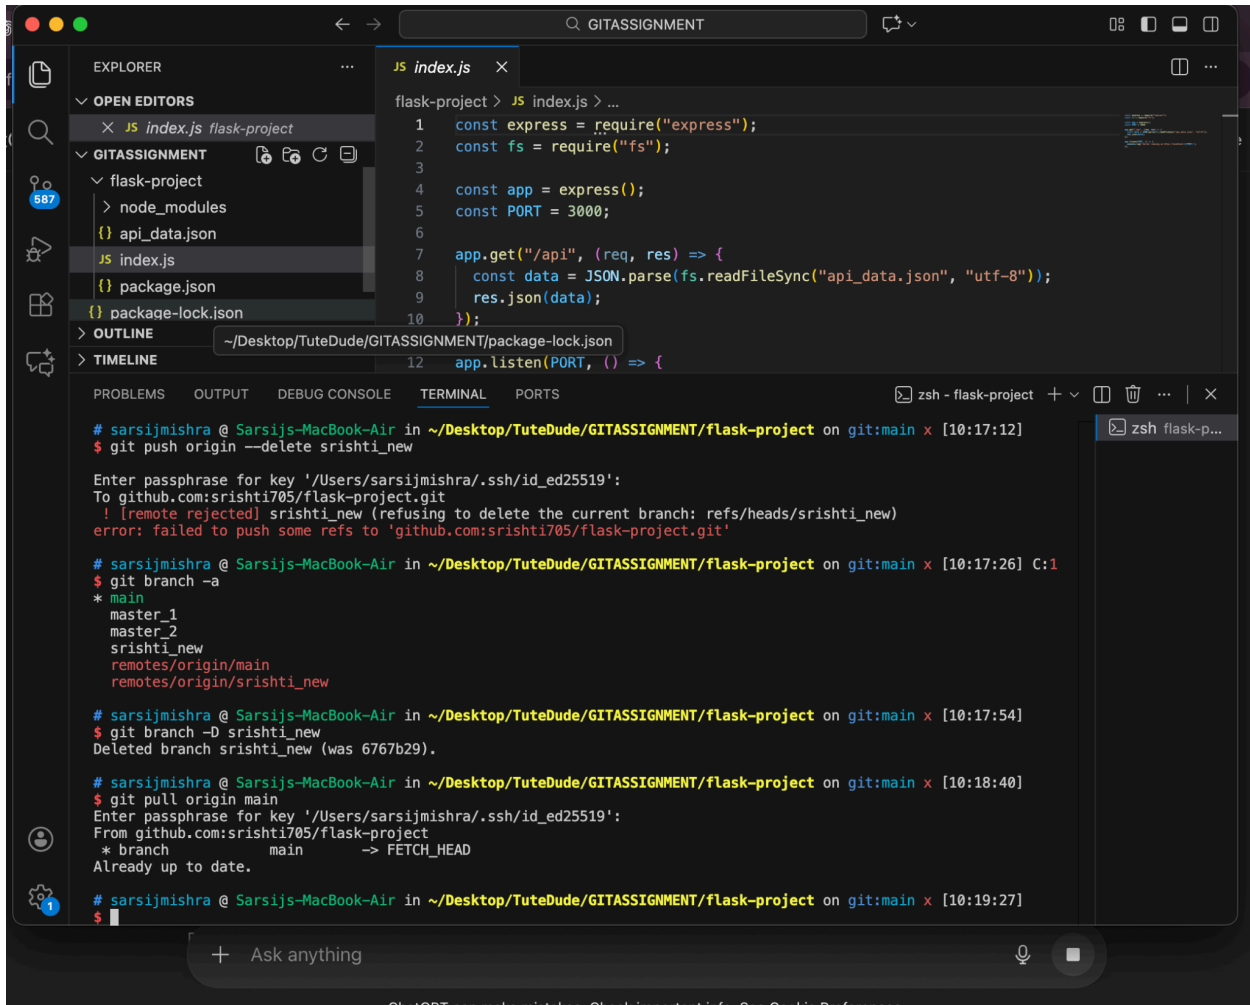

The screenshot shows the Visual Studio Code editor interface. The Explorer panel on the left displays the file structure of a project named 'flask-project', including 'node_modules', 'api_data.json', 'index.js', 'package.json', and 'package-lock.json'. The main editor window shows the content of 'index.js', which is a Node.js application using Express.js to serve JSON data from 'api_data.json'. The code includes imports for 'express' and 'fs', and a GET route for '/api'. The terminal window at the bottom shows a series of Git commands and their outputs. The user attempts to push to a remote branch 'srishti_new', which is rejected. They then delete the branch and pull the latest changes from the 'main' branch of the origin.

```
flask-project > JS index.js > ...
1  const express = require("express");
2  const fs = require("fs");
3
4  const app = express();
5  const PORT = 3000;
6
7  app.get("/api", (req, res) => {
8    const data = JSON.parse(fs.readFileSync("api_data.json", "utf-8"));
9    res.json(data);
10 });
12 app.listen(PORT, () => {
```

```
# sarsijmishra @ Sarsijs-MacBook-Air in ~/Desktop/TuteDude/GITASSIGNMENT/flask-project on git:main x [10:17:12]
$ git push origin --delete srishti_new

Enter passphrase for key '/Users/sarsijmishra/.ssh/id_ed25519':
To github.com:srishti705/flask-project.git
! [remote rejected] srishti_new (refusing to delete the current branch: refs/heads/srishti_new)
error: failed to push some refs to 'github.com:srishti705/flask-project.git'

# sarsijmishra @ Sarsijs-MacBook-Air in ~/Desktop/TuteDude/GITASSIGNMENT/flask-project on git:main x [10:17:26] C:1
$ git branch -a
* main
  master_1
  master_2
  srishti_new
remotes/origin/main
remotes/origin/srishti_new

# sarsijmishra @ Sarsijs-MacBook-Air in ~/Desktop/TuteDude/GITASSIGNMENT/flask-project on git:main x [10:17:54]
$ git branch -D srishti_new
Deleted branch srishti_new (was 6767b29).

# sarsijmishra @ Sarsijs-MacBook-Air in ~/Desktop/TuteDude/GITASSIGNMENT/flask-project on git:main x [10:18:40]
$ git pull origin main
Enter passphrase for key '/Users/sarsijmishra/.ssh/id_ed25519':
From github.com:srishti705/flask-project
 * branch      main       -> FETCH_HEAD
Already up to date.

# sarsijmishra @ Sarsijs-MacBook-Air in ~/Desktop/TuteDude/GITASSIGNMENT/flask-project on git:main x [10:19:27]
$
```