


```
1. #include <stdio.h>
#include <sys/types.h>
#include <sys/stat.h>
int main()
{
if (mkfifo("myfifo", 0666) == -1)
{
perror("mkfifo");
return 1;
}
printf("FIFO created\n");
return 0;
```

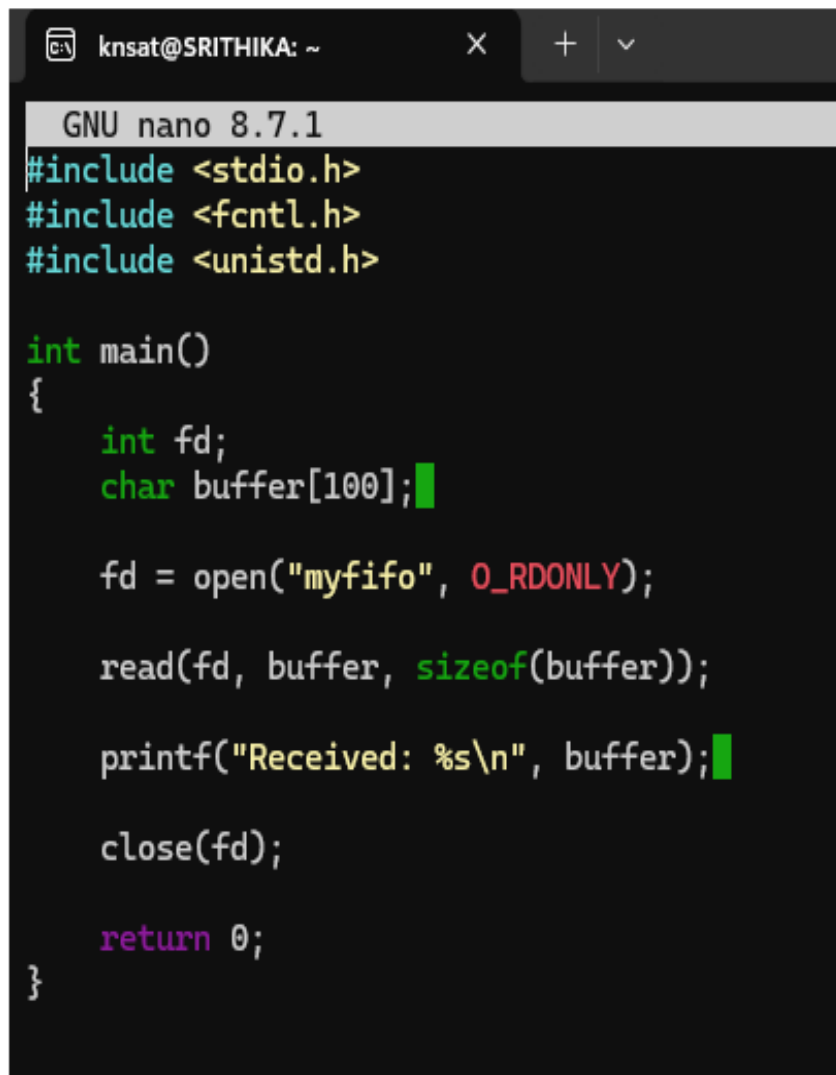

The screenshot shows a terminal window with the title bar 'knsat@SRITHIKA: ~'. The terminal is running GNU nano 8.7.1. The code displayed is a C program that includes `<stdio.h>`, `<fcntl.h>`, and `<unistd.h>`. The `main` function declares `int fd;` and `char buffer[100];`. It then opens a FIFO named 'myfifo' with `O_RDONLY` permissions. It reads data from the FIFO into the buffer using `read(fd, buffer, sizeof(buffer));` and prints it with `printf("Received: %s\n", buffer);`. Finally, it closes the file descriptor with `close(fd);` and returns 0.

```
GNU nano 8.7.1
#include <stdio.h>
#include <fcntl.h>
#include <unistd.h>

int main()
{
    int fd;
    char buffer[100];

    fd = open("myfifo", O_RDONLY);

    read(fd, buffer, sizeof(buffer));

    printf("Received: %s\n", buffer);

    close(fd);

    return 0;
}
```

```
knsat@SRITHIKA: ~  
GNU nano 8.7.1  
#include <stdio.h>  
#include <fcntl.h>  
#include <unistd.h>  
#include <string.h>  
  
int main()  
{  
    int fd;  
    char message[] = "Hello from Writer";  
  
    fd = open("myfifo", O_WRONLY);  
  
    write(fd, message, strlen(message) + 1);  
  
    close(fd);  
  
    printf("Message sent\n");  
  
    return 0;  
}
```

```
knsat@SRITHIKA:~$ nano fiforead.c  
knsat@SRITHIKA:~$ nano fifowrite.c  
knsat@SRITHIKA:~$ mkfifo myfifo  
mkfifo: cannot create fifo 'myfifo': File exists  
knsat@SRITHIKA:~$ gcc fiforead.c -o fiforead  
knsat@SRITHIKA:~$ gcc fifowrite.c -o fifowrite  
knsat@SRITHIKA:~$ ./fiforead  
Received: Hello from Writer
```

```
knsat@SRITHIKA: ~  
knsat@SRITHIKA:~$ ./fifowrite  
Message sent
```