JAVA PRACTICAL PROGRAM REPORT

Employee Details Program

Program/Class Name: Employee.java

Language: Java

Topic: Scanner input; integer, string, and double variables; nextLine() after nextInt() to consume the pending newline; console output.

This report presents the aim, requirements, program logic, UML-style class diagram, source code, execution commands, sample console output, and conclusion.

1. Aim

To read an employee's ID, name, and salary from the keyboard and display the employee details.

2. Requirements

• Java Development Kit (JDK)
• Text editor or Java IDE
• Save the source code using the public class name as the filename.

3. Concepts Used

Scanner input; integer, string, and double variables; nextLine() after nextInt() to consume the pending newline; console output.

4. Algorithm

1. Start the program and create a Scanner object.
2. Read the employee ID as an integer.
3. Consume the remaining newline with nextLine().
4. Read the employee name as a full line.
5. Read the employee salary as a double.
6. Display the employee ID, name, and salary.
7. Close the Scanner and end.

5. UML / Class Diagram

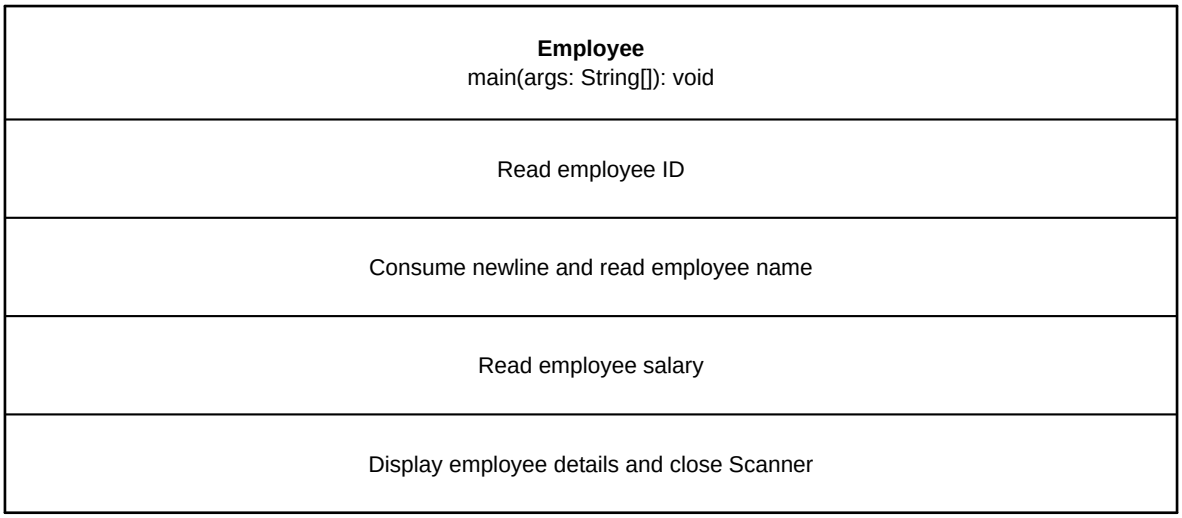

The diagram summarizes the main class flow and the key methods or calculations used by the program.

6. Source Code

```
import java.util.Scanner;

public class Employee {
    public static void main(String[] args) {

        Scanner sc = new Scanner(System.in);

        System.out.print("Enter Employee ID: ");
        int id = sc.nextInt();

        sc.nextLine();

        System.out.print("Enter Employee Name: ");
        String name = sc.nextLine();

        System.out.print("Enter Employee Salary: ");
        double salary = sc.nextDouble();

        System.out.println("\n--- Employee Details ---");
        System.out.println("Employee ID: " + id);
        System.out.println("Employee Name: " + name);
        System.out.println("Employee Salary: " + salary);

        sc.close();
    }
}
```

7. Compilation and Execution

```
javac Employee.java
java Employee
```

8. Sample Console Output

The source code was compiled and run in the available Java environment. For interactive programs, typed inputs are shown beside their prompts for readability.

```
Enter Employee ID: 101
Enter Employee Name: Asha Kumar
Enter Employee Salary: 45000.5
Enter Employee ID: Enter Employee Name: Enter Employee Salary:
--- Employee Details ---
Employee ID: 101
Employee Name: Asha Kumar
Employee Salary: 45000.5
```

9. Result / Conclusion

The program accepts and displays employee details. The nextLine() call after nextInt() prevents the newline left by numeric input from being read as an empty employee name.