



[Products](#) / [DataX](#) / [DataX Manual](#) / [Workspace](#)

Workspace

Workspace

Quick Start (15 minutes)

Before you start (Prerequisites)

Step 1: Open the Workspace and select a Data Set

Step 2: Run ingestion

Step 3: Verify results in Ingestion History

Workspace Overview

Where to Access

Workspace Action Bar

Manual Ingestion

Overview

Key Elements

Common Tasks

Tips and Best Practices

HTTP Source Connectors in Manual Ingestion

Ingestion History

Overview

Key Elements

Common Tasks

Tips and Best Practices

Quick Start (15 minutes)

Use this guided flow if you are new to DataX and want to complete your first ingestion end-to-end.

Before you start (Prerequisites)

Make sure the following are ready:

- At least one **Data Set** exists.
- The Data Set has one or more **Data Formats** linked.
- For file uploads, a connector category that supports manual upload is configured.
- For trigger-based ingestion, a connector category that supports triggering is configured.

Step 1: Open the Workspace and select a Data Set

1. Navigate to **DataX > Workspace**

2. Select the **Data Set**

Expected outcome: The workspace shows ingestion history for the selected Data Set.

Step 2: Run ingestion

Choose one approach based on the configured connector category.

Option A: Manual Ingestion (upload files)

1. Click the **Manual Ingestion** icon  in the workspace action bar
2. On the **Manual Ingestion** tab, drag-and-drop one or more files
3. Review validation results on each file
4. Click **Upload**

Expected outcome:

- Each file shows a validation status and message.
- Upload is disabled if any selected file failed validation.

Option B: Trigger Ingestion

1. Click the **Manual Ingestion** icon  in the workspace action bar
2. On the **Manual Ingestion** tab, review the linked data formats
3. Click **Trigger**

Expected outcome: A new ingestion execution is created for the selected Data Set.

Step 3: Verify results in Ingestion History

1. Return to the workspace
2. Review the new execution entry in **Ingestion History**

Expected outcome:

- Status updates to Successful / Failed / Partially Successful / Duplicated.
- More executions load automatically as you scroll in the table.

Workspace Overview

Where to Access

DataX user-facing operations are typically accessed from:

- **DataX > Workspace**
- **DataX > Manual Ingestion** (can be opened from the workspace action bar)

Workspace Action Bar

On the **DataX Workspace** screen, the top-right action bar provides quick access to common operations:

- **Manual Ingestion** ()

Opens the **Manual Ingestion** screen for the currently selected Data Set.

- **DataX Configurations**

Hover to see quick links to Data Connectors, Data Formats, and Data Sets admin screens.

- **Refresh**

Reloads workspace data such as Data Set list values and the Ingestion History table.

Manual Ingestion

Overview

Manual ingestion is used when an operations user needs to upload a file on-demand. You can access Manual Ingestion from the Workspace action bar or from the DataX side menu.

Key Elements

Element	Description
Data Set Selector	Choose which Data Set to ingest files into
Upload Area	Drag-and-drop zone for file selection
File Validation Indicator	Shows validation status and messages for each selected file
Upload Button	Initiates ingestion (disabled if validation fails)
Trigger Button	Starts scheduled ingestion for trigger-based connectors
Manual Ingestion History Tab	Quick view of recent manual upload executions

Common Tasks

Upload a File

1. Open **DataX > Manual Ingestion**
2. Select the relevant **Data Set**
3. Drag and drop your file into the upload area 
4. Review validation status (hover for details)
5. Click **Upload** if validation passes


NOTE

Manual uploads are validated against the linked Data Formats for the selected Data Set. Validation checks file name patterns, extensions, and basic format compatibility.

Monitor Upload Status

After uploading files, track their processing status in the **Manual Ingestion History** tab:

- **Execution ID** - Unique identifier for each ingestion run
- **Source Identifier** - File name or source label
- **Timestamps** - When the ingestion was initiated and completed
- **Status** - Success, Failed, Partially Successful, or Duplicated
- **Messages/Errors** - Associated messages or error details

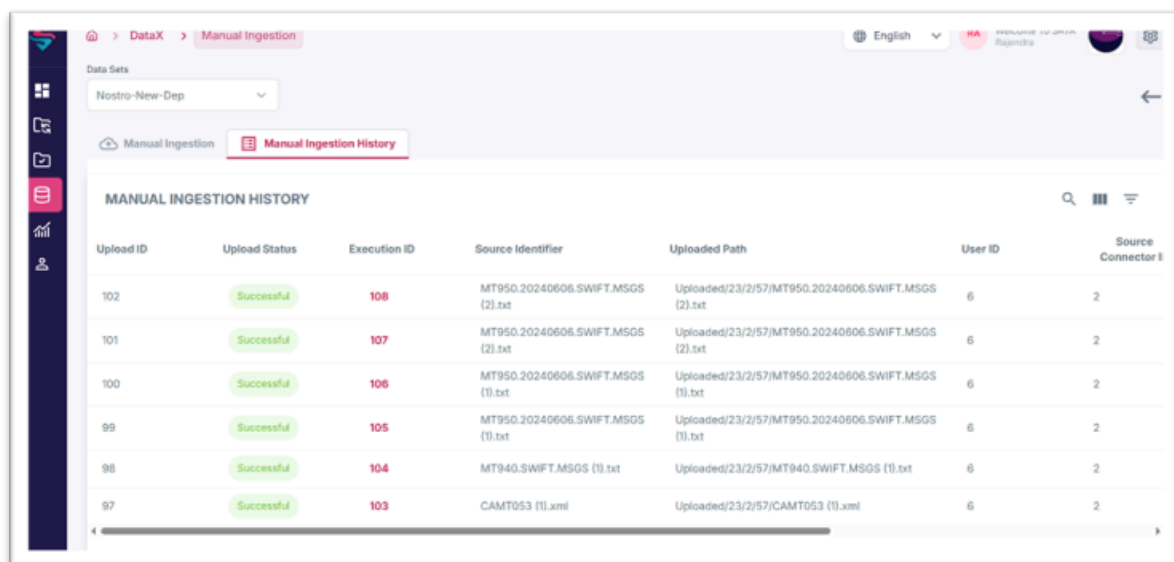

Upload ID	Upload Status	Execution ID	Source Identifier	Uploaded Path	User ID	Source Connector ID
102	Successful	108	MT950.20240606.SWIFT.MSGS (2).txt	Uploaded/23/2/57/MT950.20240606.SWIFT.MSGS (2).txt	6	2
101	Successful	107	MT950.20240606.SWIFT.MSGS (2).txt	Uploaded/23/2/57/MT950.20240606.SWIFT.MSGS (2).txt	6	2
100	Successful	106	MT950.20240606.SWIFT.MSGS (1).txt	Uploaded/23/2/57/MT950.20240606.SWIFT.MSGS (1).txt	6	2
99	Successful	105	MT950.20240606.SWIFT.MSGS (1).txt	Uploaded/23/2/57/MT950.20240606.SWIFT.MSGS (1).txt	6	2
98	Successful	104	MT940.SWIFT.MSGS (1).txt	Uploaded/23/2/57/MT940.SWIFT.MSGS (1).txt	6	2
97	Successful	103	CAMT053 (1).xml	Uploaded/23/2/57/CAMT053 (1).xml	6	2


TIP

For comprehensive execution tracking across all ingestion types (manual and automated), use the main **Ingestion History** section in the Workspace.

File Name Pattern Validation

The system checks whether uploaded files match expected file name patterns:

- If the file name is valid, upload proceeds
- If the file name does not match, an error message displays and upload is blocked

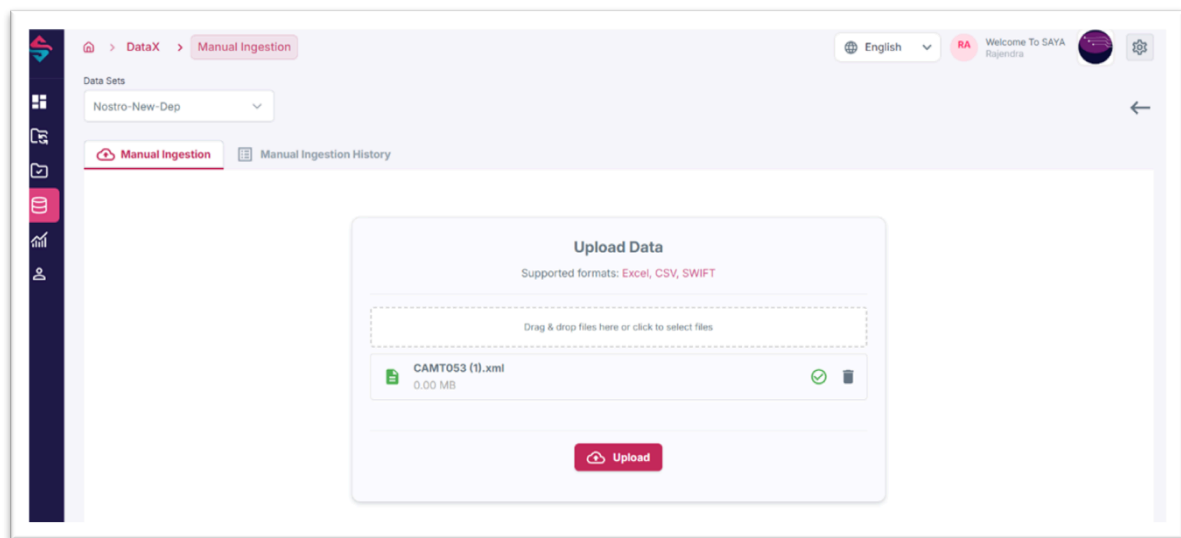

Tips and Best Practices

- Hover over validation status indicators to see detailed messages before uploading
- Use Manual Ingestion History tab for quick status checks without leaving the screen
- For recurring uploads, consider configuring scheduled ingestion instead

HTTP Source Connectors in Manual Ingestion

When the selected Data Set is linked to an HTTP source connector, Manual Ingestion adapts its trigger flow based on `connectionMode`.

REMOTE mode

In `REMOTE`, the backend executes the HTTP request during job execution.

- `FILE` : select/upload file as requested by the UI
- `JSON` / `FORM_DATA` / `NONE` : click **Trigger**; body content is taken from the Data Format configuration

LOCAL mode

In `LOCAL`, the browser executes the HTTP endpoint call first and sends the endpoint response to DataX.

1. Open **Manual Ingestion** and select the Data Set.
2. If `requestBodyType = FILE`, choose the file to send to the endpoint.

3. Click **Trigger**.
4. The browser calls the configured endpoint.
5. The endpoint response (flat JSON array) is submitted to DataX as trigger payload.
6. DataX launches the standard ingestion pipeline with that response data.

NOTE

LOCAL mode supports only POST and ANONYMOUS authentication. If the connector/authentication settings do not match these rules, trigger is rejected.

Ingestion History

Overview

Ingestion History provides a list of executions and their processing outcomes. The status reflects whether the ingestion was successful, partially successful, duplicated, or failed based on the selected Data Set and period.

Key Elements

Element	Description
Period Filter	Select preset or custom date range
Status Filter ▼	Filter by All, In Progress, Successful, Failed, Partially Successful, Duplicated
Data Set Filter	View executions for specific Data Set
Execution Table	Shows Execution ID, Source Identifier, Status, Record counts, timestamps
Row Actions (⋮)	View details or delete execution data

Expand	Execution ID	Source Identifier	Ingestion Status	Record Count	Errors	Data Format	Actions
▼	108	MT950.20240606.SWIFT.MSGS (2).txt	Successful	20	0	MT950	⋮
▼	107	MT950.20240606.SWIFT.MSGS (2).txt	Duplicated	0	0	MT950	⋮
▼	106	MT950.20240606.SWIFT.MSGS (1).txt	Successful	24	0	MT950	⋮
▼	105	MT950.20240606.SWIFT.MSGS (1).txt	Duplicated	0	0	MT950	⋮
▼	104	MT940.SWIFT.MSGS (1).txt	Successful	1	0	MT940	⋮
▼	103	CAMT053 (1).xml	Successful	1	0	CAMT_053	⋮
▼	102	CAMT053 (1).xml	Duplicated	0	0	CAMT_053	⋮

NOTE

NOTE

Executions are loaded incrementally as you scroll, and additional rows are fetched automatically.

Common Tasks

Filter Executions

Use the filter bar to narrow down executions by:

- **Period:** Preset ranges (Today, Last 7 Days, Last 30 Days) or custom date range
- **Status:** Filter by processing outcome
- **Data Set:** View executions for a specific Data Set

View Execution Details


Click Actions (...) > **View Execution Configuration** 👁 to see:

- Data Set used
- Data Format(s) selected
- Source/Sink connectors applied

Investigate Execution Steps

Click Actions (...) > **View Execution Details** to access:

- **Ingestion Steps:** Step-by-step pipeline stages and their statuses - helps identify exactly where issues occurred (e.g., file conversion, validation, transformation, writing stages)

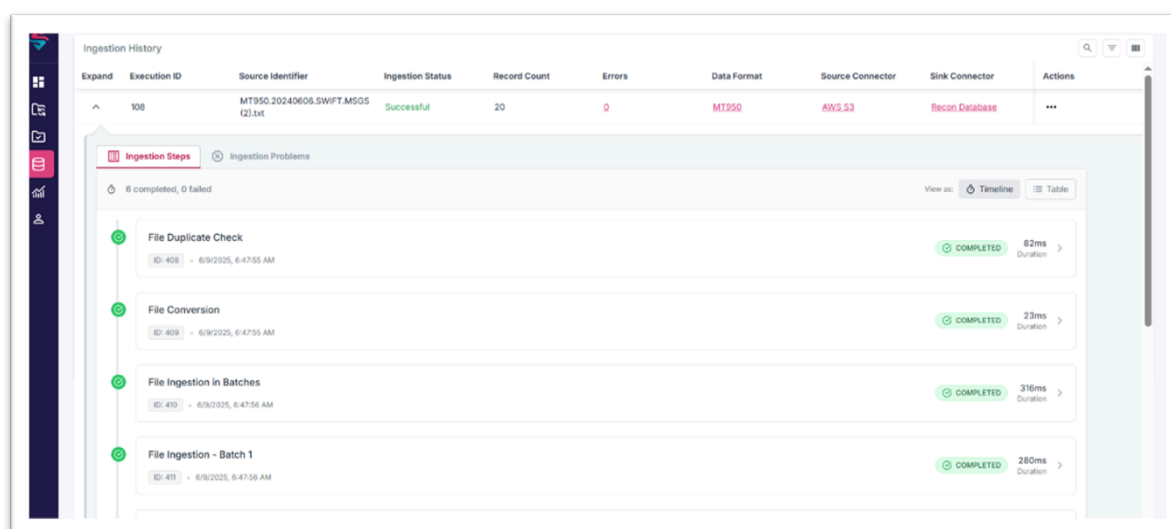

- **Ingestion Problems:** Errors, warnings, and info messages including problem codes and record contents

NOTE

NOTE

Execution steps and problems use keyset pagination - scroll to load additional rows.

Delete Execution Data

Click Actions (...) > **Delete Execution's Data**  to remove ingested data for a specific execution.

WARNING

Deleting execution data can affect downstream processes relying on that ingestion. Use this action only when necessary (e.g., accidental upload of incorrect data).

Tips and Best Practices

- Use Status filters to quickly identify failed or partial ingestions requiring investigation
- Bookmark commonly used date ranges for faster access
- Review Ingestion Problems before deleting execution data to understand root cause
- Check execution details to verify correct Data Format was applied



Copyright 2019 - 2026 3Cortex Technologies. All Rights Reserved.
[Privacy](#)

