

Name: Rajmohan Sakkarai

EmpId:863706

Assessment1:


The screenshot shows a SQL IDE interface. The top toolbar includes icons for file operations, execution, and a 'Limit to 1000 rows' dropdown. The query editor contains the following SQL statements:

```
1 • SELECT * FROM airline.passenger;
2 • select * from booking_details;
3 • SELECT * FROM airline.booking_record;
4
5 • select * from flight_info;
6 • select * from airline_info;
7 • select * from flights_info;
```

Below the query editor, the 'Result Grid' is displayed with the following data:

	passenger_id	email_address	first_name	gender	last_name	mobile_number	booking_id
▶	94	praveen@abc.com	Praveen	Male	Reddy	1212121212	93
	95	james@abc.com	James	Male	Goedic	3243654321	93
*	NULL	NULL	NULL	NULL	NULL	NULL	NULL

The bottom section of the IDE shows the 'SCHEMAS' pane on the left, listing tables under the 'airline' schema: airline_info, booking_details, booking_record, fare, flight, flight_info, flights_info, inventory, and passenger. The main query editor area at the bottom shows the same 7 SQL statements as above.

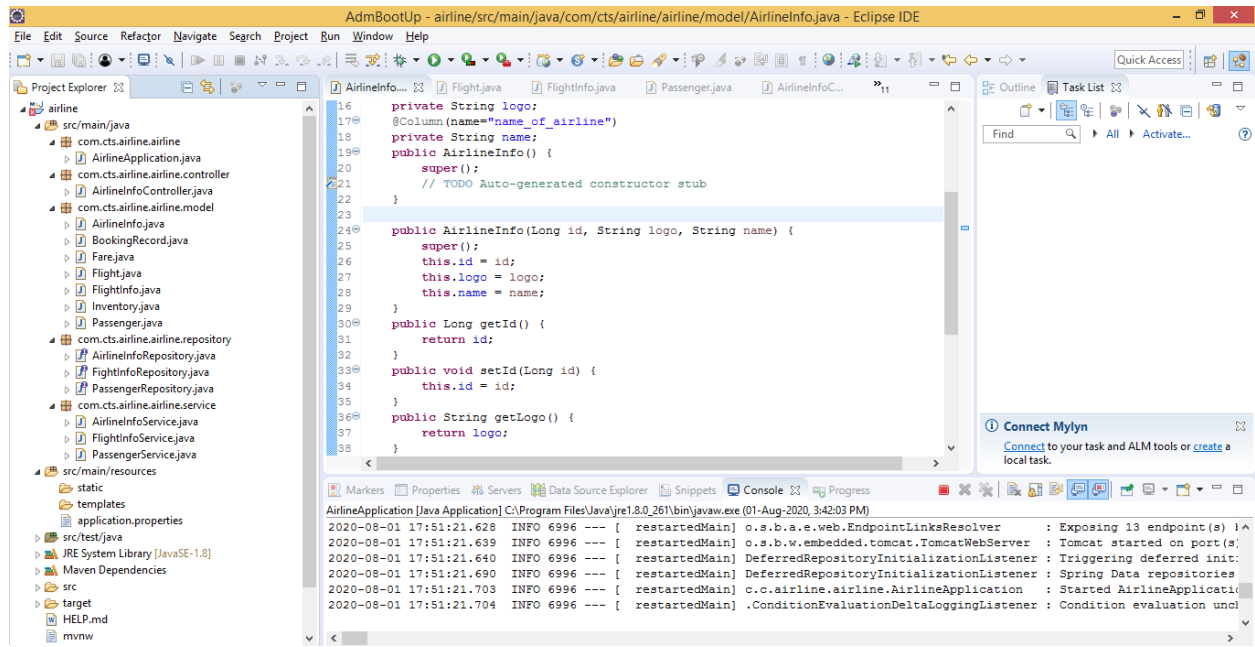

Assessment2:

