[(https://cognitiveclass.ai)](https://cognitiveclass.ai)

Assignment: Notebook for Peer Assignment

Introduction

Using this Python notebook you will:

1. Understand 3 Chicago datasets
2. Load the 3 datasets into 3 tables in a Db2 database
3. Execute SQL queries to answer assignment questions

Understand the datasets

To complete the assignment problems in this notebook you will be using three datasets that are available on the city of Chicago's Data Portal:

1. Socioeconomic Indicators in Chicago (https://data.cityofchicago.org/Health-Human-Services/Census-Data-Selected-socioeconomic-indicators-in-C/kn9c-c2s2)
2. Chicago Public Schools (https://data.cityofchicago.org/Education/Chicago-Public-Schools-Progress-Report-Cards-2011-/9xs2-f89t)
3. Chicago Crime Data (https://data.cityofchicago.org/Public-Safety/Crimes-2001-to-present/ijzp-q8t2)

1. Socioeconomic Indicators in Chicago

This dataset contains a selection of six socioeconomic indicators of public health significance and a "hardship index," for each Chicago community area, for the years 2008 – 2012.

For this assignment you will use a snapshot of this dataset which can be downloaded from:
https://ibm.box.com/shared/static/05c3415cbfbtfnr2fx4atenb2sd361ze.csv
(https://ibm.box.com/shared/static/05c3415cbfbtfnr2fx4atenb2sd361ze.csv)

A detailed description of this dataset and the original dataset can be obtained from the Chicago Data Portal at:
https://data.cityofchicago.org/Health-Human-Services/Census-Data-Selected-socioeconomic-indicators-in-C/kn9c-c2s2 (https://data.cityofchicago.org/Health-Human-Services/Census-Data-Selected-socioeconomic-indicators-in-C/kn9c-c2s2)

2. Chicago Public Schools

This dataset shows all school level performance data used to create CPS School Report Cards for the 2011-2012 school year. This dataset is provided by the city of Chicago's Data Portal.

For this assignment you will use a snapshot of this dataset which can be downloaded from:
https://ibm.box.com/shared/static/f9gjvj1gjmxxzycdhplzt01qtz0s7ew7.csv
(https://ibm.box.com/shared/static/f9gjvj1gjmxxzycdhplzt01qtz0s7ew7.csv)

A detailed description of this dataset and the original dataset can be obtained from the Chicago Data Portal at:
https://data.cityofchicago.org/Education/Chicago-Public-Schools-Progress-Report-Cards-2011-/9xs2-f89t
(https://data.cityofchicago.org/Education/Chicago-Public-Schools-Progress-Report-Cards-2011-/9xs2-f89t)

3. Chicago Crime Data

This dataset reflects reported incidents of crime (with the exception of murders where data exists for each victim) that occurred in the City of Chicago from 2001 to present, minus the most recent seven days.

This dataset is quite large - over 1.5GB in size with over 6.5 million rows. For the purposes of this assignment we will use a much smaller sample of this dataset which can be downloaded from:
https://ibm.box.com/shared/static/svflyugsr9zbqy5bmowgswqemfpm1x7f.csv
(https://ibm.box.com/shared/static/svflyugsr9zbqy5bmowgswqemfpm1x7f.csv)

A detailed description of this dataset and the original dataset can be obtained from the Chicago Data Portal at: https://data.cityofchicago.org/Public-Safety/Crimes-2001-to-present/ijzp-q8t2 (https://data.cityofchicago.org/Public-Safety/Crimes-2001-to-present/ijzp-q8t2)

Download the datasets

In many cases the dataset to be analyzed is available as a .CSV (comma separated values) file, perhaps on the internet. Click on the links below to download and save the datasets (.CSV files):

1. **CENSUS_DATA:** https://ibm.box.com/shared/static/05c3415cbfbtfnr2fx4atenb2sd361ze.csv (https://ibm.box.com/shared/static/05c3415cbfbtfnr2fx4atenb2sd361ze.csv)
2. **CHICAGO_PUBLIC_SCHOOLS** https://ibm.box.com/shared/static/f9gjvj1gjmxxzycdhplzt01qtz0s7ew7.csv (https://ibm.box.com/shared/static/f9gjvj1gjmxxzycdhplzt01qtz0s7ew7.csv)
3. **CHICAGO_CRIME_DATA:** https://ibm.box.com/shared/static/svflyugsr9zbqy5bmowgswqemfpm1x7f.csv (https://ibm.box.com/shared/static/svflyugsr9zbqy5bmowgswqemfpm1x7f.csv)
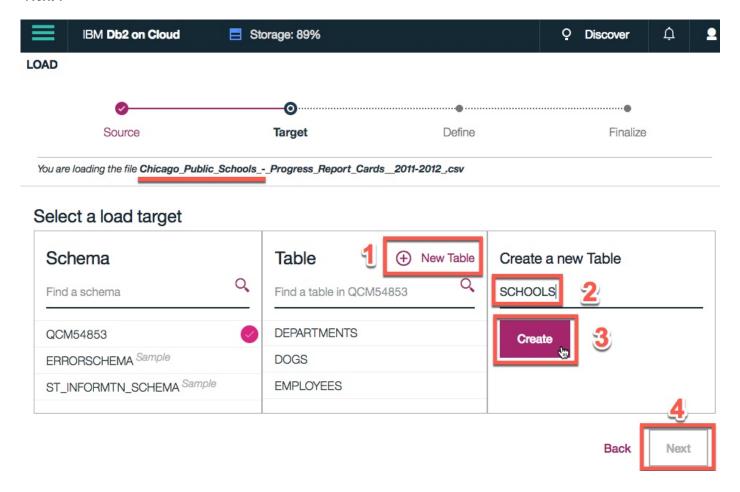
NOTE: Ensure you have downloaded the datasets using the links above instead of directly from the Chicago Data Portal. The versions linked here are subsets of the original datasets and have some of the column names modified to be more database friendly which will make it easier to complete this assignment.

Store the datasets in database tables

To analyze the data using SQL, it first needs to be stored in the database.

While it is easier to read the dataset into a Pandas dataframe and then PERSIST it into the database as we saw in Week 3 Lab 3, it results in mapping to default datatypes which may not be optimal for SQL querying. For example a long textual field may map to a CLOB instead of a VARCHAR.

Therefore, **it is highly recommended to manually load the table using the database console LOAD tool, as indicated in Week 2 Lab 1 Part II**. The only difference with that lab is that in Step 5 of the instructions you will need to click on create "(+) New Table" and specify the name of the table you want to create and then click "Next".

Now open the Db2 console, open the LOAD tool, Select / Drag the .CSV file for the first dataset, Next create a New Table, and then follow the steps on-screen instructions to load the data. Name the new tables as folows:

1. **CENSUS_DATA**
2. **CHICAGO_PUBLIC_SCHOOLS**
3. **CHICAGO_CRIME_DATA**

Connect to the database

Let us first load the SQL extension and establish a connection with the database

In [11]:

```
%load_ext sql
```

The sql extension is already loaded. To reload it, use:
  %reload_ext sql

In the next cell enter your db2 connection string. Recall you created Service Credentials for your Db2 instance in first lab in Week 3. From the **uri** field of your Db2 service credentials copy everything after db2:// (except the double quote at the end) and paste it in the cell below after ibm_db_sa://

In [12]:

```
# Remember the connection string is of the format:
# %sql ibm_db_sa://my-username:my-password@my-hostname:my-port/my-db-name
# Enter the connection string for your Db2 on Cloud database instance below
%sql ibm_db_sa://bdt17975:vsf%2B9gprwhjjgq81@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLUDB
```

Out[12]:

'Connected: bdt17975@BLUDB'

Problems

Now write and execute SQL queries to solve assignment problems

Problem 1

Find the total number of crimes recorded in the CRIME table

In [3]:

```
# Rows in Crime table
%sql select COUNT(id) from CHICAGO_CRIME_DATA
```

 * ibm_db_sa://bdt17975:***@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLU
DB
Done.

Out[3]:

1
533

Problem 2

Retrieve first 10 rows from the CRIME table

In [4]:

```
%sql select id, case_number, iucr, primary_type from CHICAGO_CRIME_DATA limit 10
```

 * ibm_db_sa://bdt17975:***@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLU
DB
Done.

Out[4]:

id	case_number	iucr	primary_type
3512276	HK587712	890	THEFT
3406613	HK456306	820	THEFT
8002131	HT233595	820	THEFT
7903289	HT133522	840	THEFT
10402076	HZ138551	820	THEFT
7732712	HS540106	810	THEFT
10769475	HZ534771	810	THEFT
4494340	HL793243	860	THEFT
3778925	HL149610	810	THEFT
3324217	HK361551	820	THEFT

Problem 3

How many crimes involve an arrest?

In [5]:

```
%sql select COUNT(id) AS total_crimes_involving_arrest from CHICAGO_CRIME_DATA where arrest = 'TRUE'
```

 * ibm_db_sa://bdt17975:***@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLU
DB
Done.

Out[5]:

total_crimes_involving_arrest
163

Problem 4

Which unique types of crimes have been recorded at GAS STATION locations?

In [6]:

```
%sql select DISTINCT(primary_type) AS gas_station_crimes from CHICAGO_CRIME_DATA where location_description = 'GAS STATION'
```

 * ibm_db_sa://bdt17975:***@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLU
DB
Done.

Out[6]:

gas_station_crimes
CRIMINAL TRESPASS
NARCOTICS
ROBBERY
THEFT

Hint: Which column lists types of crimes e.g. THEFT?

Problem 5

In the CENUS_DATA table list all Community Areas whose names start with the letter 'B'.

In [7]:

%**sql** select community_area_name from CENSUS_DATA where community_area_name like 'B%'

 * ibm_db_sa://bdt17975:***@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLU
DB
Done.

Out[7]:

community_area_name
Belmont Cragin
Burnside
Brighton Park
Bridgeport
Beverly

Problem 6

Which schools in Community Areas 10 to 15 are healthy school certified?

In [17]:

%**sql** select name_of_school, healthy_school_certified from chicago_public_schools where healthy_school_certified = 'Yes' AND community_area_number between 10 and 15

 * ibm_db_sa://bdt17975:***@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLU
DB
Done.

Out[17]:

name_of_school	healthy_school_certified
Rufus M Hitch Elementary School	Yes

Problem 7

What is the average school Safety Score?

In [8]:

%**sql** select AVG(Safety_Score) AS average_school_safety_score from CHICAGO_PUBLIC_SCHOOLS

 * ibm_db_sa://bdt17975:***@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLU
DB
Done.

Out[8]:

average_school_safety_score
49.504873

Problem 8

List the top 5 Community Areas by average College Enrollment [number of students]

In [16]:

%**sql** select community_area_name, AVG(college_enrollment) AS average_college_enrollment from CHICAGO_PUBLIC_SCHOOLS group by community_area_name order by average_college_enrollment desc limit 5

 * ibm_db_sa://bdt17975:***@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLU
DB
Done.

Out[16]:

community_area_name	average_college_enrollment
ARCHER HEIGHTS	2411.500000
MONTCLARE	1317.000000
WEST ELSDON	1233.333333
BRIGHTON PARK	1205.875000
BELMONT CRAGIN	1198.833333

Problem 9

Use a sub-query to determine which Community Area has the least value for school Safety Score?

In [18]:

```
%sql select  community_area_name from CHICAGO_PUBLIC_SCHOOLS where safety_score = (select MIN(safety_score) from  CHICAGO_PUBLIC_SCHOOLS)
```

 * ibm_db_sa://bdt17975:***@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLU
DB
Done.

Out[18]:

community_area_name
WASHINGTON PARK

Problem 10

[Without using an explicit JOIN operator] Find the Per Capita Income of the Community Area which has a school Safety Score of 1.

In [19]:

```
%sql select  per_capita_income from CENSUS_DATA where community_area_number = (select community_area_number from CHICAGO_PUBLIC_SCHOOLS where safety_score = 1)
```

 * ibm_db_sa://bdt17975:***@dashdb-txn-sbox-yp-lon02-04.services.eu-gb.bluemix.net:50000/BLU
DB
Done.

Out[19]:

per_capita_income
13785