EXPERIMENT- 8(a)

Aim:

To discover live host using NMAP scans (ARP, ICMP, TCP/UDP) on myhackme platform.


Introduction:-

When targetting a network we need an efficient tool to handle repetative tasks.

This room is first of four in NMAP series

- NMAP live host discovery
- NMAP basic port scans
- NMAP Advanced port scans
- NMAP post port scans.

Subnetworks:-

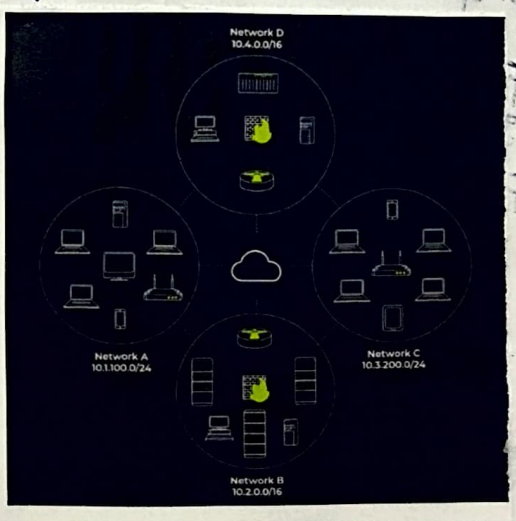

This figure displays two types of subnets.


- /16 subnet
- /24 subnet.

From Computer 1

To Computer 1

Packet Type "ARP Request"

Data : Computer 6.

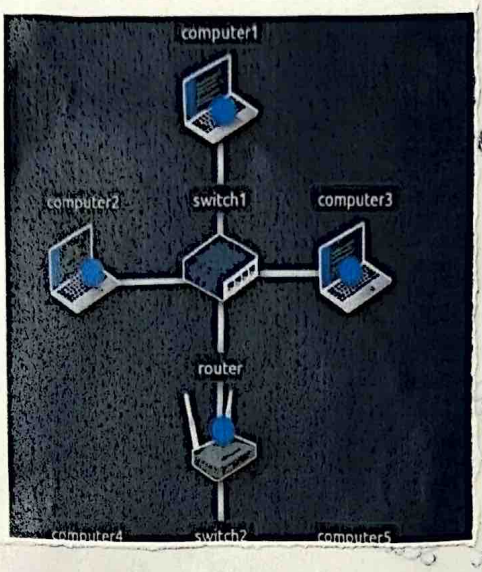

Send Packet

From: computer1

To: computer1

Packet Type: arp_request

Data: computer6


Send Packet

From Comp. 4

To Comp. 4

Packet Type: "ARP Request"

Data: Comp 6.

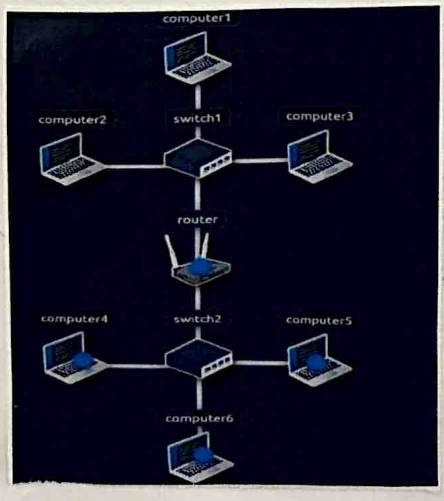

Send Packet

From: computer4

To: computer4


Packet Type: arp_request

Data: computer6

Send Packet


NMAP Host delivery using ARP:

When a privilaged user tries to scan a target on local network, NMAP uses ARP request.

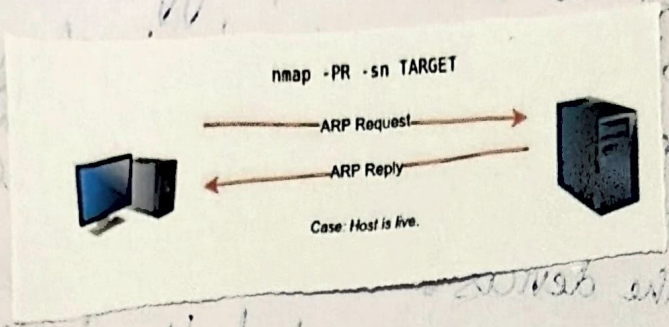

UDP Ping:

While receiving UDP packet to open UDP ports may not trigger a response, sending them to closed UDP ports.

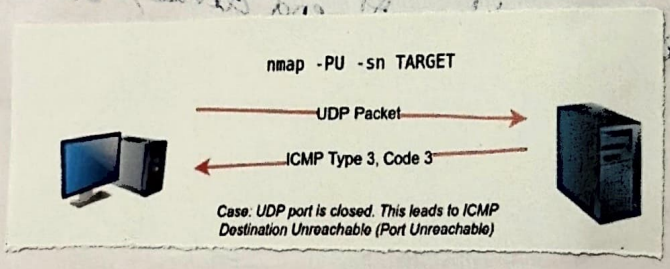

RESULT: Thus, the requirement has been completed successfully using tryhackme.