

# Clusters beat Trend!?

## Testing feature hierarchy in statistical graphics

Susan VanderPlas\*

Department of Statistics and Statistical Laboratory, Iowa State University  
and

Heike Hofmann

Department of Statistics and Statistical Laboratory, Iowa State University

August 29, 2015

### Abstract

Graphics are very effective for communicating numerical information quickly and efficiently, but many of the design choices we make are based on subjective measures, such as personal taste or conventions of the discipline rather than objective criteria. We briefly introduce perceptual principles such as preattentive features and gestalt heuristics, and then discuss the design and results of a factorial experiment examining the effect of plot aesthetics such as color and trend lines on participants' assessment of ambiguous data displays. The quantitative and qualitative experimental results strongly suggest that plot aesthetics have a significant impact on the perception of important features in data displays.

*Keywords:* Visual inference, Lineup protocol, Preattentive Features, Saliency of Plot Aesthetics, User Study.

---

\*The authors gratefully acknowledge funding from the National Science Foundation Grant # DMS 1007697.

# 1 Introduction and Background

Limits on attention span, short term memory, and information storage mechanisms within the human brain make it difficult for us to process numerical information in raw form effectively. (Well-designed) data displays are much better suited for this kind of communication, as they serve as a form of external cognition (??), ordering and visually summarizing data and thereby invoking our higher-bandwidth visual system.

One fantastic example of this phenomenon is the Hertzsprung-Russell (HR) diagram, which was described as “one of the greatest observational syntheses in astronomy and astrophysics” because it allowed astronomers to clearly relate the absolute magnitude of a star to its’ spectral classification; facilitating greater understanding of stellar evolution (?). The data it displayed was previously available in several different tables; but when plotted within the same chart, information that was invisible in a tabular representation became immediately clear (?). Graphical displays more efficiently utilize cognitive resources by reducing the burden of storing, ordering, and summarizing raw data; this frees bandwidth for higher levels of information synthesis, allowing observers to note outliers, understand relationships between variables, and form new hypotheses.

Graphical displays are powerful because they efficiently and effectively convey numerical information, but there exists relatively sparse empirical information about how the human perceptual system processes these displays. Our understanding of the perception of statistical graphics is informed by general psychological and psychophysics research as well as more specific research into the perception of data displays (?).

One relevant focus of psychological research is preattentive perception, that is, perception which occurs automatically in the first 200 ms of exposure to a visual stimulus (?).

Research into **preattentive perception** provides us with some information about the temporal hierarchy of graphical feature processing. Color, line orientation, and shape are processed preattentively; that is, within 200 ms, it is possible to identify a single target in a field of distractors, if the target differs with respect to color or shape (?). Research by ? extends this work, demonstrating that certain features of three-dimensional data displays are also processed preattentively. However, neither target identification nor three-

dimensional data processing always translate into faster or more accurate inference about the data displayed, particularly when participants have to integrate several preattentive features to understand the data.

**Feature detection** at the attentive stage of perception has also been examined in the context of statistical graphics; researchers have evaluated the perceptual implications of utilizing color, fill, shapes, and letters to denote categorical or stratified data in scatterplots. ? ranked the optimality of these plot aesthetics based on response accuracy, preferring colors, amount of fill, shapes, and finally letters to indicate category membership. ? examined both accuracy and response time, finding that color is faster and more accurately perceived (except by individuals with color deficiency). Shape, fill, and discriminable letters (letters which do not share visual features, such as HQX) were identified as less accurate than color, while confusable letters (such as HEF) result in significantly decreased accuracy.

**Gestalt psychology** is another area of psychological research, that examines perception as a holistic experience, establishing and evaluating mental heuristics used to transform visual stimuli into useful, coherent information. Gestalt rules of perception can be easily applied to statistical graphics, as they describe the way we organize visual input, focusing on the holistic experience rather than the individual perceptual features.

For example, rather than perceiving four legs, a tail, two eyes, two ears, and a nose, we perceive a dog. This is due to certain perceptual heuristics, which provide a “top-down” method of understanding visual stimuli by taking into account past experience.

The rules of perceptual organization relevant to graphical perception in this experiment are:

- **Proximity:** two elements which are close together are more likely to belong to a single unit.
- **Similarity:** the more of the same or similar aesthetics two elements share two elements are, the more likely they belong to a single unit.
- **Good continuation:** two elements which blend together smoothly likely belong to one unit.
- **Common region:** elements contained within a common region likely belong to-

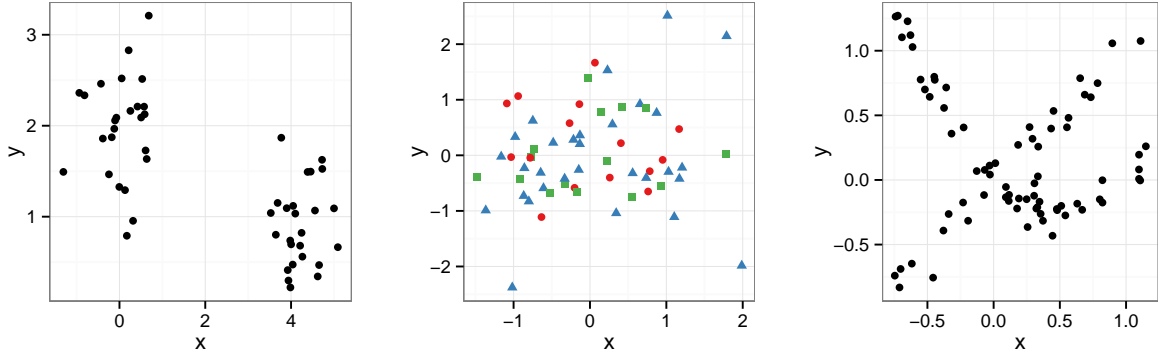


Figure 1: *Proximity* renders the fifty points of the first scatterplot as two distinct (and equal-sized) groups. Shapes and colors create three groups of points in the middle scatterplot by invoking the Gestalt principle of *Similarity*. *Good Continuation* renders the points in the scatterplot on the right hand side into two groups of points on curves: one a straight line with an upward slope, the other a curve that initially decreases and at the end of the range shows an uptick.

gether.

A complete list of the rules of perceptual grouping can be found in ?.

The plots in Figure ?? demonstrate several of the gestalt principles which combine to order our perceptual experience from the top down. These laws help to order our perception of charts as well: points which are colored or shaped the same are perceived as belonging to a group (similarity), points within a bounding interval or ellipse are perceived as belonging to the same group (common region), and regression lines with confidence intervals are perceived as single units (continuity and common region).

The processing of visual stimuli utilizes low-level feature detection, which occurs automatically in the preattentive perceptual phase, and higher-level mental heuristics which are informed by experience. Both types of mental processes utilize physical location, color, and shape to organize perceptual stimuli and direct attention to graphical features which stand out.

Research on preattentive perception is important because features that are perceived preattentively require less mental effort to process from raw visual stimuli than non-preattentive features. Top-down gestalt heuristics are subsequently applied to the categorized features in order to make sense of the visual scene once the attentive stage of

perception is reached.

This paper describes the design and the results of a user study exploring the hierarchy of gestalt principles in the perception of statistical graphics. We utilize information from previous studies (???) concerning the hierarchy of preattentive feature perception in order to maximize the effect of preattentive feature differences.

Statistical graphics can be difficult to examine experimentally; qualitative studies rely on descriptions of the plot by participants who may not be able to articulate their observations precisely, while quantitative studies may only be able to examine whether the viewer can accurately read numerical information from the chart, instead of exploring the overall utility of the data display holistically. Here, we are describing the setup and results of a study using statistical lineup methodology to provide quantitative and qualitative information.

**Statistical lineups** are an important experimental tool for quantifying the significance of a finding in a graphical display. Lineups fuse commonly used psychological tests (target identification, visual search) (?) with statistical hypothesis tests, thereby enabling formal experimental evaluation of statistical graphics.

Lineups are an experimental tool designed to serve as a visually conducted hypothesis test, separating significant effects from those that would be expected under a null hypothesis (????). A statistical lineup consists of (usually) 20 sub-plots, arranged in a grid (examples are shown in Figure ??). Of these plots, one plot is the “target plot”, generated from either real data or an alternate model (equivalent to  $H_A$  in hypothesis testing); the other 19 plots are generated either using bootstrap samples of the real data or by generating “true null” plots from the null distribution  $H_0$ . If a participant can identify the target plot from the field of distractors, this counts as evidence against the null hypothesis. Based on the number of evaluations and the number of target identifications, significance of a finding is then determined in the same sense as for a conventional hypothesis test. Apart from the hypothesis testing construct, the use of statistical lineups to test statistical graphics conforms nicely to psychological testing constructs such as visual search (??), where a single target is embedded in a field of distractors and response time, accuracy, or both are used to measure the complexity of the underlying psychological processes leading to identification.

In this paper we **modify the lineup protocol** by introducing a second target to each lineup. The two targets represent two different, competing signals; an observer’s choice then demonstrates empirically which signal is more salient. If both targets exhibit similar signal, observers may identify both targets, removing any forced-choice scenario which might skew results in a study.

Using this testing framework, we apply different aesthetics, such as color and shape, as well as plot objects which display statistical calculations, such as trend lines and bounding ellipses. These additional plot layers, discussed in more detail in the next section, are designed to emphasize one of the two competing targets and affect the overall visual signal of the target plot relative to the null plots. We expect that in a situation similar to the third plot of Figure ??, the addition of two trend lines would emphasize the “good continuation” of points in the plot, producing a stronger visual signal, even though the underlying data has not changed. Similarly, the grouping effect in the first plot in the figure should be enhanced if the points in each group are colored differently, as this adds similarity to the proximity heuristic. In plots that are ambiguous, containing some clustering of points as well as a linear relationship between  $x$  and  $y$ , additional aesthetic cues may “tip the balance” in favor of recognizing one type of signal over the other.

The study in this paper is designed to inform our understanding of the perceptual implications of these additional aesthetics, in order to provide guidelines for the creation of data displays which provide visual cues consistent with gestalt heuristics and preattentive perceptual preferences.

The next section discusses the particulars of the experimental design, including the data generation model, plot aesthetics, selection of color and shape palettes, and other important considerations. Experimental results are presented in section ??, and implications and conclusions are discussed in section ??.

## 2 Experimental Setup and Design

In this section, we discuss the models generating data for the two types of signal plots and the null plots, the selection of plot aesthetic combinations and aesthetic values, and the design and execution of the experiment.

## 2.1 Data Generation

Conventional lineups require a single “target” data set and a method for generating null plots. When utilizing real data for target plots, null plots are often generated through permutations.

Here, it is possible to generate true null plots from a null model that do not depend on the data used in the target plot. This experiment measures two competing gestalt heuristics, proximity and good continuation, using two data-generating models. Both models provide data in the same range of values in  $X$  and  $Y$ ;  $M_C$  generates data with  $K$  clusters, while  $M_T$  generates data with a positive linear relationship between  $X$  and  $Y$ . Null datasets are created using a mixture model  $M_0$  which combines  $M_C$  and  $M_T$ . In order to facilitate mixing these two models, controls on cluster centers generated by  $M_C$  ensure that  $X$  and  $Y$  have a positive linear relationship with a correlation  $\rho \in (0.25, 0.75)$ , similar to the linear relationship between datasets generated by  $M_0$ .

These constraints provide some assurance that participants who select a plot with data generated from  $M_T$  are doing so because of visual cues indicating a linear trend (rather than a lack of clustering compared to plots with data generated from  $M_0$ ), and participants who select a plot with data generated from  $M_C$  are doing so because of visual cues indicating clustering, rather than a lack of a linear relationship relative to plots with data generated from  $M_0$ .

### 2.1.1 Regression Model $M_T$

This model has the parameter  $\sigma_T$  to reflect the amount of scatter around the trend line. It generates  $N$  points  $(x_i, y_i), i = 1, \dots, N$  where  $x$  and  $y$  have a positive linear relationship. The data generation mechanism is as follows:

#### Algorithm 2.1

*Input Parameters: sample size  $N$ ,  $\sigma_T$  standard deviation around the line*

*Output:  $N$  points, in form of vectors  $x$  and  $y$ .*

1. Generate  $\tilde{x}_i, i = 1, \dots, N$ , as a sequence of evenly spaced points in  $[-1, 1]$ .

*This step ensures that the full range in  $x$  is used, which in turn keeps the ratio of  $x$  to  $y$  range constant.*

2. Jitter  $\tilde{x}_i$  by adding small uniformly distributed perturbations to each of the values:

$$x_i = \tilde{x}_i + \eta_i, \text{ where } \eta_i \sim \text{Unif}(-z, z), z = \frac{2}{5(N-1)}.$$

3. Generate  $y_i$  as a linear regressand of  $x_i$ :  $y_i = x_i + e_i$ ,  $e_i \sim N(0, \sigma_T^2)$ .

4. Center and scale  $x_i$ ,  $y_i$ .

We compute the coefficient of determination for all of the plots to assess the amount of linearity in each panel, computed as

$$R^2 = 1 - \frac{RSS}{TSS}, \quad (1)$$

where TSS is the total sum of squares,  $TSS = \sum_{i=1}^N (y_i - \bar{y})^2$  and  $RSS = \sum_{i=1}^N e_i^2$ , the residual sum of squares. The expected value of the coefficient of determination  $E[R^2]$  in this scenario is

$$E[R^2] = \frac{1}{1 + 3\sigma_T^2},$$

because  $E[RSS] = N\sigma_T^2$  and  $E[TSS] = \sum_{i=1}^N E[y_i^2]$  (as  $E[Y] = 0$ ), where

$$E[y_i^2] = E[x_i^2 + e_i^2 + 2x_ie_i] = \frac{1}{3} + \sigma_T^2.$$

The use of  $R^2$  to assess the strength of the linear relationship (rather than the correlation) is indicated because human perception of correlation strength more closely aligns with  $R^2$  (??).

### 2.1.2 Cluster Model $M_C$

We begin by generating  $K$  cluster centers on a  $K \times K$  grid, then we generate points around selected cluster centers.

#### Algorithm 2.2

*Input Parameters:*  $N$  points,  $K$  clusters,  $\sigma_C$  cluster standard deviation

*Output:*  $N$  points, in form of vectors  $x$  and  $y$ .

1. Generate cluster centers  $(c_i^x, c_i^y)$  for each of the  $K$  clusters,  $i = 1, \dots, K$ :

(a) in form of two vectors  $c^x$  and  $c^y$  of permutations of  $\{1, \dots, K\}$ , such that



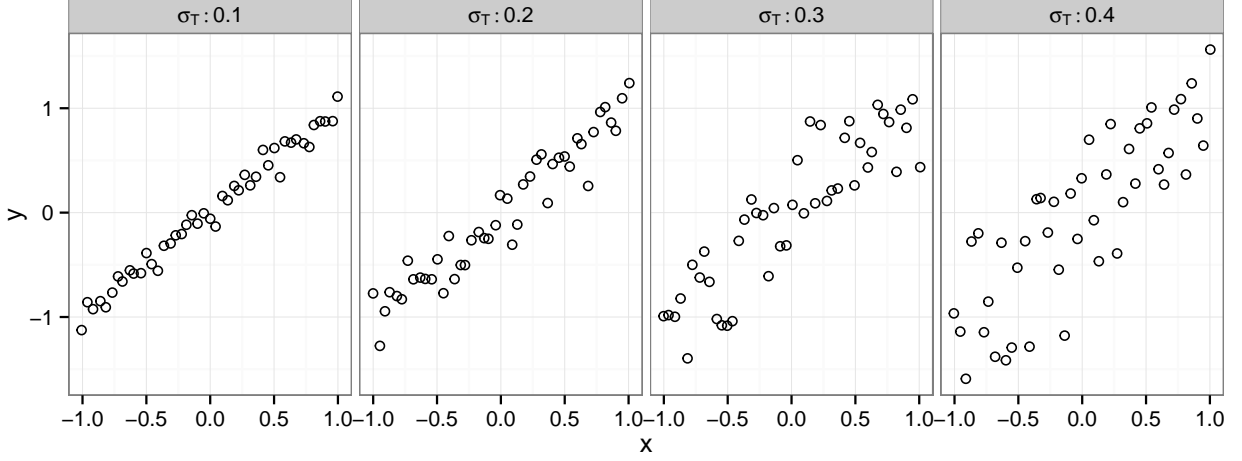


Figure 2: Set of scatterplots showing one draw each from the trend model  $M_T$  for parameter values of  $\sigma_T \in \{0.1, 0.2, 0.3, 0.4\}$ .

(b) the correlation between cluster centers  $\text{cor}(c^x, c^y)$  falls into a range of  $[.25, .75]$ .

2. Center and standardize cluster centers  $(c^x, c^y)$ :

$$\tilde{c}_i^x = \frac{c_i^x - \bar{c}}{s_c} \quad \text{and} \quad \tilde{c}_i^y = \frac{c_i^y - \bar{c}}{s_c},$$

where  $\bar{c} = (K + 1)/2$  and  $s_c^2 = \frac{K(K+1)}{12}$  for all  $i = 1, \dots, K$ .

3. For the  $K$  clusters, we want to have nearly equal sized groups, but allow some variability. Cluster sizes  $g = (g_1, \dots, g_K)$  with  $N = \sum_{i=1}^K g_i$ , for clusters  $1, \dots, K$  are therefore determined as a draw from a multinomial distribution:

$$g \sim \text{Multinomial}(K, p) \text{ where } p = \tilde{p} / \sum_{i=1}^K \tilde{p}_i, \text{ for } \tilde{p} \sim N\left(\frac{1}{K}, \frac{1}{2K^2}\right).$$

4. Generate points around cluster centers by adding small normal perturbations:

$$\begin{aligned} x_i &= \tilde{c}_{g_i}^x + e_i^x, \text{ where } e_i^x \sim N(0, \sigma_C^2), \\ y_i &= \tilde{c}_{g_i}^y + e_i^y, \text{ where } e_i^y \sim N(0, \sigma_C^2). \end{aligned}$$

5. Center and scale  $x_i, y_i$ .

As a measure of cluster cohesion we use a coefficient to assess the amount of variability within each cluster, compared to total variability. Note that for the purpose of clustering,

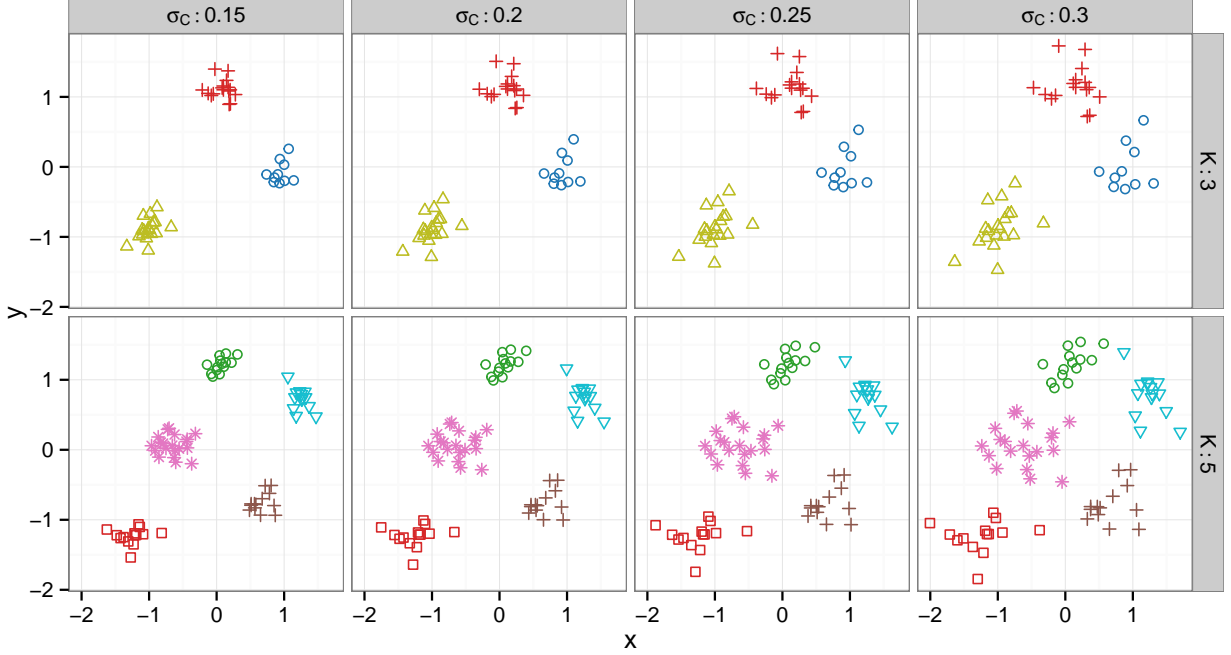


Figure 3: Scatterplots of clustering output for different inner cluster spread  $\sigma_C$  (left to right) and different number of clusters  $K$  (top and bottom), generated using the same random seed at each parameter setting. The colors and shapes shown are those used in the lineups for  $K = 3$  and  $K = 5$ .

variability is measured as the variability in both  $x$  and  $y$  from a common mean, i.e. we implicitly assume that the values in  $x$  and  $y$  are on the same scale. This ensures that  $\sigma_C$  is a scaling parameter that regulates the amount of cluster cohesion (see Figure ??).

For two numeric variables  $x$  and  $y$  and grouping variable  $g$  with  $g_i \in \{1, \dots, K\}, i = 1, \dots, n$ , we compute the *cluster index*  $C^2$  as follows: let  $j(i)$  be the function that maps index  $i = 1, \dots, n$  to one of the clusters  $1, \dots, K$  given by the grouping variable  $g$ . Then for each level of  $g$ , we find a cluster center as  $\bar{x}_{j(i)}$  and  $\bar{y}_{j(i)}$ , and we determine the strength of the clustering by comparing the within cluster variability with the overall variability:

$$\begin{aligned}
C^2 &= 1 - \frac{CSS}{TSS}, \\
CSS &= \sum_{i=1}^n (x_{j(i)} - \bar{x}_{j(i)})^2 + (y_{j(i)} - \bar{y}_{j(i)})^2, \\
TSS &= \sum_{i=1}^n (x_i - \bar{x})^2 + (y_i - \bar{y})^2.
\end{aligned} \tag{2}$$

The cluster index  $C^2$ , which is approximately inversely linear in  $\sigma_C^2$ , measures the actual amount of clustering in the generated data.

### 2.1.3 Null Model $M_0$

The generative model for null data is a mixture model  $M_0$  that draws  $n_c \sim \text{Binomial}(N, \lambda)$  observations from the cluster model, and  $n_T = N - n_c$  from the regression model  $M_T$ . Observations are assigned to specific clusters using hierarchical clustering, which creates groups consistent with any structure present in the generated data. This provides a plausible grouping for use in aesthetic and statistics requiring categorical data (color, shape, bounding ellipses).

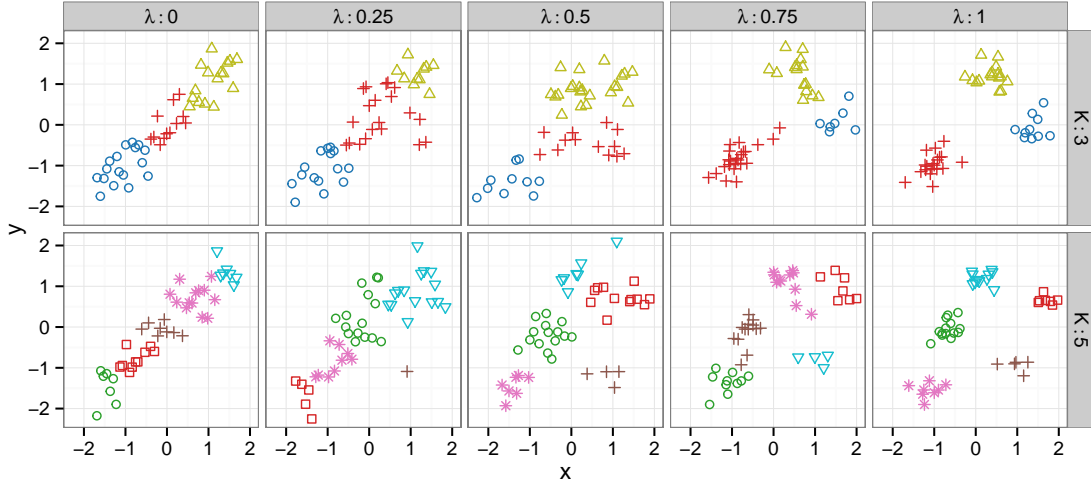


Figure 4: Scatterplots of data generated from  $M_0$  using different values of  $\lambda$ , generated using the same random seed at each  $\lambda$  value.

Null data in this experiment is generated using  $\lambda = 0.5$ , that is, each point in a null data set is equally likely to have been generated from  $M_C$  and  $M_T$  to ensure maximal distance of the null plots from either target.

#### 2.1.4 Parameters used in Data Generation

Models  $M_C$ ,  $M_T$ , and  $M_0$  provide the foundation for this experiment; by manipulating cluster standard deviation  $\sigma_C$  and regression standard deviation  $\sigma_T$  for varying numbers of clusters  $K = 3, 5$ , we systematically control the statistical signal present in the target plots and generate corresponding null plots that are mixtures of the two distributions. For each parameter set  $\{K, N, \sigma_C, \sigma_T\}$ , as described in Table ??, we generate a lineup dataset consisting of one set drawn from  $M_C$ , one set drawn from  $M_T$ , and 18 sets drawn from  $M_0$ .

Parameter	Description	Choices
$K$	# Clusters	3, 5
$N$	# Points	$15 \cdot K$
$\sigma_T$	Scatter around trend line	.15, .25, .35
$\sigma_C$	Scatter around cluster centers	.25, .30, .35 ( $K = 3$ )
		.20, .25, .30 ( $K = 5$ )

Table 1: Parameter settings for generation of lineup datasets.

The parameter values were chosen in an approach similar to that taken in ?: for each combination of  $\sigma_T \in \{0.2, 0.25, \dots, 0.5\}$ ,  $\sigma_C \in \{0.1, 0.15, \dots, 0.4\}$ , and  $K \in \{3, 5\}$  we simulated 1000 lineup datasets. Then trend and cluster strength indices,  $R^2$  and  $C^2$ , were computed for the simulated target plots, and compared to the most extreme value for each of the 18 null plots of the same lineup data.

The resulting distributions allow us to objectively assess the difficulty of detecting the target datasets computationally (without relying on human perception) within the full parameter space. That is, a target plot with  $R^2 = 0.95$  is very easy to identify when surrounded by null plots with  $R^2 = 0.5$ , while null plots with  $R^2 = 0.9$  make the target plot more difficult to identify.

Figure ?? shows densities of each measure computed from the maximum of 18 null plots compared to the measure in the signal plot for one combination of parameters. There is some overlap in the distribution of  $R^2$  for the null plots compared to the target plot displaying data drawn from  $M_T$ . As a result, the distribution of the cluster statistic values

are more easily separated from the null data sets than the distribution of the line statistic, e.g.  $\sigma_C = 0.20$  is producing cluster target data sets that are a bit easier to identify numerically than trend targets with a parameter value of  $\sigma_T = 0.25$ .

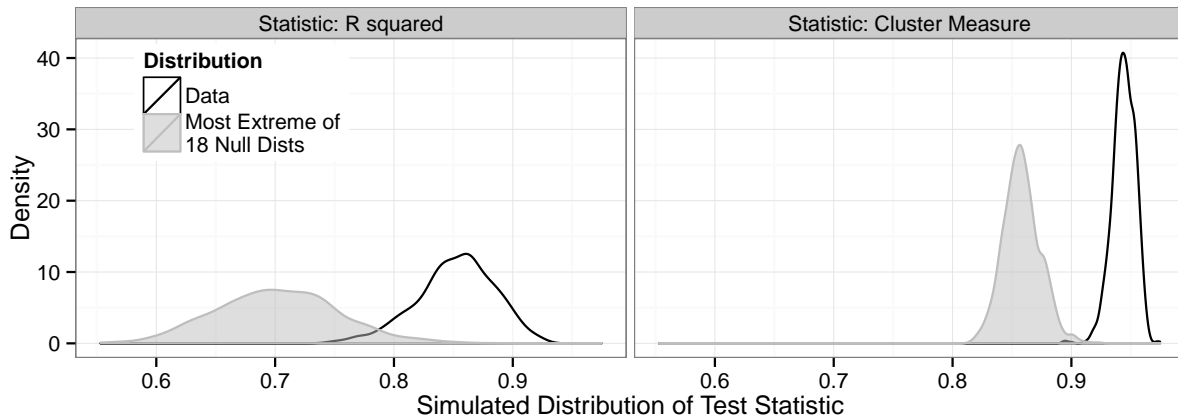


Figure 5: Density of test statistics measuring trend strength and cluster strength for target distributions and null plots based on 1,000 draws of lineup data with  $\sigma_T = 0.25$ ,  $\sigma_C = 0.20$  and  $K = 3$ .

Graphical summaries of simulation results for a range of values for  $\sigma_C$  and  $\sigma_T$  are provided in appendix ???. Using information from the simulation, we identified values and generate lineup data sets for each  $\sigma_T$  and  $\sigma_C$  (as shown in Table ??) corresponding to “easy”, “medium” and “hard” numerical comparisons between corresponding target data sets and null data sets. It is important to note that the numerical measures we have described in equations (??) and (??) only provide information on the numerical discriminability of the target datasets from the null datasets; the simulation cannot provide us with exact information on the perceptual discriminability. It has been established that human perception of scatterplots does not replicate statistical measures exactly (??).

Each of the generated datasets is then plotted as a lineup using aesthetics, which emphasize clusters and/or linear relationships, to experimentally determine how these aesthetics change a participant’s preference and ability to identify each target plot. The next section describes the aesthetic combinations and their anticipated effect on participant responses.

## 2.2 Lineup Rendering

### 2.2.1 Plot Aesthetics

Gestalt perceptual theory suggests that perceptual features such as shape, color, trend lines, and boundary regions modify the perception of ambiguous graphs, emphasizing clustering in the data (in the case of shape, color, and bounding ellipses) or linear relationships (in the case of trend lines and prediction intervals), as demonstrated in Figure ???. For each dataset we examine the effect of plot aesthetics (color, shape) and statistical layers (trend line, boundary ellipses, prediction intervals) shown in Table ??? on target identification. Examples of these plot aesthetics are shown in Figure ???.

		Line Emphasis		
		0	1	2
Cluster Emphasis	Strength			
	0	None	Line	Line + Prediction
	1	Color Shape	Color + Line	
	2	Color + Shape Color + Ellipse		Color + Ellipse + Line + Prediction
	3	Color + Shape + Ellipse		

Table 2: Plot aesthetics and statistical layers which impact perception of statistical plots, according to gestalt theory.

- (a) Plain

(b) Color

(c) Shape

(d) Shape + Color

(e) Color + Ellipse

(f) Shape + Ellipse

(g) Trend

(h) Trend + Error

(i) Trend + Color

(j) Trend + Color + Ellipse

Figure 6: Overview of each of the 10 plot feature combinations compared in this study, with  $K = 3$ ,  $\sigma_T = 0.25$  and  $\sigma_C = 0.20$ .

We expect that relative to a plot with no extra aesthetics or statistical layers, the addition of color, shape, and 95% boundary ellipses increases the probability of a participant

selecting the target plot with data generated from  $M_C$ , the cluster model, and that the addition of these aesthetics decreases the probability of a participant selecting the target plot with data generated from  $M_T$ , the trend model.

Similarly, we expect that relative to a plot with no extra aesthetics or statistical layers, the addition of a trend line and prediction interval increases the probability of a participant selecting the target plot with data generated from  $M_T$ , the trend model, and decreases the probability of a participant selecting the target plot with data generated from  $M_C$ , the cluster model.


### 2.2.2 Color and Shape Palettes

Colors and shapes used in this study were selected in order to maximize preattentive feature differentiation. ? provide sets of 10 colors and 10 shapes, with corresponding distance matrices, determined by user studies. Using these perceptual kernels for shape and color, we identified a maximally differentiable set of 3 and 5 colors each.

Figure 7: Color and shape palettes investigated for differentiability in ?.



(a) Color Palette. For the present study gray was removed from the palette to make the experiment more inclusive of participants with color deficiency.



(b) Shape palette. Due to varying point size between Unicode and non-Unicode characters, the last two shapes were not used in this study.

The color palette used in ? and shown in Figure ?? is derived from colors available in the visualization software Tableau (?).

In order to produce experimental stimuli accessible to the approximately 4% of the population with red-green color deficiency (?), we removed the gray hue from the palette, as gray is often difficult to distinguish from red and green for those with protanopia and deuteranopia, the most common types of colorblindness. This modification also resulted in maximally different color combinations which did not include red-green combinations, which would also impact the ability of color-deficient individuals to participate fully in this

experiment.

Software compatibility issues led us to exclude two shapes used in ? and shown in Figure ??. The left and right triangle shapes (available only in unicode within R) were excluded from our investigation due to size differences between unicode and non-unicode shapes. After optimization over the sum of all pairwise distances, the maximally different shape sequences for the 3 and 5 cluster datasets also conform to the guidelines in ?: for  $K = 3$  the shapes are from Robinson’s group 1, 2, and 9, for  $K = 5$  the shapes are from groups 1, 2, 3, 9, and 10. Robinson’s groups are designed so that shapes in different groups show differences in preattentive properties; that is, they are easily distinguishable. In addition, all shapes are non-filled, making them consistent with one of the simplest solutions to overplotting of points in the tradition of ?? and ?. For this reason we abstained from the additional use of alpha-blending of points to diminish the effect of overplotting in the plots.

## 2.3 Experimental Design

The study is designed hierarchically, as a factorial experiment for combinations of  $\sigma_C$ ,  $\sigma_T$ , and  $K$ , with three replicates at each parameter combination. These parameters are used to generate lineup datasets which serve as blocks for the plot aesthetic level of the experiment; each dataset is rendered with every combination of aesthetics described in Table ??. Participants are assigned to generated plots according to an augmented balanced incomplete block scheme: each participant is asked to evaluate 10 plots, which consist of one plot at each combination of  $\sigma_C$  and  $\sigma_T$ , randomized across levels of  $K$ , with one additional plot providing replication of one level of  $\sigma_C \times \sigma_T$ . Each of a participant’s 10 plots presents a different aesthetic combination.

## 2.4 Hypotheses

The primary purpose of this study is to understand how visual aesthetics affect signal detection in the presence of competing signals. We expect that plot modifications which emphasize similarity and proximity, such as color, shape, and 95% bounding ellipses, increase the probability of detecting the clustering relationship, while plot modifications



which emphasize good continuation, such as trend lines and prediction intervals, increase the probability of detecting the linear relationship.

## 2.5 Participant Recruitment

Participants were recruited using Amazon’s Mechanical Turk service(?), which connects interested workers with “Human Intelligence Tasks” (HITs), which are (typically) short tasks that are not easily automated. Only workers with at least 100 previous HITs at a 95% successful completion rate were allowed to sign up for completing the task. These restrictions reduce the amount of data cleaning required by ensuring that participants have experience with the Mechanical Turk system, as well as a vested interest in doing well.

Participants had to complete a pre-trial before being able to access the experiment. The lineups used in the pre-trial contained only a single target, and participants had to correctly identify the target in at least two lineups. The webpage used to collect data from Amazon Turk participants is available at <http://www.mlcape.com:8080/mahbub/turk16/index.html>. No data was recorded from the example task because participants had not yet provided informed consent.

Once participants completed the example task and provided informed consent, they could accept the HIT through Amazon and were directed to the main experimental task. Participants were required to complete 10 lineups, answering “Which plot is the most different from the others?”. Participants were asked to provide a short reason for their choice, such as “Strong linear trend” or “Groups of points”, and to rate their confidence in their selection from 1 (least confident) to 5 (most confident). After the first question, basic demographic information was collected: age range, gender, and highest level of education.

Throughout the experiment, participants were not informed about the inclusion of a second target into the lineup plots. The small number of participants choosing multiple plots in their answer suggests that most participants did not discover that two target plots were present in each lineup and were thus naive to the true purpose of the experiment.

## 3 Results

### 3.1 General results & Demographics

Data collection was conducted over a 24 hour period, during which time 1356 individuals completed 13519 unique lineup evaluations. Participants who completed fewer than 10 lineups were removed from the study (159 participants, 1060 evaluations), and lineup evaluations in excess of 10 for each participant were also removed from the study (421 evaluations). After these data filtration steps, our data consist of 12010 trials completed by 1201 participants.

Of the participants who completed at least 10 lineup evaluations, 61% were male, relatively younger than the US population and relatively well educated (see Figure ??). Each plot was evaluated by between 11 and 36 individuals (Mean: 22.24, SD: 4.64). 82.9% of the participant evaluations identified at least one of the two target plots successfully (Trend: 26.8%, Cluster: 56.8%).

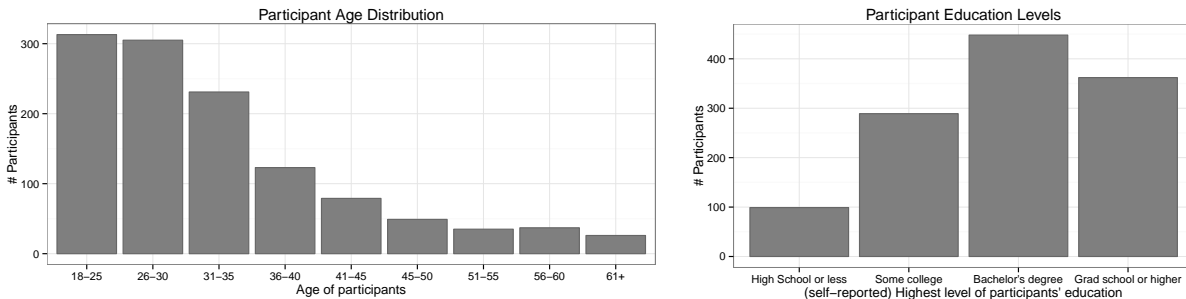


Figure 8: Basic demographics of participants.

From Figure ?? we see that participants identified more cluster targets than trend targets, but also did not primarily identify one target type over the other. Generally a participant picked both types over the course of ten lineups.

For each plot type (aesthetic combination), we first consider the probability that a participant selects one of the two target plots, and then we consider the conditional probability of selecting the cluster target over the trend target.

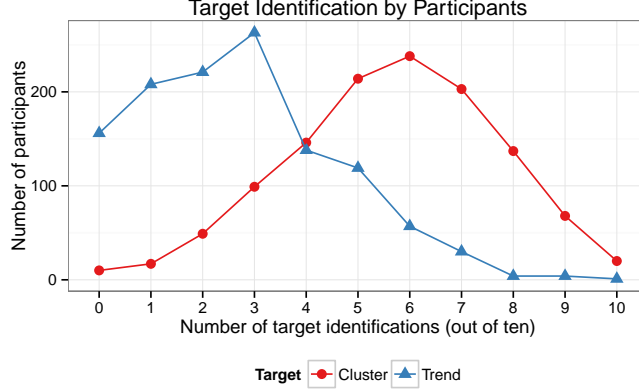


Figure 9: Target identifications by participants. Generally, participants are not primed for one target over the other.

### 3.2 Target Plot Identifications

In order to assess which of the two stimuli dominated in each of the plot types, we concentrate first on all those responses in which participants identified at least one of the targets (9959 trials). Figure ?? shows an overview of the number of evaluations by plot type (outlines) and the number of times participants chose at least one of the targets (dark shaded areas). Plot types associated with clustering as shown in table ?? lead to significantly fewer correct evaluations ( $\chi^2_9 = 385$ ,  $p\text{-value} < 0.0001$ ). A possible cause for this is discussed in more detail in section ??.

### 3.3 Face-Off: Trend versus Cluster

For all trials in which at least one of the targets was correctly identified, we compare the probability of selecting the cluster target generated by  $M_C$  with the probability of selecting the trend target generated by  $M_T$ . Define  $C_{ijk}$  to be the event

$$\{\text{Participant } k \text{ selects the cluster target for dataset } j \text{ with aesthetic set } i\}$$

and  $T_{ijk}$  to be the analogous selection of the trend target. We model the cluster versus trend decision using a logistic regression with a random effect for each dataset to account for different difficulty levels in the generated data, and a random effect for participant to account for skill level, as shown in equation ??.

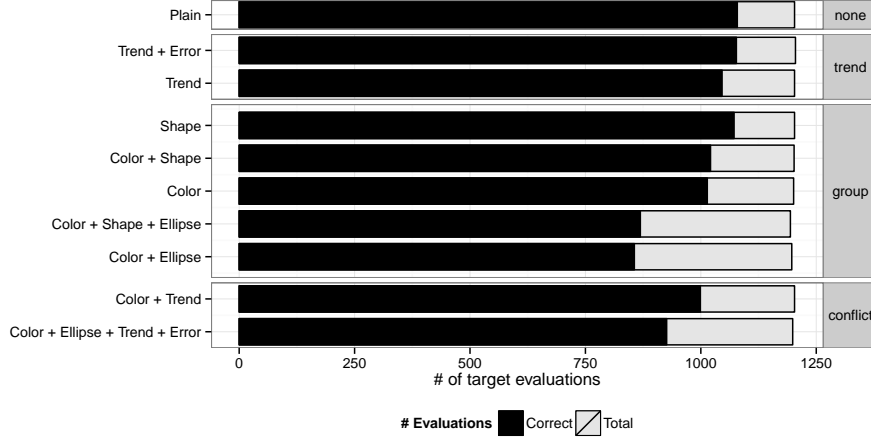


Figure 10: In dark: number of evaluations by plot type, in which at least one of the targets was identified. Due to the design of the experiment, each plot type was evaluated almost the same number of times (between 1195 and 1208 times, outlined rectangles).

$$\text{logit } P(C_{ijk}|C_{ijk} \cup T_{ijk}) = \mathbf{X}\beta + \mathbf{J}\gamma + \mathbf{K}\eta + \epsilon, \quad (3)$$

where  $\beta_i$  describe plot types,

$\gamma_j \stackrel{iid}{\sim} N(0, \sigma_{\text{data}}^2)$ , random effect for dataset specific characteristics,

$\eta_k \stackrel{iid}{\sim} N(0, \sigma_{\text{participant}}^2)$ , random effect for participant characteristics,

and  $\epsilon_{ijk} \stackrel{iid}{\sim} N(0, \sigma_e^2)$ , error associated with a single trial evaluation.

We also assume that random effects for dataset and participant are orthogonal.

The estimated log odds of a decision in favor of cluster over trend target are shown in Figure ???. From left to right the (log) odds of selecting the cluster target over the trend target increase. As hypothesized, the strongest signal for identifying groups, is color + shape + ellipse, while trend + error results in the strongest signal in favor of trends. Most of the effects are not significantly different, as seen in the letter values (?) based on Tukey's Post Hoc difference tests on the left hand side of the figure, representing pairwise comparisons of all of the designs, adjusted for multiple comparison.

Examining the model results from the perspective of Gestalt heuristics, it is clear that the similarity/proximity effect, as indicated by spatial clustering and aesthetics such as color and shape, dominates the equation, including dominating the color + trend (similarity

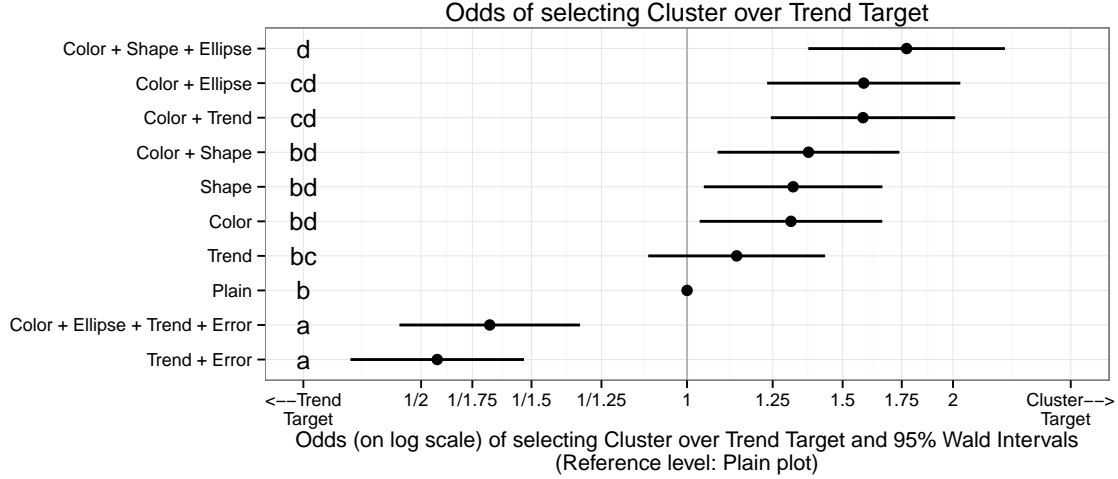


Figure 11: Estimated odds of decision for cluster versus trend target based on evaluations that resulted in the identification of one of these targets. Plot types are significantly different if they do not share a letter as given on the left hand side of the plot.

vs. continuity) condition.

When trend line and error are present in the same plot, the additional Gestalt principle of common region is recruited, in addition to the continuity heuristic present due to the trend line and the linear relationship between  $x$  and  $y$ . The interaction between these heuristics dominates the perceptual experience, decreasing the probability that a participant will select the cluster target plot in favor of the trend target.

This interaction effect explains the different outcomes seen by the two conditions with conflicting aesthetics: the color+trend condition is more likely to result in cluster plot selection, while the color + ellipse + trend + error condition is more likely to result in trend plot selection, because the combined effect of the gestalt heuristics present in the trend + error elements is stronger than the effect of color + ellipse elements, which only invoke Gestalt heuristics of similarity and common region.

In summary, the results from this experiment show that in order to gain a significant difference from a plain representation and visually emphasize groups or trends, we need to make use of a statistical layer associated with a confidence interval/region in the form of an error band or an ellipse.

The lineup experimental protocol allows us to collect participant justifications for their

target selection. These short explanations provide some additional insight into participant reasoning, and further support the gestalt explanation for the experimental results.

### 3.4 Participant Reasoning


As part of each trial, participants were asked to provide a short justification of their plot choice. Figure ?? gives an overview of summaries of participants' reasoning in form of word clouds. In the word clouds, stopwords are excluded from participants' reasons, unless they refer to quantities, such as 'none', 'all', 'some', 'few', etc. Reasons are also stemmed, so that words such as 'group', 'groups', 'grouping', 'grouped', and so on, all appear as the same (most prevalent) word in the cloud. What can be seen is a strong focus in terms of the reasoning depending on the outcome. If the participant chose one of the targets, the reasoning reflects this choice. When neither of the targets is chosen, there is less focus in the response. The word clouds look surprisingly similar independently of plot type - with the exception of the Ellipse + Color plot: here, the mentioning of specific colors is indicative of participants' distraction from the intended target towards an imbalance of the color/cluster distribution.

## 4 Discussion and Conclusions


Taken together, the results presented suggest that plot aesthetics influence the perception of the dominant effect in the displayed data. This effect is not simply additive (otherwise, the two conflicting aesthetic conditions would result in similarly neutral effects); rather, the effect is consistent with layering of gestalt perceptual heuristics. Plot layers which add additional heuristics show larger effects than plot layers which duplicate heuristics that are already in play. For example, adding ellipses to a plot which has color aesthetics increases group recognition by recruiting the common region heuristic in addition to the point similarity heuristic recruited by color; while adding shape to a plot which has color aesthetics increases group recognition only slightly, but does not add additional gestalt heuristics (though point similarity is emphasized through two different mechanisms).

In order to explicitly rank aesthetics given this nonadditive mechanism, it would be


(a) Plain, neither target (b) Plain, cluster target (c) Plain, trend target

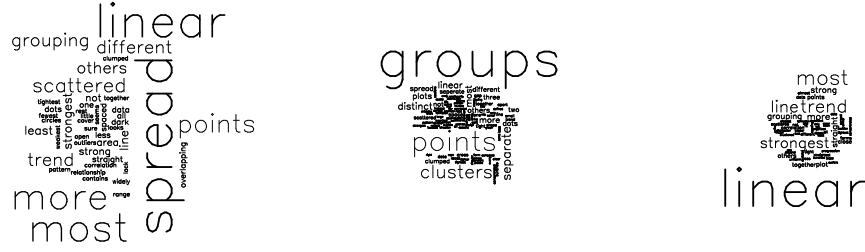

(d) Trend, neither target (e) Trend, cluster target (f) Trend, trend target

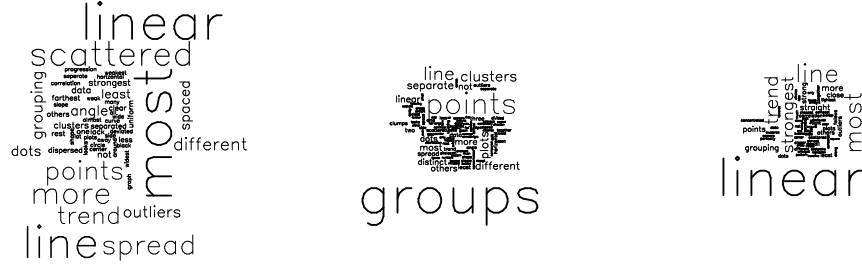

(g) Color, neither target (h) Color, cluster target (i) Color, trend target

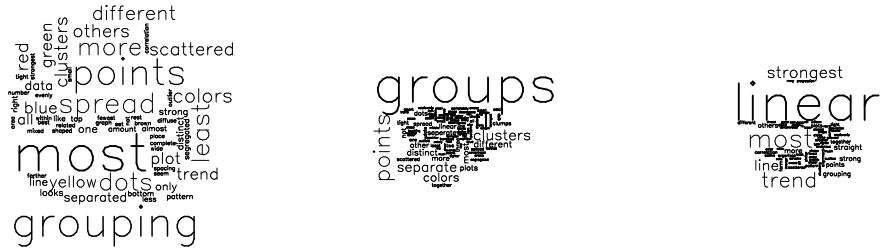

(j) Color + Ellipse, neither (k) Color + Ellipse, cluster (l) Color + Ellipse, trend

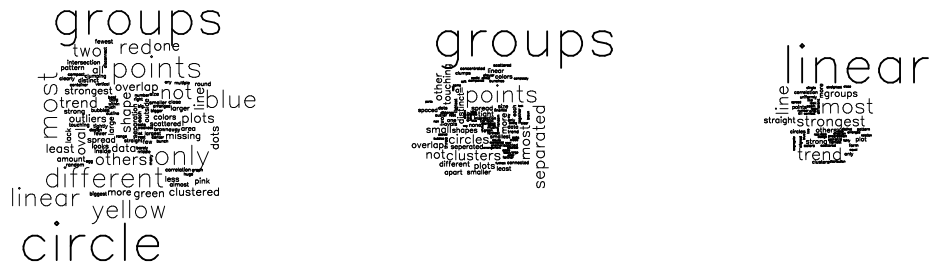


Figure 12: Wordclouds of participants' reasoning by outcome for a selected number of plot types. Mostly, the reasoning and the choice of the target are highly associated. For the Color + Ellipse plot, participants were distracted from either target by an imbalance in the cluster/color distribution, as can be seen from the reasoning in the bottom left wordcloud.

necessary to test ellipse and error band aesthetics alone; in this study, we have only examined those aesthetics in combination with color and regression line plot layers, as the bounding aesthetics are seldom seen alone.

While further studies are necessary to control for the effects of cluster sizes as well as to explore the gestalt heuristics applicable to other types of plots, these results demonstrate the importance of carefully constructing graphs in order to consistently convey the most important aspects of the displayed data.

## References

- Amazon (2010), “Mechanical Turk,” <https://www.mturk.com/mturk/welcome>.
- Bobko, P. and Karren, R. (1979), “The perception of Pearson product moment correlations from bivariate scatterplots,” *Personnel Psychology*, 32, 313–325.
- Buja, A., Cook, D., Hofmann, H., Lawrence, M., Lee, E.-K., Swayne, D. F., and Wickham, H. (2009), “Statistical inference for exploratory data analysis and model diagnostics,” *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 367, 4361–4383.
- Cleveland, W. S. (1994), *The Elements of Graphing Data*, Hobart Press, 1st ed.
- Cleveland, W. S. and McGill, R. (1984), “Graphical Perception: Theory, Experimentation, and Application to the Development of Graphical Methods,” *Journal of the American Statistical Association*, 79, pp. 531–554.
- Demiralp, C., Bernstein, M., and Heer, J. (2014), “Learning Perceptual Kernels for Visualization Design,” *Visualization and Computer Graphics, IEEE Transactions on*, 20, 1933–1942.
- DeMita, M. A., Johnson, J. H., and Hansen, K. E. (1981), “The validity of a computerized visual searching task as an indicator of brain damage,” *Behavior Research Methods & Instrumentation*, 13, 592–594.



- Few, S. (2009), *Now You See It: Simple Visualization Techniques for Quantitative Analysis*, Burlingame, CA: Analytics Press, 1st ed.
- Gegenfurtner, K. R. and Sharpe, L. T. (2001), *Color vision: From genes to perception*, Cambridge University Press.
- Goldstein, E. B. (2009), *Encyclopedia of perception*, Sage Publications.
- Hanrahan, P. (2003), “Tableau software white paper - visual thinking for business intelligence,” *Tableau Software, Seattle, WA*.
- Healey, C. G., Booth, K. S., and Enns, J. T. (1996), “High-speed visual estimation using preattentive processing,” *ACM Transactions on Computer-Human Interaction (TOCHI)*, 3, 107–135.
- Healey, C. G. and Enns, J. T. (1999), “Large datasets at a glance: Combining textures and colors in scientific visualization,” *Visualization and Computer Graphics, IEEE Transactions on*, 5, 145–167.
- Hofmann, H., Follett, L., Majumder, M., and Cook, D. (2012), “Graphical tests for power comparison of competing designs,” *Visualization and Computer Graphics, IEEE Transactions on*, 18, 2441–2448.
- Lewandowsky, S. and Spence, I. (1989a), “Discriminating strata in scatterplots,” *Journal of the American Statistical Association*, 84, 682–688.
- (1989b), “The perception of statistical graphs,” *Sociological Methods & Research*, 18, 200–242.
- Majumder, M., Hofmann, H., and Cook, D. (2013), “Validation of visual statistical inference, applied to linear models,” *Journal of the American Statistical Association*, 108, 942–956.
- Mosteller, F., Siegel, A. F., Trapido, E., and Youtz, C. (1981), “Eye fitting straight lines,” *The American Statistician*, 35, 150–152.

- Piepho, H.-P. (2004), “An algorithm for a letter-based representation of all-pairwise comparisons,” *Journal of Computational and Graphical Statistics*, 13, 456–466.
- Robinson, H. (2003), “Usability of Scatter Plot Symbols,” *ASA Statistical Computing & Graphics Newsletter*, 14, 9–14.
- Roy Chowdhury, N., Cook, D., Hofmann, H., Majumder, M., and Zhao, Y. (2014), “Utilizing Distance Metrics on Lineups to Examine What People Read From Data Plots,” *arXiv.org*.
- Scaife, M. and Rogers, Y. (1996), “External cognition: how do graphical representations work?” *International journal of human-computer studies*, 45, 185–213.
- Spence, I. and Garrison, R. F. (1993), “A remarkable scatterplot,” *The American Statistician*, 47, 12–19.
- Treisman, A. (1985), “Preattentive processing in vision,” *Computer Vision, Graphics, and Image Processing*, 31, 156 – 177.
- Treisman, A. M. and Gelade, G. (1980), “A feature-integration theory of attention,” *Cognitive psychology*, 12, 97–136.
- Tukey, J. W. (1977), *Exploratory Data Analysis*, Lebanon, IN: Addison Wesley.
- Vanderplas, S. and Hofmann, H. (2015), “Spatial Reasoning and Data Displays,” *IEEE Transactions on Visualization and Computer Graphics*, in press.
- Wickham, H., Cook, D., Hofmann, H., and Buja, A. (2010), “Graphical inference for infovis,” *Visualization and Computer Graphics, IEEE Transactions on*, 16, 973–979.
- Zhang, J. (1997), “The nature of external representations in problem solving,” *Cognitive science*, 21, 179–217.


## A Simulation Studies of Parameter Space

Using 1000 simulations for each of the 98 combinations of parameters ( $K = \{3, 5\}$ ,  $\sigma_C = \{.1, .15, .2, .25, .3, .35, .4\}$ ,  $\sigma_T = \{.2, .25, .3, .35, .4, .45, .5\}$ ), we explored the effect of parameter value on the distribution of summary statistics describing the line strength ( $R^2$ ) and cluster strength for null and target plots.

Figures ?? and ?? show the 25th and 75th percentiles of the distribution of  $R^2$  and cluster strength summary statistics for each set of parameter values. These plots guide our evaluation of “easy”, “medium” and “hard” parameter values for line and cluster tasks.

Additionally, we note that there is an interaction between  $\sigma_C$  and  $\sigma_T$ : the distinction between target and null on a fixed setting of clustering becomes increasingly difficult as the standard deviation for the linear trend is increased, and vice versa. There may additionally be a three-way interaction between  $\sigma_C$ ,  $\sigma_T$ , and  $K$ : the width of the blue intervals (bottom figure) changes between different levels of  $K$  and for different levels of  $\sigma_C$  and  $\sigma_T$ . These interactions suggest that in order to examine differences in aesthetics, we must block by parameter settings (this can be accomplished through blocking by dataset). Each dataset is non-deterministic, because we have a random process generating from different parameter settings, not a deterministic run setting as in an engineering setting. It is thus important to use replicates of each parameter setting to ensure that we can separate data-level effects from parameter-level effects.

(a)  $R^2$  values for target and null data distributions.

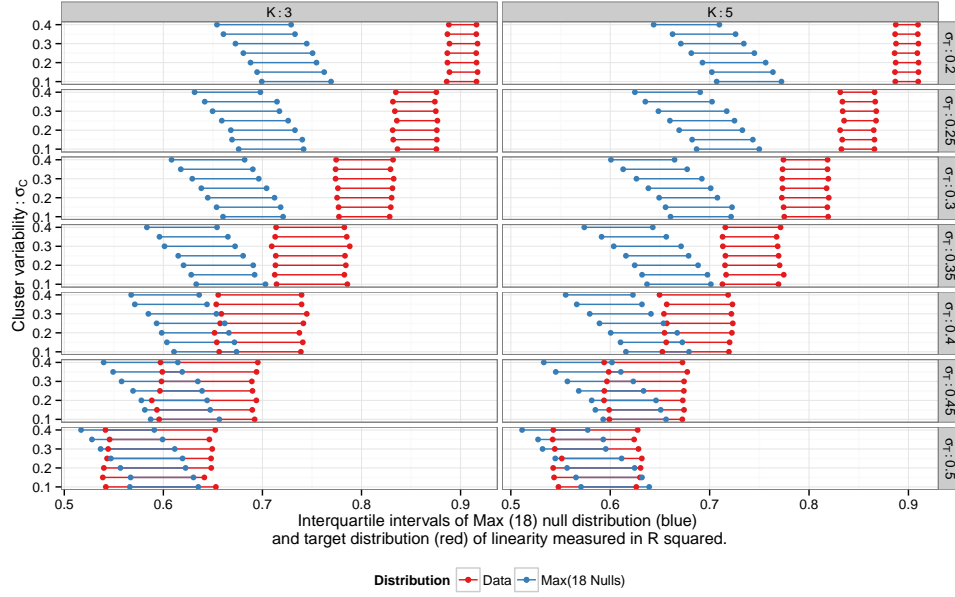

(b) Cluster cohesion statistics  $C^2$ .

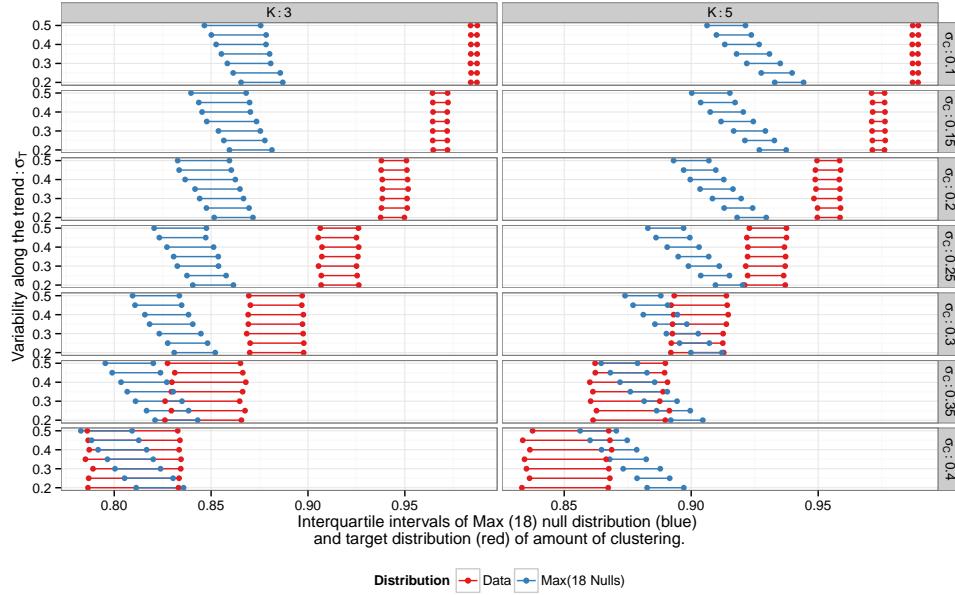


Figure 13: Simulated interquartile ranges between target and most extreme statistic from one of the 18 null plots.

## B Simulation based inference in a two-target lineup scenario

Assume that there are two targets embedded in a lineup of overall size  $m$ , where  $m$  in our experiment is taken to be  $m = 20$ . Let  $A$  be the event that one of these targets is chosen. Under the null hypothesis that both targets are consistent with being created based on data from the null model, we can assume that under the null hypothesis the expected value of the probability that an observer picks one of these plots from the lineup is  $2/m = E[P(A \mid H_o)]$ . For the distribution of  $A \mid H_o$  we employ a simulation-based strategy: Under the null hypothesis, we can assume, that the  $p$ -value corresponding to a hypothesis test ‘the presented data is consistent with the null model’ has a standard uniform distribution, i.e.  $p_i \sim U[0, 1]$  i.i.d. for all  $1 \leq i \leq m$ . We assume that the choice observers make can be modeled using a multinomial distribution, where the probability  $\pi_i$  to pick panel  $i$  is inversely linear to  $p_i$ , with  $\sum_{i=1}^m \pi_i = 1$ .

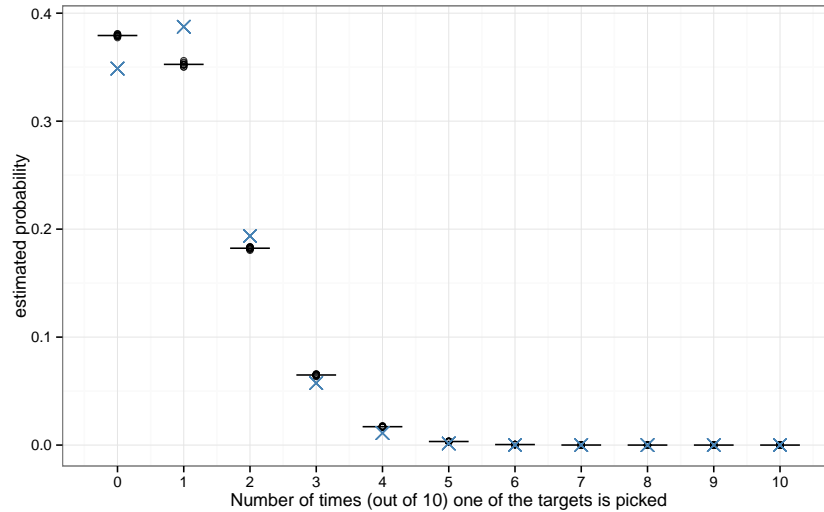


Figure 14: Ten simulations of size  $b_2 = 1,000$  and  $b_1 = 100$  for lineups of size  $m = 20$  assuming  $K = 10$  evaluations. The averages of the ten simulation runs are shown as lines. The crosses are probabilities from Binomial  $B_{2/20,10}$ .

probably should refer to this figure...

W.l.o.g. we can assume that the two target plots are in positions 1 and 2. Given that a lineup was evaluated by  $K$  individuals, the simulation process for  $P(A|H_o)$  is then as

follows:

1. Pick two values  $p_i \sim U[0, 1], i = 1, 2$ .
2. Repeat  $b_1$  times:
  - (a) Pick  $m - 2$  values  $p_i \sim U[0, 1], i = 3, \dots, m$ .
  - (b) Pick  $K$  values from a Multinomial distribution with  $\pi = \frac{1-p}{\|1-p\|}$ , i.e.  $x_j \sim M_\pi, i = 1, \dots, K$
  - (c) Return the number of times that  $x_j$  is 1 or 2.

Repeat the above process  $b_2$  times, and average results for a distribution of  $A \mid H_o$ . The choice of  $b_1$  and  $b_2$  decides on the number of decimal places to which the estimated distribution can be used reliably.