Cucumber Report

| **Start : Mar 17, 7:14:36.928 PM**	**End : Mar 17, 7:15:04.960 PM**	**Duration : 28.032 s**
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 2 SKIPPED - 0	PASSED - 4 FAILED - 2 SKIPPED - 4

Feature		Scenario				Step			
Name	**Duration**	**T**	**P**	**F**	**S**	**T**	**P**	**F**	**S**
Register New OAuth2 Application Feature	*28.032 s*	*2*	*0*	*2*	*0*	*10*	*4*	*2*	*4*

#	Feature Name	Scenario Name
1	*Register New OAuth2 Application Feature*	*Register New OAuth2 scenario with different set of data*
2		*Register New OAuth2 scenario with different set of data*

#	Feature Name	T	P	F	S	Duration
1	*Register New OAuth2 Application Feature*	2	0	2	0	28.032 s
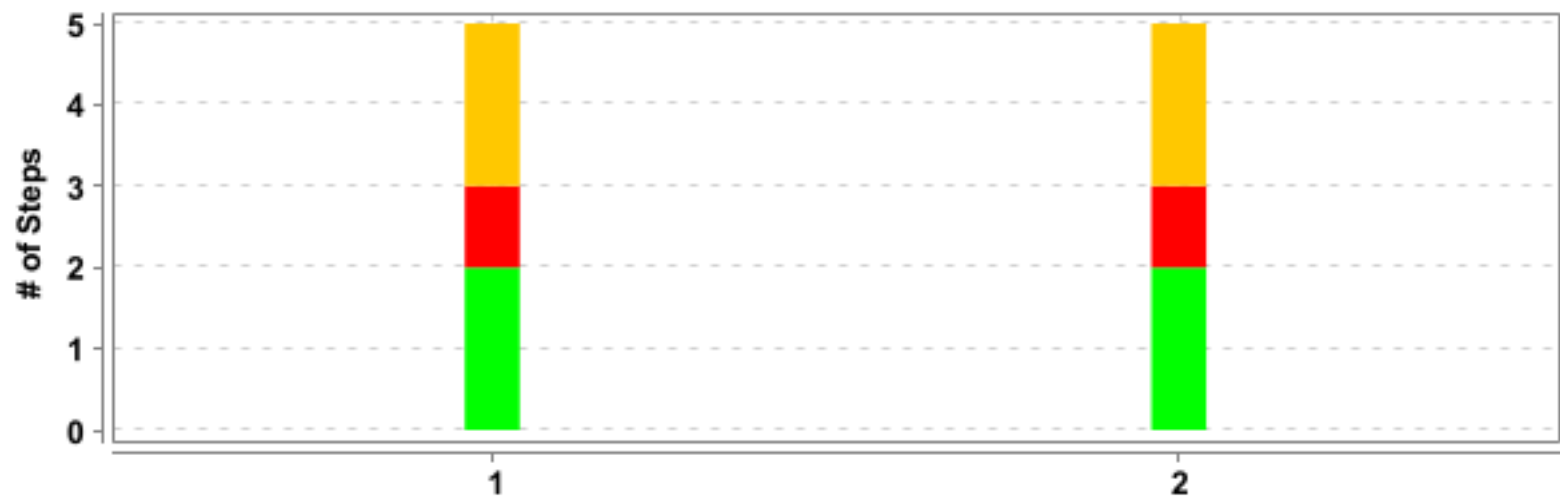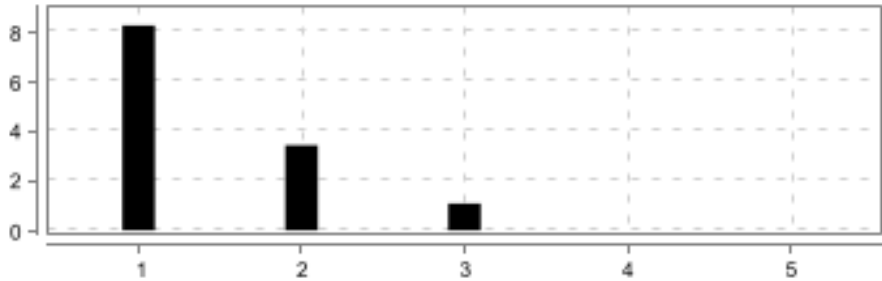
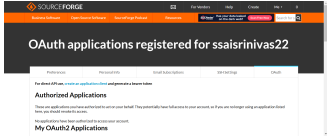| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	Register New OAuth2 Application Feature	Register New OAuth2 scenario with different set of data	5	2	1	2	15.342 s
2		Register New OAuth2 scenario with different set of data	5	2	1	2	12.645 s

Register New OAuth2 Application Feature

FAILED	DURATION - 28.032 s	Scenarios		Steps	
		Total - 2		Total - 10	
/ 7:14:36.928 PM // 7:15:04.960 PM /		Pass - 0	2	Pass - 4	10
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 4	

Register New OAuth2 scenario with different set of data

FAILED	DURATION - 15.342 s		Steps	
			Total - 5	
/ 7:14:36.939 PM // 7:14:52.281 PM /			Pass - 2	5
Register New OAuth2 Application Feature			Fail - 1	
			Skip - 2	

#	Step / Hook Details	Status	Duration
1	Given user has already logged in to application username | password ssaisrinivas22 | $Ss9704312287	PASSED	8.261 s
2	Given user navigates to OAuth2 page	PASSED	3.437 s
3	When user fills the form from given sheetname "OauthRegisteration" and rownumber 0	FAILED	1.089 s
	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//input[@name='application_name'][@tabindex='6']"} (Session info: chrome=134.0.6998.89) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.29.0', revision: '5fc1ec94cb' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [b6f82cc5f0bcf0dc55d8918857c2fb3b, findElement {using=xpath, value=//input[@name='application_name'][@tabindex='6']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\ssais\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:49364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:49364/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: b6f82cc5f0bcf0dc55d8918857c2fb3b at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:215) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:368) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:362) at com.pageObjects.OauthRegistrationPage.fillOauthRegistrationForm(OauthRegistrationPage.java:35) at steps.OauthRegisterationStepDefinition.user_fills_the_form_from_given_sheetname_and_rownumber(OauthRegisterationStepDefinition.java:44) at ?.user fills the form from given sheetname "OauthRegisteration" and rownumber 0(file:///C:/Users/ssais/git/CucumberSeleniumPOMDemo/CucumberSeleniumPOMDemo/src/test/resources/features/OauthRegisteration.feature:10) * Not displayable characters are replaced by '?'.		
4	And user clicks on send button	SKIPPED	0.000 s
5	Then it shows a successful message "OAuth2 Client registered"	SKIPPED	0.000 s
	AFTER - ApplicationHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) Register_New_OAuth2_scenario_with_different_set_of_data 	PASSED	0.188 s

Register New OAuth2 scenario with different set of data

FAILED	DURATION - 12.645 s
/ 7:14:52.315 PM // 7:15:04.960 PM /	
Register New OAuth2 Application Feature	

Steps
Total - 5
Pass - 2
Fail - 1
Skip - 2

#	Step / Hook Details	Status	Duration
1	Given user has already logged in to application	PASSED	7.407 s
	username / password ssaisrinivas22 / $Ss9704312287		
2	Given user navigates to OAuth2 page	PASSED	3.405 s
3	When user fills the form from given sheetname "OauthRegisteration" and rownumber 1	FAILED	0.079 s

org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//input[@name='application_name'][@tabindex='6']"}   (Session info: chrome=134.0.6998.89) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.29.0', revision: '5fc1ec94cb' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0330d5210eadaed0e4f4ed012aefae0c, findElement {using=xpath, value=//input[@name='application_name'][@tabindex='6']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\ssais\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:49680}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:49680/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0330d5210eadaed0e4f4ed012aefae0c
  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
  at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167)
  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138)
  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50)
  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:215)
  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216)
  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174)
  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)
  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:165)

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:368) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:362) at com.pageObjects.OauthRegistrationPage.fillOauthRegistrationForm(OauthRegistrationPage.java:35) at steps.OauthRegisterationStepDefinition.user_fills_the_form_from_given_sheetname_and_rownumber(OauthRegisterationStepDefinition.java:44) at ?.user fills the form from given sheetname "OauthRegisteration" and rownumber 1(file:///C:/Users/ssais/git/CucumberSeleniumPOMDemo/CucumberSeleniumPOMDemo/src/test/resources/features/OauthRegisteration.feature:10) * Not displayable characters are replaced by '?'.		
4	And user clicks on send button	SKIPPED	0.000 s
5	Then it shows a successful message "OAuth2 Client registered"	SKIPPED	0.000 s
	AFTER - ApplicationHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) Register_New_OAuth2_scenario_with_different_set_of_data 	PASSED	0.165 s