

# FARRELL

Equipment & Supply Co., Inc.

## MASONRY BOOK

*Hand Tools, Power Saws,  
Mortar Mixers, Scaffolding,  
Reinforcement, Chemicals  
& Much More!*



[www.FarrellEquipment.com](http://www.FarrellEquipment.com)

*Serving the Construction  
Industry Since 1968!*

# Masonry Products

## NARROW LONDON PATTERN TROWELS



W. Rose™ Trowels are made by a process which binds blade, ferrule and tang as one piece, with select air-seasoned wood, leather, or plastic handles firmly attached to the tang. The W. Rose™ trademark gives you the excellent feel and balance... that you expect.

### W. Rose™ Trowels Handles

**RO100** Smooth comfortable grip 6" wood handle with steel ferrule.

**RO400** Smooth comfortable grip 5" wood handle with steel ferrule.

**RO300** 5-1/2" Seasoned wood handle wrapped with genuine leather to provide a smooth comfortable grip. Fitted with steel ferrule.

**RO1400** Clear/amber 5-1/4" plastic handle. Tough and rugged handle will not mushroom from tamping bricks or concrete blocks.

**RO1000** Special Soft Grip 6-3/4" handle for the professional mason. Made of soft but tough PVC material. Hard Rubber bumper fitted to end of handle.

**RO900** Special Soft Grip Kit. Includes 1 soft grip cover, 1 rubber bumper, 1 washer and 1 screw.

### 6" Wood Handle (Standard Shank)

Part #	Blade	Heel Width
RO116-9	9"	4-3/16"
RO116-9-1/2	9-1/2"	4-1/4"
RO116-10	10"	4-1/2"
RO116-10-1/2	10-1/2"	4-5/8"
RO116-11	11"	4-3/4"
RO116-11-1/2	11-1/2"	4-7/8"
RO116-12	12"	5"
RO116-12-1/2	12-1/2"	5-1/4"
RO116-13	13"	5-3/8"

### 6" Wood Handle (Low Shank)

RO186-9	9"	4-3/16"
RO186-9-1/2	9-1/2"	4-1/4"
RO186-10	10"	4-1/2"
RO186-10-1/2	10-1/2"	4-5/8"
RO186-11	11"	4-3/4"
RO186-11-1/2	11-1/2"	4-7/8"
RO186-12	12"	5"
RO186-12-1/2	12-1/2"	5-1/4"
RO186-13	13"	5-3/8"

### 5-1/2" Leather Handle (Standard Shank)

Part #	Blade	Heel Width
RO316-9	9"	4-3/16"
RO316-9-1/2	9-1/2"	4-1/4"
RO316-10	10"	4-1/2"
RO316-10-1/2	10-1/2"	4-5/8"
RO316-11	11"	4-3/4"
RO316-11-1/2	11-1/2"	4-7/8"
RO316-12	12"	5-1/4"
RO316-12-1/2	12-1/2"	5-1/4"
RO316-13	13"	5-3/8"

### 5-1/2" Leather Handle (Low Shank)

RO386-9	9"	4-3/16"
RO386-9-1/2	9-1/2"	4-1/4"
RO386-10	10"	4-1/2"
RO386-10-1/2	10-1/2"	4-5/8"
RO386-11	11"	4-3/4"
RO386-11-1/2	11-1/2"	4-7/8"
RO386-12	12"	5"
RO386-12-1/2	12-1/2"	5-1/4"
RO386-13	13"	5-3/8"

### 5" Wood Handle (Standard Shank)

Part #	Blade	Heel
RO416-9	9"	4-3/16"
RO416-9-1/2	9-1/2"	4-1/4"
RO416-10	10"	4-1/2"
RO416-10-1/2	10-1/2"	4-5/8"
RO416-11	11"	4-7/8"
RO416-11-1/2	11-1/2"	4-7/8"
RO416-12	12"	5"
RO416-12-1/2	12-1/2"	5-1/4"
RO416-13	13"	5-3/8"

### 5" Wood Handle (Low Shank)

RO486-9	9"	4-3/16"
RO486-9-1/2	9-1/2"	4-1/4"
RO486-10	10"	4-1/2"
RO486-10-1/2	10-1/2"	4-5/8"
RO486-11	11"	4-3/4"
RO486-11-1/2	11-1/2"	4-7/8"
RO486-12	12"	5"
RO486-12-1/2	12-1/2"	5-1/4"
RO486-13	13"	5-3/8"

### 5-1/4" Plastic Handle (Standard Shank)

RO1416-9	9"	4-3/16"
RO1416-9-1/2	9-1/2"	4-1/4"
RO1416-10	10"	4-1/2"
RO1416-10-1/2	10-1/2"	4-5/8"
RO1416-11	11"	4-3/4"
RO1416-11-1/2	11-1/2"	4-7/8"
RO1416-12	12"	5"
RO1416-12-1/2	12-1/2"	5-1/4"
RO1416-13	13"	5-3/8"

### 5-1/4" Plastic Handle (Low Shank)

RO1486-9	9"	4-3/16"
RO1486-9-1/2	9-1/2"	4-1/4"
RO1486-10	10"	4-1/2"
RO1486-10-1/2	10-1/2"	4-5/8"
RO1486-11	11"	4-3/4"
RO1486-11-1/2	11-1/2"	4-7/8"
RO1486-12	12"	5"
RO1486-12-1/2	12-1/2"	5-1/4"
RO1486-13	13"	5-3/8"

## CAULKING TROWELS



One piece forgings. These trowels are made from high carbon steel. They are ground for flexibility and have a high shank and lift.

<b>BL-761</b>	7" x 3/16" Caulking Trowels
<b>BL-762</b>	7" x 1/4" Caulking Trowels
<b>BL-763</b>	7" x 3/8" Caulking Trowels
<b>BL-764</b>	7" x 1/2" Caulking Trowels
<b>BL-765</b>	7" x 5/8" Caulking Trowels
<b>BL-766</b>	7" x 3/4" Caulking Trowels
<b>BL-767</b>	7" x 7/8" Caulking Trowels
<b>BL-768</b>	7" x 1" Caulking Trowels

## MARGIN TROWELS



One piece forged trowel. Made of high grade steel. Tempered, ground and polished for perfect balance and feel. Comes with comfortable hardwood handle.

<b>GG-431</b>	5" x 1-1/2" Margin Trowel
<b>GG-432</b>	5" x 2" Margin Trowel
<b>GG-434</b>	6" x 2" Margin Trowel
<b>GG-433</b>	8" x 2" Margin Trowel

## POINTING TROWELS



One piece forged trowel. Made of high grade steel. Tempered, ground and polished for perfect balance and feel. Comes with comfortable hardwood handle.

<b>GG-421</b>	4-1/2" x 1-1/4" Pointing Trowels
<b>GG-422</b>	5-1/2" x 2-1/2" Pointing Trowels
<b>GG-423</b>	7" x 3" Pointing Trowels
<b>GG-424</b>	5" x 2-1/2" Pointing Trowels

## TROWEL HANDLE TIP

**BL104**

Rubber tip for brick trowel handle.



**MANY MORE KRAFT ITEMS AVAILABLE:  
GIVE US A CALL!**



# Masonry Products

## MORTAR BOARD STANDS

All-metal rugged construction for years of use. Folds for convenient storage.



<b>MB2</b>	20" X 30" Mortar Board Stand
<b>MB3</b>	36" X 30" Mortar Board Stand
<b>MB4</b>	48" X 30" Mortar Board Stand
<b>MB5</b>	60" X 30" Mortar Board Stand

## MORTAR BOARD



### GAT1000 GATORBACK™ Mortar Board



When 50% of the total project cost is labor, give your masonry crew the best tools available and you will get higher production EVERYDAY! Dimensions: 24" x 26" x 0.75"

## GROUT BAGS

Cone shaped heavy-duty vinyl bag comes complete with removable metal tip.



<b>WL013</b>	10-1/2" x 24" Large Bag
<b>WL015</b>	3/8" Replaceable Tip
<b>WL014</b>	15" x 28" Giant Bag
<b>WL019</b>	7/16" Replaceable Tip

## BRICK JOINTERS



Made of high carbon steel, each end makes a different size joint. Overall length: 10-1/2"

<b>BL-260</b>	3/8" x 1/2" Brick Jointers
<b>BL-261</b>	1/2" x 5/8" Brick Jointers
<b>BL-262</b>	5/8" x 3/4" Brick Jointers
<b>BL-264</b>	3/4" x 7/8" Brick Jointers
<b>BL-265</b>	7/16" x 1" Brick Jointers

## HUBBARD JOINTERS



More knuckle clearance, replaceable blades, long lasting. Jointer comes assembled with one 3/4", one 7/8" blade and one 5/8" blade loose in package.

<b>BL-280</b>	Hubbard Jointer
<b>BL-281</b>	1/2" Replacement Blade
<b>BL-282</b>	5/8" Replacement Blade
<b>BL-283</b>	3/4" Replacement Blade
<b>BL-284</b>	7/8" Replacement Blade

## MORTAR GUNS



### QuikPoint Mortar Guns

- Uses all standard and pre-mixed pointing mortars.
- Excellent mortar penetration. Vibrator fed auger drive assures constant mortar bead.
- Unbreakable polyurethane body and nozzle holder. Takes just 10 seconds to reload 1/2 gallon hopper.
- Quick clean up in less than a minute simply by flushing with water.
- Portable, weighs only 7 pounds (approximately 13 pounds loaded).
- Specially designed nozzle with 3 interchangeable steel tips (small: 3/16" X 0.8", medium: 1/4" X 0.8", and large: 0.55" X 0.66"). Nozzle rotates for horizontal and vertical joints.

<b>QPT1964</b>	Quickpoint Drill-Mate Mortar Gun
<b>QPT2064</b>	Quickpoint Drill-Mate Mortar Gun w/ Makita Drill

## JOINT RAKER



### BL-210 Joint Raker

Masons love this big wheeled joint raker. Wheels are 1-3/4" in diameter, mounted 1-3/4" apart. Overall width is 3". Has 8-1/2" aluminum handle that is squared off at the end so you can rod joints. Hardened nail is adjustable for depth.

# Masonry Products

## BRICK TONGS



### BC380 Brick Tongs

This heavy-duty quick adjustable tong can carry from 6 to 10 bricks. Can't damage bricks and is designed for long wear. 16" long.



## BRICK TONGS



### BC281 "Big Red" Brick Tongs

New improved non-slip lock down to unload quickly and easily. Can't damage bricks and is designed and built for long wear. Fast adjustment from 7 to 11 bricks. Made of malleable iron with smooth wood handle.



## BRICKLAYER'S SET



Forged from the finest tool steel, well tempered, properly balanced.

- BL232** 8" x 2-1/2"
- BL233** 8" x 3"
- BL234** 8" x 4"
- BL235** 8" x 5"

## CHISELS



- CC654** 10" x 1-7/8"
- CC671** 10" x 2-1/2"
- CC655** 10" x 2-7/8"



### Concrete Chisel

Forged from the finest tool steel, well tempered, properly balanced.

### Plugging Chisel

Forged from the finest tool steel, well tempered, properly balanced.



**BL576** 10" x 4-1/2" x 3/16"

## BRICKLAYER'S HAMMER



**ES3-20BL STEEL HANDLE** 20 oz. Bricklayer Hammer

## STONE MASON'S HAMMER



A very powerful hammer made of forged and tempered steel. Comes with 16" wood handle.


- BL333** 3 lbs.
- BL334** 4 lbs.
- BL337** 6 lbs.
- BL332** 16" Replacement Handle

## BRICK SPLITTER

This Mini Brick Splitter weighs only 39 lbs. The opening is a full 5" high so it can take a regular brick standing up at any angle. Blades are 4-1/2" wide, so it cuts most bricks now in use, and the cut will be accurate, as a 12" rule and square is built right in.

**BC582** Mini Brick Splitter

**BC582-01** Set of Replacement Blades

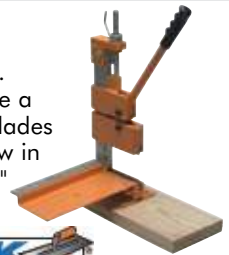

## BRICK SPLITTER



### BC-580 Brick Splitter

Adjustable hand crank. 12 ton hydraulic jack for splitting. Throat 7-1/2" high and 11-1/4" wide. Replaceable cutting blades. Weight 95 lbs.



**CUT  
MASONRY  
FAST AND  
CLEAN!**

## SLEDGE HAMMERS

### WILTON® Unbreakable Handle Sledge Hammers

Unbreakable handle is made with tempered steel, and surrounded by heavy-duty molded rubber. Ergonomic handle absorbs shock and has a slip-resistant grip. High-visibility head adds instant identification under any job site conditions.



- JET02-20416** 4 Lb. BASH Sledge Hammer w/ 16" Unbreakable Handle
- JET02-20624** 6 Lb. BASH Sledge Hammer w/ 24" Unbreakable Handle
- JET02-20636** 6 Lb. BASH Sledge Hammer w/ 36" Unbreakable Hammer
- JET02-20824** 8 Lb. BASH Sledge Hammer w/ 24" Unbreakable Handle
- JET02-20836** 8 Lb. BASH Sledge Hammer w/ 36" Unbreakable Hammer
- JET02-21036** 10 Lb. BASH Sledge Hammer w/ 36" Unbreakable Hammer
- JET02-21236** 12 Lb. BASH Sledge Hammer w/ 36" Unbreakable Hammer

## SLEDGE HAMMERS



Drop forged high carbon steel heads, heat treated with hardwood hickory or fiberglass handles.

- AS11063** 3# Fiberglass 16" Sledge Hammer
- AS11070** 4# Wood 16" Sledge Hammer
- AS11072** 4# Fiberglass 16" Sledge Hammer
- AS11082** 6# Wood Handle Sledge Hammer
- AS11085** 6# Fiberglass Handle Sledge Hammer
- AS11099** 8# Sledge Hammer w/ Wood Handle
- AS11101** 8# Sledge Hammer w/ Fiberglass Handle
- AS11203** 10# Sledge Hammer w/ Wood Handle
- AS11204** 10# Fiberglass Handle Sledge Hammer
- AS11219** 12# Sledge Hammer w/ Wood Handle
- AS11220** 12# Fiberglass Handle Sledge Hammer
- AS11234** 16# Wood Handle Sledge Hammer
- AS11244** 20# Wood Handle Sledge Hammer



### Replacement Handles

American Hickory (supplied with wood & metal wedges where applicable)



- 11401** 36" Hickory Handle For 6-16 lb. Sledges
- 11407** 36" Hickory Handle For 20 lb. Sledges
- 62-314** 14" Hickory Handle For 16 oz. Nail Hammer
- 11436** 36" Hardwood Handle For Picks

# Masonry Products

## LINE BLOCKS



### 4" Wood Line Blocks

Blocks grip the wall tightly and will not split or break. Sold in pairs

- BL349** 4-1/4" Bulk pairs
- BL348** 4-1/4" Carded pairs
- BL350** Wood Line Blocks 4" Bulk pairs



## SNAP-OVER LINE TWIGS



### BL156

Manufactured from spring steel. They snap around the mason's line and eliminate sagging. Packaged (14) per. 4" Long x 5/8" Wide.

## LINE PINS




### BL158

Made of tempered steel; stiff and long enough to hold the line. Packaged (4) per. 6" size.

## LINE STRETCHERS

Stretches line tight between blocks. Sold in pairs.

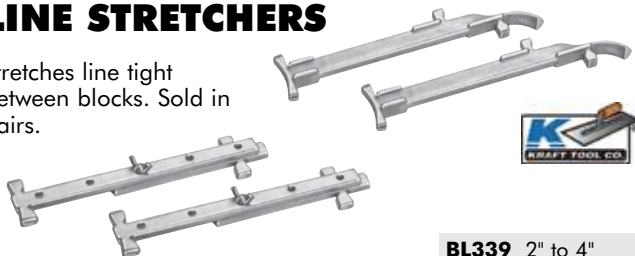

### BL147 Adjustable Line Stretcher

These aluminum line stretchers work on various size blocks from 4" to 12". Sold in pairs.

- BL339** 2" to 4"
- BL343** 4" to 6"
- BL342** 6" to 8"
- BL340** 8" to 10"
- BL341** 8" to 12"

## MASONRY GUIDES



The finest most versatile corner pole system available can be effectively used on all types of masonry brick veneer or solid load bearing wall and block work.

- BC613** 9' Pole complete with outside corner fittings
- BC612** 9' Pole complete with inside corner fittings
- BC610** 9' Pole (only)
- BC610** Telescoping pole braces (Use with masonry guide pole for multi-story, solid or free standing masonry applications. Adjusts from 7'6" to 13'8")



## MASON'S NYLON LINE



Bonded Braided Nylon Line. This ultra strong bonded line is longer wearing. The extra elasticity helps eliminate sagging. The nylon has a black flecked braid.

- KRBC352** 500' Roll Mason Line Braided (Black & White)
- KRBC353** 500' Roll Mason Line Braided (Black & Orange)
- KRBC354** 500' Roll Mason Line Braided (Black & Green)

## STRING REELS

*Stringliner Company*


### Stringliner® Pro Reloadable Reels

This reloadable nylon line reel is extremely easy to reload and has a handy rewind crank and auto-rewind with power driver capability.



- WP25459** Reloadable Reel w/ 500' Neon Orange Mason Line
- WP25462** Reloadable Reel w/ 500' Neon Pink Mason Line
- WP25465** Reloadable Reel w/ 500' Neon Yellow Mason Line
- WP35790** 1000 Ft. Black & White Braided Mason Line
- WP480NG** 500 Ft. Neon Green Braided Mason Line
- WP480NO** 500 Ft. Neon Orange Braided Mason Line
- WP480NP** 500 Ft. Neon Pink Braided Mason Line
- WP480NY** 500 Ft. Neon Yellow Braided Mason Line
- WP960NG** 1000 Ft. Neon Green Braided Mason Line
- WP960NO** 1000 Ft. Neon Orange Braided Mason Line
- WP960NP** 1000 Ft. Neon Pink Braided Mason Line
- WP960NY** 1000 Ft. Neon Yellow Braided Mason Line

## MEASURING RULES

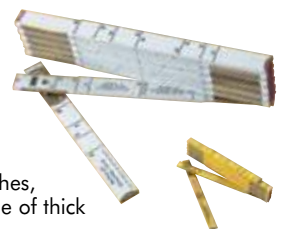

### BL167 Wood Spacing Rule

Lists ten course spacing on one side; inches, eighths and sixteenths on the other. Made of thick hardwood.

### BL512 Wood Modular Rule

Lists modular spacing on one side; feet, inches, eighths and sixteenths on the other. Made of thick hardwood.

### BL169 Brick Mason's Rule

This spacing rule is for oversized brick. Spacings at 2-7/8" and go to 3-1/2" in 1/16" increments. Made of thick hardwood.

### GG-318 Extension Folding Rule

Graduated brass slide on first section extends 6". Brass plated, riveted lock joints eliminate end play. Markings embedded in wood to 16ths with red stud markings on 16" centers.

### GG-320 Engineer Folding Rule

Red end folding rule is the finest engineer rule made. Graduations: inside markings in feet, 10ths and 100ths. Finest hardwood selected hard rock maple.



*Don't Forget... We Carry Everything You Need to Lay Out Your Job!*





# Masonry Products

## LITTLE GIANT CHALK LINE REEL

**BEST SELLER!**



### G100 Little Giant Chalk Line

Long 100 ft heavy duty cord and pull ring. Hooks easily to a utility belt and holds almost 1 lb. of chalk. One-piece steel crank for extra long life. 15 oz. capacity.



## GIANT CHALK LINE REEL



### G130 Proline® Giant Chalk Line Reel

Extra long 130 ft. heavy duty cord and pull ring. Holds 1 lb. of chalk for less refills.



## HIGH SPEED CHALK LINE REEL



### GB1 Proline®

100' polyester line rewinds 3-1/2 times faster. Quick fill rubber grommet. Free wheeling disengage gear for ease of use.



## MARKING CHALK

### ProChalk & Glo Marking Chalks

Ultra-Fine chalk is formulated to achieve a perfect line every time. Brilliant color tones provide strong, sharp lines. From the brightest pigments in the industry, we produce standard colors plus our unique, fluorescent "Glo-Orange" for improved visibility.



<b>KS8B</b>	8 oz Blue
<b>KS8GO</b>	8 oz Glo-Orange
<b>KS8R</b>	8 oz. Red

<b>KS105B</b>	5 LB Blue
<b>KS105GO</b>	5 LB Glo-Orange
<b>KS105R</b>	5 LB Red Chalk
<b>KS105W</b>	5 LB White

## MEASURING TAPES

### Extra Wide Tape Rule

Extra wide blade. Magnetic hook. True zero hook. Positive locking button. Chrome plated case.



<b>KSPG1025</b>	25', - ft., 1/10, 1/100
<b>KSPG181025</b>	25', - ft., in., 1/8, 1/16 & ft., 1/10, 1/100
<b>KSPG1825</b>	25', - ft., in., 1/8, 1/16

## MEASURING TAPE

### KSPG25FAR

#### 25' Tape Measure

Features sturdy construction and rubber grip.



## LASER DISTANCE METER



### BOS01-GLR255

#### Laser Distance Measurer

Compact unit with increased distance. Fast, easy, accurate measuring. Accuracy: +/- 1/16-Inch. For distances up to 230 feet.



## LASER DISTANCE METER



### SH06300

#### LD300 Laser Distance Measuring Kit


Range up to 100 ft. Fast and accurate measuring. Compact as a cell phone. Bright backlit screen. Length, area, volume & Pythagorean. Continuous measure function. Belt pouch included.



## GAUGE BLOCKS



Holds with just one nail.



Aline-set offers multiple offsets for different applications.



Notch to aid in setting a tight line.



Easy to remove with the claw of your hammer.



### SMIAL106 6-Pack Aline-Set

The most effective gauge block on the market today. Perfect for straightening, plumbing, & leveling walls, floors, beams, and concrete forms. Residential, Multi-Family, Commercial, Industrial, Road Construction, Pole Buildings, Ag Buildings, Decks, Fences, and more.

## PLUMB BOB SETTER



### TJMPZB-400

#### PLUMB-RITE™ Plumb Bob Setter

Universal plumb bob setter with commercial-grade 14 oz. bob. Setting pin for wood and drywall surfaces, strong magnet for steel frames. Adjustable hook ratchets to cinch onto beams or hook onto nails or studs. Braided nylon line extends and holds at lengths up to 14 1/2 ft., retracts into case automatically.



# Masonry Products

## MEASURING TAPES



### NR - Nylon-Reinforced Steel Blade

Tough, double nylon-coated steel. Break-resistant under severe use in the field. 3/8-inch wide blade reduces wind drift and tape weight. Metal-reinforced crank handle for durability.

Model	length	units.	zero pt.	attachment
NR18100	100 ft.	ft., in., 1/8	hook end	hook
NR10100	100 ft.	ft., 1/10, 1/100	tape end + 1 ft.	ring
NR10100E	100 ft.	ft., 1/10, 1/100	tape end	hook
NR10100H	100 ft.	ft., 1/10, 1/100	hook end	hook
NR10200H	200 ft.	ft., 1/10, 1/100	hook end	hook
NR18200	200 ft.	ft., in., 1/8	hook end	hook

## MEASURING TAPES



### SNR - Steel Housing, Nylon-Reinforced Steel Blade

The world's best steel long tape in a housing that's built to last! The strongest housing (stainless steel!) on the market. Tough, double nylon-coated steel blade assures long life under field abuse. Rubber-grip shovel handle for comfortable, rapid reeling. Metal-reinforced crank handle for durability.

Model	Length	Units.	Zero Pt.	Attachment
SNR10200	200 ft.	ft., 1/10, 1/100	tape end + 1 ft	ring
SNR10200H	200 ft.	ft., 1/10, 1/100	hook end	hook
SNR18300	300 ft.	ft., in., 1/8	hook end	hook
SNR10300	300 ft.	ft., 1/10, 1/100	tape end + 1 ft	ring
SNR10300E	300 ft.	ft., 1/10, 1/100	tape end	ring
SNR10300H	300 ft.	ft., 1/10, 1/100	hook end	hook

## MEASURING TAPE



### KSNRS18300

#### 300' Steel Tape w/ Nylon Coating - Inches

Nylon-Reinforced Steel Blade, Speed Rewind. 3 x 1 rewind, high-visibility housing! Metal, planetary gearing for super-fast rewind.

## MEASURING TAPE



### KSST181003X

#### 100' Steel Tape Measure - Inches

3 to 1 gearing for quick rewinding. High-impact-resistant case with a full rubber, non-slip grip. Folding steel hook for a great hold on measuring surfaces. Closed housing.

## LEVELS



### The Crick Level

A premium grade level made in the United States.

The quality is unmatched.

Precision-built for accuracy and durability. Over 50 different machines are used in production to ensure precision and dependability. The materials used have been selected for their individual reliability and are assembled by craftsmen dedicated to quality.

CRK24010	24" Level with Green Vial
CRK36010	36" Level with Green Vial
CRK42010	42" Level with Green Vial
CRK48010	48" Level with Green Vial
CRK10002	Hanging Hook for Crick Levels
CRK10004	Spring Clip for Crick Levels
CRK10006	Replacement Lens for Crick Levels

## LEVELS



### Contractor Series Levels

Lightweight, top reading, aluminum box beam levels can stand up to any job. Solid-set acrylic, barrel-shaped vials enable an accurate level reading, regardless of the horizontal orientation of the level—a full 360° read. Shock-absorbing end caps and ribbed-wall design.

LVL243HH	24" Level with 3 Vials
LVL363HH	36" Level with 3 Vials
LVL483HH	48" Level with 3 Vials
LVL724HH	72" Level with 4 Vials
LVL784HH	78" Level with 4 Vials

## PLATE LEVEL



### Plate Level - Type 106T

Designed for the residential stick framer that needs fast and accurate wall installations (Plumb Plate to Plate).

Fully sealed solid rail (six sided) extension eliminates deflection, and delivers the smoothest extension movement available.

- Top plumb vial is permanently positioned at eye level.
- Frame side opposite the stand-offs is a level measuring surface and straight edge.
- Vials are guaranteed for life never to fog, leak or require adjustment.

SH33610	6' - 10' Plate Level
SH33712	7' - 12' Plate Level



# Masonry Products

## LEVELS

### Type 196 Level

- Crystal clear vials readable in any direction with no change in accuracy tolerance.
- Spring steel hairline indicators in vials.
- Best frame strength-to-weight ratio.
- Removable rubber end caps for scribing in corners and for reading tight header and sill openings.
- Vials are guaranteed for life



<b>SH37416</b>	16" Model 196 Level	<b>SH37448</b>	48" Model 196 Level
<b>SH37424</b>	24" Model 196 Level	<b>SH37472</b>	72" Model 196 Level

**SH37532** Jamber Set: 78" Model 196 Level w/ Free 32" Level

Also Available to Order in 22", 36", 59", and 78" Lengths.

## MAGNETIC LEVELS

### Type 96M Magnetic Level

- Spring steel hairline indicators inside the vials.
- Certified Level Accuracy in top read position: 1/32" over 72".
- Removable rubber end caps for flush measuring in corners.
- Patented red pads on end caps grip walls & flat surfaces. Prevents slipping on walls.
- Level accuracy guaranteed for life; vials will never fog, leak or require adjustment.
- Readable in every direction with no change in accuracy tolerance.



Strongest Magnets, flush mounted - Work Hands-Free.

<b>SH38624</b>	24" Model 96M Magnetic Level
<b>SH38648</b>	48" Model 96M Magnetic Level
<b>SH38672</b>	72" Model 96M Magnetic Level

**SH38532** Jamber Set: 78" Magnetic Level w/ Free 32" Level

Also Available to Order in 16", 32", 36", 59", and 78" Lengths.

## DIGITAL LEVEL

- 360° Digital Measuring.
- Display always reads upright.
- Select from degrees, % slope, or audio (beep) alert.
- Certified Vial Accuracy; in top read position: (.029°) 1/32" over 72".
- Digital accuracy tolerance: at 0°, 90° = ±.1°, Between 1° & 89° = ±.2°
- Patented red pads on endcaps grip walls and flat surfaces.
- Audible tone signals plumb and level condition for eye-free installations.
- Level accuracy guaranteed for life; vials will never fog, leak or require adjustment.

<b>SH26940</b>	24" Electronic Level
<b>SH26960</b>	48" Electronic Level

Also Available to Order in 14", 59", and 78" Lengths.



## TORPEDO LEVEL



The Stabila Rare Earth Magnetic Torpedo Level is built with a heavy-duty, 10-inch die-cast metal frame and two acrylic vials (one horizontal, one vertical) that are crystal-clear, non-fogging, unbreakable, and monoblock for durability and ease of use.

**SH25100M-WC** 10" Die-Cast Torpedo Level w/ Mag

## MASON LEVELS



### Stabila 34570 48-Inch Trowel-Proof Masons Level

The 48-inch Mason's Level is designed to be hit with a trowel. One third lighter than laminated wood levels. Centered hand holes optimize balance. Top reading horizontal vial - no more bending over. Stands up to thousands of drops, will not warp or twist. Vials guaranteed for life never to fog, leak, or require adjustment. Water and brush clean-up.



### Stabila 36448 - 48-Inch Mason Level with Dead-Blow Shield

Has strike zone shields that are meant to be hit with a trowel. This level is ideal for long wall work and is the ultimate level for the professional brick and block layer. Solid acrylic vials features the ultimate durability and precision. Easy to read on any course, one vertical vial located on one end and the other vertical vial located near the center of the level, also a center horizontal vial.



# Masonry Products

## MASONRY REINFORCEMENT SYSTEMS

### Hohmann & Barnard's

#### Lox-All® Truss-Mesh and Lox-All® Ladder Mesh

Continuous lengths of joint reinforcement that are embedded into the horizontal mortar joints of masonry walls. Joint reinforcement has long been proven to be necessary for superior performance of masonry wall construction as it offers the following benefits:

- Reinforces a variety of masonry walls.
- Greatly reduces cracking that can arise from thermal stresses.
- Enhances resistance to water penetration, as cracks are controlled.
- Increases lateral flexural strength.
- Bonds exterior and interior masonry wythes together in composite or cavity walls.
- Bonds masonry at intersecting walls and corners.
- Increases elasticity.
- Increases performance of masonry walls under various stresses.
- Fabricated in conformance with ASCE/ACI 530 building code requirements for masonry structures.

#### Features:

1. Butt welding of cross rods to longitudinal rods (not more than 16" O.C.). This construction eliminates projection of cross rods beyond the specified width of reinforcement, and prevents excessive build up of wire in limited mortar joints.
2. Continuous deformation along each longitudinal rod for superior bonding performance.
3. Choice of combination of wire gauges:
  - A. Standard weight - 9ga. Side Rods x 9 ga. Cross Rods.
  - B. Extra Heavy - 3/16" Side Rods x 9 ga. Cross Rods.
  - C. Super Heavy Duty - 3/16" Side Rods x 3/16" Cross Rods.

#### Material Conformance-

##### WIRE:

Prefabricated construction from cold-drawn steel wire, conforming to ASTM A82 (Tensile Strength)

##### FINISHES:

- I. Brite Basic –No Coating
- II. Mill Galvanized
- III. Hot Dip Galvanized
- IV. Stainless Steel Type 304

Joint reinforcement for single wythe walls shall be **Lox-All® Ladder-Mesh**, as manufactured by HOHMANN & BARNARD, INC., Hauppauge, NY, or approved equal. Reinforcement shall be fabricated from cold-drawn steel wire conforming to ASTM A82, with smooth (**state dia.**) cross rods butt welded but not more than 16" o.c. to deformed (**state dia.**) side rods. Finish shall conform to (**state spec.**).







Factory fabricated Corners and Tees shall be used at all corners and intersecting walls and shall be of the same gauge, finish and design as the continuous joint reinforcement.

\* This specification can be modified for composite or cavity walls with the inclusion of the HOHMANN & BARNARD Lox-All® products found on this page.






- Packed 500' per bundle (50 pcs. - 10' long).
- Tri-Mesh, Twin-Mesh and Box-Mesh packed 250' per bundle (25 pcs. - 10' long).
- Corners and Tees packed 25 pcs. per bundle.



### Lox-All® Ladder Mesh Reinforcement:

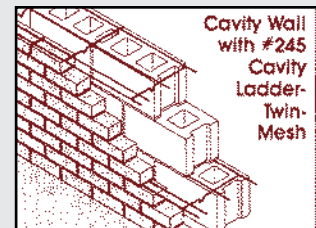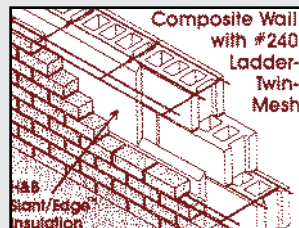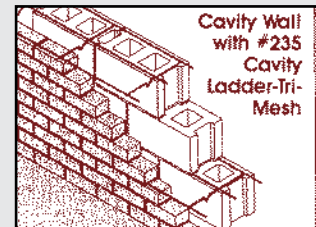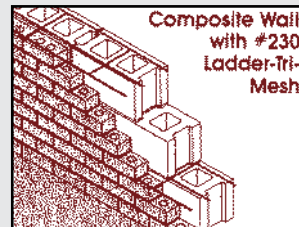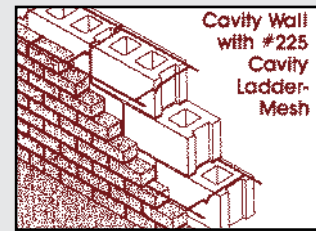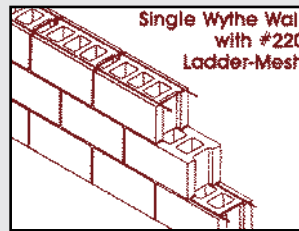

### Lox-All® Truss Mesh Reinforcement:

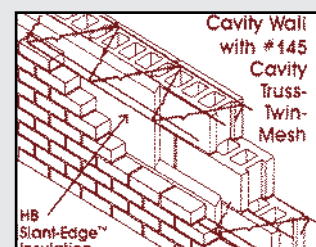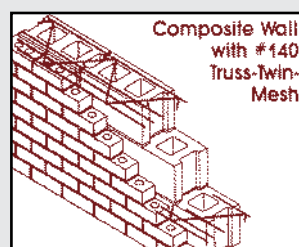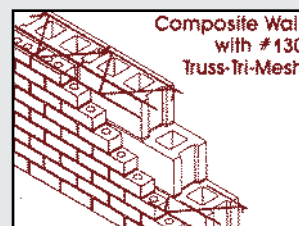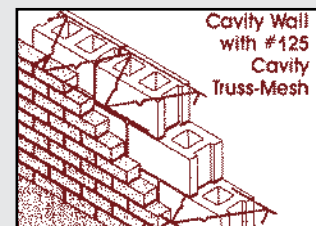
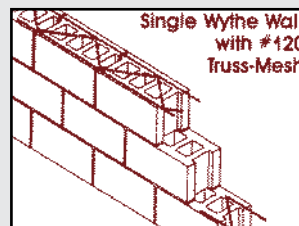


# Masonry Products

## ADJUSTABLE MASONRY REINFORCEMENT SYSTEM

### Lox-All® Adjustable Eye-Wire

- Allows construction of interior wythe in advance of exterior wythe.
- Rectangular pintle acts as a vertically adjustable anchor to bond exterior masonry, while restraining in and out movement. Crimp functions as a cavity drip.
- Projecting eyes are factory welded to accommodate different thicknesses of insulation\*.
- Special design of pintle serves to mechanically secure insulation to the masonry backup
- Available mill galvanized, hot dip galvanized, or stainless steel.
- Reinforcing for interior wythe can be STANDARD WEIGHT (9 ga. x 9 ga.), EXTRA HEAVY (3/16" Side Rods x 9 ga. Cross Rods), or SUPER HEAVY DUTY (all 3/16"). Eyes and pintles are 3/16" dia. standard.

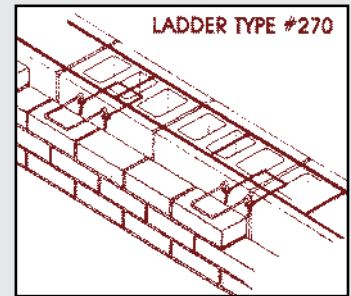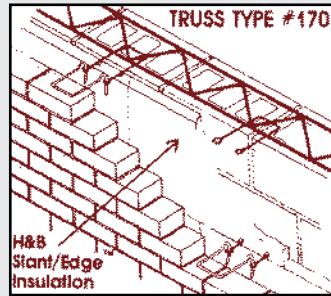

### Short Specification

Where horizontal mortar joints do not align in composite, cavity or insulated walls, or when interior wythe is to be constructed before exterior wythe, reinforcement shall be **Lox-All® Adjustable Eye-Wire**, (truss or ladder type) as manufactured by HOHMANN & BARNARD, INC., Hauppauge, NY, or

approved equal.

\* When ordering Hohmann & Barnard Eye-Wire, state the block width, cavity size, thickness of insulation (if any), and brick width. Eyes are welded 16" o.c. H & B recommends Type 304 Stainless Steel for maximum protection against corrosion

## CORRUGATED GRIPSTAY ANCHOR


### 364 Corrugated Gripstay Anchor

- Mill Galv./Hot Dip Galv./ Stainless Steel.
  - 1-1/4" wide x 16 ga., 14 ga., or 12 ga. thick.
  - Available in any length (length taken from face of channel).
- Gripstay Head fits any style H&B Gripstay Channel (tying masonry to steel columns, concrete, or existing walls).




## WALL TIES

- Standard size 7/8" x 7".
- Galvanized.
- Corrugated for greater strength.
- Brick or block applications.

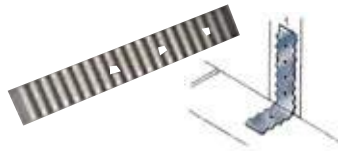

<b>GWT-7 16 ga.</b>	7" x 7/8"	<b>GWT-7 22 ga.</b>	7" x 7/8"
<b>GWT-7 18 ga.</b>	7" x 7/8"	<b>GWT-7 28 ga.</b>	7" x 7/8"

## WELD-ON TIES

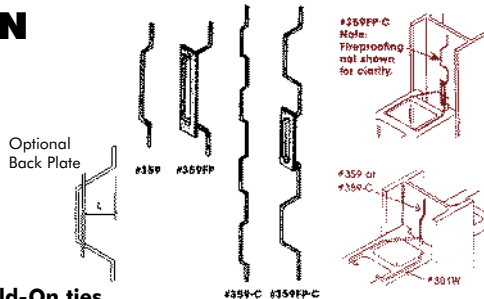

### 359 & 359-C Weld-On ties


- Mill Galv./Hot Dip Galv./ Stainless Steel.
  - 359 - 1/4" diameter x 9" long.
  - 359-C is a continuous 8 foot length with offsets 8" o.c.
- Use in conjunction with Vee Wall Tie VWT or Column Web Tie 301W. The systems anchor masonry to the structural frame allowing differential movement without any transfer of stresses.

### 359FP & 359FP-C Weld-On ties


- Plain/Hot Dip Galv./ Stainless Steel.
- 359FP - 3/8" diameter x 9" long.
- 359FP-C is a continuous 10' length of 3/8" diameter with offsets 16" o.c.
- Optional backplates (sold separately) restrain compressive loads.

For use when there is a requirement for spray-on fireproofing. Exaggerated offset dimension 'L' (specify when ordering) allows for protection beyond fire proofing for visibility and accessibility to the mason.

## GRIPSTAY CHANNELS



360 Gripstay Channel




362-C Gripstay Channel

Lok-Channel Clip

### 360 & 362-C Gripstay Channels

- Mill Galv./Hot Dip Galv./ Stainless Steel.
- Available 14 ga., 16 ga., or 11 ga. thick.
- Length of 360 is 7-1/2" (5-1/2" vertical adjustment).
- 362-C is a continuous Gripstay Channel. Standard length is 5' 0". Other lengths available in 7-1/2" increments.
- Lok-Channel Clips allow attachment to masonry (as shown).
- 360 & 362-C are welded structural steel and accept H&B Gripstay anchors for masonry or stone. 362-C can also be attached to a masonry backup using H&B's Lok Channel Clips and H&B's Expansion Bolts (as shown).

## OFFSET STRAP

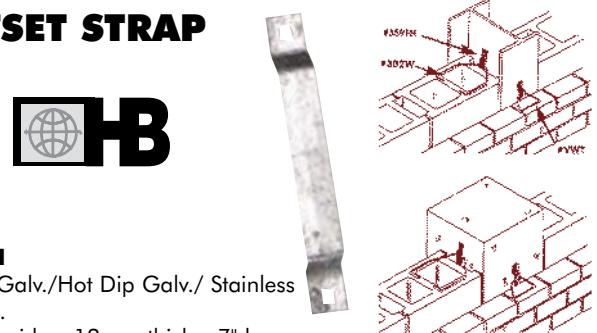

### 359FH

- Mill Galv./Hot Dip Galv./ Stainless Steel.
  - 3/4" wide x 12 ga. thick x 7" long, giving 4" of vertical adjustability.
  - May be welded onto steel as shown.
  - 1/4" holes provided for attachment to masonry.
- Use in conjunction with the Vee Wall Tie #VWT or Column Web Tie #302W. The system anchors masonry to the structural frame allowing differential movement.




# Masonry Products

## WALL TIES & ANCHORS



**CWT-Corrugated Wall Tie** for bonding masonry to masonry.

- Mill Galv./Hot Dip Galv./ Stainless Steel.
- Standard size is 7/8" wide x 7" long.
- Available in #22, #18 and #16 ga.
- Other widths, lengths and gauges available upon request.



**MWT-Mesh Wall Tie** for bonding intersecting masonry walls.



- Hot Dip Galv. wire.
- 1/2" square x 16 ga.
- Cut to any width or length required. Also available in 100ft. rolls.
- Stainless steel wire available upon special request.
- Conforms to ASTM A 185.

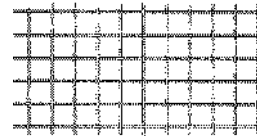

**301W-Column Web Tie**


- Mill Galv./Hot Dip Galv./ Stainless Steel.
- 3/16" or 1/4" diameter x 12" long.
- Standard widths: 2-3/8" (for 4" Block), 4" (for 6" Block), 6" (for 8" Block), 10" (for 12" Block), 12" (for 14" Block).

For use with #359 Weld-On Tie (anchoring masonry to structural column).



**302W-Column Web Tie**


- Same sizes and availability as #301 (see above).
- 1" Flat end for use with #395F Series Weld-On Straps (3/4" wide).



**303-Corrugated Dovetail Brick Tie / #305 Dovetail Slot**

- Mill Galv./Hot Dip Galv./ Stainless Steel.
- Standard #303 is 1" wide x 16 ga., 14 ga., or 12 ga. thick x 3-1/2" or 5-1/2" long. Other sizes available. #305 Slot available in 24, 22, 18, or 16 ga.
- Slots are standard 10 ft. lengths foam filled.



IMPORTANT: We are not responsible for incompatibility if ties or slots are interchanged with those of other manufacturers.



**315-Flexible Dovetail Brick Tie** permits horizontal & vertical movement of masonry wall while restraining the wall from moving laterally out of its plane.


- Mill Galv./Hot Dip Galv./ Stainless Steel.
- Dovetail end is 16 ga. or 12 ga. thick x 1" wide (state when ordering).
- Vee Wall Tie is 3/16" diameter x 3", 3-1/2", 4", 4-1/2", 5", 7", or 9" (other sizes available on request).

Dovetail head fits H&B #305 Anchor Slot. Compatibility with Dovetail Slots from other manufacturers is not guaranteed.




**344-Rigid Partition Anchor** for anchoring load bearing wall at intersections.

- Plain Steel/Hot Dip Galv./ Stainless Steel.
- Made to order from 1/8", 3/16, 1/4" or 3/8" bar stock. 1", 1-1/4", 1-1/2" or 2" wide by any length.
- Standard bends are 2". Other sizes available upon request.




**345-Corrugated Buck Anchor** for anchoring new masonry to concrete, structural steel, existing masonry or door bucks.

- Mill Galv./Hot Dip Galv./ Stainless Steel.
- Standard Sizes: 1-1/4", 1-1/2" or 2" wide: 16, 14, or 12 ga. thick; 2-1/2" to 8-1/2" long.
- Standard bend 1-1/2" long with 1/4" or 5/16" hole. Other sizes available upon request.




**345BT-Flexible Tie** for use with the Seismiclip® Interlock System (where reinforced masonry walls are required).

- Mill Galv./Hot Dip Galv./ Stainless Steel.
- Sheet steel is 3/4" wide x 12 ga. thick with 5/16" screw hole.
- Byna-Tie® is 3/16" diameter x 2-1/2", 3", 3-1/2", 4", 4-1/2" or 5".
- 1/4" diameter available on special request.



**VWT-Vee Wall Tie** for use with DW-10 Series Anchors (tying brick veneer to steel studs) or #359 Series Weld-On Ties (tying masonry to steel columns).

- Mill Galv./Hot Dip Galv./ Stainless Steel; 3/16" or 1/4" diameter wire.
- Sizes: 3" x 3", 3-1/2" x 3-1/2", 4" x 4", 4-1/2" x 4-1/2", 5" x 5", 7" x 7", 7" x 9".
- Other sizes available on special request.



# Masonry Products

## SEISMIC TIES & ANCHORS



DA213 Seismic Veneer Anchor Plate



DA213S Seismic Veneer Anchor Pintle



DA431 Seismic Veneer Anchor



DA519 Adjustable Seismic Wall Eye Plate

### DA213 Seismic Veneer Anchor Plate

Designed to anchor masonry to a structure accommodating rigid insulation up to 3 inches thick. Used with DA213S Seismic Pintle or DA213QT Lite Duty Seismic pintle.

### DA213S Seismic Veneer Anchor Pintle

Designed to anchor masonry to a structure accommodating rigid insulation, with provision for holding joint reinforcement in the veneer. Used with DA213 Plates, DA519 Seismic Adjustable Eye Plates, Seismic Dur-O- Eye or Seismic Ladur-Eye joint reinforcement.

### DA431 Seismic Veneer Anchor

Designed to anchor masonry to a structure when the air cavity is less than 1 inch (25mm).

### DA519 Adjustable Seismic Wall Eye Plate


Designed to tie multiwythe masonry walls, provide adjustment between wythes and allow for joint reinforcement in the veneer. Used with DA213 Seismic Pintle.

## VENEER ANCHORS FOR METAL STUD DRYWALL CONSTRUCTION



### DW-10-X

The DW-10-X anchor was designed to address the problem of possible long-term deterioration of insulation or wall board. The prolonged legs bridge the sheathing and about the metal stud, thus affording independent positive anchorage.

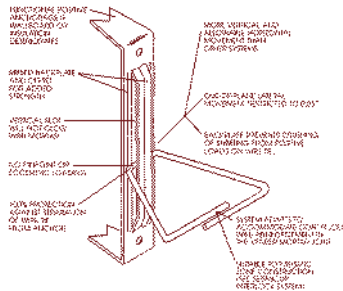

### DW-10®

### DW-10HS®

The DW-10 and DW10HS anchors have all the features of the DW-10-X, but without the prolonged leg design. They are primarily for use when there is no insulation and little potential for wallboard deterioration.



### Self-Drilling Self-tapping Screws

- Standard size #10-16 x 1-1/2" Hex Washer Head (suitable for 5/8" sheathing).
- Zinc plated, polymer coated, or Type 410 SS.
- Neoprene sealing washer available.


## TIE ASSEMBLIES

### Adjustable Veneer Tie Assemblies


Engineered to allow new brick veneers to be tied to existing masonry structures. They can be used for virtually any cavity wall combination, with or without insulation, or with composite walls. This system provides for the maximum long-term performance and reliability of the tie. Eliminates common problems associated with self-tapping anchors such as thread stripping, questionable clamping force or preload, performance sensitivity to the hole size, etc. Tie and plate are available in hot dipped galvanized and stainless steel finishes and packaged with the recommended brass anchor assembly.



5801 Series




5213 Series





5431 Series

## CONTROL JOINTS

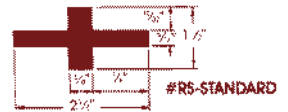

### RS Series - Rubber Control Joint

- Extruded rubber material designed for masonry walls at control joints.
- Rubber material conforms to ASTM D-2000 2AA-805 with durometer hardness of 80 (+ or -5) when tested in conformance with ASTM D-2240.
- Length per piece is 4 ft.



### NS - Closed Cell Neoprene Sponge

- Available in 1/4", 3/8" or 1/2" thickness (others also available).
- Standard width is 3". Other widths cut as required.
- Available with adhesive backing.
- Available with tear-strip upon special request.
- Conforms to ASTM D-1056 Grade 2A1.

For placing horizontally beneath relieving angle, or in the vertical expansion joint to act as a control joint. Also prevents clogging of expansion joint with mortar.

NOTE: also available, solid neoprene for bearing pad conditions.

## WALL BRACING SYSTEM



### Footlock™ Bracing System

You can specify blueprint placement. No tools required. Requires no additional footing support. Install or remove in a minute with one person. Great savings of valuable time, lumber, and space. Safety improvement at the work site.



**FT-1000** Foot Lock Brace  
**FT-2000** Foot Lock Hook




# Masonry Products

## CAVCLEAR® DRAINAGE SYSTEM

### CavClear® Air Space Maintenance and Drainage System

CavClear® Masonry Mat creates a completely clear cavity wall. No mortar bridging, no ventilation problems, no drainage concerns.

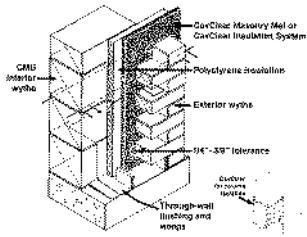



#### 8" x 96" Sheets

3/4" for air spaces 1" - 1-1/8"  
1" for air spaces 1-1/4" - 1-3/8"  
1-1/4" for air spaces ≥ 1"-1-1/2"

#### 16" x 96" Sheets

3/4" for air spaces 1" - 1-1/8"  
1" for air spaces 1-1/4" - 1-3/8"  
1-1/4" for air spaces ≥ 1"-1-1/2"

## MORTAR/GROUT SCREEN

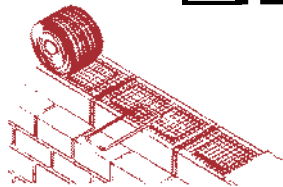

### MGS- Mortar/Grout Screen

- Isolates flow of grout in designated areas requiring reinforced concrete block
- Allows for greater bonding of masonry anchor in hollow block construction
- 1/4" square monofilament screen is fabricated from high strength, non corrosive polypropylene polymers
- Micro-thin material has high tensile and burst strength, yet will not interfere with mortar bond.
- Standard widths: 4", 6", 10" & 12" x 100ft. roll

## REBAR CAPS



### DU1000 Rebar Caps

Fits 3/8" to 1-1/4" Rebar. Reusable, Heavy-duty polyethylene is virtually indestructible. Impervious to weather and temperature extremes. Brightly colored for good visibility.



## IMPALEMENT PROTECTION



### DS0220339 Impalement Rebar Cap

Our Patented Suprotek PC-110 Meets Federal OSHA specification #1926.701(b). It contains a curved steel plate, which provides additional protection against falls that occur from an angle, preventing hazardous impalement.



## MORTAR NET™ DRAINAGE SYSTEM

Mortar Net™  
USA, LTD

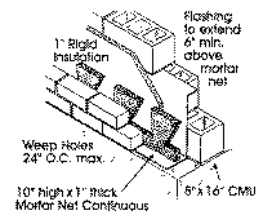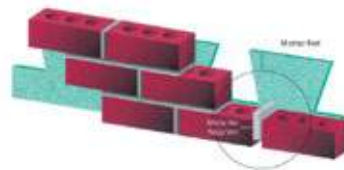

Mortar Net™ is the patented dovetail shaped material placed in the cavity of brick masonry walls.


Mortar Net is placed vertically on top of the flashing inside the wall cavity where it catches and permanently suspends mortar droppings above the level of the weep holes and flashing. Its patented dovetail shape prevents mortar droppings from forming a continuous dam. Its shape, combined with a 90 percent open weave construction, allows water and air to rapidly and easily move through the Mortar Net material to the weeps.

**Mortar Net Weep Vents** are placed between units in the weep course of a brick or block wall to keep weep holes open, preventing blockage by insects or debris. Available in six colors to match mortar: white, brown, tan, red, gray, almond (please specify).

Product #	Thickness	Height	Length	Pkg Qty
MN10-04	0.4"	10"	60"	250 lin ft
MN10-1	1.0"	10"	60"	100 lin ft
MN10-2	2.0"	10"	60"	100 lin ft

Also Available: Weep Vents 2.25" x 3.5" x 0.5" (specify color)

## REBAR POSITIONERS



### RB & RB-Twin Rebar Positioners

Positions rebar in center of block. Simple Z-shape wire bridges cell of block while bends rest on shell. Available for 6", 8" & 12" block. Available in Mill Galvanized or Hot Dip Galvanized 9 Ga. wire. RB-Twin has double loops to hold 4 rebars.

## BARRICADE TAPE



Non-pressure sensitive vinyl barricade ribbon. High visibility 3" wide. Variety of stock and special order legends available. Rolls are 3" x 1000' Available in Heavy Duty 4 Mil or Standard Grade (2 mil).

- RI1000 "Caution" Tape 4 mil.
- RI1002 "Caution" Tape Standard Grade
- RI2000 "Keep Out" Tape 4 mil.
- RI3000 "Danger" Tape 4 mil.
- RI4000 "Caution Wet Concrete" Tape 4 mil.

Harris Industries

# Masonry Products



## WEEP HOLES



### 341 Series - Round Plastic Weep Holes

Manufactured from Medium Density Polyethylene (white).


- 341 - 1/4" or 3/8" O.D. x 4" long.
- 341W - 3/8" O.D. x 4" long. Provided with cotton wick attached.
- 341S - 3/8" O.D. x 4" long. Provided with screen insert (brass or stainless steel).
- 341 W/S - 3/8" O.D. x 4" long. Provided with both wick and screen.

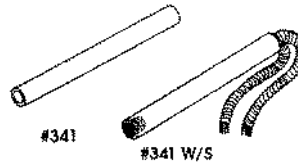

### 342 Series - Round Plastic Weep Holes

Manufactured from Clear Butyrate.


- 342 - 3/8" x 1-1/2" x 3-1/2" long.
- 342W - Provided with cotton wick attached.
- 342S - Provided with screen insert (brass or stainless steel).
- 342 W/S - Provided with both wick and screen.

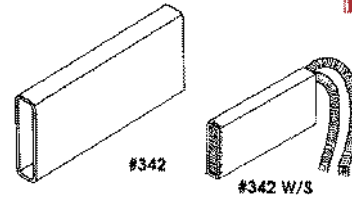

### 343 Louvered Weep Hole



#### 343W - Wilko™ Weep Hole

- Injection-molded flexible PVC (343)/Painted aluminum (343W).
- Configuration of louvers directs the passage of water from the cavity to outside the building, while preventing reverse passage of water.
- Design permits air passage into cavity, thus aiding pressure equalization and reducing suction which can cause water penetration.
- Rectangular closure strip prevents mortar droppings from clogging openings (343).
- Compressible flanges can accommodate joint widths of 1/2" - 3/4" (343).
- 343 available in gray only. 343W: Gray or White.



### QV - Quadro Vent™

- Quadro-Vent's honeycomb design allows passage of moisture from cavity to the buildings exterior while restricting ingress of insects and other debris.
- Quadro-Vents allows passage of moisture up to its 2-1/2" height, important in the event of mortar droppings at bottom of cavity.
- Polypropylene tested in conformance with ASTM D2240, D790B, D638 and D1238B.
- Available colors: Translucent, Grey, Brown, Cocoa and Almond.
- Standard size: 3/8" x 2-1/2" x 3-3/8" - Jumbo size 3/8" x 3-1/2" x 3-1/2". Other heights and widths available.

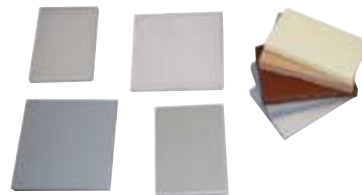

## COTTON ROPE



JC1000 3/8" - 10 lb. Coil

## BUCK BRACES

SINCLAIR INDUSTRIES, INC.




### Buck-Ups®

The Sinclair all-metal adjustable door buck brace that eliminates most of the labor and all of the material waste in setting metal door bucks and window sash.

- SAVES TIME-Instantly clamps in place without tools
- SAVES LABOR-Unskilled labor does fast, perfect job
- SAVES SPACE-Leaves clear work area for masons & other work
- NO WASTE-Buck-Ups go from job to job without waste
- ACCURATE-Holds bucks plumb without wobble or warp

**No. 480 Buck-Up** (for ceiling heights up to 15')

Universal joints allow fastening from any angle. Ceiling bracket is secured by externally threaded stud with standard 1/4"-20 nut.





# Masonry Products


## FLASHING

### Textroflash™ Flashing

Textroflash's strength, pliability, ease of use and self-sealing properties combine to make it a superior flashing product.

- 40 mil thick cross-laminated polyethylene rubberized asphalt.
- Adhesive-backed with removable release paper.
- Provides dual layered waterproofing protection.
- Resists tearing and slicing.
- Self-seals around shaft of fasteners.
- Laps easily formed on site.
- 12", 16", 18", 24", or 36" wide x 50ft.



Storage and installation instructions included with each package and also upon request.



### EPRA-MAX™ EPDM Thru-Wall Flashing



EPDM is a synthetic rubber that has been used extensively for decades in the roofing industry. Its durability under harsh, exposed roofing conditions renders it an ideal choice for use in more controlled applications, such as Thru-Wall Flashing.

- Superior tear and puncture resistance.
- Excellent elongation performance (500%), important when considering differential expansion and contraction.
- Not susceptible to decomposition due to UV or ozone exposure.
- Will not "drool" in high temperatures.
- High or low temperatures are not detrimental to EPDM performance.
- 40 mil thick x standard widths of 12", 16", 18", 20, 24", or 36".
- Stainless steel drip plate optional.

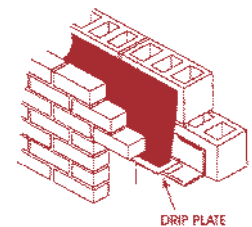

### MFL - Metal Flashing


- Available in type 304 stainless steel.
- Also available in copper and aluminum.
- Shown as relief angle flashing, also available as thru-wall and parapet flashing.
- Profiles, sizes and gauges to suit job conditions.
- Pre-formed drip edge allows efficient passage of water to outside of building.
- Shown with termination bar (see below for available styles).

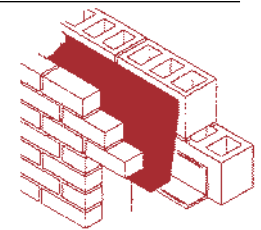

### T1 - Termination Bar

Used at top of flashing to mechanically secure it to backup.

- Type 304 stainless steel.
- 1/4" holes spaced 16" o.c.
- T1 is standard 1/8" x 1".



## COPPER FLASHING



### C-Kraft™ Duplex Thru-Wall Flashing

Low in cost, flexible and easy to handle. A full sheet of copper is combined under pressure with two sheets of creped kraft paper saturated in waterproofing asphalt. The heavy asphalt concentration in the layers of kraft paper, in addition to the asphalt bond between the copper and

paper layers, assures efficient waterproofing.

Sizes: Available in rolls of 60 lineal feet. Standard widths are 12", 16", 18", 24" & 36". Non-standard sizes and configurations are available by special order. Available 2, 3, 5, or 7 oz. per square foot.

## FLASHING TAPE



### 8067 All Weather Flashing Tape

A self-adhered, waterproof flashing membrane designed for sealing around openings and penetrations in exterior walls. This product has a unique acrylic pressure sensitive adhesive that aggressively sticks and stays stuck both at lower and higher application temperatures than traditional flashing tapes. It even adheres to damp surfaces. The proprietary backing seals around hand driven nails and staples to prevent moisture intrusion. This backing is also tough, resists punctures and tears, yet it is thin to fit conveniently into corners and under siding. Available in 4, 6, & 9 in. widths.



# Masonry Products

## AIR-SHIELD FLASHING



### SEALTIGHT® Air-Shield

An airtight waterproofing / vaporproofing membrane that is normally 40 mils thick, 67' long, and available in various different widths. It is fabricated from specially modified asphalt and cross-laminated polyethylene. AIR-SHIELD provides complete "above-grade" flashing and water, air and vapor barrier on concrete, masonry, gypsum board, and wood walls.



<b>MD4512</b>	12" x 75' roll
<b>MD4516</b>	16" x 75' roll
<b>MD4518</b>	18" x 75' roll
<b>MD4520</b>	20" x 75' roll
<b>MD4524</b>	24" x 75' roll

## CONCEALED WATERPROOFING



### WASCOSEAL®

A polyvinyl chloride carefully calendered to assure full weight and uniform thickness. Sheet weight and thickness inhibits puncture during installation or from building movement. The material will not be physically deformed when stretched at room temperature nor will it tear or rip. It will show no cracking or flaking when bent through 180 degrees over a 1/32" mandrel and if bent at the same point over the same size mandrel in the opposite direction through 360 degrees. The material is suitably stabilized to resist exposure without physical deterioration when tested in accordance with ASTM standards D-822 for a period of not less than 400 hours. **RECOMMENDED FOR CONCEALED APPLICATIONS ONLY.**

Sizes: Type 20, rolls 144' long, 48" and 72" wide. Types 20 and 30, rolls 100' long, 48" and 72" wide.

Type 60, rolls 50' long, 48" wide. Can be cut into multiple widths.



Type	Thickness	Avg. Weight
10	.010	1.1 oz./SF
20	.020	2.2 oz./SF
30	.030	3.3 oz./SF
60	.056	6.2 oz./SF

## AIR BARRIER

### TK-2102 Rubberized Air Barrier

Provides an effective barrier against air leakage and vapor diffusion and provides a water-resistive barrier in above-grade wall assemblies. Sprayed onto masonry, poured, precast walls or dens-glas along with a self-adhering air-barrier and flashing membrane around windows and doors and over control joint and pipe and conduit extrusions through the wall make up a comprehensive system to protect any exterior envelope.



**TK210255** 55 Gal. Drum Air Barrier



## WATERPROOFING MEMBRANES

### Mel-Rol® Self-Adhering Waterproofing System

A flexible, versatile, dependable, cost-effective, "peel and stick" protective, roll-type waterproofing membrane. It is ideal for waterproofing foundations, vertical wall and below-grade floors in residential and commercial construction.



**MD4000** 60' long by 38.5" wide roll



## AIR BARRIER

### TK-2103 Airmax Wb Rubberized Air Barrier

Water based above grade rubberized air barrier. A high performance rubberized polymer formulation. Its intended use is for commercial cavity walls to prevent air and water movement, saving energy and preventing damage caused by moisture condensation such as structural damage, mold and mildew.



**TK210355** 55 Gal. Drum Air Barrier

## POINTING MASTIC

### Sealtight® Pointing Mastic

A pre-mixed, cold-applied polymeric single component compound. Pointing Mastic was specifically designed for use with vapor and waterproofing membrane and detail strip products to seal all membrane terminations. It offers excellent cohesive and adhesive qualities to structural concrete, masonry, or wood.

**MD4200** 29 oz. cartridges



## AIRLESS SPRAYERS



**GH733**  
3500 psi,  
3.0 gpm

### Gas Powered Airless Sprayers

Handles the thickest coatings - from elastomerics to tough bonding adhesives to the widest range of aggressive coatings in the market today.



<b>GRAGH733</b>	Graco GH733 Pump w/ 2 Hoses & Heavy Duty Gun
<b>GRA238396</b>	3/8" x 50' Graco Pump Hose (Replacement)
<b>GRA239049</b>	8 oz. Bottle Throat Seal Liquid

*We have waterproofing product for every application. Call us for more information!*





# Masonry Products

## TK-290 TRI-SILOXANE

A solvent based, low viscosity oligomeric organosiloxane, one-component, deep penetrating, invisible, non-darkening water repellent for concrete and masonry. The siloxane groups are chemically bonded, not just physically bonded like other surface penetrating sealers, to the concrete. It eliminates the ever present moisture that had previously engulfed the cementitious substrate, thus eliminating spalling, freeze/thaw damage, and rebar corrosion. It penetrates up to 1/4 inch and becomes a permanent part of the substrate not allowing water to enter, but allows moisture vapor to pass out of the substrate.



<b>TKTRI01</b>	1 Gallon Container
<b>TKTRI05</b>	5 Gallon Container
<b>TKTRI55</b>	55 Gallon Container

## SOLVENT CLEANER

**TK-00** A solvent for cleaning sprayers that were used for spraying solvent based sealing compound, and tools. Also used for removing solvent based curing and sealing compounds.



<b>TK0001</b>	1 Gallon Container
<b>TK0005</b>	5 Gallon Container



## CLEANER DEGREASER

### SP757 Citrus Cleaner Degreaser

A heavy duty, multi-purpose cleaner and graffiti remover. Has pleasant citrus scent. Removes grimy dirt, grease and oil on walls, vinyl, formica, fiberglass, wood, ceramic tile and many plastics. Biodegradable. 20 oz. can (16 oz. net wt.)



## NITRILE DISPOSABLE GLOVES

### Powder Free Nitrile Gloves

Breakthrough 5.5 pH Technology! Made to match healthy skin's natural 5.5 pH levels to ensure the MOST comfortable fit yet! 100 Pc. Box.



<b>NEWA-GLV-L</b>	Nitrile Gloves - Large
<b>NEWA-GLV-XL</b>	Nitrile Gloves - X-Large



## RUBBER GLOVES



**VP7000 Sol-Vex Gloves**  
Unsupported, Premium-Quality, Nitrile. 11 mil, 13" embossed straight cuff glove.

**VP63B Black Rubber Gloves**  
Unlined Natural Rubber, Heavy Duty, 40-Mil Thick. 18" long. Rolled cuff.

## EXPANDING FOAM SEALANT

### PowerFoam

A single component, moisture curing expanding polyurethane foam. The adhesive strength of PowerFoam allows it to be set on various types of building elements including concrete, brick, wood, metal, aluminum and steel. The structure of the hardened foam provides excellent insulation against heat and noise. The foam has a R-5 equivalent value when used in place of traditional installation methods.



<b>RA08130N</b>	12 oz. Can Power-Foam w/ Straw Applicator
<b>RA08132N</b>	29 oz. Can Power-Foam w/ Straw Applicator

## FIRE BLOCK FOAM SEALANT



### TriggerFoam Pro™ Fire Block

A professional grade, gun applied, polyurethane foam sealant designed to effectively block the spread of smoke and flame in Type V residential construction. It is more cost effective than fiberglass and caulks used for this purpose. NOT A FIRESTOP. Adheres to wood, metal, masonry and concrete. Seals gaps and joints, insulates, stops air infiltration and saves time and money. Ideal for use around pipes, wires and ductwork.



<b>RA08133P</b>	29 oz. Can Trigger-Foam Pro Fireblock
<b>RA08128</b>	Deluxe Metal Gun For Trigger Foam

## SPRAY FOAM SEALANT KITS

### Handi-Foam®

#### Two-Component Foam

A chemically cured polyurethane foam system. Two-component foam systems consist of an "A" component and a "B" component. These two components mix in the nozzle of the patented Handi-Gun, and the resulting foam cures much more quickly than one-component foams.



<b>HANP10600</b>	II-12 Handi-Foam Spray Foam- Net Weight 1.76 lbs.
<b>HANP10700</b>	II-105 Handi-Foam Spray Foam- Net Weight 15.3 lbs.
<b>HANP10720</b>	II-205 Handi-Foam Spray Foam- Net Weight 29.9 lbs.

# Masonry Products

## MASONRY CLEANER

### Sure Klean® Vana Trol®

A masonry cleaner specially designed to safely clean sensitive brick and stone surfaces subject to vanadium, manganese and other metallic stains.

- Breaks up excess mortar and job dirt for easy rinsing away with fresh water.
- Designed for use with colored mortars.

<b>PSVAN1</b>	1 Gallon Container
<b>PSVAN5</b>	5 Gallon Container
<b>PSVAN55</b>	55 Gallon Container



PROSOCO  
SINCE 1939

## CITRUS CLEANER



### Citri-Clean

Environmentally safe, nontoxic. Dilute with water or use in concentrated form. Removes oil, grease, rubber marks and other contaminants. Also removes cures, sealers and cure/sealers.

<b>UNX60001</b>	1 Gallon Jug Citri-Clean Degreaser
<b>UNX60005</b>	5 Gallon Pail Citri-Clean Degreaser
Also available in 55 Gallon Containers	



## CONCRETE CLEANER

### Sure Klean® Heavy Duty Cleaner

General purpose acidic cleaner rids textured concrete of excess mortar, concrete splashes, heavy efflorescence, embedded stains, rust and more. Improves color depth and uniformity of standard and colored concrete.

<b>PS10090-01</b>	1 Gallon Container
<b>PS10090-05</b>	5 Gallon Container



PROSOCO  
SINCE 1939

## MURIATIC ACID

A heavy-duty concrete muriatic acid.  
Uses: etching and cleaning concrete.

<b>DO3000</b>	1 gallon container
---------------	--------------------



## LIME SOLVENT

### Sure Klean® 101 Lime Solvent

Concentrated acidic cleaner for dark-colored brick and tile surfaces not subject to metallic oxidation. Safely removes excess mortar and job dirt from new masonry. Safer and more effective than muriatic acid on colored mortar and dark-colored brick and tile.

<b>PS1011</b>	1 Gallon Container
<b>PS1015</b>	5 Gallon Container
<b>PS10155</b>	55 Gallon Container



PROSOCO  
SINCE 1939

## ICKEE STICKEE



### Ickee Stickee Unstuck Graffiti Remover

Ickee Stickee Unstuck removes graffiti fast and safely. safe and guaranteed to remove almost any permanent marker, inks, crayon, or spray paint from hard surfaces.

<b>FRAIC1GWD</b>	1 Gallon Jug
------------------	--------------



## EBC2 CLEANER



### EBC2 Exterior Building Cleaner

A blend of mild natural acids and super infusion surfactants. A concentrated cleaner ideal for cleaning building exteriors and removing cement film, lime residues, mortar residues, moss and algae, surface rust and environmental dirt. Suitable for use on all natural stones, polished surfaces, aluminum, stucco, fine stoneware, tiles,

high-alloyed steel, stainless steel, glass, plastic, ceramics and much more.

<b>FRAEK1GWD</b>	1 Gallon Jug
------------------	--------------



## DETERGENT

### Sure Klean® 600 Detergent

The world's no. 1-selling proprietary cleaner for new masonry, 600 Detergent quickly dissolves mortar smears and construction dirt, leaving bricks clean and color-uniform. Safer and more effective than muriatic acid for new masonry. No streaking, burning or etching.

<b>PS6001</b>	1 Gallon Container
<b>PS6005</b>	5 Gallon Container
<b>PS6055</b>	55 Gallon Container



PROSOCO  
SINCE 1939

## MANUFACTURED STONE CLEANER

PROSOCO  
SINCE 1939

### Sure Klean® Manufactured Stone Cleaner

Removes common construction and atmospheric staining from manufactured stone and other architectural concrete surfaces. This general-purpose, non-etching acidic cleaner removes mortar smears, rust, mud, atmospheric dirt and other stains without altering the surface texture.

<b>PS10050-01</b>	1 Gallon Jug Manufactured Stone Cleaner
-------------------	---



## CORROSION PROTECTION

### Fluid Film

Provides corrosion control, penetration, metal wetting and water displacement. Heavily corroded and/or frozen parts can be salvaged.



<b>FLU00107</b>	2.25 oz. Spray Can Of Fluid Film
<b>FLU00207</b>	11.75 oz. Spray Can Of Fluid Film
<b>FLU12207</b>	1 Gal. Can Of Fluid Film
<b>FLU12208</b>	5 Gal. Pail Of Fluid Film



# Masonry Products

## CONCRETE BUILDUP & SPLATTER REMOVER

### Blast-Off

Extremely effective at dissolving concrete buildup and splatter without damaging or corroding exposed steel, chrome, aluminum or electrical components. Produces a thick, rich foam that clings to vertical and overhead surfaces.



**NOXB010L** Nox-Crete 2.64 Gal. Box

**nox-crete**

## BLAST-OFF SPRAYER

### SP20C Sprayer

For Increased Effectiveness use this sprayer equipped With The Blast-Off Foaming Tip.



**NOX8007** Blast-Off Foaming Tip  
**NOX887** Conversion Kit For Foaming Tip To Chapin Sprayer

**nox-crete**

## TOOL PROTECTANT

### GatorSkin® Tool Protectant & Lubricant

Excellent for power screeds & troweling machines! Spray on surfaces to protect against spatter. Reduces concrete sticking for easy clean-up. Lubricates moving parts on hand tools, walking tools, and power tools.



**GF10900C** 24 oz Spray Bottle Gator Skin  
**GF10905C** 1 Gallon Gator Skin

**GATOR**

## POLY

### Plastic Sheeting

Thousands of uses!

- Equipment Cover
- Vapor Barrier
- Insulation
- Paint Protection
- Moisture Barrier



**Up North Plastics**

*More Sizes Available!  
Give us a call!*

<b>042002</b>	2 Mil - 4'2" x 200'	<b>201006</b>	6 Mil - 20' x 100'
<b>061004</b>	4 Mil - 6' x 100'	<b>201006B</b>	6 Mil - 20' x 100' Black
<b>061006</b>	6 Mil - 6' x 100'	<b>201008</b>	8 Mil - 20' x 100'
<b>081004</b>	4 Mil - 8' x 100'	<b>201010</b>	10 Mil - 20' x 100'
<b>081006</b>	6 Mil - 8' x 100'	<b>202001.5</b>	1.5 Mil - 20' x 200'
<b>082001.5</b>	1.5 Mil - 8'4" x 200'	<b>202002</b>	2 Mil - 20' x 200'
<b>094007</b>	.7 Mil - 9' x 400'	<b>241004</b>	4 Mil - 24' x 100'
<b>101004</b>	4 Mil - 10' x 100'	<b>241006</b>	6 Mil - 24' x 100'
<b>101006</b>	6 Mil - 10' x 100'	<b>281004</b>	4 Mil - 28' x 100'
<b>121004</b>	4 Mil - 12' x 100'	<b>281006</b>	6 Mil - 28' x 100'
<b>121006</b>	6 Mil - 12' x 100'	<b>321004</b>	4 Mil - 32' x 100'
<b>161004</b>	4 Mil - 16' x 100'	<b>321006</b>	6 Mil - 32' x 100'
<b>161006</b>	Mil - 16' x 100'	<b>401004</b>	4 Mil - 40' x 100'
<b>201004</b>	4 Mil - 20' x 100'	<b>401006</b>	6 Mil - 40' x 100'

## INDUSTRIAL WATER/ GARDEN HOSE

All Rubber Heavy-Duty Hose with Brass Fittings. Also available in 3/4" diameter and 25, 75, & 100 foot lengths.



**HS5001** 5/8" x 50' Hose

## HOSE WASHERS



**HSTVW7** Garden Hose Washer 3/4"  
**HSKRW25** Rubber Hose Washer 2"  
**HSKRW35** Rubber Hose Washer 3"

## HOSE MENDER



**HSDM6**  
**Steel Hose Mender 3/4"**  
Not for compressible products such as air, nitrogen or steam.

## INSULATED HOSE NOZZLE

**HSSN75** Heavy-duty brass valve and adjusting nut. Hold open clip locks any spray pattern. Handles hot water up to 180° F.



## MIXING PAIL



**KRGG468**  
**5 Gallon Plastic Bucket**  
Marked Liters, Quarts and Gallons Measurements on Side.

## PAIL



**FA1000**  
**5 Gallon Plastic Bucket**  
White plastic. Wide range of possible uses at any work site.

## CONTAINERS

**Rubbermaid**  
Commercial Products

### BRUTE® Round Containers

Durable, heavy-duty containers for a variety of uses. Built with its trademark durability and toughness, they feature the newest innovations to improve productivity and ease-of-use.



**RUB-FG264300GRAY** 44 Gal. Brute Container with out Lid  
**RUB-FG265500GRAY** 55 Gal. Brute Container with out Lid  
**RUB-FG264000BLA** SF Brute Dolly

## TILT TRUCK

**Rubbermaid**  
Commercial Products

### RUB-FG9T1400BLA 1/2 Cu. Yd. Tilt Truck

Fits through standard commercial doors and onto elevators easily. Non-marking casters reduce touch-up cleaning. Capacity 850 lbs.





# Masonry Products

## HAND BRUSH

This brush is ideal for general use. A brush with a lot of body to give you that extra long life.

**608** 8" Brush 2-1/2" Trim



## SCRUBS



### Plastic Block Floor, Deck or Wall Scrub

Our plastic block floor scrubs are made for where you need sanitary conditions. This block will not split, crack or warp. One threaded handle hole, 2" trim.

**687** Blue Polyester Fill. Specify 12" or 14"

## WASH BRUSH

Densely filled with x shaped nylon, this brush will carry a lot of water or solution. The fill is soft but has plenty of body to clean the heaviest dirt. Plastic block, foundation type, one threaded handle hole, one tapered handle hole can be used with fountain hole. Bumper can be added at a small cost. Just specify when ordering, add the letter "B" to the end of the number.

**1082** Green Fill - Specify 8" or 10"



## WIRE BRUSH

A favorite with painters and maintenance workers. 14" length will reach further and clean better. 4 rows of fill, 1-1/8" trim.

**1162-** Steel Wire with Scraper



## BARN BROOM



### LB592 16" Barn Broom - Orange

Heavy gauge plastic staple set in smooth sanded hardwood block. Durable long lasting plastic will outlast natural fiber. Will not absorb odors, mildew, rot or discolor. Will not absorb water and rinses clean. Wide flare on ends allows close sweeping to curbs.

## FLOOR SQUEEGEES



Our gray rubber squeegees are made of the highest quality materials. Includes hardwood handle.

**LB90724** 24" Curved Gray Rubber

**LB90736** 36" Curved Gray Rubber

**La Crosse  
Brush, Inc.**

## UTILITY BRUSHES



### Poli-block Utility or Fender Brushes

A low cost, high quality plastic block brush for all general cleaning. The block is moisture and bacteria proof.

- 633** Synthetic Fill - Specify 8" or 20"
- 634** Union Fiber Fill - Specify 8" or 20"
- 635** Tampico Fill - Specify 8" or 20"
- 636** Palmyra Replacement Fill - Specify 8" or 20"
- 637** White Polyester Fill - Specify 8" or 20"
- 638** X Shaped Nylon Fill - Specify 8" or 20"

### For Color Coded Plants or Where Color is Preferred

- 2637** Blue Polyester Fill - Specify 8" or 20"
- 3637** Red Polyester Fill - Specify 8" or 20"
- 5637** Green Polyester Fill - Specify 8" or 20"
- 2638** Blue X-shaped Nylon Fill - Specify 8" or 20"
- 3638** Red X-shaped Nylon Fill - Specify 8" or 20"
- 4638** Yellow X-shaped Nylon Fill - Specify 8" or 20"

## CEMENT COATER BRUSH



### LB561 Best Grade White Tampico

fiber staple set in clear lacquered hardwood block with 6-3/4" red handle attached. Block size: 6-1/2" L x 2" W. Length of Trim: 4".

## WHISK BRUSH



### LB885 10" Whisk Broom

Sewed two times, cad. plated ring cap. These are the best quality whisk brooms for home, automobile and office.

## CORN BROOM



### LB880 Corn Broom

Made of best quality selected broom corn and fibre. Sewed 4 times and reinforced with a wire band. Made on a heavy-duty handle. This broom was designed for sweeping smooth and rough surfaces.

# Masonry Products

## SHOVELS



### EAGLE® Series

Coated Hardwood handle for strength. Open back, tempered-steel blade.

- AS15545 Square Point Shovel**  
44" long wood handle
- AS15543 Round Point Shovel**  
44" long wood handle
- AS15544 Square Point Shovel**  
29" with "D" wood handle
- AS15546 Round Point Shovel**  
29" with "D" wood handle



## FIBERGLASS HANDLE SHOVELS



SRS700

SRS700D

SRS701

SRS701D



**Struction Brand 700 Series** shovels feature heat-treated, high carbon polished steel for ultimate durability. PowerCore™ solid fiberglass reinforcing rod extends 12.5 inches from the handle into the shank for maximum strength at this critical stress point.

- SRS700** Round Point 48" fiberglass long handle shovel
- SRS700D** Round Point 29" fiberglass handle with poly D grip
- SRS701** Square Point 48" fiberglass long handle shovel
- SRS701D** Square Point 29" fiberglass handle with poly D grip


## SHOVELS



### Blue Max Contractor Shovels

48" long wood handle. Texture coated blue blade keeps debris from sticking, prevents rust corrosion. Edge grind makes it easier to dig in harder soils and materials. Two rivets in 11" socket keep handle securely attached, redistributes load to stronger steel socket-not the handle. Industrial gauge FTS.

- ASBMDLR** Round Point Blue Max Shovel
- ASBMDLRS** Square Point Blue Max Shovel

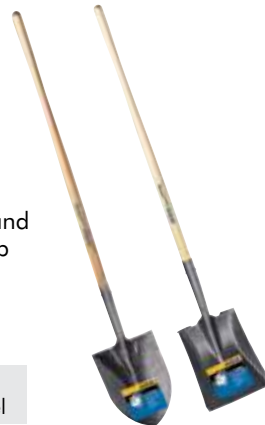

## SHOVELS



### Kraft Shovels

48" Long Fiberglass Handle. 14 Gauge tempered steel blade for strength.

- KRGG861F** Square Point Kraft Shovel
- KRGG864F** Round Point Kraft Shovel



## SHOVELS



### Razor-Back Contractor Shovels

Strength and durability make Razor-Back tools the choice of professionals. 48-inch sturdy, stained North American ash handle for long life. Industrial gauge open-back blade. Rolled-step helps prevent material build-up. Dual rivet, extended tab socket for added strength.

- AS45520** Round Point Razor-Back Shovel
- AS44101** Square Point Razor-Back Shovel



## SHOVELS



### J-350 Series Blue Max Shovels

14-gauge industrial strength blade. 48-inch North American ash handle. For professionals who expect high-quality features and durability.

- ASBMDLR** LHRP Blue Max Shovel(J-350 series)
- ASBMDLS** LHSP Blue Max Shovel(J-350 series)



## DRAIN SPADE



### 15609 Jackson 14" Drain Spade

14" drain spade with 29" wood/steel "D" handle. Forward-turned step.



## SHOVELS

Wood handle.  
Forward-turned step.



- AS15602** Round Point 48" long handle
- AS15605** Square Point 48" wood handle
- AS15606** Square Point 30" "D" handle



# Masonry Products

## CONTRACTOR WHEELBARROW



**BRENTWOOD INDUSTRIES®**

### BW6S

#### 6 cu. ft. Wheelbarrow

Professional grade wheelbarrows are built for masonry, concrete construction, demolition, rough job sites. Lacquered hardwood handles. UV-resistant .275" thick HDPE pan. Wheels with heavy-duty ball bearings and grease fitting. Cushioned grip handles.

## CONTRACTOR WHEELBARROWS



### Heavy Duty Contractor Wheelbarrows

Outlasts and outperforms all other brands on the job. Special deep, narrow tray design plus far forward position on undercarriage mean easier lifting, transport and discharge. Carry heavier loads with less effort.



**ST530-16-42DB** Metal Tub with Air Tire  
**ST530-16-42DB-FF** Metal Tub with Flat Free Tire  
**STDWB-530-42** Metal Tub with Dual Air Tires

## MORTAR BOX



### Steel Mortar Box

Made of heavy-duty 16 gauge steel. Smooth interior makes mixing easier.

**BC-206** 50" x 29" x 12" (6 Cu. Ft.)  
**BC-209** 60" x 32" x 12" (9 Cu. Ft.)  
**BC-215** 78" x 38" x 12" (15 Cu. Ft.)

## MORTAR BOX



### BC210 Steel Mortar Box

10 cu. Ft. Made of 10 gauge heavy-duty steel. 6" forklift clearance. Joints lapped with continuous welds for extra strength.

## MORTAR BOX



### Kraft BC-211 10 Cubic Feet Steel Mortar Box w/Casters

The Mud Dobber Mortar Box: Reinforced 1" steel handle and easy-turn heavy-duty 8" casters. steel mortar box is made of heavy-duty 16 gauge steel and leak proof.

## CONTRACTOR WHEELBARROW



Jackson® wheelbarrows are the professionals' choice for superior quality, value and performance.

Heavy duty steel or poly trays, professional grade steel undercarriages and strong hardwood handles add up to the toughest, most dependable wheelbarrows on the jobsite. Don't compromise, choose Jackson and get the job done.



**ASM6T22BB** 6 cu. ft. Steel Tub with Air Tire  
**ASM6TC** 6 cu. ft. Steel Tub "Total Control" with Air Tire  
**ASMP575T22BB** 5 3/4 cu. ft. Poly Tray  
**ASMP575W** 5 3/4 cu. ft. Poly Tray with 6" Wide Tire

## POWER BUGGY



### ALN058801 #AR16 16 Cu. Ft. Power Buggy with Foam Filled Tires

The AR16 has earned its rank as the standard by which all power buggies are judged. Its massive two-inch thick solid steel tank-tough frames provide unparalleled strength and durability along with a lower center of gravity and ideal weight distribution. Excellent traction in real-world job site conditions. Drive components are protected by a removable steel shroud. The standard high-strength, high-density polyethylene bucket is the industry's thickest and most durable. Engine: Honda™ GX390 (389 cc) Payload: 2,500 lb.



# Masonry Products

## CONCRETE BUCKETS

The Garbro Round-Gate or 'R' Series Concrete Bucket is 30% to 50% lighter than most standard steel buckets of the same capacity. The Double Clamshell 16 inch diameter gate featuring the patented Garbro venturi throat is non-jamming, grout tight, and self closing. A variety of attachments are available for all 'R' series buckets, including hoppers, side chutes, air-operated gate systems, and extension collars.

MODEL NO.	RATED CAPACITY CUBIC YARDS	LEVEL CAPACITY CUBIC FEET	OUTSIDE DIAMETER INCHES	LOADING HEIGHT INCHES	WEIGHT POUNDS
<b>410-R</b>	1/3	10.0	38	34	237
<b>413-R</b>	1/2	13.5	38	41	257
<b>420-R</b>	3/4	20.3	47	44	316
<b>427-R</b>	1	27.5	56	46	400
<b>440-R</b>	1-1/2	40.5	63	53	491
<b>454-R</b>	2	54	70	58	642
<b>483-R</b>	3	83	70	72	800



**GarBro**

## RUBBER ACCORDION HOPPERS

### 409-E

These hoppers confine concrete when pouring into narrow forms and prevent segregation due to free-fall. Fastened to the bucket gate, the hopper opens and closes with the gate itself to control spillage and ensure proper flow control. When grounded, it folds under the bucket without damage.



## MINI CONCRETE MIXER



### MQMC3PEA Mix-N-Go

3 Cu Ft Poly Tub Concrete Mixer with Stand 3/4HP Electric motor. Durable, versatile and ideal for users of all skill levels. Perfect for small footings, bases, patching.

- Use as a wheelbarrow or with a stand.
- Thick polyethylene drum - Resists rust and dents.
- Highly durable - Gears immersed in oil for long trouble free lift.



## CONCRETE MIXER



### MQMC94SH8

#### 9 Cu. Ft. Concrete Mixer with Honda GX240 Engine

The ultimate in heavy-duty concrete mixers. Powered by reliable Honda GX240 engine. Heavy-duty tubular steel frame with forklift pocket. Rugged 14 gauge steel engine cover resists vibration. Spring suspension standard for less bounce, sway. Powder coat paint with a durable long-lasting finish.



## MORTAR & PLASTER MIXERS



Crown has earned a reputation for building the most dependable and safest mortar mixers on the market today. Designed to increase your productivity and reduce routine maintenance, Crown mixers have all the features you

demand and the quality you expect. We back it up with a comprehensive warranty and unparalleled service at a price that makes Crown come out on top every time.

Bag Capacity: 6 Cu. Ft.=2-2-1/2 6 Cu. Ft.=2 1/2 - 3



**CRN609717M** 6 Cu. Ft. Mortar Mixer w/ 5.5 Hp Honda  
**CRN609917M** 8 Cu. Ft. Mortar Mixer w/ 9 Hp Honda

## POWER MIXER

### COL-X01 Professional Hand-Held Power Mixer

Optimum performance and perfect ergonomics. Easy to operate with a straight back and ergonomically shaped grip handles. State-of-the-art motor and gear unit components for long service and safety while working. 0 - 650 rpm.

**Collomix**



## MORTAR HOE



### BC228 Heavy-Duty Mortar Hoe

Has two holes for better mortar mixing. 66" shovel type wood handle. 6" x 10" Blade. Preferred by the pros.

# Masonry Products

## GROUT HOG™

### Grout-Hog™ Grout Delivery System

Finally, a grout delivery system that's simple, dependable and timesaving!

Designed by a mason for masons. Grout Hog will deliver materials such as sand, cement, and even 3/4" aggregate mixes. Can be operated with one man on scaffold and one man on forklift. Average unloading time: 4 Yards in less than 1/2 hour. Swivel allows 20' of wall grouting without moving forklift. Has fewer moving parts and is nearly impossible to plug, as opposed to grout pump. Can be used with any type of scaffold, from either side or opposite side of the wall. Hooks to auxiliary hydraulics on your fork lift. Grout can be easily controlled at point of discharge. Grout-hog costs about 1/3 the price of a small grout pump.

**GH-75 Hydraulic Powered Grout Hog** 3/4 cu. yard capacity  
Hooks to auxiliary hydraulics of fork lift

**GHP-75 Gas Powered Grout Hog** (now available with crane bail)  
Powered by 11 hp. Honda

Available for  
Sale or Rental!

Grout Hog  
Grout Delivery System  
for mason contractors



EZ Grout  
Corporation



GHP-75 with crane bail

## BOOGER HOG™

EZ Grout  
Corporation



### Masonry Wall Scrubber

Wall cleanup is quicker and easier. Weighs under 20 lbs. Save money on decreased puchout time with less labor. Keep more masons on the wall when one man and a Booger Hog™ can do the work of 4 to 5 men.

*If you don't see what your looking for, Call us- We'll find it for you!*

## UPHILL GROUT HOG™



All the features of the original and more: Extended discharge arm saves several feet of boom extension on your forklift. Decreased head height allows pouring up close to bar joist on interior walls. Makes grouting from the scaffold side of the wall easier. Will handle up to 1/2 inch aggregate with virtually no plugging. Removable auger and hopper tilt allows for 15 minute clean up.

## MUD HOG®



EZ Grout  
Corporation



### Mud Hog® MH20 Mixing Station

20 cu. ft. capacity. 13 hp Honda with electric start. Hydraulic drive and hydraulic dump. Load height: Minimum 36 inches. Dump Height: Maximum 56 inches. Fork lift pockets from any side. Fits standard 8 ft. truck bed. Use bag mixes or on-site mixing tower. Dumps directly into Grout Hog®. Complete with adjustable stand.

### Mud Hog® MH12

12 cu. ft. Mud Hog®! Triple Use: Mortar, Grout, and Concrete. Available with solid dust cover for pre-blended mix tower application. Adjustable legs provide stability on unlevel surface and keeps it out of the mud. The Most Durable, Best Designed mixer on the Market!



## HOG TROUGH™

EZ Grout  
Corporation



### EZHTP10 Poly Hog Trough

10 cu. ft. capacity. Virtually indestructible. Lightweight (60 lbs.). Easy to clean, non-stick surface.

## WALL BRACING SYSTEM

EZ Grout  
Corporation

### Hog Leg® Wall Bracing System

Designed by the requests of Mason Contractors that needed a safer way to brace masonry walls. The Hog Leg® is a safe, fully tested, and more efficient way to brace masonry walls for today's masons. Reduce the time it takes to brace masonry walls by 50%!!



**EZHL14** Hog Leg 14' Extension Kit  
**EZHL400** Hog Leg Engineered Bracing System

# Masonry Products

## TILE SAW

### TS 60 Tile Saw

Equipped with an innovative, patented Jet Stream Water Containment System that keeps water and slurry inside the water pan even while cutting. A stream of water is directed through a channel in the conveyor cart, cooling and lubricating the blade before it cuts the material and minimizing spray and slurry outside the frame of the saw. This keeps the area surrounding the saw free of water spray. The 16" x 26" conveyor cart supports larger tile and allows diagonal cuts up to 20" and rip cuts up to 28".



Stand included!

## TILE SAW

Available for Sale or Rental!



### Tilematic® TS 250 X3

The contractor's choice for production sawing and the chosen preference for the rental market, the Husqvarna Tilematic TS 250 X3 delivers more power with its high torque 1-1/2 hp motor. Rip cut up to 24" tiles or diagonally cut up to 18" tiles. Strength and durability are provided by the sliding water pan that is available in galvanized metal or stainless steel. Shown with optional rolling stand. Galvanized pan shown.



Stand not included

## TILE SAW

### Super Tilematic® TS 250 XL3

Built for the professional who performs high production sawing, the Husqvarna Super Tilematic TS 250 XL3 is designed to cut big tiles and to deliver the required cutting power. Rip cut a 34" tile in one pass or diagonally cut a 24" tile with optional cart. The sliding water pan allows instant adjustment from small to large material for unequaled productivity and convenience. Shown with optional stand and Cart Kit for 24" diagonal cuts. Galvanized pan shown.



Stand not included

## PORTABLE MASONRY SAW



### Portasaw® MS 355

The industry's best built, longest lasting portable masonry saw is now even better with standard carrying handles. The removable handles make the Husqvarna Portasaw MS 355 easy to carry and easy to store. The most reliable saw in the market is easy to set-up and transport.



Blade & Stand not included

Available for Sale or Rental!

<b>HUS07-966006501</b>	#TS355 14" Portasaw w/ 1-1/2 HP Motor
<b>HUS07-966006503</b>	#TS355 14" Portasaw w/ 2 HP Motor
<b>HUS07-034040</b>	Folding Stand for Portasaw

## MASONRY SAW



Electric Model



Blade not included

Gas Model



### Guardmatic® MS 510

This saw proves its value daily on the job, and many of them have been on the job for over 25 years. If you need a production masonry saw you can count on year after year, the reliable Husqvarna Guardmatic MS 510 is the saw for the job. Patented Sta-Level® Blade Guard. 2 Pivot Points. Available with 3, 5, or 7.5 electric motor or 9, or 11 hp Honda engine options.

## WORK LIGHT



### Wobble Light®

400 Watt Metal Halide. 36" Tall. A breakthrough in portable, industrial lighting. It is virtually indestructible. It has an impact-resistant body and counter-weighted hemispherical base, that quickly & automatically returns the light upright if knocked over.



<b>WOBL400MH</b>	400 Watt Wobble Light
<b>WOBD052197</b>	400 Watt Replacement Bulb
<b>WL52230</b>	Wobble Light Reflection Shield



# Masonry Products

## CUT-OFF SAW

### K 760 Cut-Off

14" 5 HP Cutoff Saw. A powerful all around power cutter with features that make it one of the best power cutters on the market. Equipped with the new generation Active Air Filtration™ that delivers up to one year's operation without a filter change and SmartCarb™, a built-in automatic filter compensation and a highly efficient vibration dampening system.



## CUT-OFF SAW

### K970

The new Husqvarna K 970 is our latest and most powerful handheld power cutter, featuring the revolutionary X-Torq® engine technology. It is a unique machine, in a class of its own when it comes to emission levels, efficiency and maneuverability.



Blade sold separately

**HUS06-966477101** K970 14" Gas Saw  
**HUS06-966477201** K970 16" Gas Saw

## CUT-OFF SAW

### K3000 Electric Saw

One of the world's most powerful and versatile electric saws. With it's powerful motor (2.5 hp), ergonomic design and deep cutting capacity, it's the best in its class. Cutting depth for 14" blade is 5".



**HUS06-968378401** K3000 14" Electric Saw - Wet

## CUT-OFF SAW

### K2500 16" Hydraulic Saw

Hydraulic Pressure is an excellent option, a smooth, efficient source of power. Not surprisingly, our hydraulic-powered cutters are remarkably light and easy to handle, robust and powerful. Equipped with a 16" blade.



## HYDRAULIC POWER PACK

### PARE968352401

#### HP40 MarkII Hydraulic Power Pack

Our gas-powered, hydraulic power pack are the first power pack to deliver three flow rates, enabling it to be used to power several types of hydraulic tools. Our hydraulic flow and pressure controller FC40 can turn a truck or a loader into the ideal on-site hydraulic power source. Hydraulic power cutters can provide the answer to most challenges!



## RING SAW

### K970 Gas Powered Ring Saw

First 14" gas powered saw with a 10" cutting depth. The Partner K970 Ring Saw also has the maneuverability and versatility of a gas-powered saw, giving you the best of both worlds.



Available for Sale or Rental!

## RING SAW

### K3600 MKII Hydraulic Ring Saw

A saw whose performance and features make it totally unique. The only hydraulic cutter in the world that is capable of a cutting depth of 10" with a 14" blade!



## RINGSAW BLADES



Fast cutting with depths up to 10". **ELR70 (Blue-Red)** For concrete block, green concrete, limestone, lava rock, slate rock, shale and sandstone. This blade is suitable for cutting through very abrasive, softer material and has excellent speed and life.

**ELR45 (Blue)** A general purpose blade for cutting wide range of material including concrete less than 6,000 psi tensile strength, lightly reinforced concrete, concrete pipes and other precast concrete.

**HUS01-531100708** ELR 70-Red 14" Ringblade for Block  
**HUS01-531108059** ELR 45-Blue 14" Ringblade for Cured Concrete

## ENGINE OIL



### Husqvarna 504067201 2 Cycle Oil

50:1 Ratio. A synthetic blend designed for power cutters and any other 2-cycle equipment used in tough dirty conditions. Lowers engine operating temperatures. Reduces smoke includes fuel stabilizer.



**HUS07-504067201** 6 Pack 2.6 oz. 2 Cycle Oil - Mix 1 to 1 gal. Gas  
**HUS07-504067301** 6 Pack 6.4 oz. 2 Cycle Oil - Mix 1 to 2 1/2 Gal Gas

## SAFETY GLASSES



### Virtua™ Safety Glasses

- So light, it's almost like it's not there. Less than 1 oz.
- Meets ANSI Z87.1-2003 standards for high impact.

**3M04-62103** Virtua Safety Glasses-Indoor/Outdoor Mirror Lens  
**3M04-62105** Virtua Safety Glasses-Clear Anti Fog Lens  
**3M04-62107** Virtua Safety Glasses-Gray Anti Fog Lens

# Masonry Products

## CUT-N-BREAK SAW

**HUS06-968388402**  
**K3000 Cut-n-break**

A completely new electric power cutter, featuring our unique Cut-n-Break method, which allows you to make cuts up to 400 mm deep, at a very low tool cost. Includes set of blades.



## CUT-N-BREAK SAW

**HUS06-966481901**  
**K650 Cut-n-Break**

Features an entirely new cutting method for cuts as deep as 16" at a very economical tooling cost. Has a wide range of applications. It eliminates overcutting on all types of openings requiring square corners. Precision openings for doors, windows, HVAC ductwork, pipes and more.



## CUT-N-BREAK BLADES



### Diamond Cut-n-Break Blades

**HUS01-543088823** EL35CnB Set of 2 Cut-n-Break Blades for Gas Saw  
**HUS01-576778401** EL10CnB Set of 2 Cut-n-Break Blades for Electric Saw

## SAFETY KITS

### New Hire Safety Kits

Kit contains Liberty White helmet (ANSI Z89.1), Boas Smoke or Clear eye protection (ANSI Z87), ERB corded reusable ear plugs and pair of work gloves. Good for temporary labor, carpenters and plumbers.



**ERB02-18531** 4 Pc. New Hire Kit w/Clear Safety Glasses  
**ERB02-18532** 4 Pc. New Hire Kit w/Smoke Safety Glasses

## SAFETY GLASSES



### AO Safety Virtua™

- So light, it's almost like it's not there. Less than 1 oz.
- Meets ANSI Z87.1-2003 standards for high impact.

**AOS11328** Virtua Safety Glasses - Indoor/Outdoor Mirror Lens  
**AOS11329** Virtua Safety Glasses - Clear Anti-Fog Lens  
**AOS11330** Virtua Safety Glasses - Gray Anti Fog Lens

## CONCRETE CHAIN SAW



### ICSE544107 695GC Utility Chain Saw

Everything that makes chain saws the preferable method in cutting concrete, stone, and masonry wrapped in a hungry, power filled package called the 695GC. Deep,

straight cuts and square corners with ease of use and dependable performance to match. Excellent for cutting concrete, stone, masonry or ductile iron pipe. Narrow deep cutting up to 16 in. 94 cc gas powered engine. Includes 14" Bar & 14" Standard Chain.

## CONCRETE CHAIN SAW



### 680GC Gas Powered Saw

The distinctive black powerhead houses redesigned carburetion and ignition systems that work together to ensure easy starting, cooler operation, and dependable performance at just about any elevation. Improved airflow design keeps the engine much cooler, extending its life. Available with 12" and 14" guidebars and the entire

line of TwinMAX™ diamond chain.

**ICSE525348** 680GC Gas Saw 12" Bar & 12" TwinMAX Chain  
**ICSB1271395** 12" Bar for 613 & 680 Saw  
**ICSB513122** 14" Bar for 613 & 680 Saw

## DIAMOND CHAINS

**Diamond Chain Technology™** is a revolution in concrete cutting. Diamond segments laser-welded to a steel chassis grind through concrete and other aggregate material, eliminating kickback and the damage that percussive methods can cause.



**ICSC2971400** 12" TwinMAX Chain For 680 & 613 Saws  
**ICSC3271486** 14" TwinMAX Chain For 633 & 680 Saws  
**ICSC71607** 16" TwinMAX Chain For 633 Saw  
**ICSC3271705** 14" TwinMAX Plus Chain For 633 & 680 Saws  
**ICSCRM525392** 14" RentMax Chain For 633 & 680 Saws  
**ICSC525342** 15" ProFORCE Chain For 880F4 Hydraulic Saw

## SAFETY GLASSES



### AO Safety Virtua V4 Safety Glasses

Extended viewing range in every direction without distracting sideshields or brow guard. Soft, universal fit nose bridge. High impact, polycarbonate lens. Wrap around lens. Meets ANSI Z87.1 safety standards.

**AOS11671** Virtua V4 Safety Glasses - Gray Hardcoat Lens  
**AOS11672** Virtua V4 Safety Glasses - Clear Anti-Fog Lens  
**AOS11674** Virtua V4 Safety Glasses - Indoor/Outdoor Mirror Lens



# Masonry Products

## CUT-OFF SAW

**STIHL**  
NUMBER ONE WORLDWIDE

Water Hookup Kit & Abrasive Wheel included.  
Diamond wheel (shown) sold separately.

**STLTS410-12**

**TS 410 STIHL Cutquik®**

Cut-off machine with a 12" cutting wheel. Featuring the X2 air filtration system and an anti-vibration system, this cut-off machine is comfortable to use and easy to maintain. Displacement: 4.07 cu. in. Engine Power: 4.4 bhp Weight: 20.7 lbs.



## CUT-OFF SAW

**STIHL**  
NUMBER ONE WORLDWIDE

Water Hookup Kit & Abrasive Wheel included.  
Diamond wheel (shown) sold separately.

**STLTS420-14**

**The TS 420 STIHL Cutquik®**

Cut-off machine — one of the best we've ever built. Helping you work longer and more comfortably, this cut-off machine comes with a 14" wheel, delivering a unique blend of performance and efficiency so you get the job done right. Displacement: 4.07 cu. in. Engine Power: 4.4 bhp. Weight 21.2 lbs.



## CUT-OFF SAW

**STIHL**  
NUMBER ONE WORLDWIDE

Water Hookup Kit & Abrasive Wheel included.  
Diamond wheel (shown) sold separately.

**STLTS700-14**

**14" STIHL Cutquik®**

Lightweight, well balanced and features a brand new 5 point, dual element vibration control system for exceptional operator comfort. Loaded with innovative features like the semi-automatic belt tensioner, the TS 700 is the right choice for demanding professionals. Displacement: 6.0 cu. in., Engine Power: 6.7 bhp. Weight: 25.6 lbs.



## CUT-OFF SAW

**STIHL**  
NUMBER ONE WORLDWIDE

Water Hookup Kit & Abrasive Wheel included.  
Diamond wheel (shown) sold separately.

**STLTS800-16**

**16" STIHL Cutquik®**

The most advanced STIHL Cutquik® ever produced. The TS 800 is well balanced and features a brand new 5 point, dual element vibration control system for exceptional operator comfort. The TS 800 is the right choice for professionals that need to make cuts up to 6" deep. Displacement: 6.0 cu. in., Engine Power: 6.7 bhp. Weight: 28.7 lbs.



## ENGINE OIL

**STIHL**  
NUMBER ONE WORLDWIDE

High Performance 2-Cycle Engine Oil  
Contains fuel stabilizers for long fuel life.

**STL0781-319-8008** 6 Pak 2.6 oz. Oil - Mix 1 to 1 gal. Gas  
**STL0781-319-8009** 6 Pak 6.4 oz. Oil - Mix 1 to 2-1/2 gal. Gas  
**STL0781-319-8010** 6 Pak 12.8 oz. Oil - Mix 1 to 5 gal. Gas



## SAFETY GLASSES

**STIHL**

**STL05-7010-884-0308**

**GSX Safety Glasses with Smoke Mirror Lens**

Adjustable temples allowing a customized fit and a soft nose pad that offers comfort that lasts all day. Polycarbonate glasses with impact-resistant lens provide 99% UV protection. Meet ANSI Z87+ Standard.



## SAFETY GLASSES

**Pacifix Safety Glasses**

An elliptical lens encapsulates the eye and helps provide additional protection. Polycarbonate glasses with impact-resistant lens provide 99% UV protection. Meet ANSI Z87+ Standard.



**STL05-7010-884-0310**

Pacifix Safety Glasses w/ Smoke Mirror Lens

**STL05-7010-884-0319**

Pacifix Safety Glasses w/ Sun Mirror Lens

## SAFETY GLASSES

**STIHL**

**STL05-7010-884-0324**

**Sleek Line Safety Glasses with Orange Lens**

Comfort, protection and durability. Polycarbonate glasses with impact-resistant lens provide 99% UV protection. Meet ANSI Z87+ Standard.



## EAR MUFFS

**STIHL**



**STL05-7010-884-0503**

Professional Hearing Protector, NRR-23

**STL05-0000-886-0402**

Hearing Protectors, NRR-25

**STL05-0000-884-0513**

Camouflage Hearing Protectors, NRR-25

**STL05-7010-884-0501**

Professional Hearing Protector w/ Radio

## EAR MUFFS

**JACKSON**

**JAC06-3015089 Vibe Headband Earmuffs**

Adjustable, soft padded headband that adjusts to fit all head shapes and sizes. Durable thermoplastic material retains its shape and pressure for consistent noise reduction. 26 NRR. For medium noise environments.



**JAC06-3015092 Vibe Capmount Earmuff**

Adjusts to fit all head shapes and sizes. Durable thermoplastic material retains its shape and pressure for consistent noise reduction. 25 NRR. For medium noise environments.



# Masonry Products

## FARRELL PREMIUM GREEN & GOLD BLADE

**High Speed Segmented Premium General Purpose Diamond Blade** For extra long life when cutting cured concrete, masonry, stone, concrete pilings with steel, culvert pipe with steel and brick pavers.



**HUS01-590531** 12" x .110 x 1" 20mm Premium  
**HUS01-590524** 14" x .110 x 1" 20mm Premium  
**HUS01-590618** 16" x .125 x 1" 20mm Premium

## GENERAL PURPOSE DIAMOND BLADE



### BB5 Brickbreaker Diamond Blade

A general purpose blade to cut a wide variety of materials on the first pass, such as medium brick and block. Total segment height is .400" (.300" diamond depth; .100" segment base).



**HUS01-542751371** 14" BB5 Brickbreaker Diamond Blade  
**HUS01-542751372** 20" BB5 Brickbreaker Diamond Blade

## GENERAL PURPOSE BLADES



### VH-5 Series

For general purpose cutting of cured concrete and brick. The total segment height is .400" diamond depth.



**HUS01-542774462** 12" VH-5 Dry Diamond Blade  
**HUS01-542774463** 14" VH-5 Dry Diamond Blade

## GENERAL PURPOSE DIAMOND BLADE



### BB8 Blockbreaker Diamond Blade

The BB8 Block breaker general purpose blade cuts abrasive block, soft brick and some concrete pavers. A crisp, smooth and chip-free edge is important for cutting abrasive materials.



**HUS01-542751719** 14" BB8 Blockbreaker Diamond Blade  
**HUS01-542751720** 20" BB8 Blockbreaker Diamond Blade

## GENERAL PURPOSE DIAMOND BLADE



### Husqvarna Barracuda™ Multi-Application Blades

Barracuda™ blade is for fast, smooth cutting on almost any masonry, tile, stone or hard concrete material. This blade is not recommended for abrasive materials like block and asphalt. The Barracuda™ has a total segment height of .350".




**HUS01-772182** 14" Dry Diamond Blade for Cured Concrete/Masonry

## GENERAL PURPOSE BLADES



### Husqvarna EH Series. General Purpose, Abrasive Materials, Asphalt Blades

EH5 is a general purpose blade used for cutting concrete, masonry and stone. The total segment height for the EH series is .450"

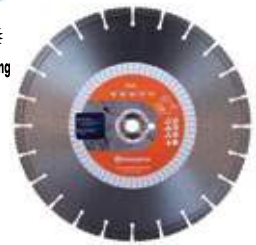

**HUS01-542778735** 14" EH-5 Cured Concrete Blade

## GENERAL PURPOSE DIAMOND BLADE



### XL-Turbo High Speed Blade

General purpose for FAST cutting in concrete and hard materials. Special core with air holes for keeping the blade cool while cutting at high speeds. Serrated turbo segments allow less surface to surface contact, increasing cutting speeds.



**DIA19312** 14" XL-Turbo Diamond Blade for Brick

## GENERAL PURPOSE BLADES



### Husqvarna HI Series General Purpose, Abrasive Material Blades

Used for fast cutting of a wide variety of materials on the first pass, such as cured concrete and brick. It is the only all-purpose diamond blade with aggressive notched segments which grab and grind material for a rapid first cut. The total segment height is .475"



**HUS01-542774540** 12" HI-5 Dry Blade for Cured Concrete / Brick  
**HUS01-542774541** 14" HI-5 Dry Blade for Cured Concrete / Brick

# Masonry Products


## GENERAL PURPOSE DIAMOND BLADE

**Star Blue Diamond Blade**  
General Purpose, Concrete with Minimal Rebar. .374 Diamond Depth. Our Most Economical Blade. Specification: H8B



**DIA14335** 14" Star Blue Masonry Blade for Brick / Block  
**DIA20651** 20" Star Blue Masonry Blade for Brick / Block

## DIAMOND BLADE



### Small Diameter Diamond Blade

Our most affordable segmented blade for fast cutting a wide variety of materials including concrete, masonry, brick and stone. Total segment height of this blade is .275" diamond depth.

**HUS01-FA4508CDUX22** 4-1/2" x .080 Dry Diamond Blade

## TILE SAW DIAMOND BLADES




### TM-7

Used for chip-free cutting of porcelain tile, granite, quarry tile and dense floor tile with a thin rim for precision cuts. The total rim height is .275".



**HUS01-542761281** 4" (100) x .060 x 7/8 - 5/8 B  
**HUS01-542761282** 7" (178) x .060 x 5/8  
**HUS01-542761283** 8" (203) x .060 x 5/8  
**HUS01-542761284** 10" (254) x .060 x 5/8

## TUCKPOINT BLADE



### Diamond Tuckpoint Blade

Quickly remove mortar between brick and block. The total segment height is .400".

**HUS01-FA4525CDPX2** 4-1/2" x .250 Dry Diamond Blade

## SMALL DIAMETER DIAMOND BLADES



### Barracuda™ Small Diameter Diamond Blades

For cutting almost any masonry, tile, stone or hard concrete material.



**HUS01-580002** 4-1/2" Barracuda Dry Diamond Blade  
**HUS01-580604** 7" Barracuda Dry Diamond Blade  
**HUS01-580083** 8" Barracuda Dry Diamond Blade

## SANDWICH BLADE



### Small Diameter Diamond Tuckpoint Blades

Features a double row of tuckpointing for aggressive mortar removal. A total segment height of .400".

**HUS01-542774614** 4.5" x .250 x 7/8-5/8 Sandwich Blade

## DIAMOND BLADES




### TSD-S Dri Disc Wet and Dry Cutting Diamond Blade

Target's most affordable segmented blade for cutting a wide variety of materials including concrete, masonry, brick and stone.



**HUS01-773039** 4-1/2" TSD-S Dry Diamond Blade  
**HUS01-773046** 7" TSD-S Dry Diamond Blade

## CRACK CHASER BLADE



### Bevel Diamond Tuckpoint (Crack Chaser) Blade

The 45° Bevel Tuckpoint blade is used for crack chasing and mortar removal between brick and block. A great multi-purpose blade for the restoration market. A total segment height of .525".

**HUS01-FASHM0401** 4" Crack Chaser Diamond Blade

# Masonry Products

## CUP WHEELS

UNITED  
ABRASIVES, INC.

SAIT



### A16 - Type 11


Aluminum oxide grain. Coarse grit wheel for tough grinding applications. Excellent for cleaning castings, mold marks, removing flashing. Max RPM 7,250 rpm.

**UA26013** for Metal - 5" Diameter, 2" Width, 5/8-11 Bore

**UA26014** for Concrete - 5" Diameter, 2" Width, 5/8-11 Bore

## WIRE BRUSHES & WHEELS

5/8-11 Arbor.



**UA03414** 2-3/4" Knotted Wire Cup Brush

**UA06513** 3-1/2" Crimped Wire Cup Brush

**UA03410** 6" Knotted Wire Cup Brush

**UA03426** 4" Knotted Wire Wheel

UNITED  
ABRASIVES, INC.

SAIT

## DIAMOND GRINDING DISCS

Husqvarna



Wet or Dry Cutting



**Single Row** for fast removal on concrete, masonry, stone and similar materials.



**Double Row** for long life and smooth finish on concrete, masonry, stone and similar materials.



**Turbo** for faster and smoother finish (segmented turbo) on concrete, masonry, stone and similar materials. For faster grinding with extended life.

**HUS04-FA04GDDDX1** 4" x 5/8-11 Double Row Diamond Disc

**HUS04-FA04HDDGDX2** 4" x 5/8-11 Turbo Diamond Disc

**HUS04-FA04HDDSX1** 4" x 5/8-11 Single Row Diamond Disc

**HUS04-FA07HDDDX1** 7" x 5/8-11 Double Row Diamond Disc

**HUS04-FA07HDDGDX2** 7" x 5/8-11 Turbo Diamond Disc

**HUS04-FA07GDDSX1** 7" x 5/8-11 Single Row Diamond Disc

## DUST CONTAINMENT SHROUD

### The DustBuddie Dust Containment Shroud

Fits most hand grinders including Makita, Bosch, Dewalt and more. It captures up to 99% of airborne particles for outstanding dust control.



**DTSD1835** 4" - 5" Dust Buddie w/ Universal Arbor & 18" Hose

**DTSD1850** 7" - 9" Dust Buddie w/ Universal Arbor & 18" Hose

## SCYTHE STONE



UNITED  
ABRASIVES, INC.

SAIT

**UA 120L Scythe Stone**

10" x 1-5/16" x 9/16"

## HAND/FLOOR RUBS

### Vitrified Bonded Abrasives

Removes form marks on concrete.



UNITED  
ABRASIVES, INC.



**Handle:** For extra comfort and working overhead.

**Fluted:** For extra shearing action.

**Plain:** For cleaning castings and dressing bench grinding wheels.

**UA25040** 6" x 3" x 1" Rubbing Stone w/ Handle

**UA25050** 8" x 3-1/2" x 1-1/2" Rubbing Stone w/ Handle

**UA25062** 8" x 2" x 2" Scored Rubbing Stone Fine Grit

**UA25030** 8" x 2" x 2" Fluted Rubbing Stone

## FLOOR SCRAPER

Ideal for after work clean up. Scraper blades are firm but flexible. Comes with heavy-duty 5' shovel type wood handle.

<b>CC-214</b>	14" Scraper
<b>CC-218</b>	18" Scraper
<b>CC-222</b>	22" Scraper
<b>CC-207</b>	14" Replacement blade
<b>CC-208</b>	18" Replacement blade
<b>CC-209</b>	22" Replacement blade



## FLOOR SCRAPER

### T-Handle Floor Scraper

Floor scraper has 7" blade that shaves all kinds of floor coverings on any type of floor. Also scrapes carpeting. All steel "T" handle is 54" long. Blades are replaceable.

<b>GG-393</b>	7" Scraper
<b>GG-394</b>	7" Replacement blade



## FLOOR SCRAPERS



All steel construction.

**KRFC506** 8" Floor Scraper w/ Adjustable Handle

**KRFC507** 3 Pc Pack 8" Replacement Blades for KRFC506

**KRFC520** Heavy Duty 5" Scraper w/ 15" Handle

**KRFC521** 10 Pc Pack 5" Replacement Blades for KRFC520






# Masonry Products

## SCAFFOLDING

Common Scaffolding Set-Ups & Accessories

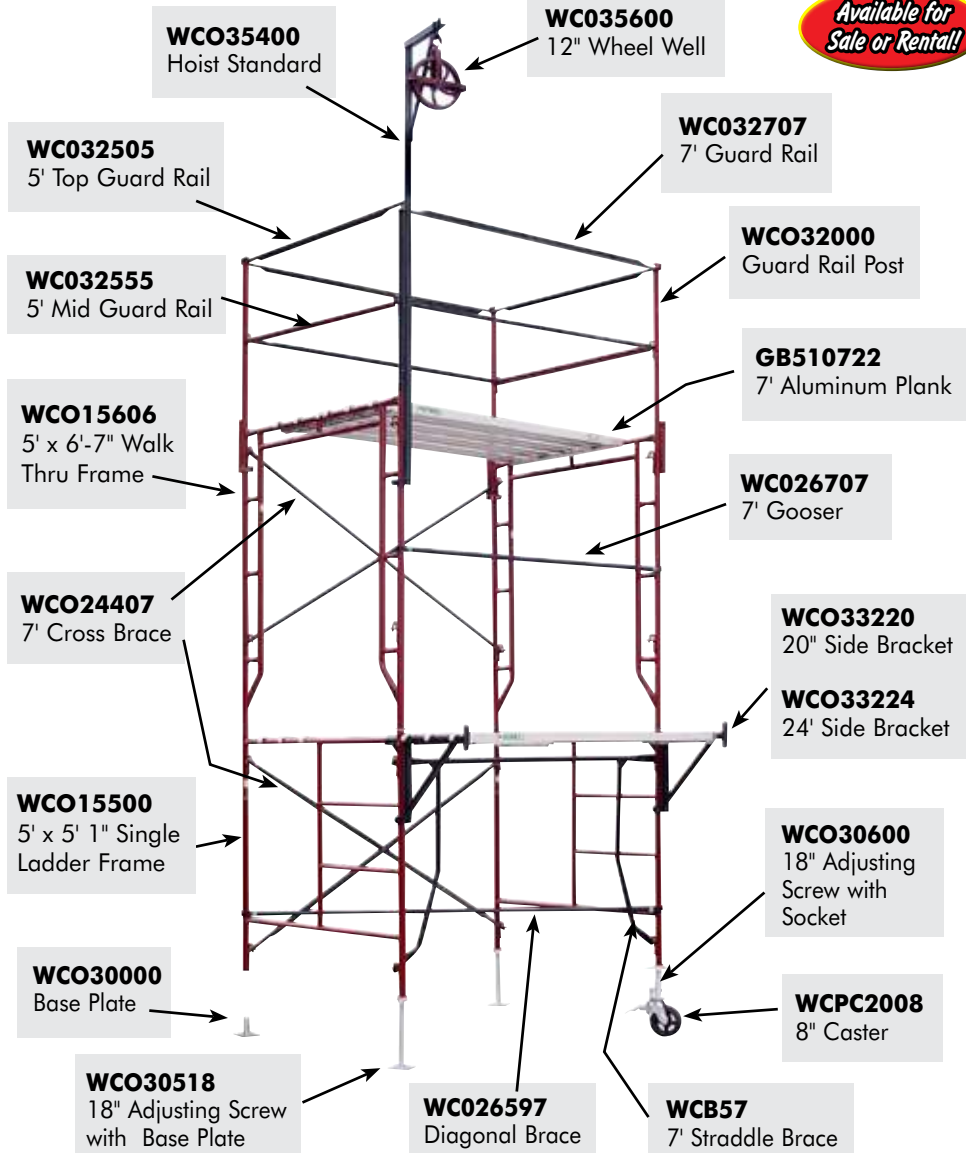

*Available for Sale or Rental!*

## SCAFFOLDING COMPONENTS



**WC020600**  
Spring Retainer



**WC020000**  
Toggle Pin




**WC195600**  
Gravity Lock



**WC042202**  
Dual Purpose Right Angle Clamp

## END FRAMES

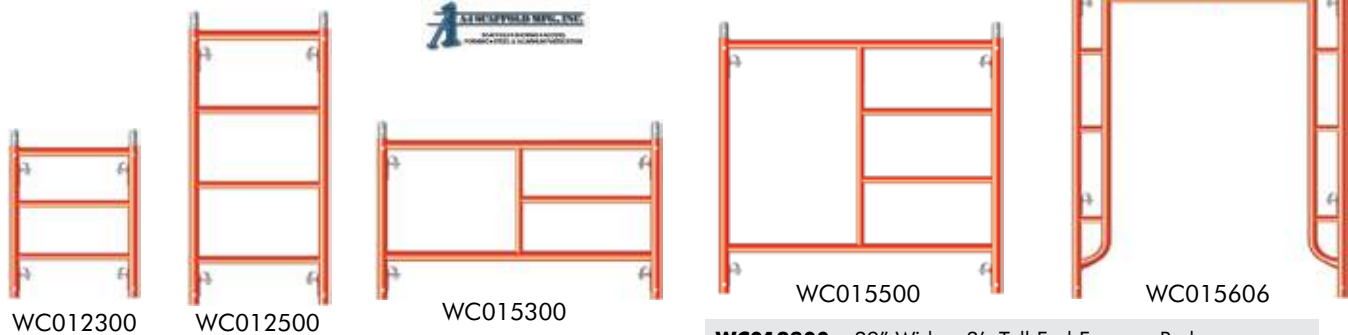


### "W" Red Series Scaffolding

- 1-5/8" Diameter Tube, Holes at 90°, S Locks
- Coupling Pins included with Spring Retainers

**WC012300** 29" Wide x 3' Tall End Frame - Red  
**WC012500** 29" Wide x 5' Tall End Frame - Red  
**WC015300** 5' Wide x 3' Tall End Frames  
**WC015500** 5' Wide x 5' Tall End Frames  
**WC015606** 5' Wide x 6'6" Tall Walk-Through End Frame


# Masonry Products

## CROSS BRACES

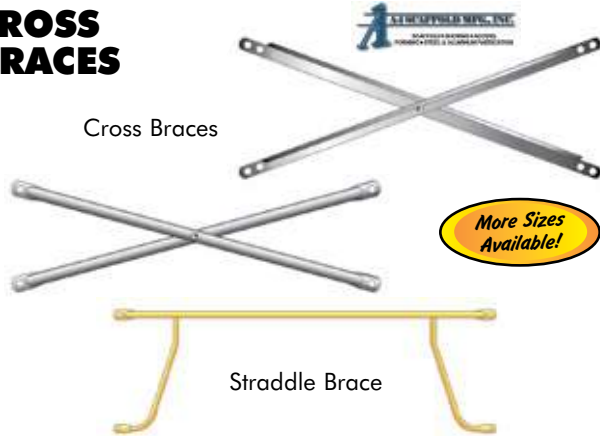

Part No	Description	Weight
<b>WC025307</b>	7' x 2' Cross Brace	11.50 lbs
<b>WC024407</b>	7' x 4' Cross Brace	12.25 lbs
<b>WC024410</b>	10' X 4' Cross Brace	16.50 lbs
<b>WCB57</b>	7' x 4' Straddle Brace	15.00 lbs
<b>WCB57</b>	7' x 4' Straddle Brace	15.00 lbs

## GUARD RAILS & GATES

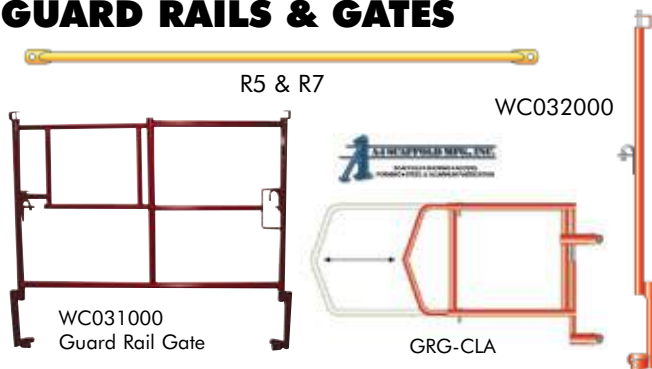


<b>R5</b>	5' Guard Rail
<b>R7</b>	7' Guard Rail
<b>WC031000</b>	Guard Rail Gate
<b>GRG-CLA</b>	Adjustable Guard Rail Gate
<b>WC032000</b>	Guard Rail Post
<b>WR-GRPC</b>	Guard Rail Post Corner Unit (not shown)
<b>WR-GRPTB</b>	Guard Rail Post w/Toeboard Clip (not shown)
<b>W-SBEG20</b>	20" Side Bracket End Guard (not shown)
<b>W-SBEG23</b>	23" Side Bracket End Guard (not shown)

## GOOSERS



<b>G3</b>	3' Gooser	6.0 lbs
<b>G5</b>	5' Gooser	9.5 lbs
<b>G7</b>	7' Gooser	12.0 lbs
<b>G10</b>	10' Gooser	19.0 lbs
<b>G10H</b>	10' Gooser (Heavy Duty)	20.0 lbs
<b>G75</b>	7' X 5' Gooser	13.0 lbs
<b>G105</b>	10 X 5 Gooser	20.0 lbs
<b>G105H</b>	10' X 5' Gooser (Heavy Duty)	21.0 lbs

## BASE PLATES & SCREW JACKS

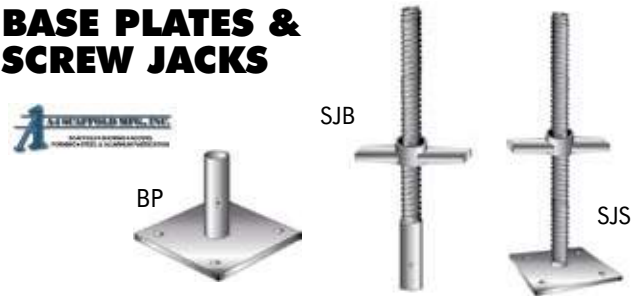

<b>BP</b>	Base Plate	2.0 lbs
<b>SJS</b>	Screw Jack W/ Socket	12.0 lbs
<b>SBJ</b>	Screw Jack W/ Base Plate Jr.	9.5 lbs
<b>SJSJ</b>	Screw Jack W/ Socket Jr.	9.5 lbs


## SCAFFOLD CASTERS



**WCPC2008** 8" Scaffold Caster



## SIDE & END BRACKETS

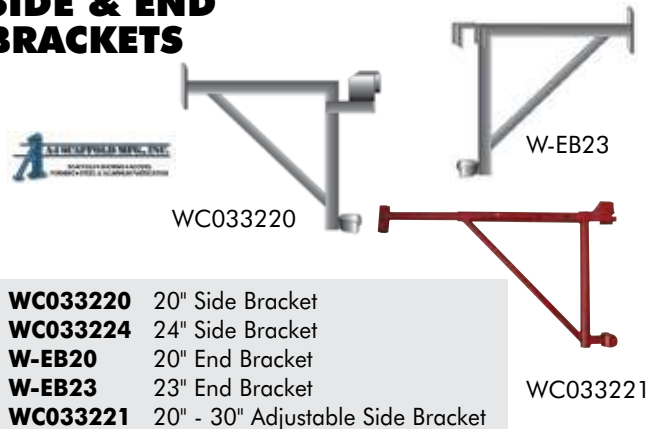


<b>WC033220</b>	20" Side Bracket
<b>WC033224</b>	24" Side Bracket
<b>W-EB20</b>	20" End Bracket
<b>W-EB23</b>	23" End Bracket
<b>WC033221</b>	20" - 30" Adjustable Side Bracket

## SCAFFOLD HOIST SYSTEM

Heavy-duty professional quality for years of use.

<b>WW</b>	Well Wheel
<b>HS</b>	Hoist Standard
<b>SA</b>	Swing Arm
<b>HSSA</b>	Hoist Standard w/ Swing Arm

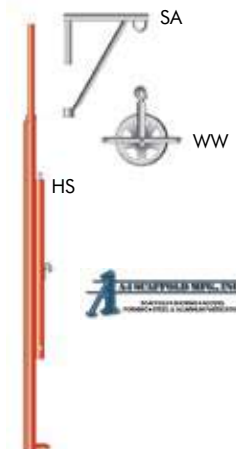

*Scaffolding is available for Sale or Rent - Give us a call for more information!*


# Masonry Products

## ALUMINUM PLANKS & RAIL SYSTEMS



These scaffold planks offer a 500 pound duty rating and allows for 2 people on one plank. The TWIST-PROOF® stage design is ideal for ladder jack applications, swing stages or catwalks. Individual slip-resistant decking minimizes paint or material build-up. Vinyl-coated end caps serve as hand grips and protect from sharp edges and surface marks.

- WER04-2316** 12" X 16' Aluminum Plank 2- Person 500 Lbs.
- WER04-2320** 12" X 20' Aluminum Plank 2- Person 500 Lbs.
- WER04-2324** 12" X 24' Aluminum Plank 2- Person 500 Lbs.
- WER04-2516** 20" X 16' Aluminum Plank 2- Person 500 Lbs.
- WER04-2520** 20" X 20' Aluminum Plank 2- Person 500 Lbs.

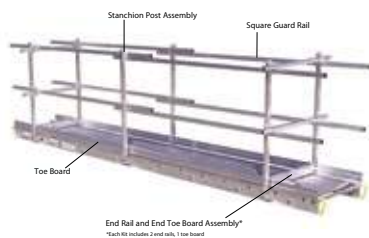

**Guard Rail System**  
Gives versatility to design a 1, 2, or 3-sided guardrail system. Select from end rail/toe board assemblies, stanchion posts, square guard rails and toe boards in 9' and 13' foot cut lengths.

## ALUMINUM SCAFFOLD BOARD



Heavy gauge heat-treated structural aluminum alloy. Hooks accommodate 1.66" and 2" O.D. pipe. Meets or Exceeds OSHA requirements. Weight Rating: 75lbs. per foot.

**GB510722** 7' x 19-1/4 Aluminum Plank

## LAMINATED PLANKS



**WC1016** 16 Foot Laminated Plank

## PLANK SAVERS

**Plank Tie** A simple method for protecting and saving your 10" and 12" wide scaffold planks from splitting. 100 to a box.



## SCAFFOLDING TIES

- 073-0005** 5" Scaffold Tie
- 073-0009** 9" Scaffold Tie



1000 per Box

## ALUMINUM EXTENSION PLANKS



Ideal for use on stepladders, telescoping multiladders, extension trestle ladders and extension and single straight ladders equipped with ladder jacks. Positive stops on the plank prevent overextending. Molded thermo-plastic spacer guides allow for easy open/close action. Made of 2" deep box section extrusions. 250 pound load capacity.

- WER04-PA208** 8' to 13' Aluminum Extension Plank
- WER04-PA210** 10' to 17' Aluminum Extension Plank

## LADDERS

*Farrell Has a Complete Line of Ladders in Stock!*



### Werner NXT1A Series Stepladders

Designed for professional contractors and industrial users. With a duty rating of 300 pounds, this series features HolsterTop®s with the Lock-In System to secure tools from falling while keeping them right at hand.



- WER01-6204** 4 Ft. Fiberglass Stepladder Type 1A
- WER01-6205** 5 Ft. Fiberglass Stepladder Type 1A
- WER01-6206** 6 Ft. Fiberglass Stepladder Type 1A
- WER01-6208** 8 Ft. Fiberglass Stepladder Type 1A
- WER01-6210** 10 Ft. Fiberglass Stepladder Type 1A
- WER01-6212** 12 Ft. Fiberglass Stepladder Type 1A

*Many more Ladder Styles and Sizes in Stock!*

### Werner Fiberglass Extension Ladders

Have non-conductive rails making these ladders ideal for working near electricity. With a duty rating of 300 pounds, this series is durable and long lasting. The exclusive ALFLO® rung joint means TWIST-PROOF® performance on the job.



- WER03-D6220-2** 20 Ft. Fiberglass Extension Ladder Type 1A
- WER03-D6224-2** 24 Ft. Fiberglass Extension Ladder Type 1A
- WER03-D6228-2** 28 Ft. Fiberglass Extension Ladder Type 1A
- WER03-D6232-2** 32 Ft. Fiberglass Extension Ladder Type 1A
- WER03-D6240-2** 40 Ft. Fiberglass Extension Ladder Type 1A




# Masonry Products

## HOOP CANOPY



Easily forms a protective work area with your existing scaffolding. Place on top of scaffold frame with poly sheeting for a dry comfortable jobsite.

**WC039218** Hoop  
**WC039219** Female Leg  
**WC039220** Male Leg

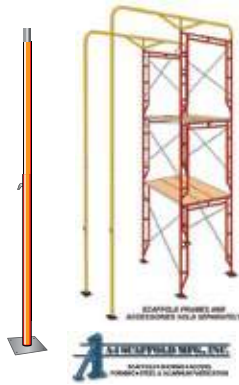

## MOBILE SCAFFOLDING




**SYSUAB-05**  
**Indoor/Outdoor**  
**Mobile Scaffolding**  
All-Purpose Unit

### RR4C Ready Roll 4' Compact Scaffold

4 ft. high unit rated at 400 lb. load capacity. Easy to use unit that folds for storage and handling.

## STAIRWAYS & ACCESSORIES

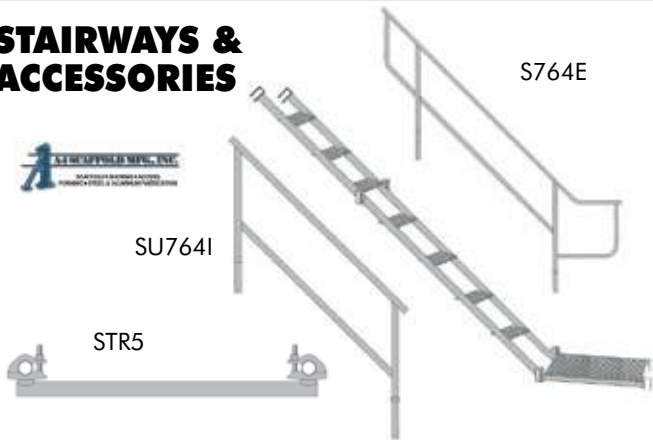

**SU64C** 7' x 6' 4" Stairway w/o Hand Rails  
**S764** 7' x 6' 6" Stairway w/ Hand Rails  
**SU764I** Interior Hand Rail  
**SU764E** Exterior Hand Rail  
**STR5** Starter Bar

## ELEVATING SCAFFOLD SYSTEM

Available for  
Sale or Rental!

**Non-Stop**  
SCAFFOLDING



### Non-Stop HEAVY-DUTY

is the most widely-copied elevating scaffolding on the market. Proven to be the most durable elevating scaffolding you can buy. Period. Every part carries a lifetime warranty and we'll be here to back it up. Will work as well on the 100th job as it did on the first. Guaranteed. An inertial safety catch protects your crew from a platform collapse in the event of a cable failure. It does not need to be engaged or reset and is unaffected by mortar and debris. Can be used on every job including cut-ups, radius walls and even sloping job sites. No special modifications or add-ons necessary.

## WIND CLIPS



**Wind Clips** work on any poly enclosure material! Full sized, 11" Plastic wind clips placed three feet apart will: Reduce labor with their easy snap on design. Hold poly securely to the scaffolding. Reduce noise caused by flapping poly. Fit most commercial scaffolding.

**WD1000** 100 pc. box of Wind Clips

## REINFORCED POLY

### Max Katz® Blue Stripe™ Reinforced Poly Film

A superior Heavy Duty Film that resists tears in ANY direction. Whenever you need an extra strong fabric to protect your work sites, materials, equipment, from rain, snow or wind this reinforced poly film is ideal.



**MK2012** 12' x 100'  
**MK2016** 16' x 100'  
**MK2020** 20' x 100'  
**MK2024** 24' x 100'  
**MK2032** 32' x 100'  
**MK2040** 40' x 100'

## SHORING POSTS



G-Style B-Style W-Style F-Style

**G-Style**  
**PS-1G** 5' 0" to 9' 0"  
**PS-2G** 6' 0" to 11' 0"  
**PS-3G** 8' 0" to 13' 0"  
**PS-4G** 10' 0" to 15' 0"  
**B-Style**  
**PS-1B** 5' 9" to 10' 3"  
**PS-2B** 6' 6" to 11' 0"  
**PS-3B** 8' 6" to 13' 0"  
**PS-4B** 10' 6" to 16' 0"  
**W-Style**  
**PS-2W** 6' 0" to 11' 0"  
**PS-3W** 8' 0" to 13' 0"  
**PS-4W** 10' 5" to 15' 6"  
**F-Style**  
**PS-1F** 5' 1" to 9' 0"  
**PS-2F** 6' 0" to 11' 0"  
**PS-3F** 8' 0" to 13' 0"  
**PS-4F** 10' 0" to 15' 0"

# Masonry Products

## PORTABLE FORCED AIR HEATERS

Additional Models Available!



### Tradesman Forced Air LP Heaters

Feature a unique 3-trial ignition system, the industry's heaviest gauge combustion chamber and burner plate, and Self Diagnostic Service Saver models for convenient troubleshooting. Designed to withstand the harsh environments.

<b>LBW-TRADESMAN100</b>	100,000 BTU LP Gas Heater w/Regulator
<b>LBW-TRADESMAN155</b>	155,000 BTU LP Gas Heater w/Regulator
<b>LBW-TRADESMAN170</b>	170,000 BTU LP Gas Heater w/Regulator
<b>LBW-TRADESMAN400</b>	400,000 BTU LP Gas Heater w/Regulator

## PORTABLE KEROSENE HEATER

Additional Models Available!



### LBW-TRADESMAN #K175

#### K175 Kerosene Heater 175,000 BTU with Thermostat

For those times when gas may not be available, L.B. White Tradesman K kerosene heaters offer the ultimate in efficient, portable construction heat.

## DUCTABLE UNIT HEATER

*Safe-Efficient Clean Heat!*



L.B. White's Premier series of ductable direct-fired heaters are perfect for small, hard to reach areas, as well as large construction applications that require directed heat. Delivers clean, worry-free heat or air circulation where you need it.



<b>WH170</b>	170,000 BTU Premier Heater
<b>WH26346</b>	12" x 12' Gray Duct For 170,000 BTU Heater
<b>WHTS350DF</b>	350,000 BTU Premier Heater LP / Natural
<b>WH22835</b>	18" Duct for 350 DF Premier Heater

## CONVECTION HEATER



*No Electricity Required!*

### WH341 Norseman 250 LP Gas Salamander Heater with Regulator

Ideal for new construction sites or situations where electrical power is not readily available, L.B. White convection heaters offer easy to use, highly efficient heat with no electricity needed.



## HEATING SYSTEM



### THAWZALL™ HEAT MACHINE is a total heating system on wheels!

An economical way to thaw frozen ground and keep your crews working year 'round. Efficient oil-fired boiler heats transfer fluid which is pumped through hydronic hoses. Completely portable.

Heat only the areas you want. Great source of safe & quiet heat at the construction site.

- Emergency Heat Source - can connect directly into down boiler heating system.
- Thaws up to 12 inches of frost per 24hr period.
- Safe- No open flame.



## PORTABLE CONSTRUCTION HEATER



### Gas Fired Industrial Heaters

Natural gas/propane, low pressure. 2 Position quick changeover valve. Full protective frame for stacking and handling.

<b>AIRRM1/1.5DFG</b>	1.5 Mill. BTU Direct Fired Heater w/ Regulator
<b>AIRRM400DFG</b>	400,000 BTU Direct Fired Heater w/ Regulator
<b>AIR1000</b>	1" X 50' Black LP 350# Gas Hose w/ Fittings
<b>AIR2000</b>	1" X 100' Black LP 350# Gas Hose w/ Fittings

## THERMOSTAT



### WH00831 In-Line Electric Thermostat



# Masonry Products


## VOLCANO ROD

HEALL16JX2B

### Electric Sand Pile Heater

Heats all day while you work, three ways:

1) heat from the ground below the sand pile moves up through the sand; 2) heat radiates from the water barrel in the center of sand pile; and 3) heat lost through the top forms a heated air shield between the whole top surface of the sand and the tarp. Measuring only 16" x 38" x 1" and weighing less than 5 pounds, it can fit behind the seat of a pickup truck.

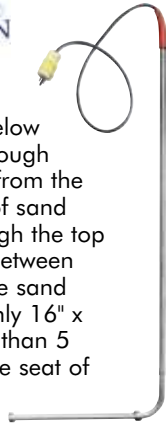

## ELECTRIC BARREL HEATERS

### The Powerblanket® Drum Warmer

With patented GreenHeat™ technology, protects product by maintaining desired temperature through an evenly heated area, thus reducing downtime. This keeps chemicals and other industrial materials within customer-defined temperature ranges, which means no overheating and burning of product.

**POWBH55-PRO** 55 Gallon Drum Blanket w/ Adjustable Temp  
**POWBH55-RR** 55 Gallon Drum Blanket



## ELECTRIC TOTE HEATERS

### POWTH275 Tote Heater

With patented GreenHeat™ technology, saves products by keeping it within safe temperature ranges. The flexible weather resistant tote heaters fit 275 gallon IBC totes and include an adjustable thermostatic controller.



## ELECTRIC CYLINDER HEATERS

### POWGCW100 Gas Cylinder Warmer

With patented GreenHeat™ technology, saves money by optimizing the gas temperature and increasing the vaporization rate.



## EXTRUDED POLYSTYRENE FOAM BOARDS

**CertiFoam®**  
Extruded Polystyrene Insulation

### CertiFoam® 15

Rigid extruded polystyrene insulation board suitable for residential and commercial applications where higher compressive resistance is not required. CertiFoam 15's closed-cell structure and extruded skins provide superior moisture resistance and excellent thermal performance. Meets or exceeds ASTM C578-95 Type X.

Machined square on all edges and pre-scored on 16" and 24" centers for flexible trimming on cavity wall applications.



**DV1010** 48" x 96" x 1" Sheets  
**DV1015** 48" x 96" x 1-1/2" Sheets  
**DV1020** 48" x 96" x 2" Sheets



## EXTRUDED POLYSTYRENE FOAM BOARDS

**CertiFoam®**  
Extruded Polystyrene Insulation

### CertiFoam® 25 SE and SL

Rigid extruded polystyrene foam boards suitable for most common residential, commercial, and roofing insulation applications. The closed-cell structure and extruded skins provide superior moisture resistance, high compressive strength, and excellent long term thermal performance. Both meet or exceed ASTM C578-95 Type IV.

**CertiFoam 25 SE** is machined square on all edges and pre-scored on 16" and 24" centers for flexible trimming on cavity wall applications.



**DV2010** 48" x 96" x 1" Sheets  
**DV2015** 48" x 96" x 1-1/2" Sheets  
**DV2020** 48" x 96" x 2" Sheets  
48" x 96" x 2-1/2" Sheets  
48" x 96" x 3" Sheets



## SET ACCELERATOR

### 98454 Non-Chloride Mortar Set Accelerator

A dry, white, powdered set accelerator packaged for use in pre-packaged mortar or concrete. It speeds up set times while increasing early compressive strength. Mortar Set Accelerator contains calcium, but no chlorides. 5.6oz. per bag or 5lb. water soluble bags.



## SET RETARDER

### Mortar Set Retarder

A white powdered set retarder packaged for use in pre-packaged mortar or concrete. It slows down set times without affecting compressive strength. It is ready for easy dosing; no premixing is required. 5.6oz. per bag.





# Masonry Products

## MORTAR COLOR



### Mortar Color

SGS Mortar Colors are provided in unique pre-weighed and measured amounts to assure the most accurate color consistency available. Since mortar makes up over 20% of the surface area of brick structures, make the most of it with the most trusted name in mortar coloring – Solomon Colors.

### X SERIES:

10X		40X	
20X		41X	
22X		44X	
25X		45X	
30X		50X	
32X		70X	
33X		80X	
35X		85X	
37X		94X	
		97X	

Due to shade variations associated with printing limitations, we suggest that you review samples for actual color.

## PCL SAND



### PCL Sand Mortar

A dry preblended mortar mix containing portland cement, hydrated lime and dried masonry sand formulated for superior bond, water retention and board life. Meets ASTM C 270 requirements.

<b>SPX101013</b>	80 LB Bag PCL Sand Mortar Type S
<b>SPX101212</b>	80 LB Bag PCL Sand Mortar Type N
<b>SPX101455</b>	3,000 LB Bag PCL Sand Mortar Type S

## SILICA SAND

### SPX200170


50 LB Bag  
40/30 Silica Sand  
Multi Use!



## SELF-FURRED MESH LATH

### STX0-002 Self-Furred Mesh Lath

3.4 lb. per sq. yard. 27" x 96" sheet



## CORE FILL GROUT



### Core Fill Grout

A dry, preblended mix containing cementitious materials and dried aggregates formulated for superior flow to fill masonry voids while meeting ASTM C 476 requirements for reinforced masonry construction.

### Common Spec Mix® Colors - Many More Available!



Due to shade variations associated with printing limitations, we suggest that you review samples for actual color.

<b>SPX106745</b>	80 LB Bag Corefill Grout 3,000 PSI
<b>SPX104768</b>	3,000 LB Bag Corefill Grout 3,000 PSI

## UNDERGROUND MORTAR



### Underground Utility Mortar

A dry preblended mortar mix containing Portland cement and hydrated lime, Masonry Cement or Mortar Cement and dried masonry sand formulated for superior bond and outstanding freeze-thaw resistance in all underground pre-cast concrete structure applications. This product meets ASTM C 270 and ASTM C 1714 requirements.

<b>SPX106516</b>	80 LB Bag Underground Utility Mortar
------------------	--------------------------------------

## PORTLAND CEMENT



### Type 1 Portland Cement

General purpose cement, for use when there are no extenuating conditions.

<b>SPX0854</b>	94 LB. Bag Portland Cement Type 1
----------------	-----------------------------------

## STONE VENEER MORTAR



### Stone Veneer Mortar

(Color P2310-Cedar)

A blend of dry cementitious materials and masonry sand specifically designed to provide superior bond for precast, lightweight masonry veneer units to base surfaces.


<b>SPX109454</b>	80 LB Bag Stone Veneer Type S
------------------	-------------------------------

*If you don't see it here, call us-- We will find it for you!*

# Masonry Products

## DECORATIVE CAST CONCRETE STONE

**TRILITE**

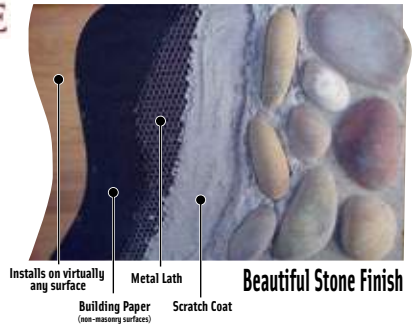

The elegance of stone may offer virtually unparalleled beauty to a home, room, or commercial building. TriLite Stone Company is committed to a manufacturing process that is superior to other systems because of our full-color integration — not just facial coating. We invite you to tour our selections and imagine the possibilities yourself.



**Weatherledge**  
wisconsin



**Mountain Ledgestone**  
sienna



**Mountain Ledgestone**  
chestnut w/ dressed fieldstone



**Mountain Ledgestone**  
bucks county



**Minnesota Limestone**  
bucks skin



**Minnesota Limestone**  
sedona



**River Rock**  
full color blend



**Hackett**  
ohio



**Stackstone**  
sante fe



**Fieldstone**  
western

*Many More Styles Available!*

Sill Stones



Keystones



Corner Quoins



Address Stones



Water  
Faucet Trim



Light Fixtures &  
Electrical Boxes



Hearthstones



Mantles

### ACCESSORIES:

Accessories are a critical component in providing the finishing touch to any stone application. TriLite offers a comprehensive line of accessory options for both exterior and interior projects. Please contact us for any questions or clarifications on style, application, or color.

### Farrell Equipment & Supply Co., Inc. - Trade Customs

The compilation and checking of a general catalog of supplies and machinery is complicated, involving many thousands of product numbers, dimensions, etc. and absolute perfection is not a commercial possibility. Every endeavor has been made to have the latest lists, dimensions, descriptions and designs throughout this catalog, but we do not guarantee accuracy. If any errors or misprints have escaped our checkers and printers, we are not responsible for them, and they are subject to our correction. All information contained in this catalog, pertaining to strengths and proper working loads of material, tools or machines is derived from information compiled by the manufacturers for the convenience of the buyer. We assume no responsibility for the accuracy of this information.

Manufacturers are constantly changing designs, specifications and accessories on many items and these are subject to change without notice. Illustrations are subject to modification.

All references in this catalog are for description only and are not representations or warranties of any kind or nature.

Copyright © 2015 by Farrell Equipment & Supply, Inc.



Printed in U.S.A. 2000-032315






## Other Available Farrell Catalogs:



Blade & Fastener Book




Decorative Concrete Book




Concrete Book



Erosion Control Book



Measuring & Marking Book




Road & Highway Book



Safety Book



Winter Jobsite Book



Rental Book



Rental Concrete Stamps



# FARRELL

## Equipment & Supply Co., Inc.

Visit us at any of our  
**6** Locations!

All our catalogs are  
available online!



**ROCHESTER**  
507-252-0234  
888-533-8909  
Fax: 507-252-0222  
1635 3rd Avenue S.E.  
Rochester, MN 55904

**EAU CLAIRE**  
715-835-4334  
800-533-0909  
Fax: 715-835-4356  
1510 N. Hastings Way  
Eau Claire, WI 54703

**WAUSAU**  
715-355-8300  
800-933-5939  
Fax: 715-298-1662  
7405 Commerce Drive  
Weston, WI 54476

**APPLETON**  
920-903-1985  
Fax: 920-903-8278  
1002 Truman Street  
Kimberly, WI 54136

**LA CROSSE**  
608-796-9300  
888-533-0909  
Fax: 608-796-9435  
508 Monitor Street  
La Crosse, WI 54603

**MADISON**  
608-222-5372  
888-533-7909  
Fax: 608-222-5405  
6809 Mangrove Lane  
Monona, WI 53713

For Your Convenience We Accept:



Copyright © 2015 by Farrell Equipment & Supply Co., Inc.

Find us online: **www.FarrellEquipment.com**

