


Measuring the Design Decisions of an Open-Source Post-Quantum HSM Chip

ML-KEM-512 NTT and Keccak, from a Python golden model to a SKY130 layout

Nguyen Tan Dat · University of Science, VNU-HCM (HCMUS) · IEEE SSCS Code-a-Chip, ISSCC 2027




What did each architectural decision made for the ASIC actually cost in area, latency and energy, what does the design still leak, and can anyone re-derive those numbers with open tools?

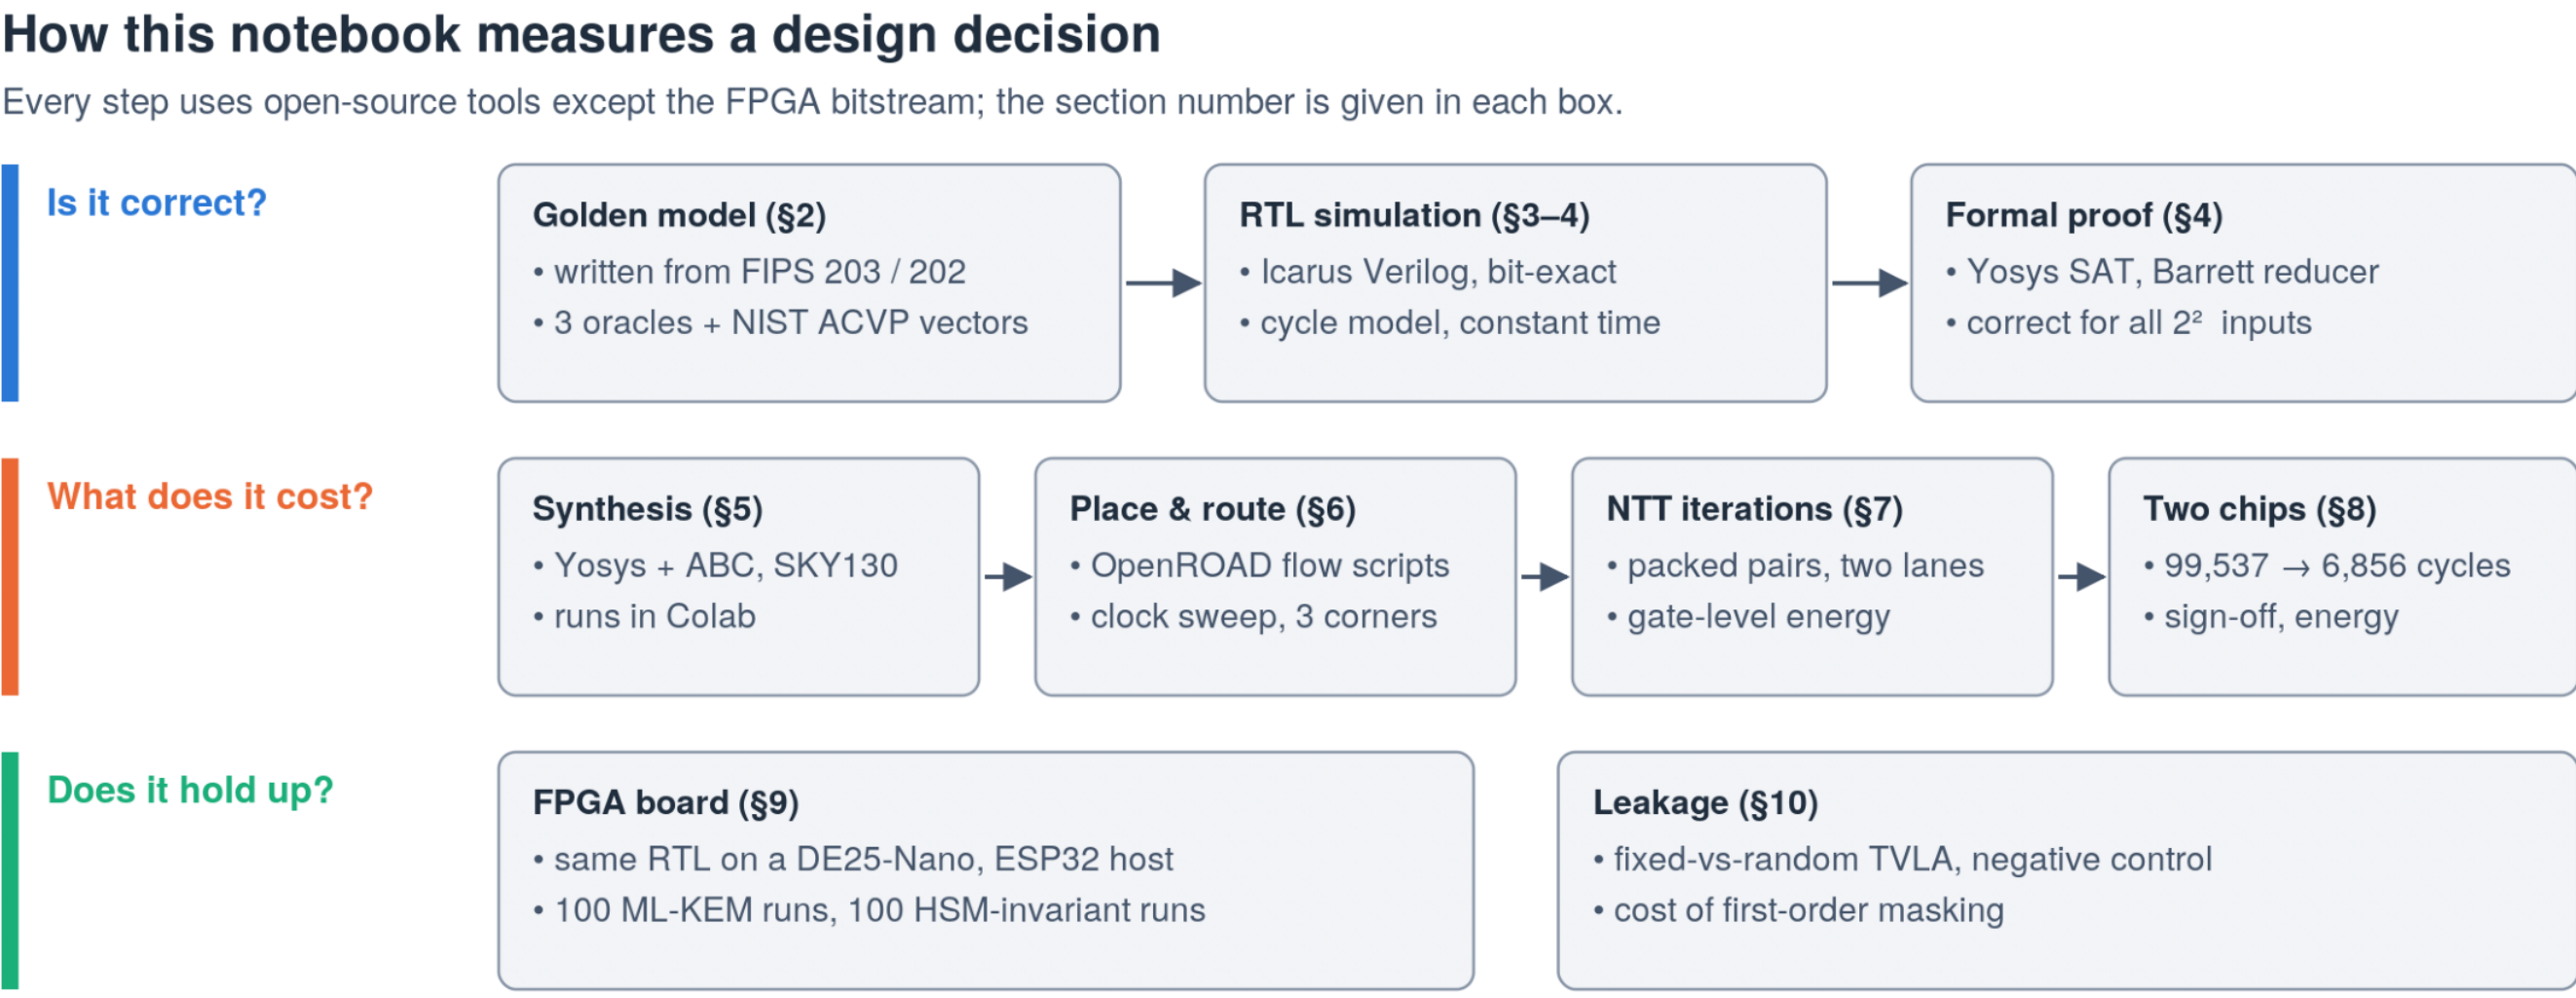

I. Is it correct?


- 25/25 NIST ACVP key generations reproduced byte for byte by the complete RTL
- 0 mismatches over 208,896 NTT coefficients and 404 Keccak permutations, at a constant latency
- The Barrett reducer is proven correct for all 2²⁴ inputs, and one subtraction suffices
- The routed netlists reproduce the golden results at gate level

II. What does it cost?

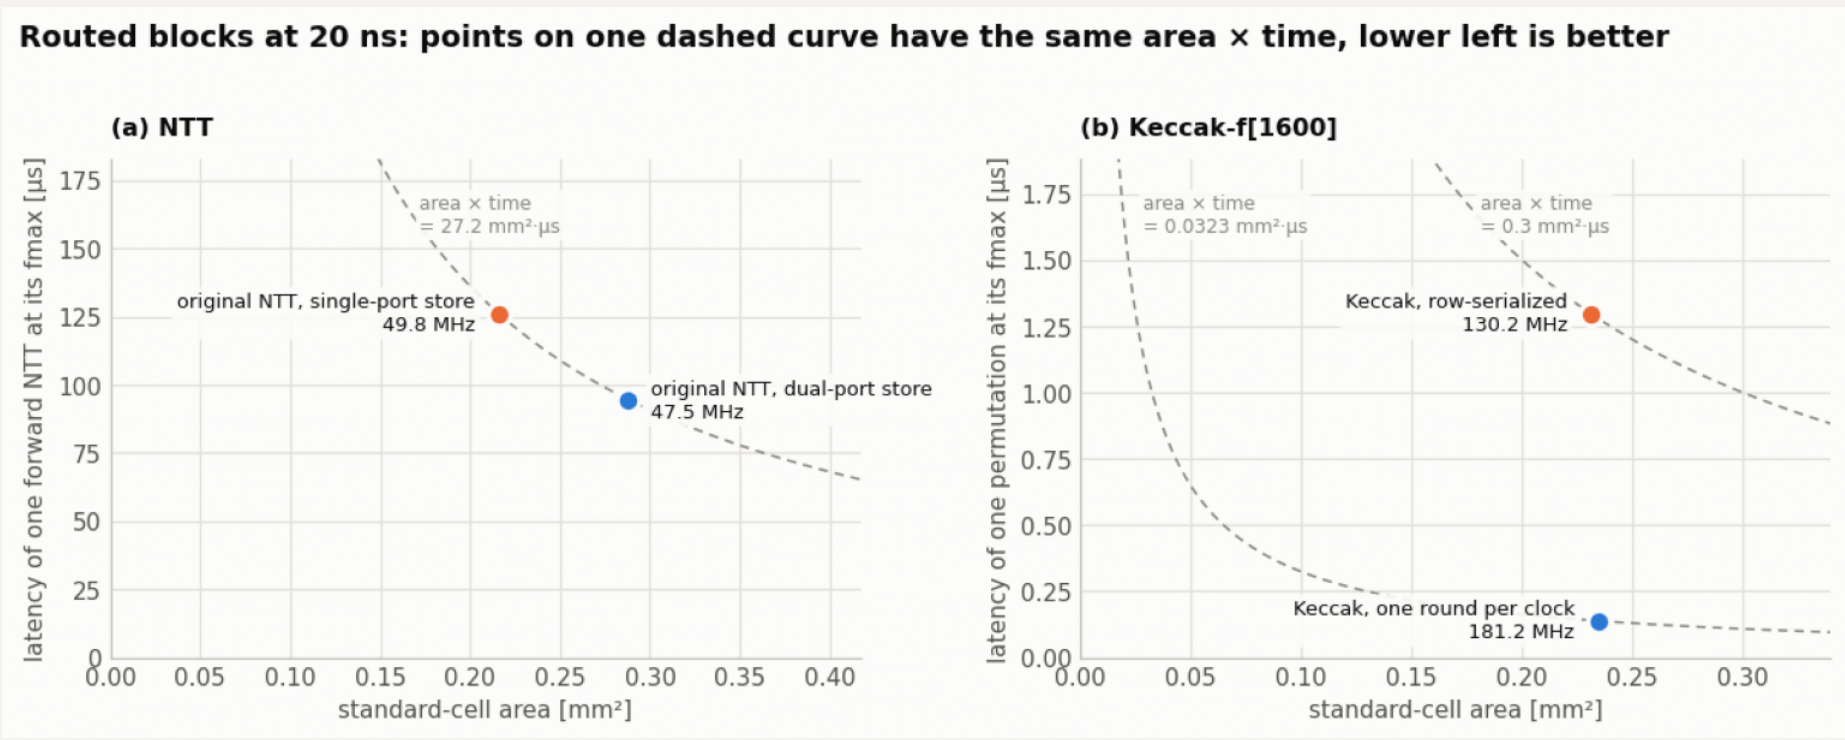


A first measured iteration of the NTT, after routing: fmax 50 → 83 MHz, area -21%, area × time -46%.


III. Does it hold up?

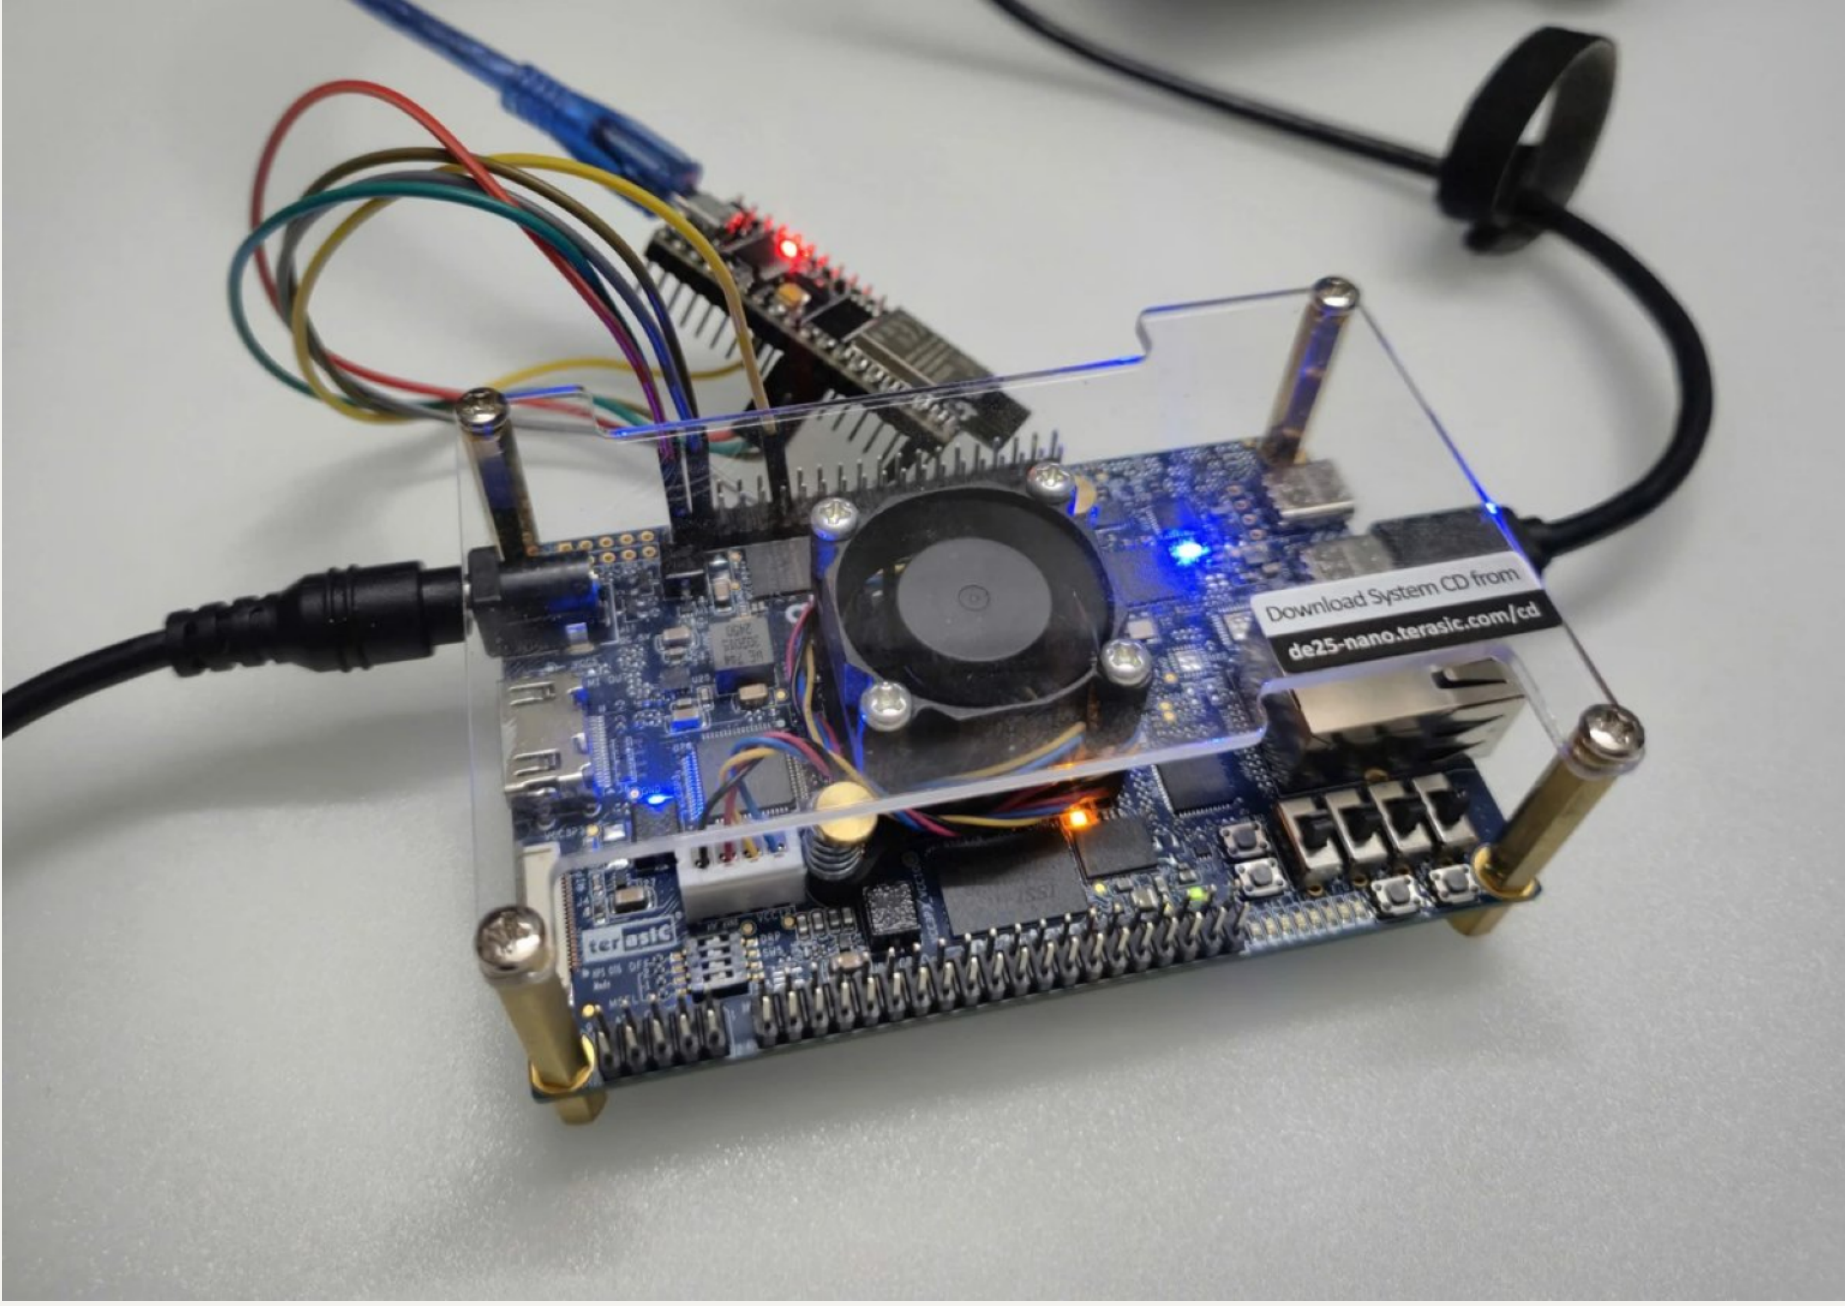

The same RTL on the DE25-Nano: 100/100 two-role ML-KEM runs pass.

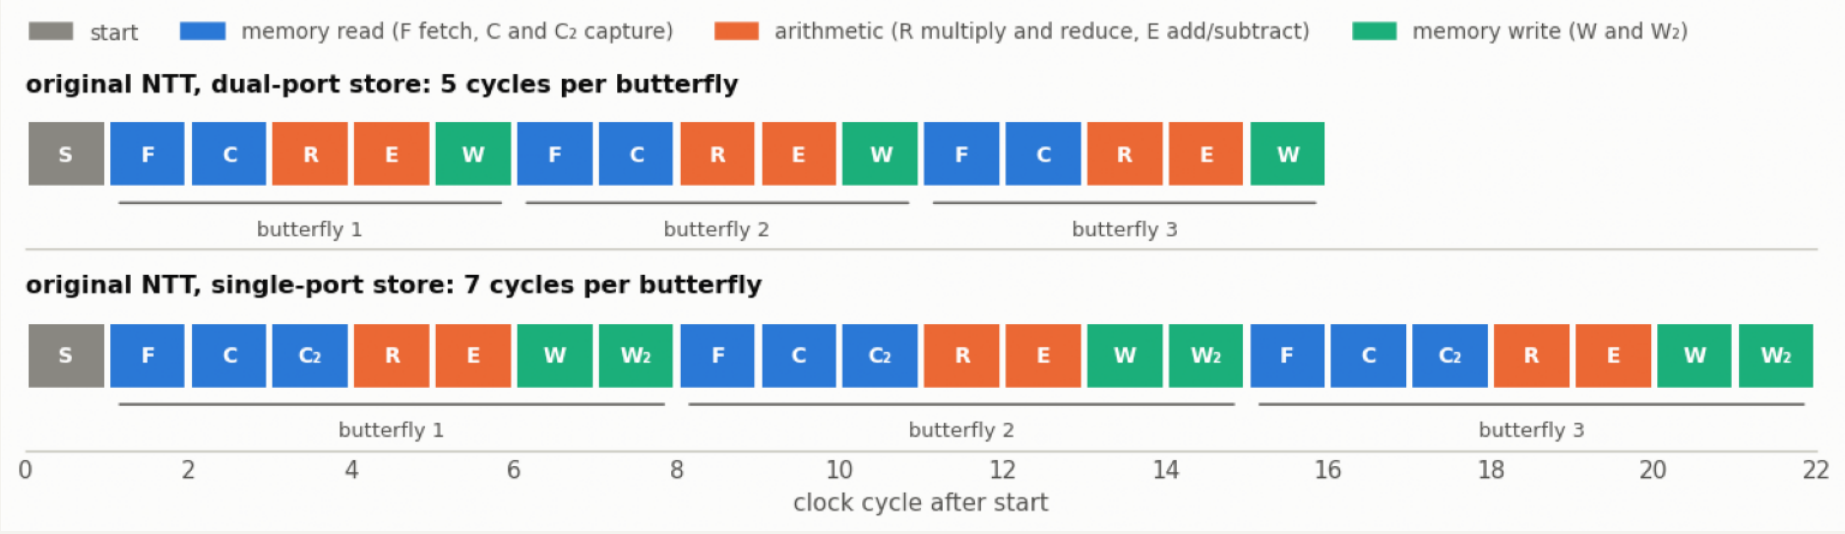


The controller visits the 896 butterflies in the order of FIPS 203, Algorithm 9; the single-port store needs two extra cycles per butterfly.

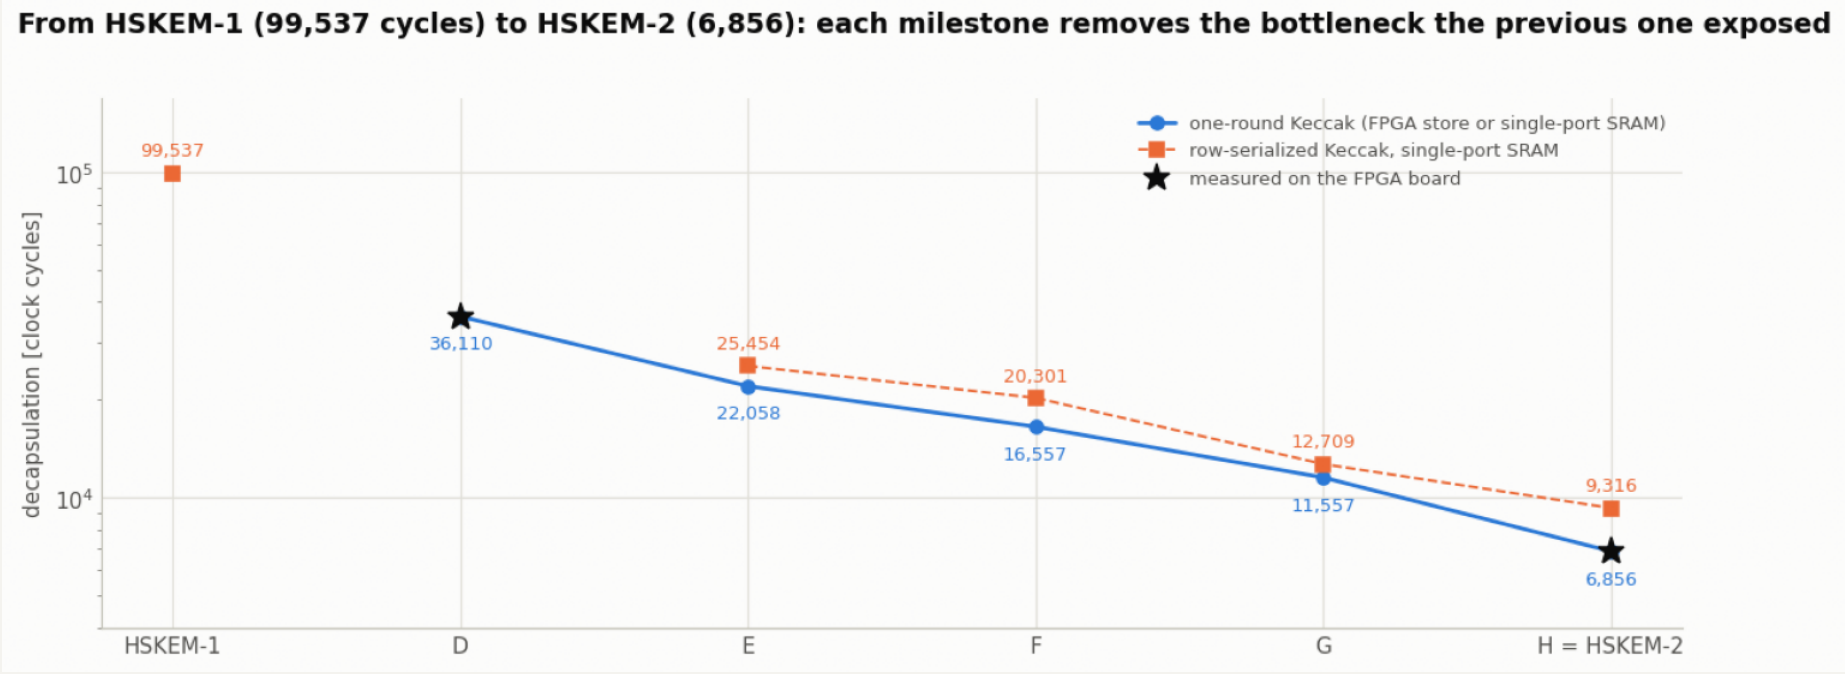


A second iteration stores two coefficients in every SRAM word: a forward NTT takes 14 instead of 130 μs and 0.16 instead of 0.50 μJ. With a two-lane engine and a streamed datapath that removes no check, a decapsulation takes 6,856 instead of 99,537 cycles (HSKEM-1 → HSKEM-2), as the board confirms.

A decapsulation on HSKEM-2: 31 μJ

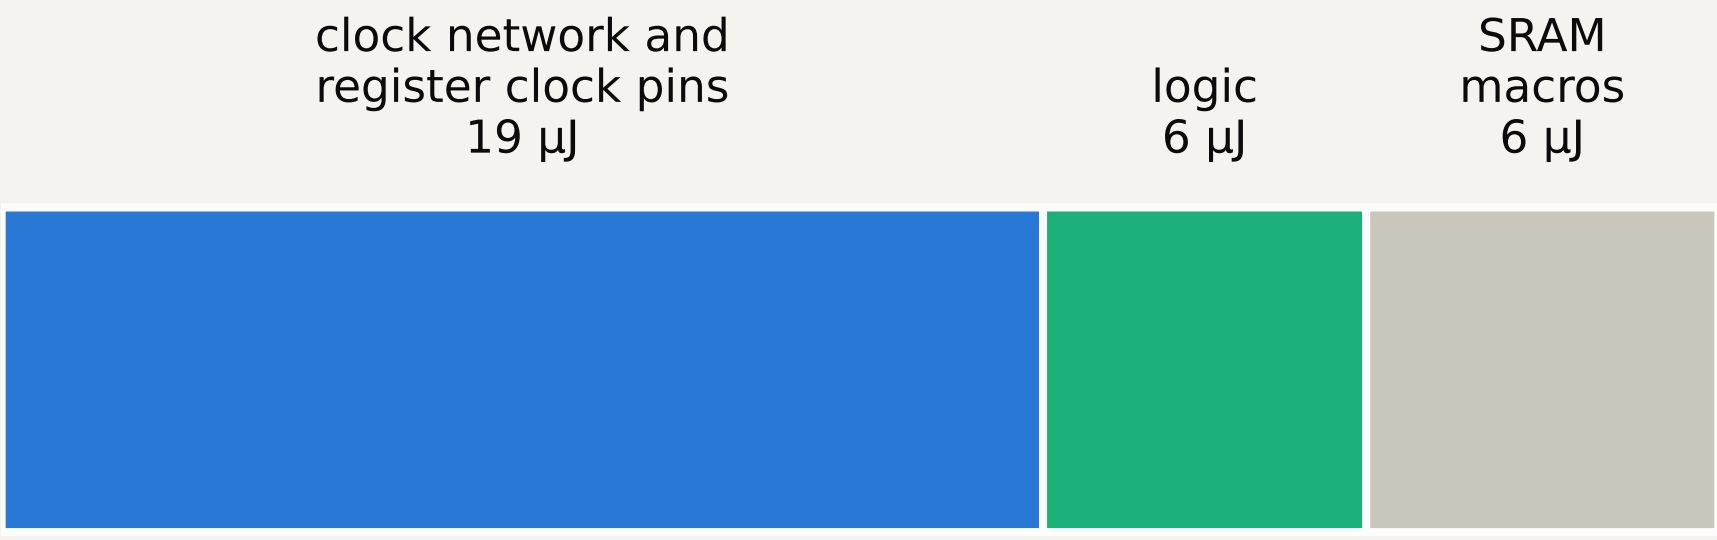

HSKEM-2, the signed-off SKY130 chip of the streamed system, spends 31 μJ per decapsulation instead of HSKEM-1's 0.35 mJ. The rest is set by the integration: gating the clock of idle blocks and the chip selects of the macros would save roughly 28 to 42 %.

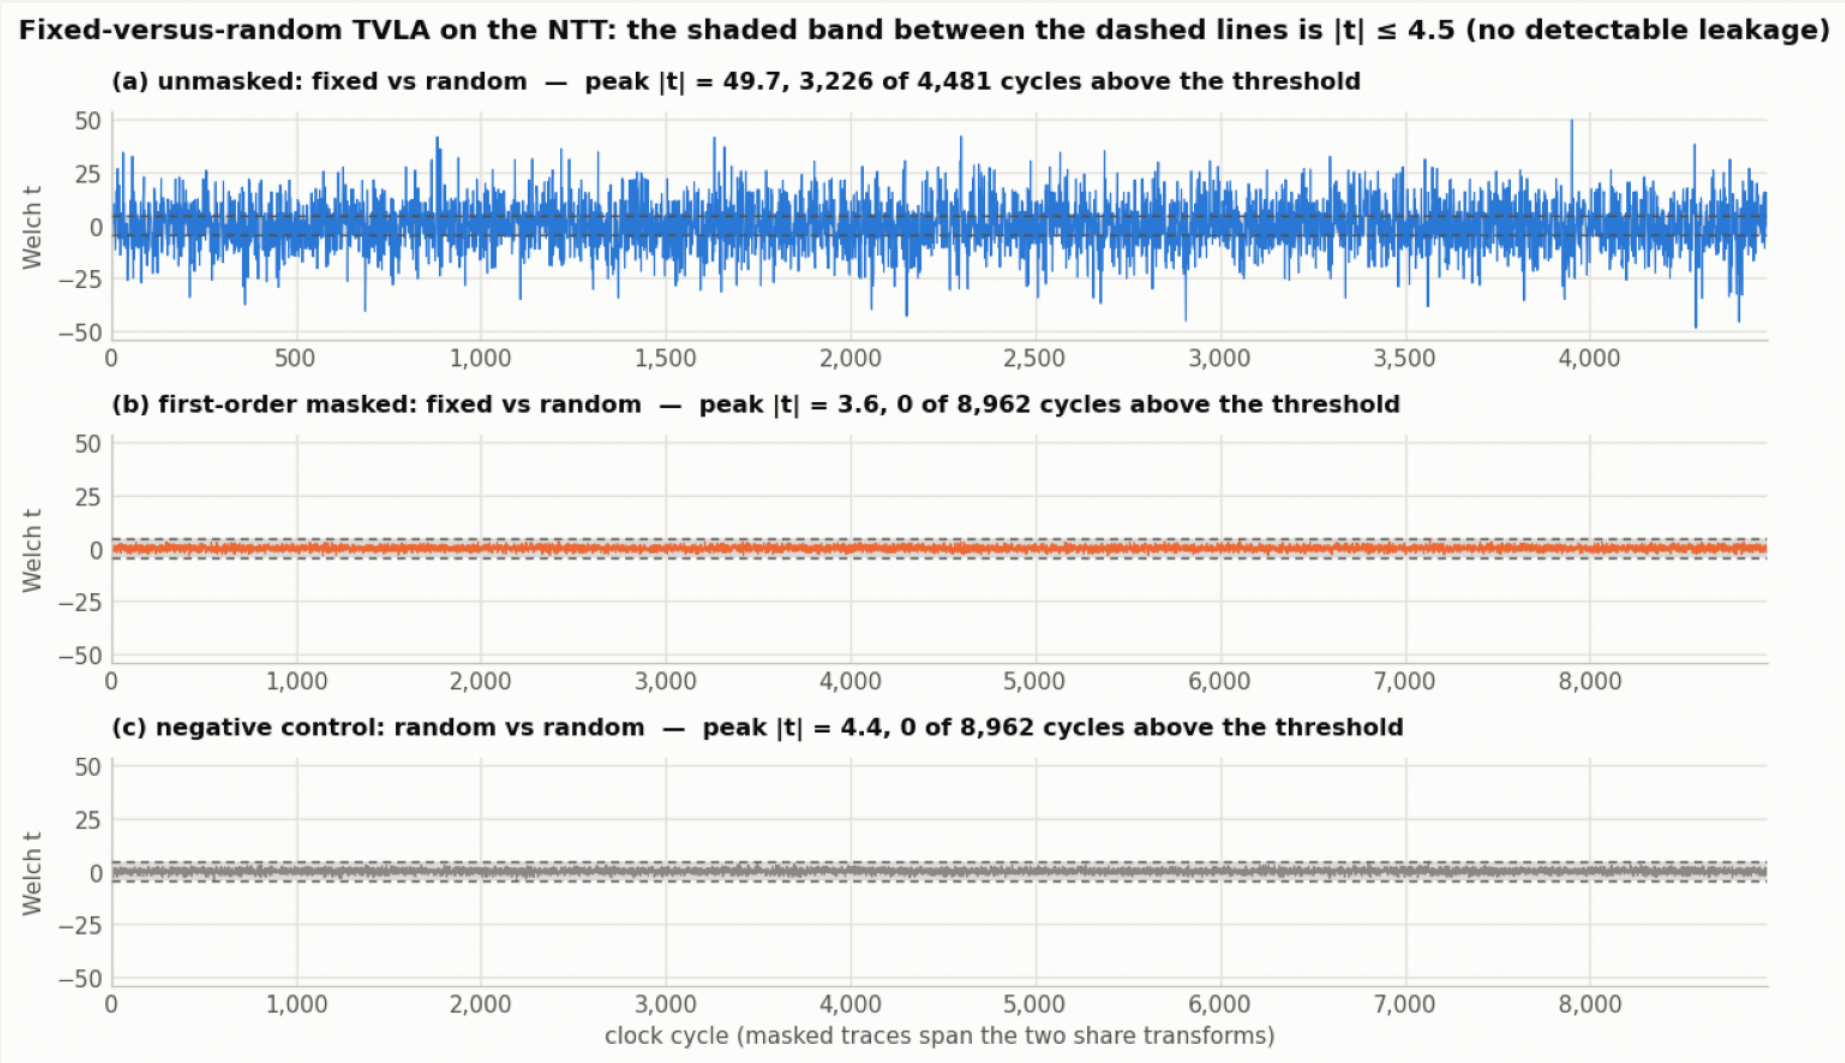

Simulated TVLA: largest |t| 49.7 unmasked, 3.6 with first-order masking (threshold 4.5).

What transfers

- Weigh a block by how often the system waits for it.
- Measure the integrated chip, not only its blocks.
- Check the check: ten results here first looked right and were not.
- Tie the prose to the data: assertions stop the notebook when they part.

