



irgsctool

None

Sarang Shah

None

Table of contents

1. irgsctool	3
1.1 Getting Started	3
1.2 Installation	3
2. About irgsctool	4
2.1 Motivation to generate irgsctool	4
2.2 Nature of the generated catalog	6
2.3 Application of irgsctool on fields	9
3. API Reference	11
3.1 <code>irgsc(ra, dec, validate=None)</code>	11
3.2 <code>GetData(ra, dec)</code>	12
3.3 <code>ReadData(ra, dec)</code>	13
3.4 <code>StarGalaxyClassification(ra, dec)</code>	13
3.5 <code>ExtinctionCorrection(ra, dec)</code>	14
3.6 <code>Models(use_sam=None)</code>	15
3.7 <code>GenerateIRGSC(ra, dec)</code>	16
3.8 <code>ValidateIRGSC(ra, dec)</code>	16
3.9 irgsctool - tutorials	18
3.10 1. Generating IRGSC for a given set of coordinates	18
3.11 2. Validating the IRGSC	21

1. irgsctool

1.1 Getting Started

This package is a tool to generate the catalog of Natural Guide Stars (NGS) based on the requirements of the NFIRAOS, the facility Adaptive Optics system on the Thirty Meter Telescope (TMT). This tool obtains the optical data from PANSTARRS DR2 and generates a catalog of the computed Near-Infrared (NIR) magnitudes. There is also an option in this tool to validate the computed NIR magnitudes using the readily available NIR observed data from UKIDSS DR11 (in the regions where the UKIDSS data is available.)

1.2 Installation

This package can be installed in two ways:

1.2.1 1. Using pip

In a fresh environment, enter the following command

```
pip install irgsctool
```

1.2.2 2. Using .zip file on GitHub [here](#)

After downloading the .zip file, unzip it into a directory and type

```
pip install .
```

This will install irgsctool locally in your system.

1.2.3 3. Using the Development version from GitHub:

Open the terminal in your system and run:

```
pip install git+https://github.com/ssshah1502/irgsc@main
```

This will also install the package locally in your system.

2. About irgsctool

irgsctool to generate the catalog of NIR guide stars for Adaptive Optics (AO) observations of the Thirty Meter Telescope (TMT). The module computes the NIR magnitudes of the optical sources in the PANSTARRS data.

2.1 Motivation to generate irgsctool

The performance of any ground-based optical/near-infrared (NIR) telescope is affected by the turbulence in the atmosphere of Earth. When the light from a distant astronomical source passes through Earth's turbulent atmosphere, it distorts the wavefront of the light. These distortions make the science images appear fuzzy/blurry. To improve the performance of the ground-based optical/NIR telescopes by compensating for the effects of wavefront distortions, astronomers use a technique known as Adaptive Optics (AO). An AO system tries to correct the distortions using a WaveFront Sensor (WFS), which takes some of the astronomical light, a deformable mirror that lies in the optical path, and a computer that receives input from the detector (Refer Figure: (1)).

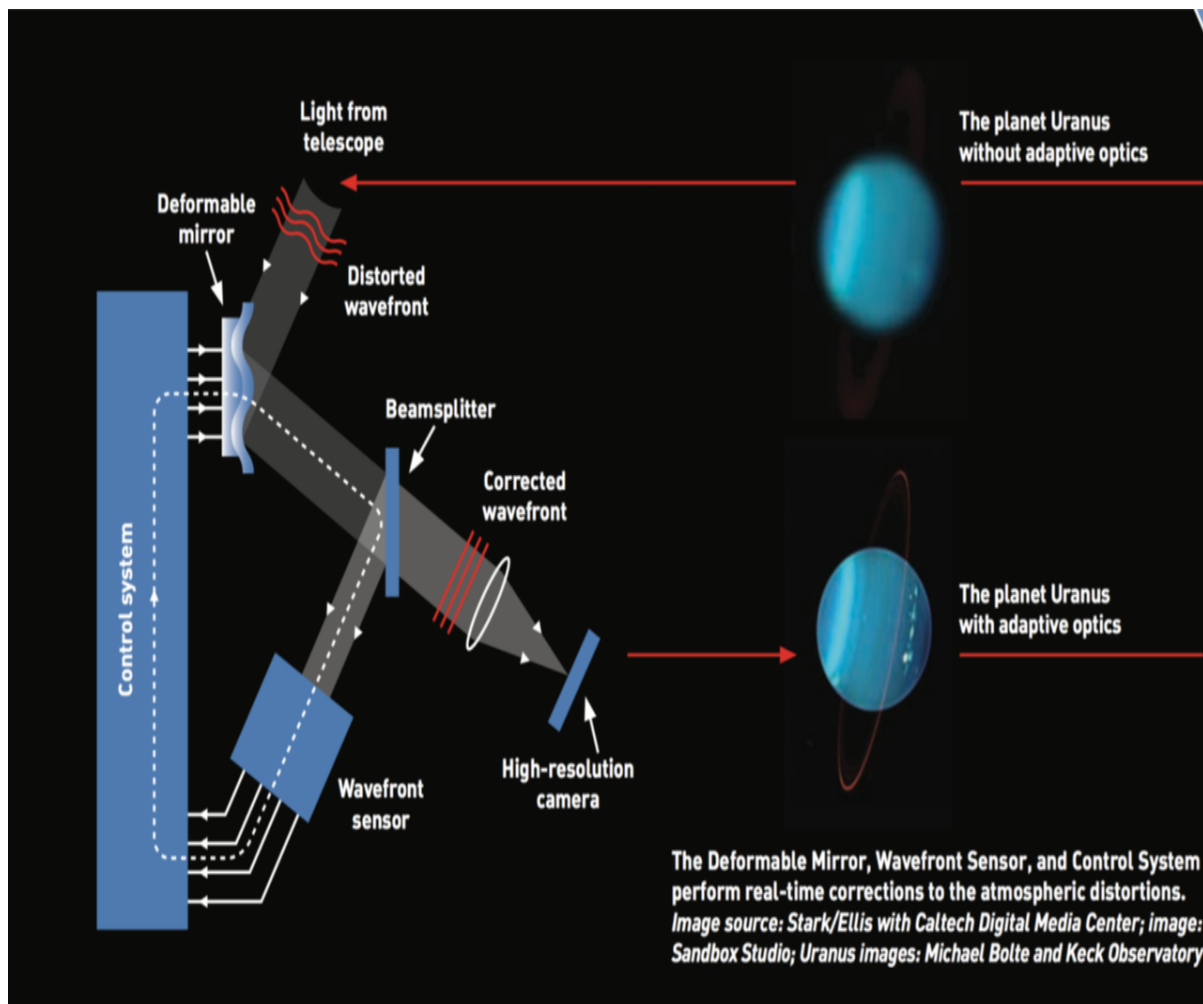


Figure 1: A conceptual image of the working of an AO system.

A WFS is a high-speed camera that detects the deformity in the incoming light several thousand times per second. After measuring the deformity, the WFS sends feedback to the system-controlling computer, which then changes the shape of the deformable mirror so that the light eventually becomes distortion-free. This distortion-free light is then fed to the science instruments in the telescopes to obtain high-quality images with a spatial resolution close to

the theoretical diffraction limit. A science target to be studied is often too faint or extended to be used as a reference for measuring the shape of the incident wave-fronts. Instead, a nearby brighter guide star can be used for distortion correction. But, sufficiently bright stars are not available in all parts of the sky, which significantly limits the usefulness of natural guide star AO. This limitation can be overcome by creating an artificial guide star by shining a laser into the mesosphere and creating an asterism. However, much fainter natural reference stars are still required for image position or tip/tilt correction.

The Thirty Meter Telescope (TMT) is one of the largest optical and near-infrared (NIR) ground-based telescopes to be built, and the first light is expected in the next decade. The first light NIR instruments of TMT will be assisted by a multi-conjugate AO instrument, known as Narrow Field Infrared Adaptive Optics System (NFIRAOS) (see Figure: (2)). NFIRAOS will have a field of view (FOV) of 2-arcmin diameter and will use laser guide stars (LGS) for distortion correction. However, it will require three or more natural guide stars for tip/tilt correction. A catalog of guide stars will thus be a critical resource for TMT operations. It will enable efficient planning and observations, fulfilling a role similar to that of the Guide Star Catalogs I and II, which were created to allow for the acquisition and control of the Hubble Space Telescope. The TMT Infrared Guide Star Catalog (TMT-IRGSC) should be a star catalog consisting of point sources with NIR (J, H, Ks) magnitudes as faint as 22 mag in the J band in the Vega system covering the entire TMT-observable sky. No catalog currently exists with objects as faint as $J_{\text{Vega}} = 22$ mag over the entire TMT observable sky to be used as a guide star catalog. Hence it is essential to develop this catalog by computing the expected NIR magnitudes of stellar sources identified in various optical sky surveys using their optical magnitudes.


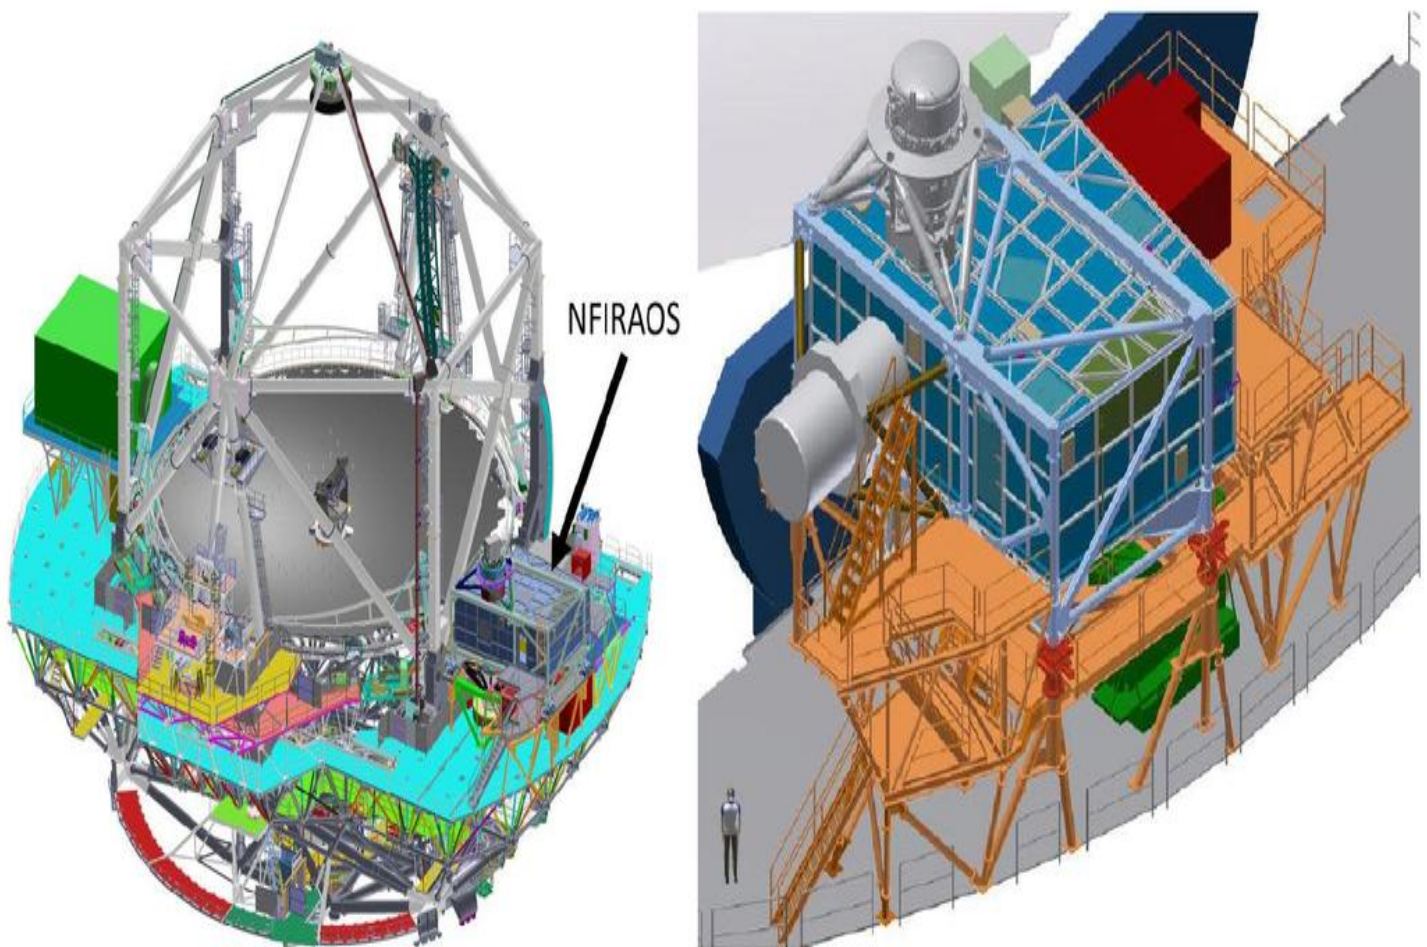


Figure 2: A rendered image of the facility AO system on TMT - NFIRAOS.

2.2 Nature of the generated catalog

The IRGSC generated has various information about the sources shown in the following Table. This table describes the columns in the IRGSC generated for a particular test field. The details of the flags, e.g., infoflags, filterflags, and qualityflags can be found [here](#). These flags indicate various values assigned to the source by the PANSTARRS team, which gives further information about the nature of the source and the quality of its detection, which can help understand more about a particular object of interest. It is to be noted that although this package relies on the PANSTARRS StackObjectView table, the Right Ascension and Declination of the source is obtained from the mean photometric information as they are well calibrated using Gaia DR2. In the table below PS1 stands for PANSTARRS, pm stands for proper motion and sam standsfor Stellar Atmospheric Model.

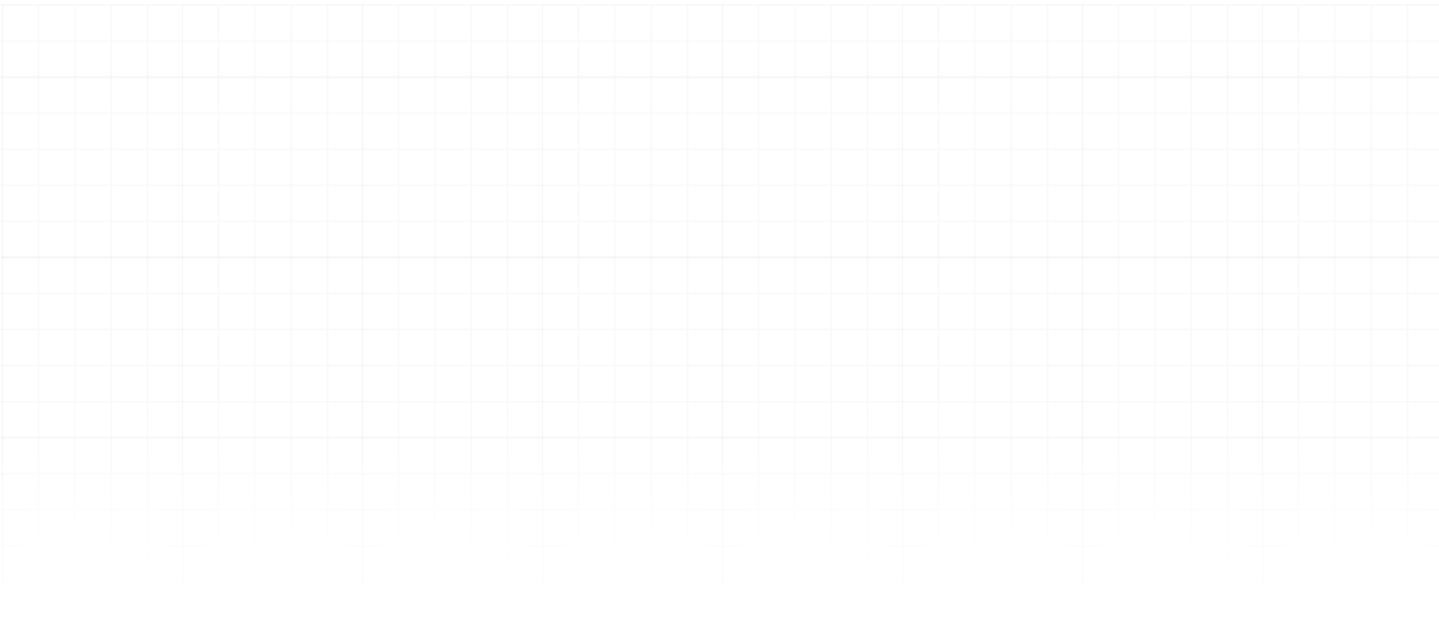

Column Name	Description	dtype
PS1_ObjID	Source identifier in the PANSTARRS data	float
PS1_ra	Right Ascension of the source in the PANSTARRS DR2 weighted mean photometry	float
PS1_ra_error	Uncertainty in PS1_ra	float
PS1_dec	Declination of the source in the PANSTARRS DR2 weighted mean photometry	float
PS1_dec_error	Uncertainty in the PS1_dec	float
PS1_gpsf	psf magnitude of the source in the g-band stacked photometry	float
PS1_gpsf	Uncertainty in PS1_gpsf	
PS1_rpsf	psf magnitude of the source in the r-band stacked photometry	float
PS1_rpsf	Uncertainty in PS1_rpsf	float
PS1_ipsf	psf magnitude of the source in the i-band stacked photometry	float
PS1_ipsf	Uncertainty in PS1_ipsf	float
PS1_zpsf	psf magnitude of the source in the z-band stacked photometry	float
PS1_zpsf	Uncertainty in PS1_zpsf	float
PS1_ypsif	psf magnitude of the source in the y-band stacked photometry	float
PS1_ypsif	Uncertainty in PS1_ypsif	float
Teff	Best-fitted model parameter: Teff	float
logg	Best-fitted model parameter: log(g)	float
[Fe/H]	Best-fitted model parameter: [Fe/H]	float
sam_g	Best-fitted model magnitudes in PANSTARRS g-filter	float
sam_r	Best-fitted model magnitudes in PANSTARRS r-filter	float
sam_i	Best-fitted model magnitudes in PANSTARRS i-filter	float
sam_z	Best-fitted model magnitudes in PANSTARRS z-filter	float
sam_y	Best-fitted model magnitudes in PANSTARRS y-filter	float
sam_j	Best-fitted model magnitudes in PANSTARRS j-filter	float
sam_h	Best-fitted model magnitudes in PANSTARRS h-filter	float
sam_k	Best-fitted model magnitudes in PANSTARRS k-filter	float
scale factor	The scale factor computed after fitting the SAM	float
scale factor error	Error in the computed scale factor	float
d_dev	The parameter denoting the goodness-of-fit	float
Computed J	The computed J magnitude in the Vega system	float
Computed J error	Error in computed J magnitude	float
Computed H	The computed H magnitude in the Vega system	float
Computed H error	Error in computed H magnitude	float
Computed K	The computed K magnitude in the Vega system	float
Computed K error	Error in computed K magnitude	float
gaia source id	Source identifier in Gaia DR3	float
gaia ra	Right Ascension of the source in Gaia DR3 catalog	float
gaia ra error	Uncertainty in gaia ra	float
gaia dec	Declination of the source in Gaia DR3 catalog	float
gaia dec error	Uncertainty in gaia dec	float

Column Name	Description	dtype
gaia parallax	Parallax (mas) of the source in the Gaia DR3 catalog	float
gaia parallax error	Uncertainty in gaia parallax	float
gaia pm	pm of the source (mas/yr) in Gaia DR3 catalog	float
gaia pm ra	pm of the source along R.A. axis in the Gaia DR3 catalog	float
gaia pm ra error	Uncertainty gaia pm ra	float
gaia pm dec	pm of the source along Dec. axis in the Gaia DR3 catalog	float
gaia pm dec error	Uncertainty gaia pm dec	float
gaia ruwe	Renormalised Unit Weight Error flag of the source in Gaia DR3	float
objinfoflag	These flag values of the source in PANSTARRS data specify whether the object is a QSO, transient, asteroid, extended, a known solar system object, etc. in nature	float
objqualityflag	These flag values denote if an object is real or a possible false positive	float
ndetections	The number of times something is detected from the individual exposures	float
nstackdetections	The number of stack detections after which the stack photometric measurements are done	float
ginfoflag	These flags indicate the details of the g filter stack photometry	float
ginfoflag2	These flags indicate the details of the g filter stack photometry	float
ginfoflag3	These flags indicate the details of the g filter stack photometry	float
rinfoflag	These flags indicate the details of the r filter stack photometry	float
rinfoflag2	These flags indicate the details of the r filter stack photometry	float
rinfoflag3	These flags indicate the details of the r filter stack photometry	float
iinfoflag	These flags indicate the details of the i filter stack photometry	float
iinfoflag2	These flags indicate the details of the i filter stack photometry	float
iinfoflag3	These flags indicate the details of the i filter stack photometry	float
zinfoflag	These flags indicate the details of the z filter stack photometry	float
zinfoflag2	These flags indicate the details of the z filter stack photometry	float
zinfoflag3	These flags indicate the details of the z filter stack photometry	float
yinfoflag	These flags indicate the details of the y filter stack photometry	float
yinfoflag2	These flags indicate the details of the y filter stack photometry	float
yinfoflag3	These flags indicate the details of the y filter stack photometry	float
SAM_Name	Name of the best-fitted Stellar Atmospheric Model (SAM)	string

2.3 Application of irgsctool on fields

The method developed for the generation of IRGSC has applied on twenty test fields (shown in the following table) across the sky. The generated IRGSC is also validated using the UKIDSS data available for those fields and the generated as well as validated catalog for these fields can be found in the [generated_irgsc](#) directory. In addition to the twenty test fields, additional ten catalogs are provided for the PANSTARRS Medium Deep Survey (MDS) Fields [more information available here](#). Out of eleven MDS fields, one field coincides with M31. Hence it is skipped here since the MDS data is not publically released by the PANSTARRS, the optical data to generate the IRGSC for these fields is been taken from the 3-pi PANSTARRS survey. In case of validation using the UKIDSS observed NIR data, certain fields have observations in only one or two out of the J, H and K bands. This package takes care of these issues and validates the generated IRGSC using the available band data.

R.A.	Decl.	l	b	E(B-V)
227.26	0.0	359.27	47.24	0.04
335.00	-1.25	61.96	-45.43	0.07
60.00	1.25	188.72	-36.53	0.26
30.00	0.50	156.53	-57.82	0.02
11.16	7.83	120.00	-55.00	0.04
225.53	2.19	0.00	50.00	0.04
269.93	-13.48	15.00	5.00	0.98
334.80	50.96	100.00	-5.00	0.28
324.09	51.47	95.00	-0.50	2.48
298.02	34.02	70.00	3.00	1.01
0.00	0.00	96.33	-60.18	0.02
34.50	-5.16	169.97	-59.87	0.01
36.25	-4.50	171.65	-58.22	0.02
164.25	57.66	148.39	53.43	0.04
66.75	15.86	180.08	-22.32	0.58
82.25	-2.60	205.62	-19.48	0.62
189.83	0.00	296.33	62.71	0.01
150.25	10.00	227.71	46.40	0.03
15.0	0.90	127.47	-61.89	0.02
35.0	-3.50	168.62	-58.28	0.01

3. API Reference

This page introduces to the classes and functions in the **irgsc** package. The main class is the **irgsc** class which has several subclasses like [GetData](#), [ReadData](#), [StarGalaxyClassification](#), [ExtinctionCorrection](#), [GenerateIRGSC](#), [ValidateIRGSC](#).

Figure (1) shows the UML diagram of the irgsc tool package.

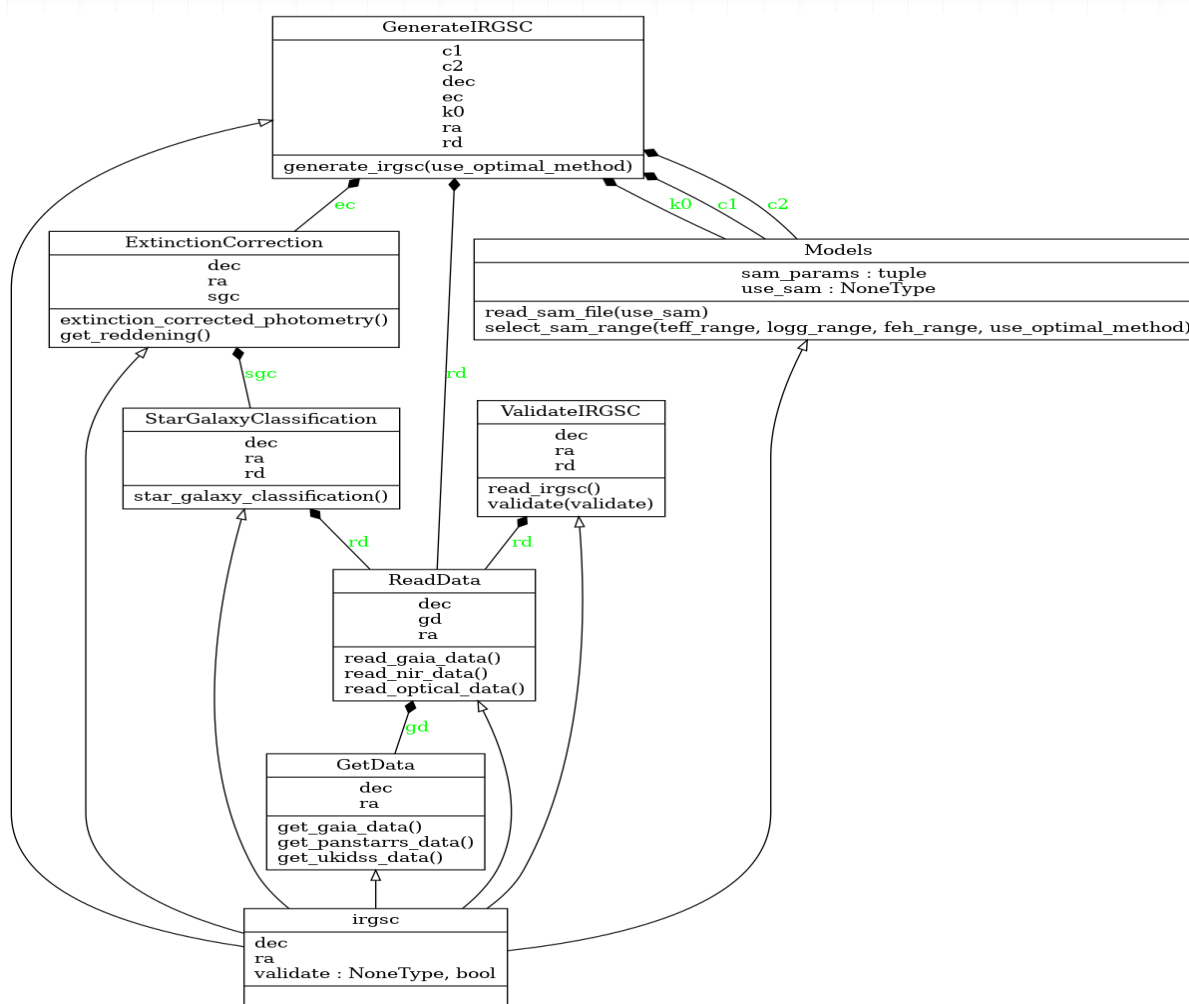


Figure 1: The UML diagram of the **irgsc** package.

3.1 `irgsc(ra, dec, validate=None)`

Initialisation of child **irgsc** class . This class has several child classes.

This method described using input ra and dec. It checks whether the data from PANSTARRS DR2, UKISS DR11 and Gaia DR3 can be obtained.

RAISES DESCRIPTION

`ValueError` if the data is not available in UKIDSS or PANSTARRS 3-pi survey. The code will not proceed further.

`Warning` if the data is not available in the Gaia DR3 survey. In the IRGSC, the Gaia values will be replaced with -999.

3.2 GetData(ra, dec)

GetData class contains methods to obtain PANSTARRS DR2 stacked optical photometry data, UKIDSS NIR observed data and GAIA DR3 astrometry data. The default search radius is 0.25 degrees due to the limitation of pyvo. The data retrieved is stored in .csv format with the name of the survey + str(ra) + str(dec)

Examples:

```
>>> irgsctool.GetData.get_panstarrs_data(0.0,0.0)
'PS1_RA_0_0_DEC_0_0.csv'
>>> irgsctool.GetData.get_gaia_data(0.0,0.0)
'GAIA_RA_0_0_DEC_0_0.csv'
>>> irgsctool.GetData.get_ukidss_data(0.0,0.0)
'UKIDSS_RA_0_0_DEC_0_0.csv'
```

3.2.1 get_gaia_data()

```
irgsctool.GetData.get_gaia_data()
```

This function sends a query to obtain GAIA DR3 data using the astroquery module. The ROW_LIMIT is set to -1 which implies that the query retrieves all the rows in the given field.

3.2.2 get_panstarrs_data()

```
irgsctool.GetData.get_panstarrs_data()
```

This function sends a query to obtain the PANSTARRS data from DR2 database. The query uses pyvo TAPService module for retrieving the data. The data is selected from StackObjectView db and the maximum search radius is 0.25 degrees.

3.2.3 get_ukidss_data()

```
irgsctool.GetData.get_ukidss_data()
```

This function sends a query to obtain UKIDSS DR11 NIR data using astroquery. UKIDSS consists of five sub-surveys viz. UDS, GPS, GCS, DXS and LAS. The query loops over these surveys and retrieves the data for the given coordinates. The surveys which do not contain J and H band data, the function sends an alert. <\justify>

3.3 ReadData(ra, dec)

ReadData class contains methods to read the photometric data from PS1 DR2, GAIA DR3 and UKIDSS DR11.

3.3.1 read_gaia_data()

```
`irgsctool.ReadData.read_gaia_data()`
```

Reads the input GAIA DR3 data. The number of columns are 12.

RETURNS DESCRIPTION

`gaia_data` A multi-dimensional array of gaia sourced_id, astrometry, and ruwe.

3.3.2 read_nir_data()

```
`irgsctool.ReadData.read_nir_data()`
```

Reads the input UKIDSS NIR data. The number of columns are 8. Some regions do not have J or H band data especially DXS or GCS surveys. For these regions, only K band data is obtained.

RETURNS DESCRIPTION

`nir_data` A multi-dimensional data of observed UKIDSS NIR sources that have SNR>5. Also plots a histogram of UKIDSS data.

3.3.3 read_optical_data()

```
irgsctool.ReadData.read_optical_data()
```

This function reads the input optical PANSTARRS data. The number of columns in the input file are 32. After reading the input data, this function filters it for nan values (if present) and restricts the data to the sources having detection in all the five bands and that have SNR atleast 5. This data is then fed to the Star-Galaxy classification routine to separate stars and galaxies in the data.

RAISES

DESCRIPTION

`FileNotFoundError` if the optical input data file is not available.

RETURNS

DESCRIPTION

`filtered_optical_data` A multi-dimensional array consisting of optical panstarrs stack photometry in five bands which is free from nan values and duplicate sources.

3.4 StarGalaxyClassification(ra, dec)

StarGalaxyClassification class contains `star_galaxy_classification()` method which is used to separate the stars and galaxies in the PANSTARRS optical data.

3.4.1 star_galaxy_classification()

```
irgsctool.StarGalaxyClassification.star_galaxy_classification()
```

This method is used to separate stars and galaxies using the condition applied to all the five optical filters:

$psf_kron < 0.05$

This relation filters the input optical data for only probable stellar sources. The (psf-kron) diagram showing stars and galaxies in the data as well as (g-r) vs (r-i) CCD is also plotted by this method.

RETURNS DESCRIPTION

A multi-dimensional array of the PANSTARRS optical data containing

most probable stellar sources after separating the galaxies. Also plots

the figures showing the comparison of psf vs $psf - kron$,

the color-color diagrams of the stars and galaxies.

3.5 ExtinctionCorrection(ra, dec)

ExtinctionCorrection class has two methods; one to obtain the reddening and NIR extinction coefficients, while the other to correct the PANSTARRS data for extinction in each optical filter.

3.5.1 extinction_corrected_photometry()

```
`irgsctool.ExtinctionCorrection.extinction_corrected_photometry()`
```

This method corrects the input optical PANSTARRS data for reddening and extinction along the line of sight. It uses the `get_reddening()` method.

Returns: `psf_phot`: A multi-dimensional array consisting of extinction corrected PANSTARRS optical photometry containing `psf` and `kron` measurements.

3.5.2 get_reddening()

```
irgsctool.ExtinctionCorrection.get_reddening()
```

This method obtains the reddening value for a given set of input coordinates from Schlegel et.al. 1998 (sfd) reddening map. irgsctool uses Schlafly & Finkbeiner 2011 (snf) reddening map which is $\text{snf} = 0.86 * \text{sfd}$.

RAISES	DESCRIPTION
<code>FileNotFoundError</code>	if the sfd files are not present.

RETURNS DESCRIPTION

<code>ebv</code>	Reddening from Schlafly & Finkbeiner 2011
<code>err_ebv</code>	Uncertainty in reddening
<code>aj</code>	J-band extinction coefficient.
<code>ah</code>	H-band extinction coefficient.
<code>ak</code>	K-band extinction coefficient.

3.6 Models(use_sam=None)

Models class reads and selects the required Kurucz and Phoenix stellar atmospheric models in the generation of IRGSC.

3.6.1 read_sam_file()

```
irgsctool.Models.read_sam_file(use_sam=None)
```

This method reads the model parameters and results from the interpolated Kurucz or the Phoenix model files. `use_sam` is bool and decides which model file to be read. To use the interpolated Kurucz models, set ***use_sam = Kurucz*** . Similarly, ***use_sam = Phoenix*** to use interpolated Phoenix models.

RAISES	DESCRIPTION
<code>AttributeError</code>	if <code>use_sam</code> is None.
<code>FileNotFoundError</code>	if the model files are not found.

RETURNS DESCRIPTION

<code>sam_params</code>	A multi-dimensional array of the sam parameters depending upon the model selected.
-------------------------	--

3.6.2 select_sam_range(teff_range=None, logg_range=None, feh_range=None)

```
irgsctool.Models.select_sam_range(teff_range=None, logg_range=None,
feh_range=None, use_optimal_method=False)
```

This method selects the range of the models to be used in the generation of IRGSC.

If ***use_optimal_method*** is set to True, the following range of model parameters is selected:

Model Name	(T _{eff}) (K)	log(g) (dex)	[Fe/H] (dex)
Phoenix (C1)	2800 - 5000	3.0 - 5.5	-5.0 - -1.5
Phoenix (C2)	2800 - 4000	0.0 - 3.0	-0.5 - 1.5
KuruczCastelli-Kurucz (K0)	4000 - 10000	---	---

RAISES DESCRIPTION

`TypeError` if range of parameters is not given.

RETURNS DESCRIPTION

`sam_params` A multi-dimwnsional array of the selected model parameters and model magnitudes to generate IRGSC.

3.7 GenerateIRGSC(ra, dec)

The ***GenerateIRGSC*** class hosts method to generate a catalog of probable stellar sources in the PANSTARRS data with their computed magnitudes, astrometric information from GAIA DR3 data, best fitted model parameters and flags.

3.7.1 generate_irgsc(use_optimal_method=True)

```
irgsctool.GenerateIRGSC.generate_irgsc(use_optimal_method=True)
```

This method finds the best fitting model to the observed colors of the stellar source. The best fitting model is chosen from a combination of Kurucz/Castelli-Kurucz and Phoenix synthetic spectra convolved with the PANSTARRS response function (or BANDPASS) which is integrated w.r.t. the wavelength and normalised to the product of the PANSTARRS response function and wavelength. This is also called as Effective Stimulus (ES).

$$ES = \frac{\int F_{\lambda} P_{\lambda} d\lambda}{\int P_{\lambda} d\lambda}$$

The spectra is obtained from pysynphot ([More information here](#)).

RETURNS DESCRIPTION

`irgsc_data` A multi-dimensional array consisting of the generated IRGSC.

3.8 ValidateIRGSC(ra, dec)

The ***Validate*** class includes methods to validate the generated irgsc, generate a validated catalog and plot the comparison of the observed and computed NIR magnitudes.

3.8.1 read_irgsc()

```
irgsctool.validate.read_irgsc()
```


This function reads the generated IRGSC for a given set of coordinates.

RAISES	DESCRIPTION
--------	-------------

FileNotFoundError

This error arises if there is no generated IRGSC

RETURNS	DESCRIPTION
---------	-------------

irgsc_data

A multi-dimensional array consisting of elements in IRGSC.

3.8.2 validate(validate=None)

irgsctool.ValidateIRGSC.calidate(validate=True)

This method compares the observed and computed NIR magnitudes for a given field. If this is set to True, the method first obtains the UKIDSS data for the given field. The output is a validated IRGSC and plots showing the comparison of the computed NIR magnitudes with the observed ones.

RAISES	DESCRIPTION
--------	-------------

ValueError

if validate is False

3.9 irgsctool - tutorials

3.10 1. Generating IRGSC for a given set of coordinates

```
from irgsctool import GenerateIRGSC
gc = GenerateIRGSC(ra=0.0, dec=0.0)
gc.generate_irgsc()
```

This results in a catalog file: 'IRGSC_R_A_0_0_DEC_0_0.csv' that contains probable stellar sources in 0.25 degrees radius around the input coordinates. The following plots are also generated:

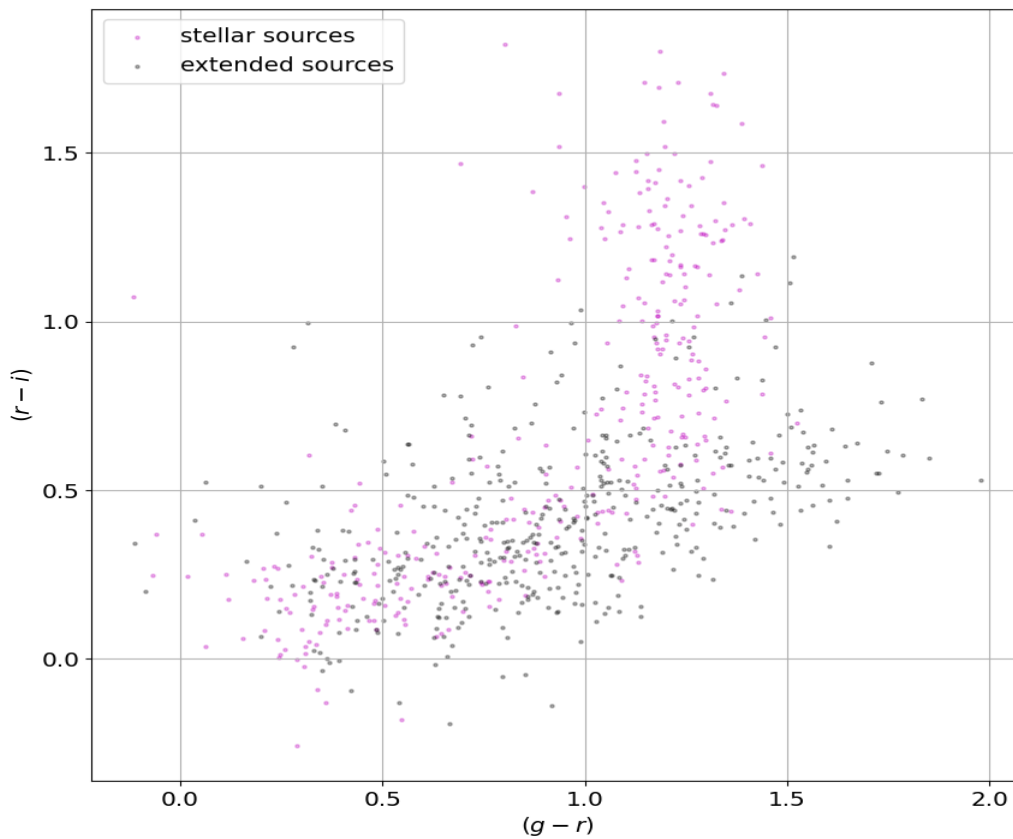


Figure 1: The generated plot shows a color-color diagram where stars follow the magenta locus and the galaxies are randomly scattered.

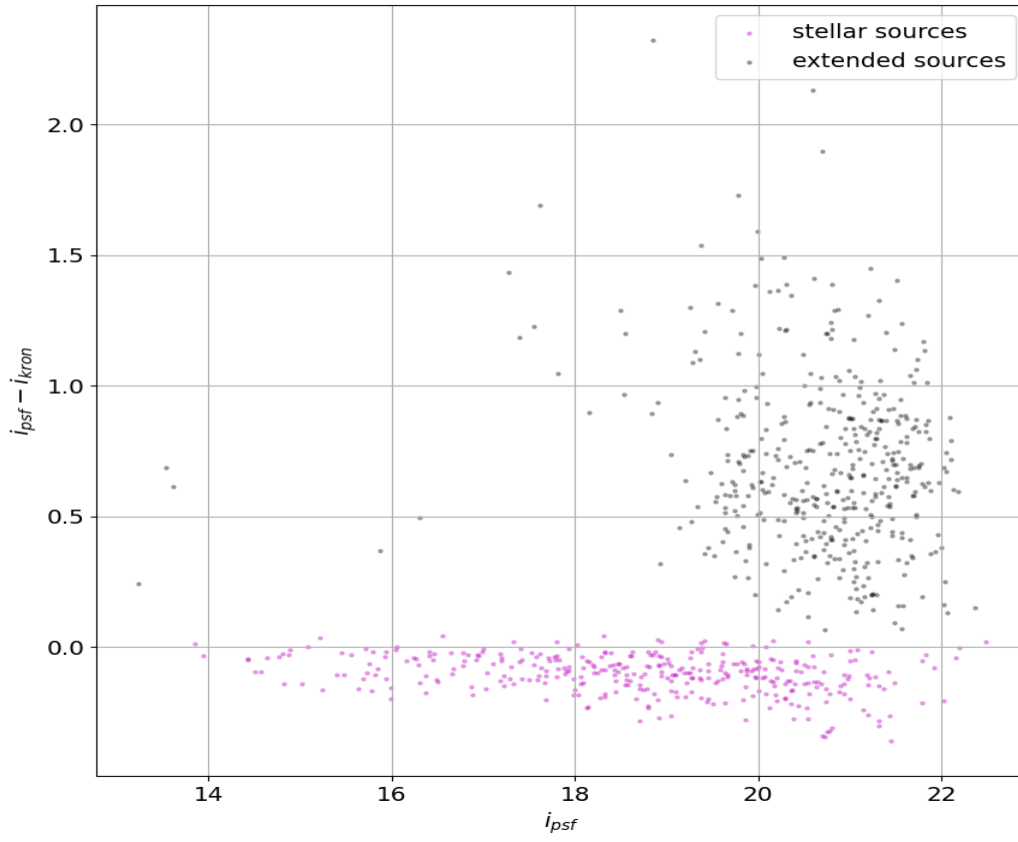


Figure 2: The (psf-kron) relation of the sources plotted on the y-axis w.r.t i_{psf} on the x-axis. The galaxies form a random scatter while the stellar point sources are below 0.05 on the y-axis.

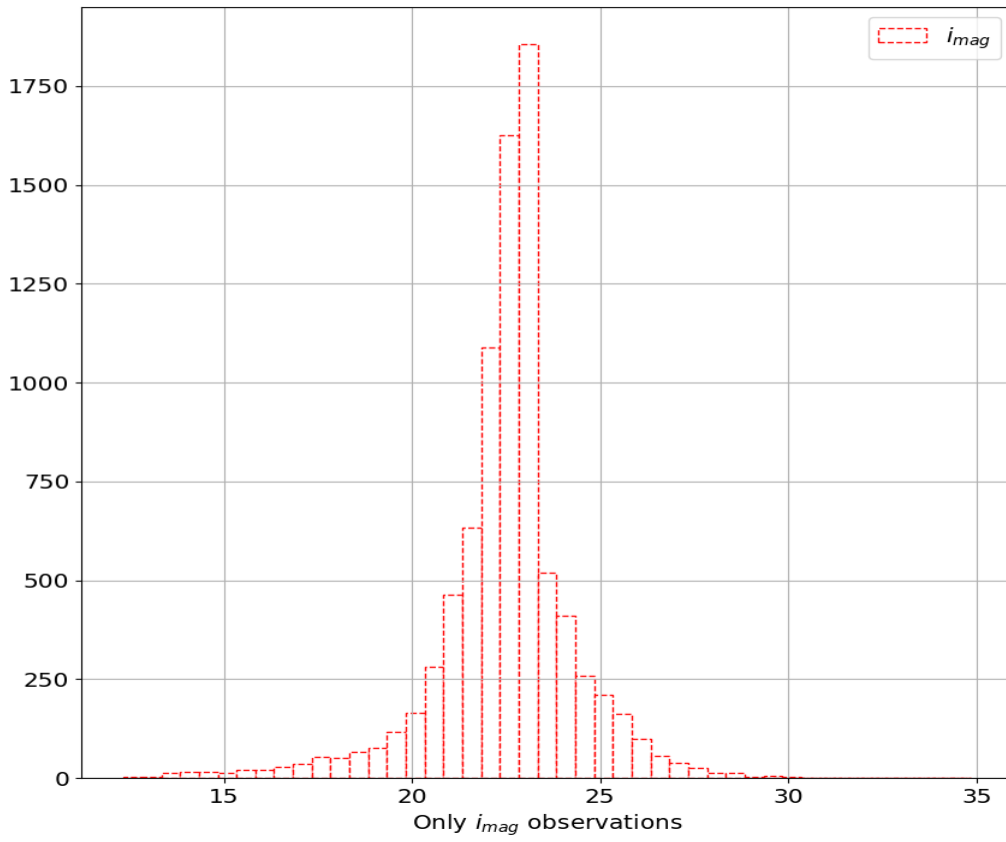


Figure 3: A histogram showing the depth of PANSTARRS data when only i-band observations are considered. This is sufficient depth to upto $J = 22$ mags in the IRGSC.

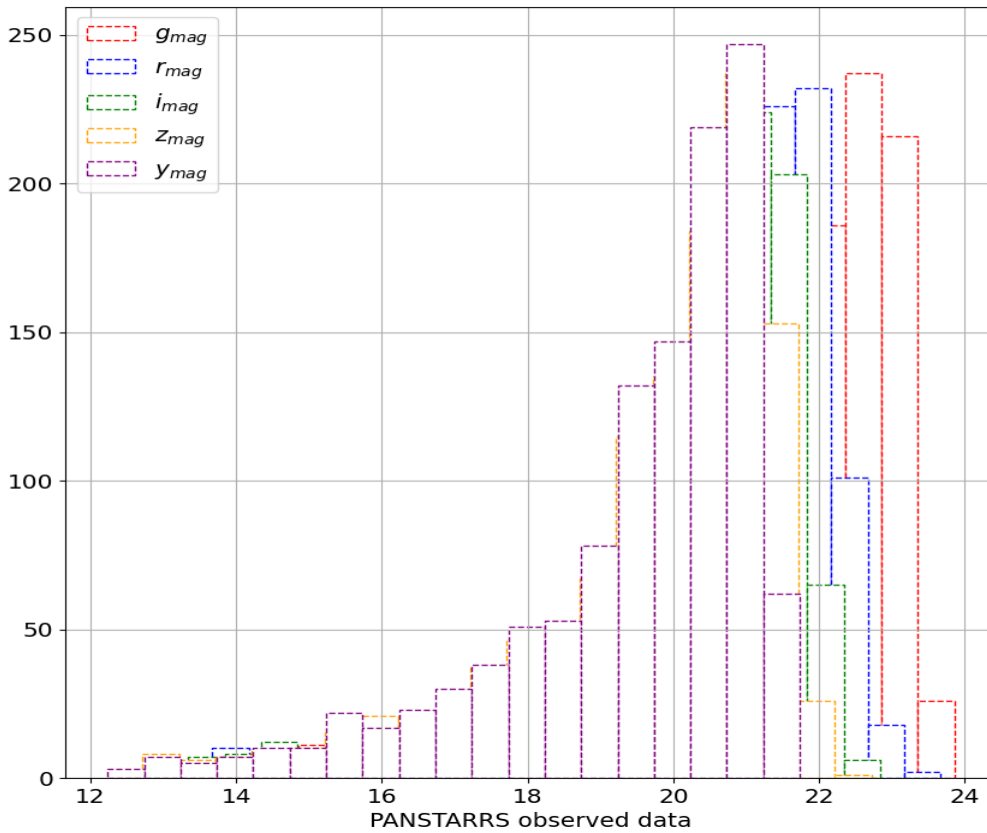


Figure 4: The figure shows the histogram of the sources that are detected in all the five filters of the PANSTARRS. The condition in the generation of IRGSC that the sources must have detection in all the filters reduces the depth of the input optical data.

3.11 2. Validating the IRGSC

```
from irgsctool import ValidateIRGSC
vd = ValidateIRGSC(0.0,0.0)
vd.validate(validate=True)
```

This results in the validated catalog file: `validated_IRGSC_R_A_0_0_DEC_0_0.csv` that contains additional information about the observed NIR data and the comparison between the observed and computed NIR data. This comparison when plotted appears as shown in Figure (5,6,7).

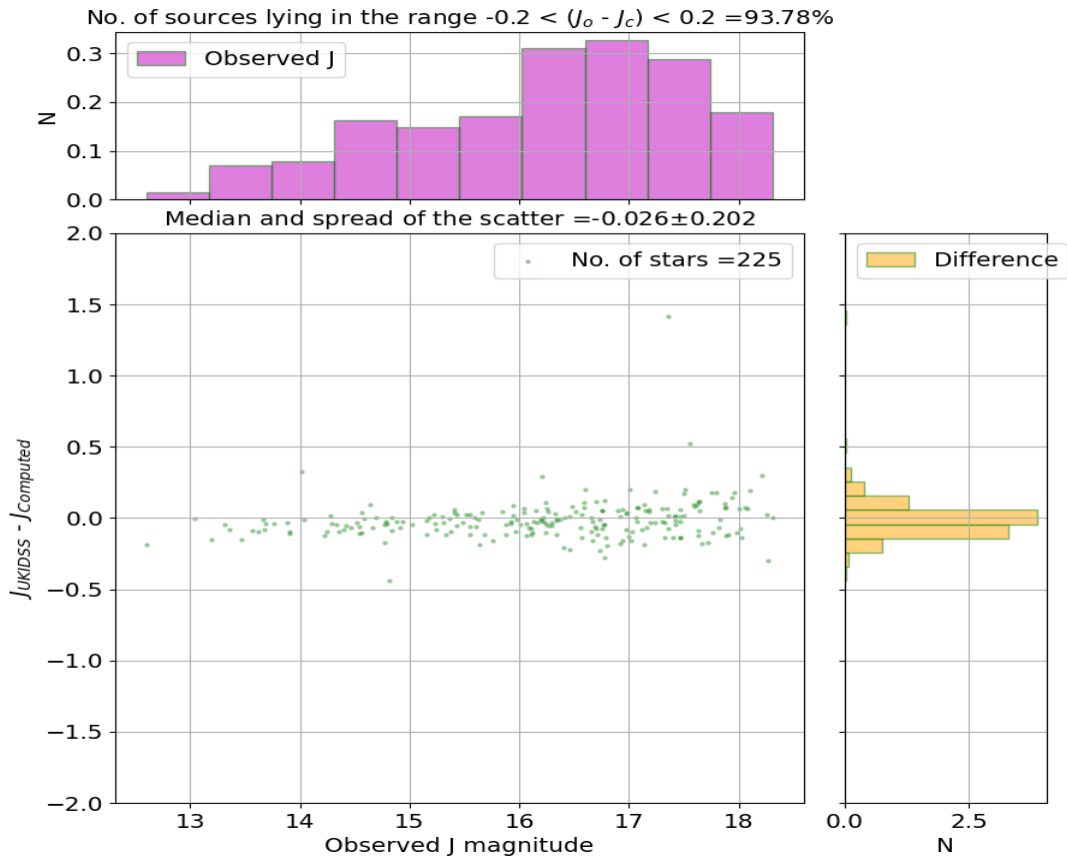


Figure 5: The figure shows the comparison of the computed and observed J band magnitudes.

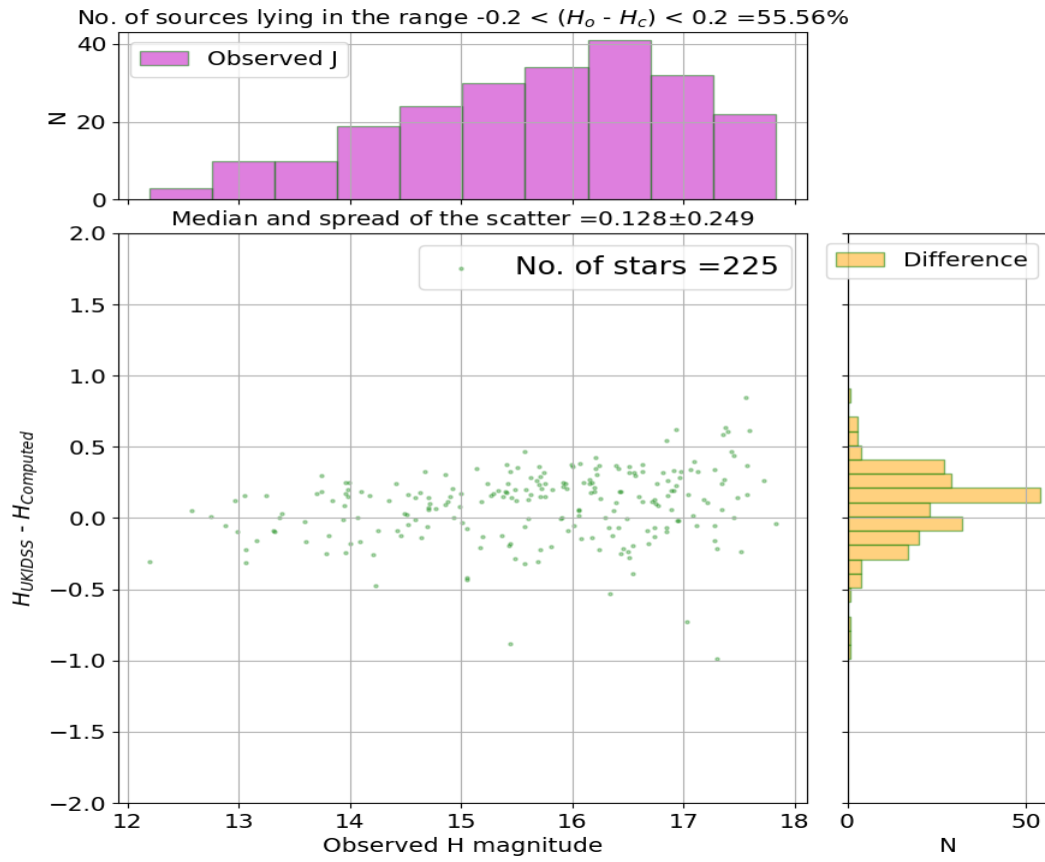


Figure 6: The figure shows the comparison of the computed and observed J band magnitudes.

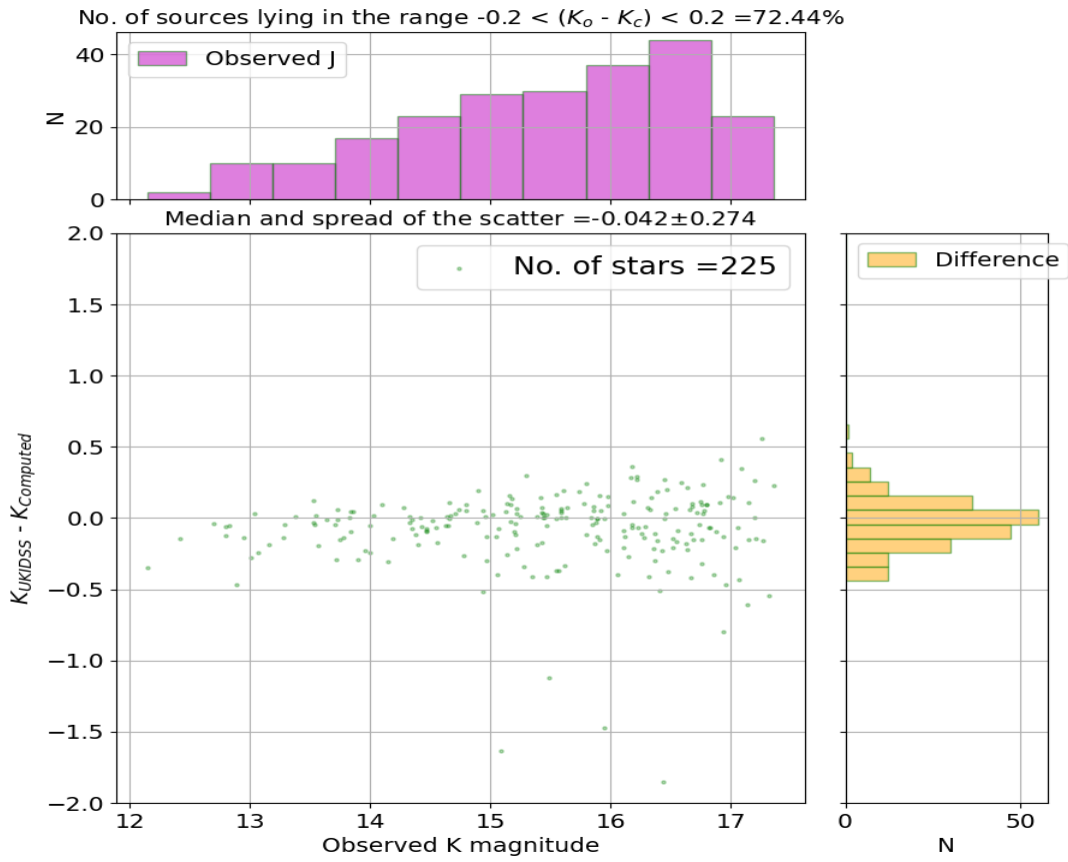


Figure 7: The figure shows the comparison of the computed and observed J band magnitudes.

Please add the following acknowledgment if you use our package in your work. This work has made use of Infrared Guide Star Catalog (IRGSC) developed as a part of the Thirty Meter Telescope (TMT) project." If you have any questions or suggestions for improvements to this repo, please email: sarang.itcc@iiap.res.in

*License

MIT License

Copyright (c) 2023

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

""