

파이썬으로 배우는 데이터 구조



한동대학교
전산전자공학부
김영섭 교수



학습 목표

강의를 소개하고,
파이썬의 기본 문법을 학습한다

Data Structures in Python

Chapter 1 - 1

- Introduction - Review Python
- Objects and References
- List Operations
- GitHub & Jupyter-Lab
- Markdown Tutorial

그런즉 너희가 먹든지 마시든지 무엇을 하든지 다 하나님의 영광을 위하여 하라 (고전10:31)

Data Structures in Python

Table Of Contents

Chapter 1: Introduction to Data Structures and Python

- Python Review
- Object-Oriented Programming (OOP)

Chapter 2: Performance Analysis

Chapter 3: Linear Data Structures

- Stack and Queue

Chapter 4: Recursion

Chapter 5: Searching and Sorting

Chapter 6: Hashing

Chapter 7: Trees and Tree Algorithms

Chapter 8: Heap and Priority Queues

Chapter 9: (Optional) Graph and Graph Algorithms


Learning outcomes

- A student who successfully completes this course will be able to:
 - Define a **class** to model and represent an **object**. (OOP)
 - Write programs that store and manipulate data in standard linear data structures (arrays, linked lists, stacks, queues) and non-linear data structures (hash tables, trees).
 - Write code which handles important **exception** types.
 - Compare the efficiency of algorithms using standard **big-O notation**.
 - Implement **recursive data structures and solutions** to simple problems.
 - Explain the basic algorithm for any of the studied **sorting** methods.
 - Get familiar with **regular expressions** to extract data from a body of text.
- Tools to use
 - Use **Jupyter-lab** (or Jupyter notebook) for coding and reading the textbook.
 - Use **GitHub** to save and get source code files and resources for this course.

Git, GitHub & GitHub Desktop, Anaconda, and Jupyter-lab

- Install **Git** and **GitHub Desktop**
- Get an account at www.github.com
 - Read [GettingStarted.md](https://www.github.com/idebtor/DSPy/GettingStarted.md) in www.github.com/idebtor/DSPy/
 - Clone www.github.com/idebtor/DSPy repository in your local computer.
- Install **Andaconda** package:
 - Make sure that you check the both options.
- Now you can start **Jupyter-lab** in console.

```
Windows PowerShell
PS C:\GitHub\JoyAIx> py
Python 3.9.6 (tags/v3.9.6:db3ff76, Jun 28 2021, 15:26)
Type "help", "copyright", "credits" or "license" for
>>> exit()
PS C:\GitHub\JoyAIx> jupyter-lab
[I 2021-08-23 00:58:57.589 ServerApp] jupyterlab | ex
[W 2021-08-23 00:58:57.616 ServerApp] The 'min_open_
NoneType None.
[I 2021-08-23 00:58:57.670 ServerApp] The port 8888 i
[I 2021-08-23 00:58:57.671 ServerApp] The port 8889 i
[I 2021-08-23 00:58:57.691 LabApp] JupyterLab extensi
```

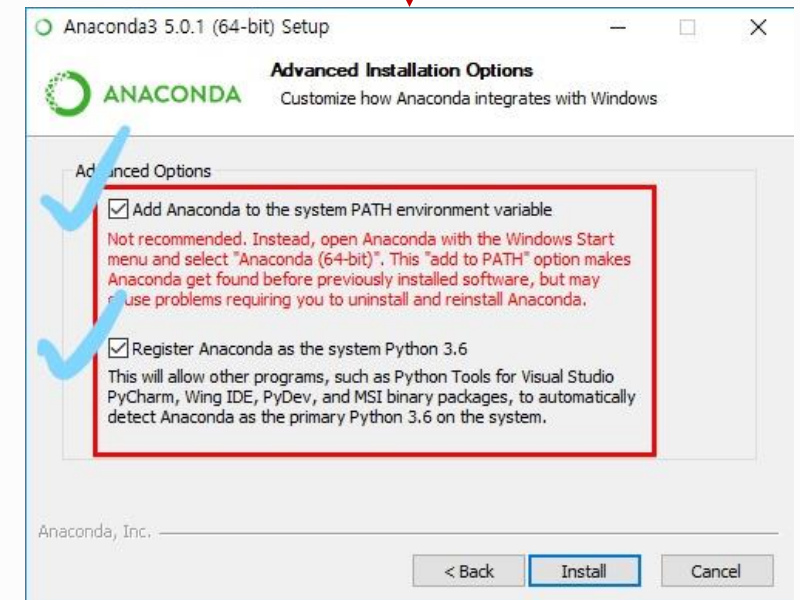

Agenda

- Topics:
 - Python Review
 - list
 - list comprehension
- References:
 - www.github.com/idebtor/DSpy:
 - Ch1-1: Introduction
 - Ch1-2: Review(1) ~ (7)
 - [Problem Solving with Algorithms and Data Structures using Python](#)
 - Chapter 1: Introduction

Python

- It is a programming language designed to be easy to read but **powerful**
 - **Readability**
 - **Simplicity**
 - **Extensibility**
- Ways of running a program
 - Interactive execution — great for learning
 - Creating a module (file) and executing the module
 - Use **Jupyter-lab** (or **Jupyter Notebook**) for interactive execution and documentation
- Install **Anaconda** Package that includes Python and Jupyter-lab (or Jupyter Notebook) and a very large library of standard modules

Lists

- Lists are a built-in type in Python
 - Use **square brackets** to signify a list
 - Lists can contain any type of data, or any mixture of data
 - Examples:

```
my_list1 = [1, 2, 3]
```

```
my_list2 = ['Hello', 'Is', 'there', 'anybody', 'out', 'there?']
```

```
my_list3 = [1, 5.899, 'Hello']
```

```
my_list4 = [4, 2, 6, 9, 3]
```

List functions

- Numerous list functions are supported
 - Use **help(list)** to find out the functions
 - Examples:

```
>>> x = [1, 2, 3]
```

```
>>> len(x)
```

```
3
```

```
>>> x + [4]
```

```
[1, 2, 3, 4]
```

```
>>> x += [5]
```

```
[1, 2, 3, 5]
```

```
>>> 3 in x
```

```
True
```


```
>>> x[0]
```

```
1
```


```
>>> [1, 2, 3] * 2
```

```
[1, 2, 3, 1, 2, 3]
```

x →



x →



```
Windows PowerShell
PS C:\GitHub\DSPy\jupyter> py
Python 3.9.6 (tags/v3.9.6:db3ff76, Jun 28 2021, 15:26:21) [MSC v.1929 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license" for more information.
>>>
```

List functions

- Numerous list functions are supported
 - Use **help(list)** to find out the functions
 - Examples:

```
>>> x = [1, 2, 3]
```

```
>>> len(x)
```

3

```
>>> x + [4]
```

[1, 2, 3, 4]

```
>>> x += [5]
```

[1, 2, 3, 5]

```
>>> 3 in x
```

True


```
>>> x[0]
```

1


```
>>> [1, 2, 3] * 2
```

[1, 2, 3, 1, 2, 3]

X



X



```
Windows PowerShell
PS C:\GitHub\DSPy\jupyter> jupyter-lab
[I 2021-08-11 12:28:39.492 ServerApp] jupyter
[W 2021-08-11 12:28:39.518 ServerApp] The
```

```
[1]: x = [1, 2, 3]
len(x)
```

```
[1]: 3
```

```
[2]: x + [4]
```

```
[2]: [1, 2, 3, 4]
```

```
[3]: x += [5]
x
```

```
[3]: [1, 2, 3, 5]
```

```
[4]: 3 in x
```

```
[4]: True
```

```
[5]: x[0]
```

```
[5]: 1
```

```
[6]: [1, 2, 3] * 2
```

```
[6]: [1, 2, 3, 1, 2, 3]
```

```
Windows PowerShell
PS C:\GitHub\DSPy\jupyter> py
Python 3.9.6 (tags/v3.9.6:db3ff76, Jun 28 2021, 15:26:21) [MSC v.1929 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license" for more information.
>>>
```

List comprehensions

- A powerful feature of the Python language.
 - A list can be created using instructions that appear within the square bracket
 - Generate a new list by applying a function to every member of an original list
- The syntax of a “list comprehension” is tricky.
 - If you’re not careful, you might think it is a for-loop, an ‘in’ operation, or an ‘if’ statement since all three of these keywords (‘for’, ‘in’, and ‘if’) can also be used in the syntax of a list comprehension.
 - It’s something special all its own

```
my_list = [ x for x in range(9) ]
```

List comprehensions: Syntax 1

- The general format is as follows:

```
[expression for variable in sequence]
```

- Where expression is some calculation or operation acting upon the variable.
 - For each member of the sequence, calculate a new value using expression, and then we collect these new values into a new list which becomes the return value of the list comprehension.

- Examples:

```
spells = [ ch for ch in 'Ann' ]
```

```
['A', 'n', 'n']
```

```
c_degs = [ -10, 0, 10, 100 ]  
f_degs =
```

```
[14.0, 32.0, 50.0, 212.0]
```

```
basket = [ '  banana', ' kiwi  ' ]  
fruits =
```

```
['banana', 'kiwi']
```

```
square =
```

```
[1, 4, 9, 16]
```

List comprehensions: Syntax 2

- If the original list contains a variety of different types of values, then the calculations contained in the expression should be able to operate correctly on all of the types of list members.

```
items = [ 'hello', [1, 2], (a, b, c) ]  
length =
```

[5, 2, 3]

- If the members of list are other containers, then the name can consist of a container of names that match the **type** and “**shape**” of the list members.

```
store = [ ('apple', 1), ('kiwi', 2), ('pear', 3) ]  
order =
```

[2, 4, 6]

```
store = [ ('apple', 1), ('kiwi', 2), ('pear', 3) ]  
order =
```

{'apple': 2, 'kiwi': 4, 'pear': 6}

List comprehensions: Syntax 3

- The expression of a list comprehension could also contain user-defined functions.

```
def c2f(c):  
    return c * 1.8 + 32
```

```
c_degs = [ -10, 0, 100 ]  
cflist =
```

```
[(-10, 14.0), (0, 32.0), (100, 212.0)]
```

- We can also create a list of tuples, and convert it a dictionary:

```
vector = [ 2, 4, 6 ]  
square =
```

```
{2: 4, 4: 16, 6: 36}
```


List comprehensions that uses conditions (Filtered list)

- We can extend the syntax for a list comprehension to include a condition:

```
evens = [0, 2, 4, 6, 8]
```

- The general format is as follows:

```
[expression for variable in sequence if condition]
```

- Similar to regular list comprehensions, except now we might not perform the expression on every member of the list.
- We first **check** each member of the list to see if it satisfies a **filter** condition. Those list members that return False for the filter condition **will be omitted** from the list before the list comprehension is evaluated.

List comprehensions: Filtered List


- Examples:

```
vector = [ 2, 4, 6 ]  
my_vec = [ 3 * x for x in vector if x > 3 ]
```



[12, 18]

```
vector = [ 2, 4, 6 ]  
my_vec = [ 3 * x for x in vector if x < 2 ]
```



[]

Summary: Features of lists

- Information in a list is stored contiguously in memory
 - location of the information can be calculated
 - $\text{location} = \text{start of the list} + \text{index} * \text{size of each element}$
- Efficiency issues
 - It takes the same time to access any of the elements
 - Slow to move elements around (i.e. add and delete elements from within the list)

학습 정리

- 1) List 자료형은 대괄호([])형태로 사용한다
- 2) help()를 통해 내장함수 사용법을 익힐 수 있다
- 3) List comprehension은
[expression for variable in sequence]의 형식으로 사용하고
필요시 조건문이나 반복문을 추가할 수 있다

파이썬으로 배우는 데이터 구조

수고했습니다
곧 다음 시간에
다시 뵙겠습니다

