


ripgrep: UniAlloc uses 6 MiB at +1.8% wall time





Single-thread deterministic search; n=7 paired measured runs per configuration. Bars are medians; dots are runs.

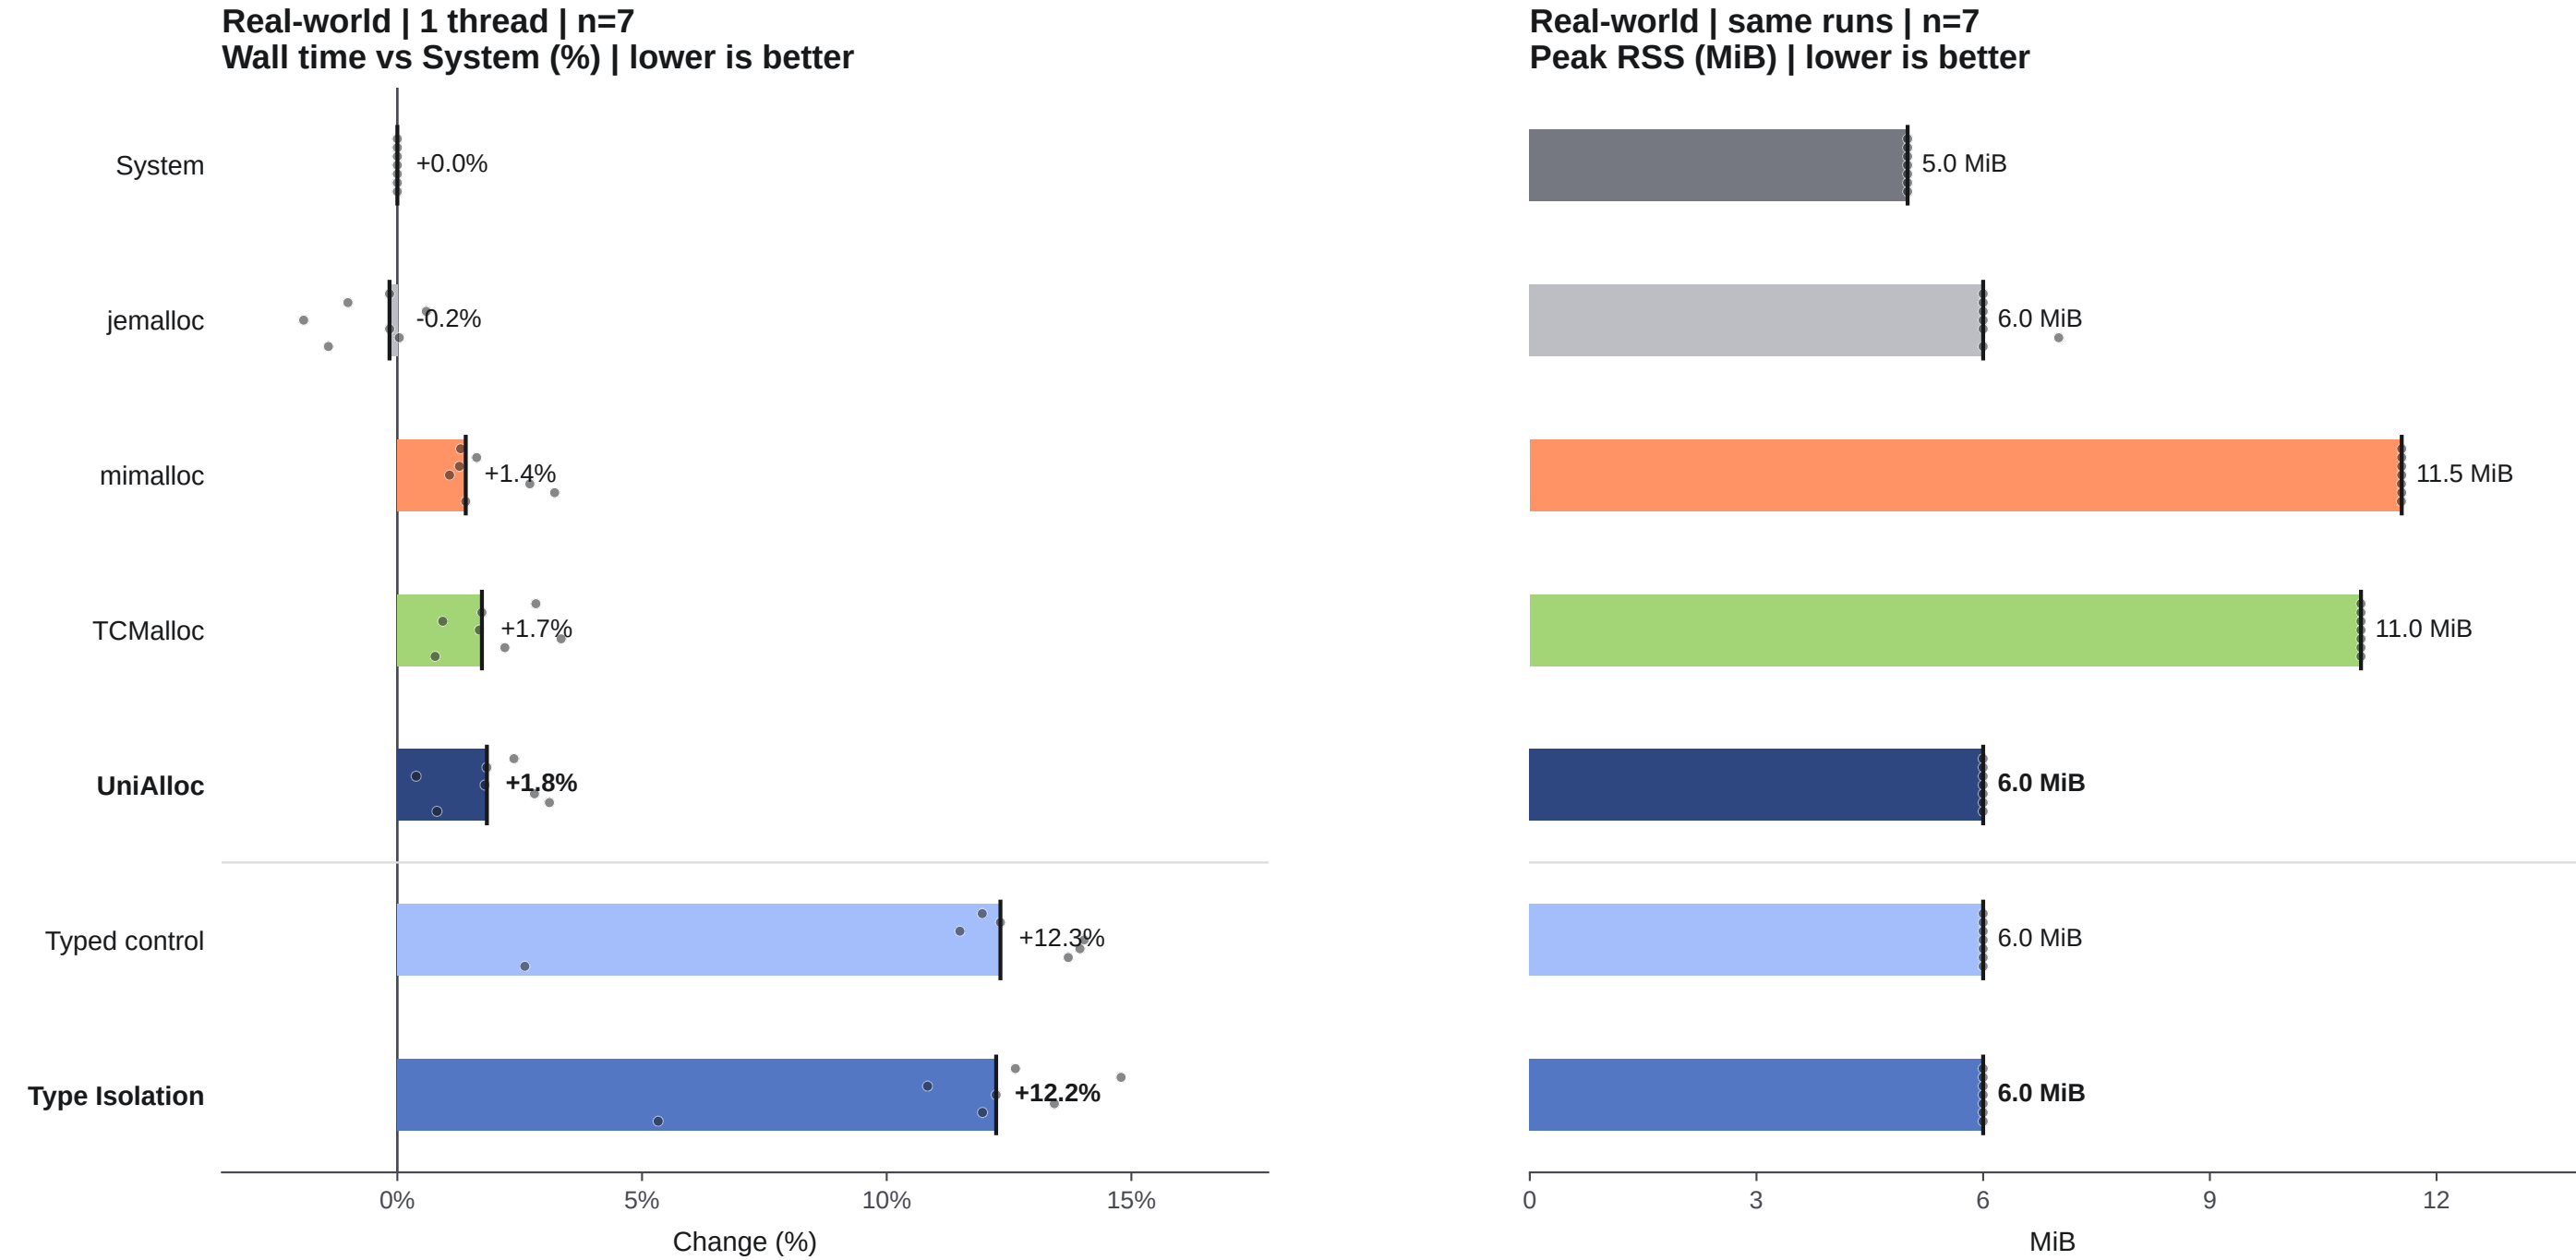

Median of same-round ratios; dots are runs. Type Isolation / Typed control: -0.46% wall, +0.00% RSS. Source: [realworld-rust-allocator-20260714.json](#).

Oxipng: UniAlloc stays below System RSS in both campaigns


Campaigns remain separate: a 1-thread real-world matrix (n=7) and a 4-thread feature matrix (n=5). Bars are medians; dots are runs.

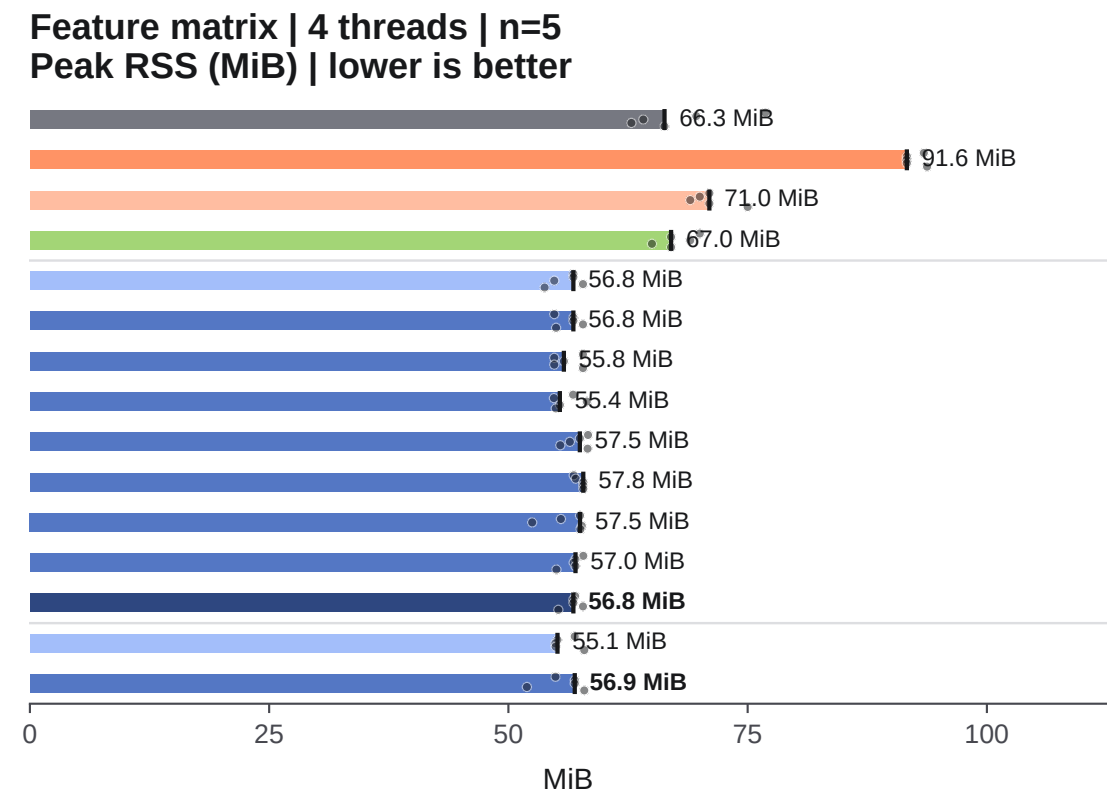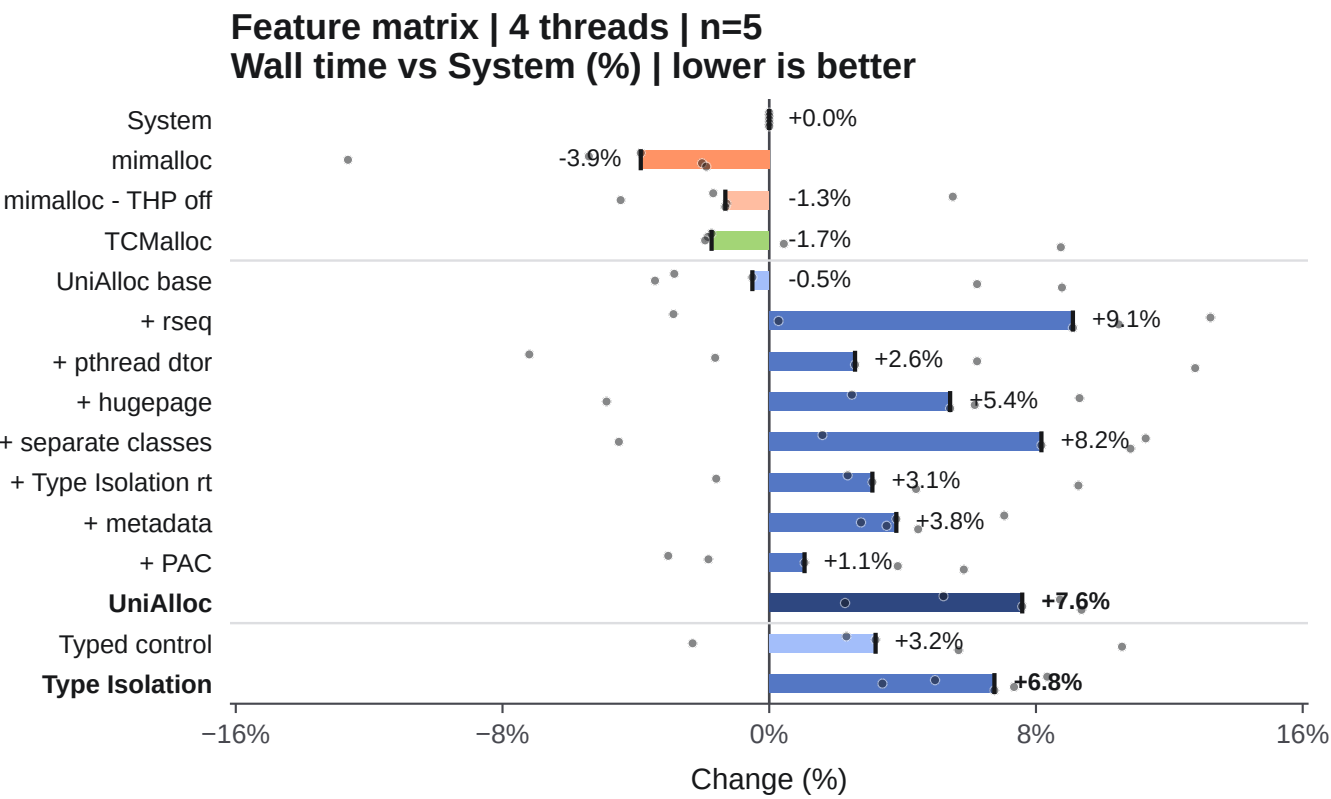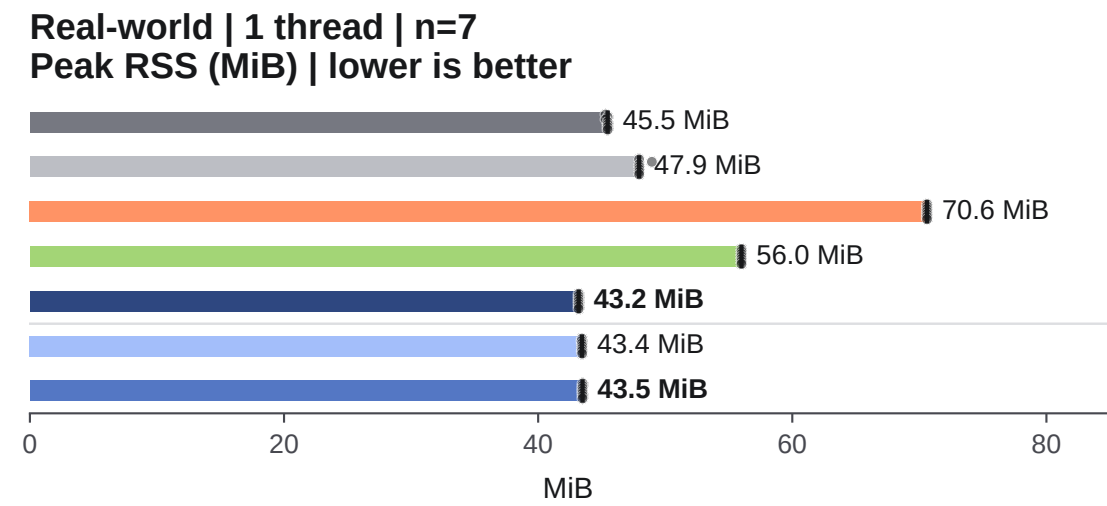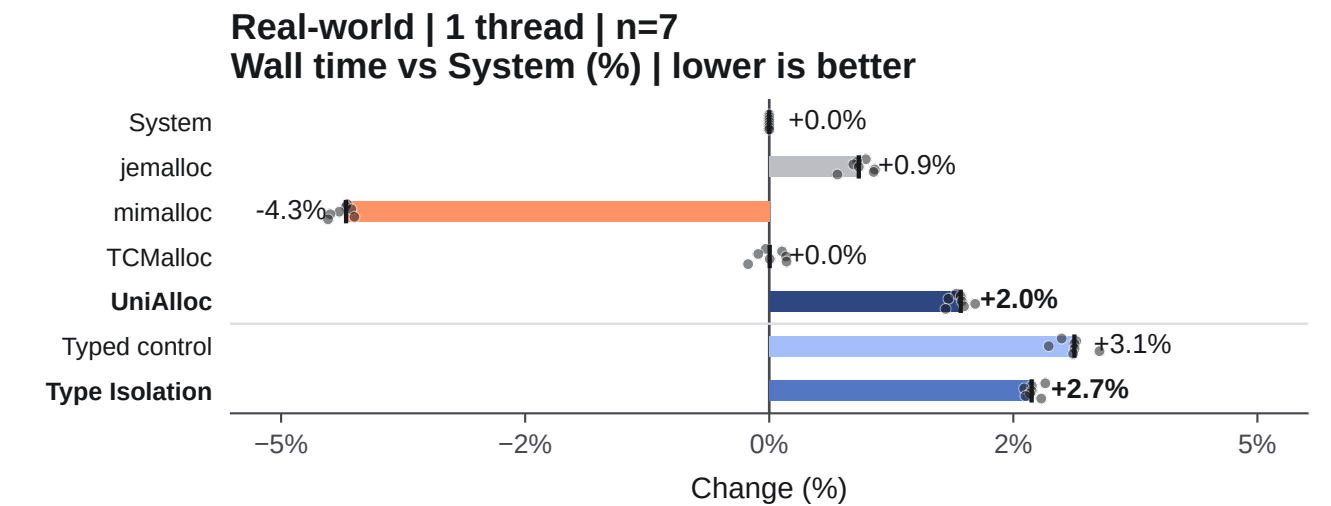

Independent axes; campaigns are not pooled. THP off / allowed: -23.6% RSS, +2.3% wall; Type Isolation / control: +1.73% wall. Sources: realworld + feature/THP JSON.

Rsedis: UniAlloc gains +2.6% throughput at 24.4 MiB RSS

Five fresh-server runs per configuration. Allocator and THP mechanism campaigns use independent axes and baselines.

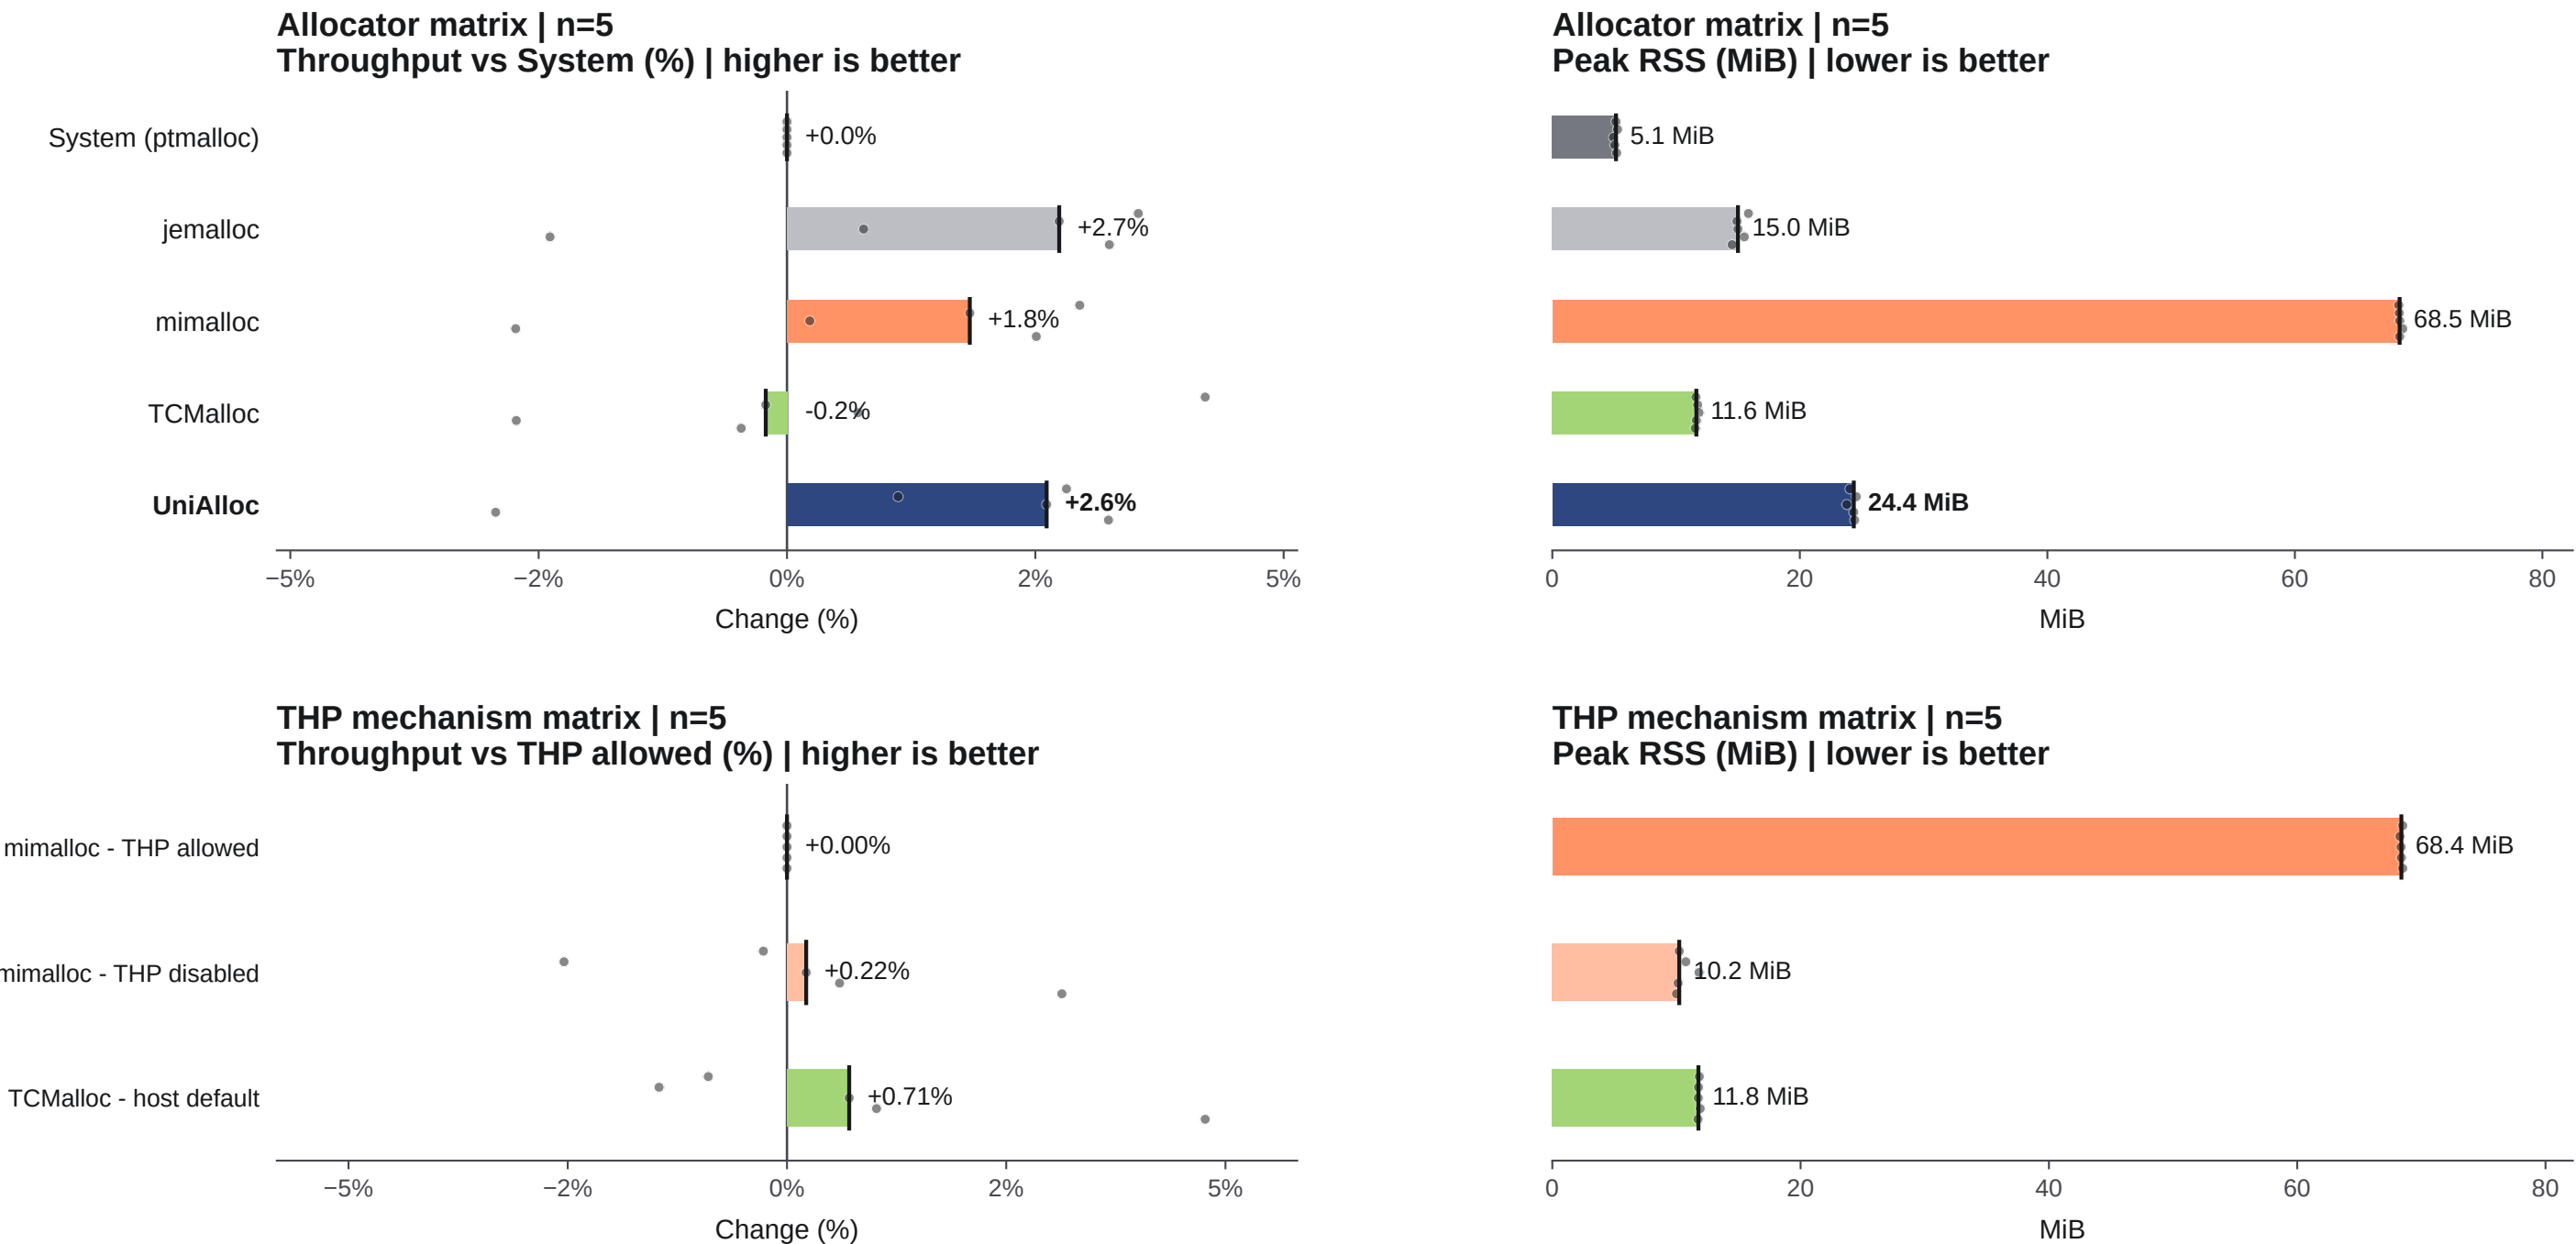

Independent axes; campaigns are not pooled. THP matrix median AnonHugePages: 36 MiB allowed, 0 MiB disabled. Sources: paper + feature/THP JSON.