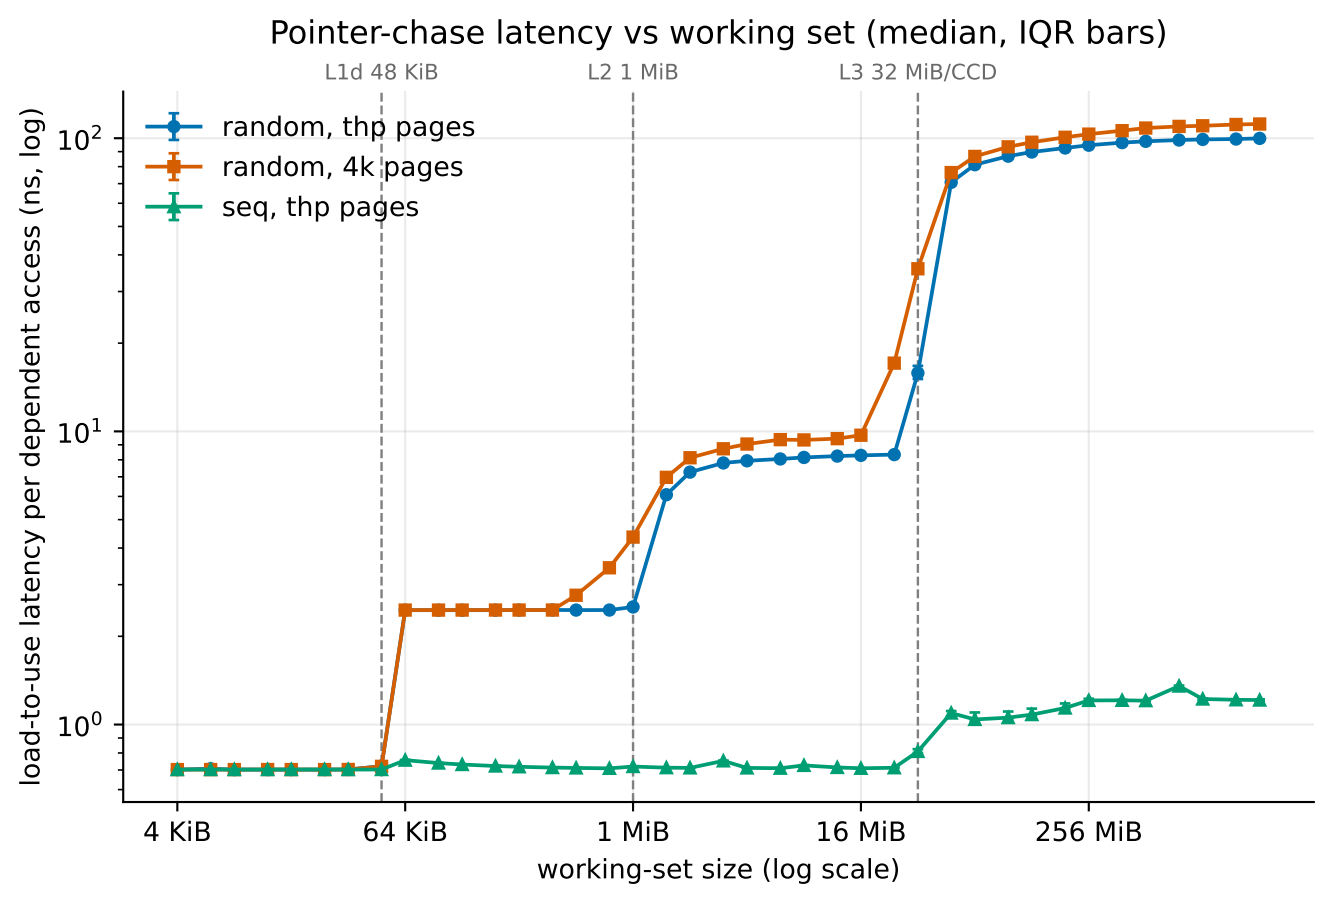
Pointer-chase latency vs working set (median, IQR bars)
L1d 48 KiB
L2 1 MiB
L3 32 MiB/CCD
random, thp pages
random, 4k pages
seq, thp pages
load-to-use latency per dependent access (ns, log)
10^2
10^1
10^0
4 KiB
64 KiB
1 MiB
16 MiB
256 MiB
working-set size (log scale)