

Relational Database Design: E/R-Relational Translation

Introduction to Databases
CompSci 316 Fall 2015



Announcements (Thu. Sep. 3)

- Homework #1 due on the 15th (the Tuesday after the next)
 - Please please please start early
- Project description available next week

Database design steps: review

- Understand the real-world domain being modeled
- Specify it using a database design model (e.g., E/R)
- Translate specification to the data model of DBMS (e.g., relational)
- Create DBMS schema


☞ Next: translating E/R design to relational schema

E/R model: review

- Entity sets
 - Keys
 - Weak entity sets
- Relationship sets
 - Attributes on relationships
 - Multiplicity
 - Roles
 - Binary versus n -ary relationships
 - Modeling n -ary relationships with weak entity sets and binary relationships
 - ISA relationships


Translating entity sets

- An entity set translates directly to a table
 - Attributes → columns
 - Key attributes → key columns

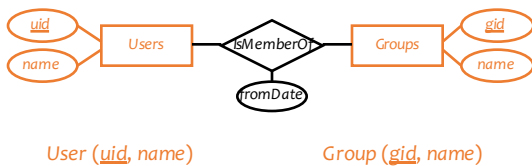


Translating weak entity sets

- Remember the “borrowed” key attributes
- Watch out for attribute name conflicts

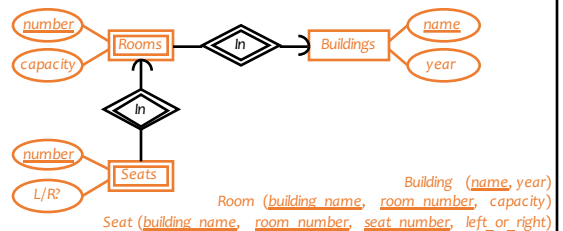


Translating relationship sets

- A relationship set translates to a table
 - Keys of connected entity sets → columns
 - Attributes of the relationship set (if any) → columns
 - Multiplicity of the relationship set determines the key of the table




More examples

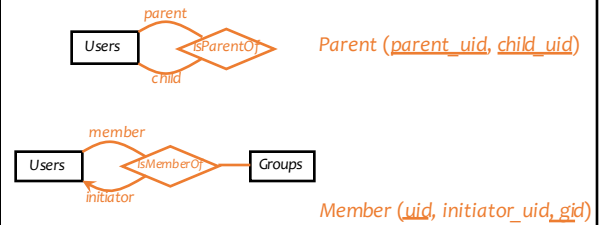


Translating double diamonds?

- Recall that a double-diamond (supporting) relationship set connects a weak entity set to another entity set
- No need to translate because the relationship is implicit in the weak entity set's translation

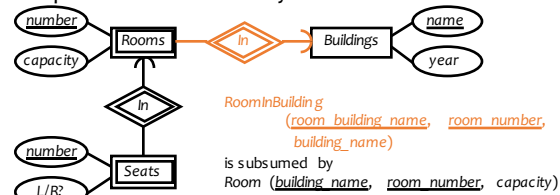


Translating subclasses & ISA: approach 1

- Entity-in-all-superclasses approach ("E/R style")
 - An entity is represented in the table for each subclass to which it belongs
 - A table includes only the attributes directly attached to the corresponding entity set, plus the inherited key

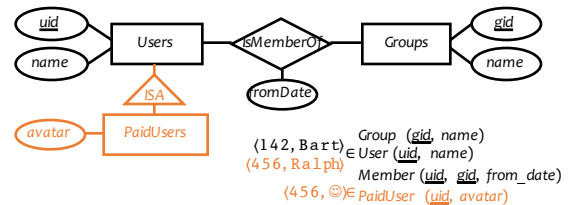


Translating subclasses & ISA: approach 2

- Entity-in-most-specific-class approach ("OO style")
 - An entity is only represented in one table (the most specific entity set to which the entity belongs)
 - A table includes the attributes attached to the corresponding entity set, plus all inherited attributes

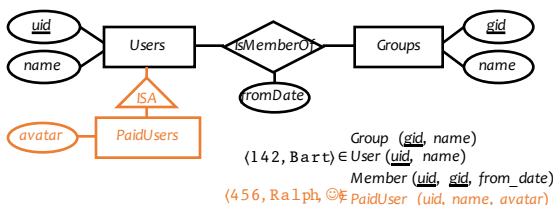

Translating subclasses & ISA: approach 3


- All-entities-in-one-table approach ("NULL style")
 - One relation for the root entity set, with all attributes found in the network of subclasses (plus a "type" attribute when needed)
 - Use a special NULL value in columns that are not relevant for a particular entity

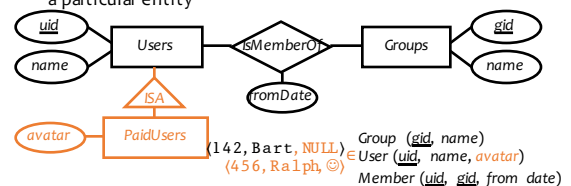

Comparison of three approaches

- Entity-in-all-superclasses
 - User (uid, name), PaidUser (uid, avatar)
 - Pro: All users are found in one table
 - Con: Attributes of paid users are scattered in different tables
- Entity-in-most-specific-class
 - User (uid, name), PaidUser (uid, name, avatar)
 - Pro: All attributes of paid users are found in one table
 - Con: Users are scattered in different tables
- All-entities-in-one-table
 - User (uid, [type,]name,avatar)
 - Pro: Everything is in one table
 - Con: Lots of NULL's; complicated if class hierarchy is complex

A complete example

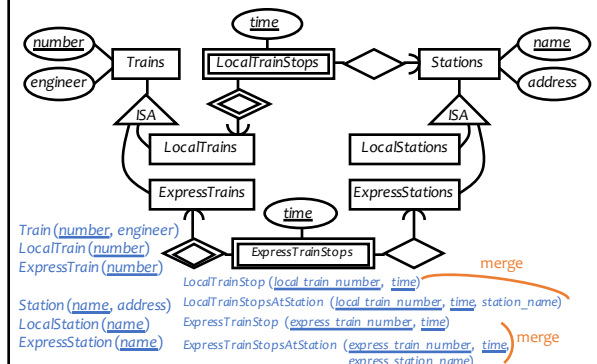

Simplifications and refinements

Train (number, engineer), LocalTrain (number), ExpressTrain (number)
 Station (name, address), LocalStation (name), ExpressStation (name)
 LocalTrainStop (local_train_number, station_name, time)
 ExpressTrainStop (express_train_number, express_station_name, time)

- Eliminate LocalTrain table
 - Redundant: can be computed as $\pi_{number}(Train) - ExpressTrain$
 - Slightly harder to check that local_train_number is indeed a local train number
- Eliminate LocalStation table
 - It can be computed as $\pi_{number}(Station) - ExpressStation$

An alternative design

Train (number, engineer, type)
 Station (name, address, type)
 TrainStop (train_number, station_name, time)

- Encode the type of train/station as a column rather than creating subclasses
- What about the following constraints?
 - Type must be either "local" or "express"
 - Express trains only stop at express stations
 - They can be expressed/declared explicitly as database constraints in SQL (as we will see later in course)
- Arguably a better design because it is simpler!

Design principles

- KISS
 - Keep It Simple, Stupid
- Avoid redundancy
 - Redundancy wastes space, complicates modifications, promotes inconsistency
- Capture essential constraints, but don't introduce unnecessary restrictions
- Use your common sense
 - Warning: mechanical translation procedures given in this lecture are no substitute for your own judgment

