



TPC Web API Manual

Comprehensive technical documentation for developers and integration engineers implementing TPC Web API solutions. This manual provides complete guidance for booking automation, tracking integration, and logistics process optimization using modern JSON-based API endpoints.

API Overview & Integration Benefits

Seamless Integration

The TPC Web API enables seamless integration with other APIs or applications, making it easier to automate booking, tracking, and related logistics processes. Built on modern JSON standards, the API ensures compatibility across most platforms and development environments.

Our comprehensive API suite supports full lifecycle management from initial service verification through final delivery confirmation, providing developers with all necessary endpoints for complete logistics automation.

Technical Specifications

Base URL: <https://www.tpcglobe.com>


Format: JSON (industry standard)

Authentication: UserID and Password

Method: POST requests

Content-Type: application/json

Credentials are allocated by TPC stations upon quotation approval and shared securely via email from authorized TPC stations.

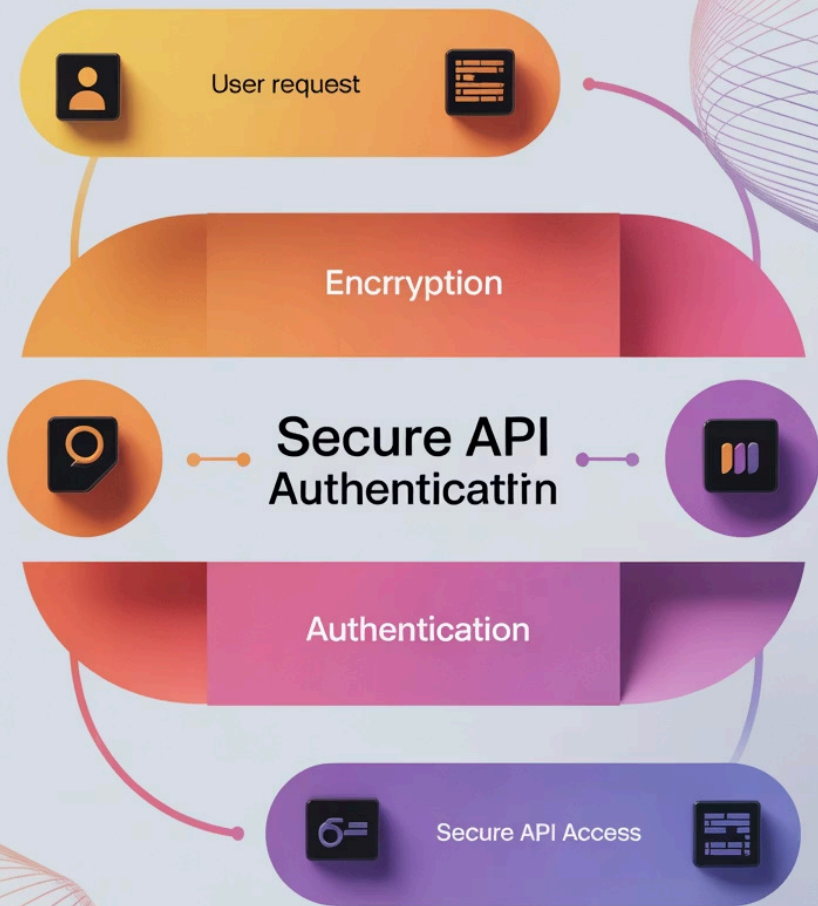

Authentication & Security

UserID Allocation

Unique identifier assigned by TPC stations after quotation approval. This ID serves as your primary authentication credential and must be included in all API requests.

Password Security

Secure passwords are transmitted via encrypted email from authorized TPC stations. Store credentials securely and implement proper password management practices in your applications.

Request Validation

All API requests undergo strict credential validation. Invalid or missing authentication will result in request rejection and service access denial.

PIN Code Service Verification

Endpoint URL

```
http://www.tpcglobe.com/tpcwebService/PINcodeService.ashx?pincode=563130
```

Before initiating any consignment booking, developers should implement service verification to confirm TPC coverage for specific PIN codes. This essential pre-booking validation prevents failed shipments and improves customer experience by ensuring service availability.

The PIN code service checking API provides real-time verification of TPC's service network coverage. Integration teams should implement this check as a mandatory step in their booking workflow to validate service availability before allowing users to proceed with shipment creation.



```
"PINCODE": "563130",  
"AREANAME": "ARALERI",  
"STATION_CODE": "MLU",  
"SUB_BRANCH_CODE": "MLU",  
"DOC_DELIVERY": "YES",  
"PARCEL_DELIVERY": "YES",  
"PROPREMIUM_DELIVERY": "YES",  
"DOC_DELIVERY_SCHEDULE": "COUNTER DELIVERY",  
"PARCEL_DELIVERY_SCHEDULE": "COUNTER DELIVERY",  
"PRODLYSCHEDULE": "AM/PM",  
"COD_DELIVERY": "NO"
```



☐ Always validate PIN code coverage before presenting booking options to end users. This prevents customer frustration and reduces support overhead.

Area Name Search API

Endpoint Configuration

<https://www.tpcglobe.com/TPCWebservice/PINcodeCitysearch.ashx?AreaName=coimbatore>

```
"AREANAME": "COIMBATORE",  
"PINCODE": "641037",  
"STATION_CODE": "CJB",  
"SUB_BRANCH_CODE": "CJB",  
"DOC_DELIVERY": "YES",  
"PARCEL_DELIVERY": "YES",  
"PROPREMIUM_DELIVERY": "YES",  
"DOC_DELIVERY_SCHEDULE": "DAILY",  
"PARCEL_DELIVERY_SCHEDULE": "DAILY",  
"PRODLYSCHEDULE": "AM",  
"COD_DELIVERY": "YES"
```

Implementation Details

Method Type: POST

Content-Type: application/json

This API enables location-based searches allowing users to find serviceable areas by city or region name. Particularly useful for building dynamic address selection interfaces and location autocomplete features.

Use Cases

- Dynamic address validation
- City-based service lookup
- Regional coverage verification
- Location autocomplete features

Consignment Note Management

Effective consignment note management is crucial for seamless booking operations. TPC's API provides comprehensive endpoints for requesting, checking, and managing consignment note inventory to prevent booking failures due to stock shortages.

01

Stock Verification

Check current consignment note availability before initiating booking processes to avoid interruptions.

02

Note Requests

Request additional consignment notes when stock levels approach minimum thresholds.

03

Inventory Monitoring

Implement automated monitoring to maintain adequate stock levels for continuous operations.



Requesting Consignment Notes

API Endpoint

```
https://www.tpcglobe.com/TPCWebService/CnoteRequest.ashx?client=blraveryden&tpcpwd=prof&Qty=100
```

Before initiating booking operations, ensure your TPC account maintains sufficient consignment note stock. This API endpoint allows developers to programmatically request additional consignment notes, preventing booking interruptions due to stock depletion.

Implementation teams should integrate stock monitoring logic that automatically requests additional notes when inventory falls below predetermined thresholds. This proactive approach ensures uninterrupted service delivery and maintains optimal user experience during high-volume booking periods.

Response Format

```
{
  "Starting No": "9000084531",
  "Ending No": "9000084630"
}
```

Stock Level Monitoring

Current Stock API

```
https://tpcglobe.com/tpcwebservice/ClientCnoteStock.ashx?client=xxxxxxx&tpcpwd=xxxx
```

This endpoint retrieves current consignment note availability in your TPC account. Essential for maintaining adequate inventory levels and preventing booking service interruptions.

Response Structure

```
[{
  "Response Data": {
    "Available stocks": {
      "No of Cnotes": "98"
    }
  }
}]
```

Implement automated stock monitoring with threshold alerts to maintain continuous service availability. Configure your systems to trigger restocking requests when inventory drops below defined minimum levels, ensuring smooth operations during peak booking periods.

Detailed Stock Information

Stock Details Endpoint

```
https://tpcglobe.com/tpcwebservice/ClientStockDetails.ashx?client=xxxxxxx&tpcpwd=xxxx
```

Access comprehensive stock information including detailed breakdowns of consignment note allocations, usage patterns, and availability metrics. This endpoint provides granular insights for advanced inventory management and planning.

Integration teams should leverage this detailed information to build sophisticated inventory dashboards, generate usage analytics, and implement predictive restocking algorithms. The detailed stock data enables proactive management strategies that optimize operational efficiency.

```
{
  {
    "Issued_Date": "13/01/2023",
    "ConsgnNum": "BLR9000034283"
  },
  {
    "Issued_Date": "12/04/2023",
    "ConsgnNum": "BLR9000039530"
  }
}
```

- ☐ Use detailed stock information to implement predictive analytics for inventory management and operational planning.

Pickup Request Configuration

Primary Endpoint

```
https://www.tpcglobe.com/TPCWebService/PickupRequest.ashx?client=blraveryden&tpcpwd=xxxx
```

The pickup request API serves as the cornerstone for shipment booking automation. This endpoint requires valid client credentials and accepts comprehensive JSON payloads containing complete shipment details, recipient information, and service preferences.

Authentication is mandatory for all pickup requests. The API validates credentials before processing any booking requests, ensuring secure access and maintaining data integrity throughout the booking process. Invalid credentials result in immediate request rejection and service access denial.

Authentication Required

Valid Client ID and password must be provided in JSON format for all pickup requests.

Credential Validation

All requests undergo strict validation. Invalid credentials prevent web service invocation.

Pickup Request Data Structure

```
{
  "REF_NO": "1234567",
  "BDATE": "2023-09-02",
  "SENDER": "BLR",
  "SENDER_CODE": "1234",
  "SENDER_ADDRESS": "TPC",
  "SENDER_CITY": "Bengaluru",
  "SENDER_PINCODE": "560055",
  "SENDER_MOB": "9xxxxxxxx0",
  "SENDER_EMAIL": "xyz@gmail.com",
  "GSTIN": "29xxxxxxx5",
  "RECIPIENT": "ABC",
  "RECIPIENT_COMPANY": "abc limited",
  "RECIPIENT_ADDRESS": "ABC",
  "RECIPIENT_CITY": "Chennai",
  "RECIPIENT_PINCODE": "560032",
  "RECIPIENT_MOB": "9xxxxxxxx0",
  "RECIPIENT_EMAIL": "abc@gmail.com",
  "WEIGHT": "0.1",
  "PIECES": "1",
  "RECIPIENT_GSTIN": "32xxxxxxx4",
  "FLYER_NO": "s123456",
  "CUST_INVOICE": "INV1002",
  "CUST_INVOICEAMT": "100.00",
  "VOL_LENGTH": "5",
  "VOL_WIDTH": "10",
  "VOL_HEIGHT": "10",
  "DESCRIPTION": "TESTING",
  "REMARKS": "TESTING",
  "COD_AMOUNT": "100.00",
  "PAYMENT_MODE": "CASH/CREDIT",
  "TYPE": "PICKUP",
  "ORDER_STATUS": "HOLD",
  "MODE": "AT",
  "SERVICE": "STD",
  "POD_NO": "XXX1234567"
}
```

Complete JSON structure for pickup requests including all mandatory and optional fields. Ensure all required fields are populated to prevent booking failures.

Service Configuration Parameters



Transit Modes

AT: Air Transit

ST: Surface Transit

Choose appropriate transit mode based on delivery requirements and cost considerations.



Service Types

STD: Standard Booking

PRO: PROPremium

PRC: Priority Class

OTP: One Time Password/Delivery PIN

PARAMETER: "SERVICE"



Operation Types

PICKUP: Courier collection

DROP: Direct delivery

Select operation type based on shipment logistics requirements.


Configure service parameters according to specific delivery requirements. The SERVICE parameter accepts multiple values for different service levels, while MODE determines transit method. TYPE specifies whether the shipment requires pickup or direct drop service.


API Testing with Postman

Postman provides an excellent environment for testing TPC API endpoints during development and integration phases. The interface allows developers to configure headers, authentication, and JSON payloads while providing detailed response analysis and debugging capabilities.

Use Postman collections to organize different API endpoints, save authentication credentials, and create comprehensive test suites. This approach enables efficient testing workflows and simplifies debugging during integration development. Export collections for team collaboration and documentation purposes.

- Create Postman collections for each API endpoint to streamline testing and facilitate team collaboration during integration development.

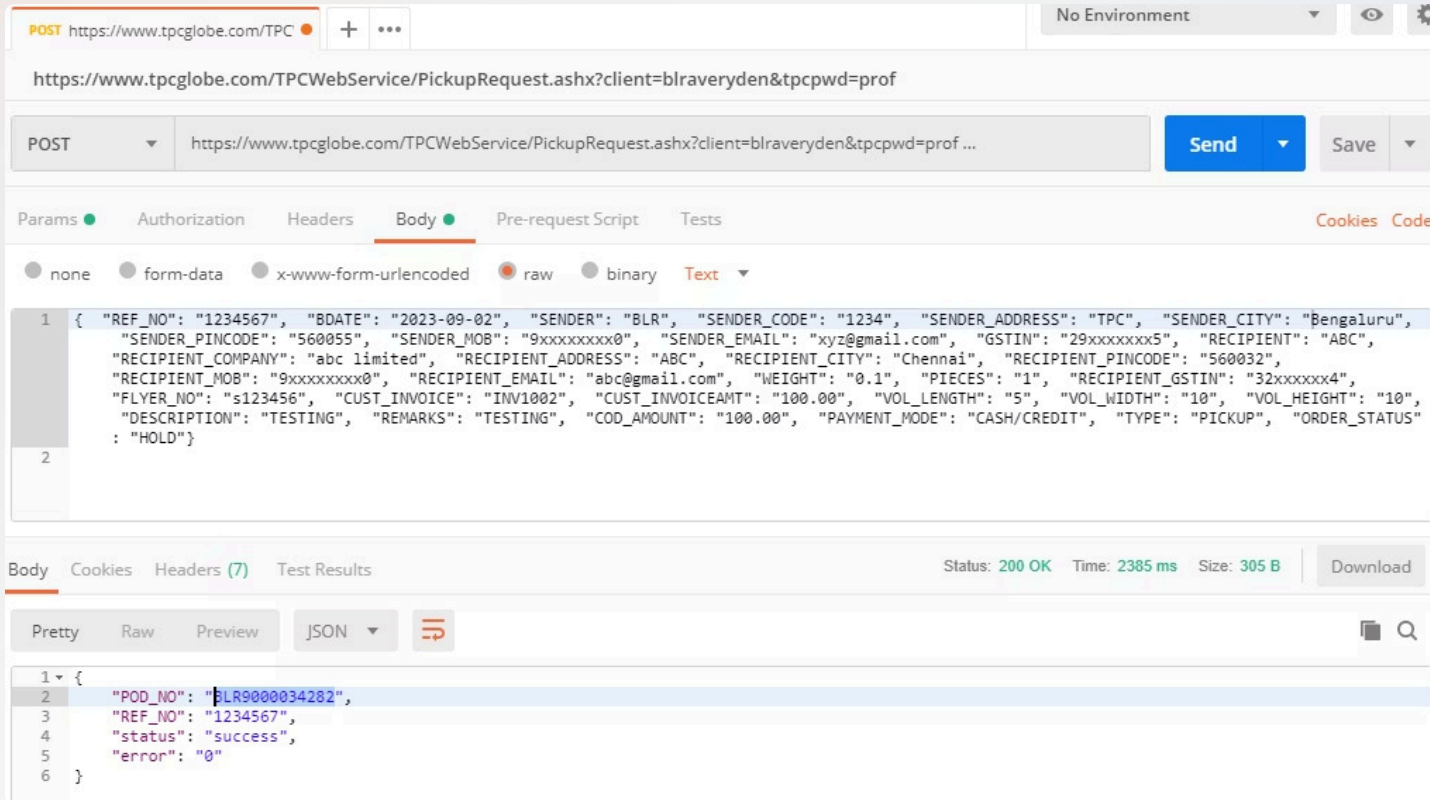

Shipper's Details	BLR/MRO	Date: 23/01/2025 12:19:09	Consignee's Details	Destn: BLR/MVM	Mode :SURFACE	No of Pieces: 1				
M/s: ID :BLRTEST 9164244321, RAMESH@TPCBLR.IN Flyer No.: AAA1234 Ref No.: 1050-TPC GSTIN :29AAAF6234H1Z3			M/s: RAMESH 195, MARGOSA ORAD, MALLESWARAM16TH CROSS MVM 9845211617, RAMESH@TPCBLR.IN		<table border="1"> <tr> <th>Kg.</th> <th>Gms.</th> </tr> <tr> <td>0</td> <td>2</td> </tr> </table>		Kg.	Gms.	0	2
Kg.	Gms.									
0	2									
Contents: Declared Value:Rs. 1500 I/We certify that this consignment does not contain personal mail of any kind contrabands cash, jewellery, etc Sender's Name: Sign:			Track your consignment at www.tpcglobe.com Recieved by consignee in good order/condition. No claims/Complaints will be accepted after 30days of booking Name: Stamp: Sign: Date: Mobile No.: Time: Prepared by: 1050 Delivered by:		CREDIT This is a non-negotiable consignment note and is subject to standard conditions of carriage. Carrier's liability is limited to Rs.100/- per consignment for any cause  BLR9000089542					
 MARGOSA ROAD,BETWEEN 16TH & 17TH CROSS MALLESWARAM BENGAL URU-560055 ,9844701583,blro@tpcglobe.co.in blr-crm@tpcinia_bangalore,560055 GSTIN :29AAAF6234H1Z3			 BLR9000089542		 BLR59.97.21.150					
PLEASE DO NOT BOOK CASH.IT IS AN OFFENCE IF IT IS LOST. WE ARE NOT RESPONSIBLE.			PROOF OF DELIVERY							

Consignment Note Generation

Upon successful booking completion, TPC generates official consignment notes containing all shipment details, tracking information, and service specifications. These documents serve as legal proof of shipment creation and contain essential tracking identifiers.

The generated consignment notes include comprehensive shipment information including sender and recipient details, package specifications, service type, and unique tracking numbers. This documentation provides complete audit trails and supports customer service operations throughout the shipping lifecycle.

Printing & Documentation

Standard A4 Printing

<https://www.tpcglobe.com/TPCWebService/CnotePrinting.aspx?client=xxxxxxxx&tpcpwd=xxxx&podno=xxxxxxxx>

Generate full-size A4 consignment notes for official documentation and customer records. The podno parameter requires the complete AWB number including origin code.

Single Copy Printing

<https://www.tpcglobe.com/TPCWebService/CnotePrintingsingle.aspx?client=xxxxxxxx&tpcpwd=xxx&podno=xxxxxxxxxx>

Optimized endpoint for single copy generation, ideal for digital workflows and reduced paper consumption scenarios.

Printing Best Practices

- Verify POD number accuracy before printing
- Include origin codes in AWB numbers
- Implement error handling for invalid AWB requests
- Cache printing responses for audit purposes

Booking Cancellation API

Cancellation Endpoint

https://www.tpcglobe.com/TPCWebService/CancelCnoteBKG.ashx?client=xxxxx&tpcpwd=xxx&podno=xxxxxx

Cancel AWB/Consignment numbers after booking but before dispatch using this endpoint. Cancellation is only permitted for bookings that have not yet been collected or dispatched from the origin facility.

Success Response

```
{ "POD_NO": "BLR123456", "REF_NO": "1234567", "status": "success", "error": "0" }
```

Error Responses

```
{ "POD_NO": "BLR123456", "REF_NO": "1234567", "status": "Consignment number not allotted", "error": "1" }  
{ "POD_NO": "BLR123456", "REF_NO": "1234567", "status": "Invalid credential", "error": "1" }  
{ "POD_NO": "BLR123456", "REF_NO": "1234567", "status": "Invalid credential", "error": "1" }  
{ "POD_NO": "BLR123456", "REF_NO": "1234567", "status": "failed", "error": "1" }
```

Failure Response

Case 1: Invalid Credentials

```
{ "error": "Invalid credential" }
```

When wrong client ID or password is provided.

Case 2: Consignment Not Requested

```
{ "error": "Consignment number not requested" }
```

When attempting to cancel a non-existent booking.

Case 3: Invalid Consignment

```
{ "error": "Consignment number not allotted" }
```

When consignment number is not properly allocated.

Case 4: Failed Attempt

```
{ "error": "failed" }
```

General failure response for invalid operations.

Implement comprehensive error handling to manage various cancellation scenarios including invalid credentials, unallocated consignment numbers, and failed cancellation attempts. Always verify response status before confirming cancellation to users.

Shipment Details Modification

Modification Endpoint

```
https://www.tpcglobe.com/tpCWebService/PickupAddon.ashx?client=blrxxxxxx&tpcpwd=xxx
```

After consignment note generation but before dispatch, modify critical shipment information including weight, piece count, and invoice details. This flexibility allows for last-minute corrections and ensures accurate billing and tracking.

Modifiable Fields

- Weight (kilograms)
- Number of pieces
- Invoice number
- Content description
- Declared value
- Invoice amount

Sample JSON Request

```
{
  "POD_NO":"BLR123456",
  "WEIGHT":"0.5",
  "PIECES":"2",
  "CONTENT":"TEST",
  "DECLARED_VALUE":"100",
  "CUST_INVOICE":"INV123",
  "CUST_INVOICEAMT":"100"
}
```

Use this API judiciously as modifications are only permitted before dispatch. Implement validation logic to ensure modifications comply with service limitations and pricing structures. Always confirm successful updates before proceeding with dispatch operations.

Comprehensive Tracking API

Primary Tracking Endpoint

```
https://www.tpcglobe.com/TPCWebService/tracktracejson.ashx?podno=xxx123456&client=xxxxxx&tpcpwd=xxxx
```

Access real-time tracking information for consignments throughout their delivery journey. This API provides transactional details for each movement, status change, and delivery attempt, enabling comprehensive shipment visibility.

Each API call returns only new transactional details since the last request, requiring immediate data storage in your database. Implement proper data persistence strategies to maintain complete tracking history and avoid data loss between API calls.



Booking Completed

```
{
  "Date": "01/09/2023",
  "Time": "18:08",
  "City": "Madurai",
  "Activity": "Booking Completed",
  "Forwardingno": "95845294",
  "Pod_no": "BLR4550068765",
  "Remarks": "1001112913",
  "Pieces": "5",
  "Weight": "0.1",
  "Receiver": "FIRST GARMENT PVT LTD",
  "Receiver Phno": "",
  "Stamp": "SIGN",
  "Refno": "1001112913",
  "Idproof": "",
  "Type": "Booking"
}
```



In Transit

```
{
  "Date": "01/09/2023",
  "Time": "20:41",
  "City": "Bengaluru",
  "Activity": "Despatched to Madurai",
  "Forwardingno": "MBLR588841067",
  "Pod_no": "BLR4550068765",
  "Remarks": "HT - ",
  "Pieces": "5",
  "Weight": "1.3",
  "Receiver": "",
  "Receiver Phno": "",
  "Stamp": "",
  "Refno": "1001112913",
  "Idproof": "",
  "Type": "Outbound"
}
```



Out for Delivery

```
{
  "Date": "04/09/2023",
  "Time": "09:30",
  "City": "Madurai",
  "Activity": "Out for Delivery",
  "Forwardingno": "DIXM104809",
  "Pod_no": "BLR4550068765",
  "Remarks": "DL",
  "Pieces": "2",
  "Weight": "0.1",
  "Receiver": "",
  "Receiver Phno": "",
  "Stamp": "",
  "Refno": "1001112913",
  "Idproof": "",
  "Type": "Out for Delivery"
}
```



Delivered

```
{
  "Date": "04/09/2023",
  "Time": "19:58",
  "City": "Madurai",
  "Activity": "Delivered - Area : AUT",
  "Forwardingno": "DIXM104809",
  "Pod_no": "BLR4550068765",
  "Remarks": "DE",
  "Pieces": "2",
  "Weight": "0.1",
  "Receiver": "",
  "Receiver Phno": "",
  "Stamp": "SIGN",
  "Refno": "1001112913",
  "Idproof": "",
  "Type": "Delivered"
}
```



ERROR RESPONSE

```
•{"message":
{"pod_no":"XXX12345678","description":"No
transaction","error":"1"}}

•{"message":
{"pod_no":"","description":"Empty body
data":"1"}}

•{"message":
{"pod_no":"XXX12345678","description":"Emp
ty Client in request ":"1"}
```



Failure Response

- Case 1:-** When you have entered wrong client or wrong password.

```
{"error_description": "Empty client in request or Invalid password "}
```
- Case 2:-** When you have entered wrong podno.

```
{"error": "Not valid consignment number in request"}
```
- Case 3:-** When you have not entered client ID and podno.

```
{"error": "Empty body data "}
```

 Limit API calls to 3–4 times daily at recommended intervals: 10:00 AM, 1:00 PM, 4:00 PM, and 8:00 PM for optimal data retrieval.

Once you receive the response, you can immediately store the data in your database for further processing or reference.

Enhanced Tracking & Web Integration

Enhanced Tracking API


```
https://www.tpcglobe.com/TPCWebService/tracktracejsonnew.ashx?podno=xxx123456&client=xxxxxx&tpcpwd=xxxx
```

```
•[{"T_Date":"01/08/2024","T_Time":"18:36","City":"Mumbai-Kurla","Activity":"Booking Completed","Forwardingno":"","Pod_no":"XYZ1234567","Remarks":"DX","Pieces":"1","Weight":"0.1","Receiver":"AAFIYA HASHIM SHAIKH","Receiver Phno":"","Stamp":"SIGN","Refno":"YOUNG CHAMP","Idproof":"","Type":"Booking"},{"T_Date":"01/08/2024","T_Time":"19:08","City":"Udupi","Activity":"Despatched to Mumbai-Kurla","Forwardingno":"MUDP549166","Pod_no":"XYZ1234567","Remarks":"DX","Pieces":"1","Weight":"0.1","Receiver":"","Receiver Phno":"","Stamp":"","Refno":"YOUNG CHAMP","Idproof":"","Type":"Outbound"},{"T_Date":"01/08/2024","T_Time":"19:08","City":"Udupi","Activity":"Despatched to Mumbai-Kurla","Forwardingno":"XKUR01181","Pod_no":"XYZ1234567","Remarks":"PK","Pieces":"","Weight":"0.1","Receiver":"","Receiver Phno":"","Stamp":"","Refno":"YOUNG CHAMP","Idproof":"","Type":"Outbound"},{"T_Date":"03/08/2024","T_Time":"15:08","City":"Mangalore","Activity":"Received at Mumbai-Kurla","Forwardingno":"MMLR1541278","Pod_no":"XYZ1234567","Remarks":"DX","Pieces":"1","Weight":"0.1","Receiver":"","Receiver Phno":"","Stamp":"","Refno":"YOUNG CHAMP","Idproof":"","Type":"Inbound"},{"T_Date":"03/08/2024","T_Time":"16:52","City":"Mumbai-Kurla","Activity":"Despatched to Mumbai-Kurla - Ghansoli","Forwardingno":"IKUR100459723","Pod_no":"XYZ1234567","Remarks":"DX","Pieces":"1","Weight":"0.1","Receiver":"","Receiver Phno":"","Stamp":"","Refno":"YOUNG CHAMP","Idproof":"","Type":"Outbound"},{"T_Date":"05/08/2024","T_Time":"11:19","City":"Mumbai-Kurla","Activity":"Recieved at Mumbai-Kurla - Ghansoli","Forwardingno":"IKUR3856844","Pod_no":"XYZ1234567","Remarks":"DX","Pieces":"1","Weight":"0.1","Receiver":"","Receiver Phno":"","Stamp":"","Refno":"YOUNG CHAMP","Idproof":"","Type":"Inbound"},{"T_Date":"05/08/2024","T_Time":"16:36","City":"Mumbai-Kurla","Activity":"Out for Delivery - Area : Ghansoli","Forwardingno":"DKUR505879613","Pod_no":"XYZ1234567","Remarks":"TD","Pieces":"1","Weight":"0.1","Receiver":"","Receiver Phno":"","Stamp":"","Refno":"YOUNG CHAMP","Idproof":"","Type":"Attempted"},{"T_Date":"05/08/2024","T_Time":"17:06","City":"Mumbai-Kurla","Activity":"Delivered - Area : Ghansoli","Forwardingno":"DKUR505879613","Pod_no":"XYZ1234567","Remarks":"DE","Pieces":"1","Weight":"0.1","Receiver":"","Receiver Phno":"","Stamp":"SIGN","Refno":"YOUNG CHAMP","Idproof":"","Type":"Delivered"}]
```

The enhanced tracking API provides complete transactional history with each call, including all movement details from booking to delivery. Note the hourly call limit restrictions that prevent excessive API usage while ensuring data availability.

Web Tracking Integration

```
https://www.tpcglobe.com/trackcnote.aspx?id=xxxxxxxxxx&client=xxxxxxxx&PSWD=xxxxxxxx
```

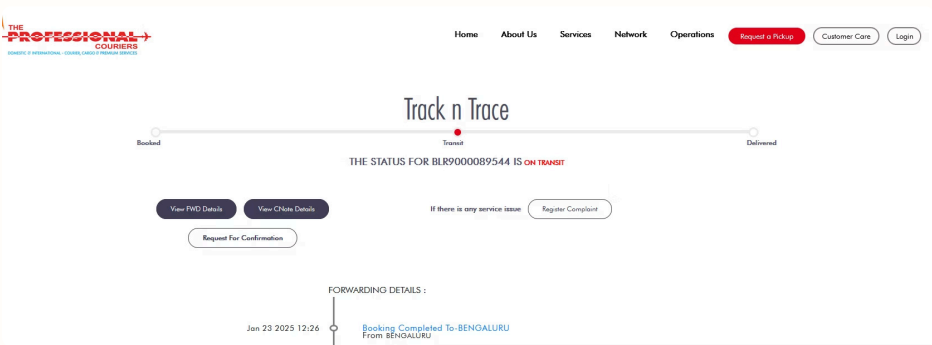

Direct web tracking integration allows embedding TPC's tracking interface within your applications. This provides customers with familiar tracking experiences while maintaining your application's branding and user experience.

24/7

Tracking Availability

Continuous tracking access with real-time status updates

100+

Daily Consignments

Webhook integration recommended for high-volume operations



Advanced Integration & Support



COD Services (www.proeserve.com)

<https://www.tpcglobe.com/TPCWebService/CODBooking.ASHX?client=xxxxxxxxx&tpcpwd=xxxxxx>

Comprehensive Cash on Delivery API available through dedicated endpoints with specialized JSON formatting and response handling.



SAMPLE TEXT FORMAT

```
{ "REF_NO": "109010", "BDATE": "2024-06-18", "SENDER": "ABC", "SENDER_CODE": "1234", "SENDER_ADDRESS": "New Delhi", "SENDER_CITY": "gurgaon", "SENDER_PINCODE": "110059", "SENDER_MOB": "1234567890", "SENDER_EMAIL": "gaurav.maurya@shipway.com", "GSTIN": "22AAAAA0000A1Z5", "RECIPIENT": "Testing Name", "RECIPIENT_COMPANY": "", "RECIPIENT_ADDRESS": "Testing address1 Testing address2", "RECIPIENT_CITY": "Testing city", "RECIPIENT_PINCODE": "110059", "RECIPIENT_MOB": "9999999999", "RECIPIENT_EMAIL": "xyz@ezyslips.com", "WEIGHT": "0.05", "PIECES": "1", "RECIPIENT_GSTIN": "", "FLYER_NO": "s123456", "CUST_INVOICE": "INV1002", "CUST_INVOICEAMT": "100.00", "VOL_LENGTH": "10", "VOL_WIDTH": "10", "VOL_HEIGHT": "10", "DESCRIPTION": "TESTING", "REMARKS": "TESTING", "COD_AMOUNT": "100.00", "PAYMENT_MODE": "CASH", "TYPE": "", "ORDER_STATUS": "HOLD" }
```



RESPONSE

```
{"POD_NO": "Saved Successfully with Cons No COD1112122752", "ID": "2921497", "status": "success", "error": "0"} {"status": "failed", "Desc": "Duplicate Order no ", "error": "1" }
```

Webhook Integration (Push to URL Service)

For operations exceeding 100 daily consignments, implement webhook-based integration for real-time status push notifications directly to your servers.

AWB No insertion to customer URL can be availed by this web service.

Authentication

Provide TPC credentials and API key

Request Method

Send HTTP POST requests to push data

Endpoint

Use provided URL with `=api_key=tpcpushTl6dJ9UzTaH4awwPhus1lpcnl`

Payload Format

Submit Delivered details as JSON



Webhook Integration (Push to URL Service)

Service Input

Response Data:

```
{"POD_NO": "MAA938093439", "ID": "181918178", "status": "success", "error": "0"}
```

Headers:

TYPE VALUE

```
Content-Type application/json
```

Request Data:

Sample JSON –

```
[{
  "POD_NO": "MAA938093439", "Remarks": "Out for Delivery", "Sys_Dt": "2025-01-11", "Sys_Tm":
  "10:45", "Delivered_Time": "", "Way_Number": "DMAA16140881", "Destination": "Chennai",
  "Area": "Guindy", "Recipient": "", "Stamp": "", "Relationship": "", "Recipient_Number": "",
  "Id_PROOF": "", "Pieces": "1", "weight": "0.1", "CODAmount": "", "latitude": "", "longitude": "", "id":
  "181918178"
},
{
  "POD_NO": "MAA939204368", "Remarks": "Delivered", "Sys_Dt": "2025-02-18", "Sys_Tm":
  "18:19", "Delivered_Time": "11:44", "Way_Number": "DMAA16843287", "Destination":
  "Chennai", "Area": "Mugappair", "Recipient": "", "Stamp": "", "Relationship": "Self",
  "Recipient_Number": "", "Id_PROOF": "", "Pieces": "1", "weight": "0.1", "CODAmount":
  "", "latitude": "", "longitude": "", "id": "221118131"}]
```

Field Name	Data Type /Type Description	Remarks
POD_NO	varchar(16)	(mandatory field)
Remarks	varchar(50)	(mandatory field)
Sys_Dt	smalldatetime yyyy-MM-dd	(mandatory field)
Sys_Tm	varchar(12)	(mandatory field)
Delivered_Time	varchar(12)	
Way_Number	varchar(16)	
Destination	varchar(30)	
Area	varchar(30)	
Recipient	varchar(30)	
Stamp	varchar(24)	
Relationship	varchar(24)	
Id_PROOF	varchar(24)	
Pieces	varchar(8)	
Weight	varchar(12)	
CODAmount	varchar(12)	
latitude	varchar(16)	
longitude	varchar(16)	
Id	varchar(16)	

Thank You!