

02:31:19

Separar

Chat

Gente

Participar

Reaccionar

Vista

Más

Cámara

Micro

Compartir

27 de mar 20:28

us-east-1.console.aws.amazon.com/iam/home?region=us-east-1#/roles/create?trustedEntityType=AWS_SERVICE&selectedService=Lambda&selectedUseCase=Lambda

BWS

CloudFront

EC2

API Gateway

CloudWatch

Amazon Simple Email Se...

CloudFormation

IAM Identity Center

S3

IAM

Roles

Create role

Policy name

Type

Description

☐

AmazonS3ObjectLambdaExecutionRolePolicy

AWS managed

Provides AWS Lambda functions perm...

☐

AmazonSageMakerPartnerServiceCatalogProductsLambdaServiceRolePolicy

AWS managed

Service role policy used by the AWS La...

☐

AmazonSageMakerServiceCatalogProductsLambdaServiceRolePolicy

AWS managed

Service role policy used by the AWS La...

☐

AWSCodeDeployRoleForLambda

AWS managed

Provides CodeDeploy service access to ...

☐

AWSCodeDeployRoleForLambdaLimited

AWS managed

Provides CodeDeploy service limited a...

☐

AWSDeepLensLambdaFunctionAccessPolicy

AWS managed

This policy specifies permissions requir...

☐

AWSLambda_FullAccess

AWS managed

Grants full access to AWS Lambda serv...

☐

AWSLambda_ReadOnlyAccess

AWS managed

Grants read-only access to AWS Lamb...

☐

AWSLambdaBasicDurableExecutionRolePolicy

AWS managed

Provides write permissions to CloudWa...

☒

AWSLambdaBasicExecutionRole

AWS managed

Provides write permissions to CloudWa...

AWSLambdaBasicExecutionRole

Provides write permissions to CloudWatch Logs.

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Effect": "Allow",
6       "Action": [
7         "logs:CreateLogGroup",
8         "logs:CreateLogStream",
9         "logs:PutLogEvents"
10      ],
11       "Resource": "*"
12     }
13   ]
14 }
```

Customer managed

https://us-east-1.console.aws.amazon.com/lambda/home?region=us-east-1#/functions/lambda-clientes-api-sajo/edit/environment-variable...

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: 6546-5447-8122

bsajonero@unaLedu.co

Lambda

Functions

lambda-clientes-api-sajo

Edit environment variables

Edit environment variables

Environment variables

You can define environment variables as key-value pairs that are accessible from your function code. These are useful to store configuration settings without the need to change function code. [Learn more](#)

Key

Value

Remove

TABLE_NAME

clientes-api-sajo

Remove

BUCKET_NAME

ssajo-lab

Remove

Add environment variable

Encryption configuration

Cancel

Save

CloudShell

Feedback

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

Create role | IAM | Global

Documento sin título - Document: X

https://us-east-1.console.aws.amazon.com/iam/home?region=us-east-1#/roles/create?trustedEntityType=AWS_SERVICE&selectedService=La...

Account ID: 6546-5447-8122

bsajonero@unaL.edu.co

IAM > Roles > Create role

Step 3

Name, review, and create

Role name
Enter a meaningful name to identify this role.

ssajo-lab-27

Maximum 64 characters. Use alphanumeric and '+=, @, _' characters.

Description
Add a short explanation for this role.

Allows Lambda functions to call AWS services on your behalf.

Maximum 1000 characters. Use letters (A-Z and a-z), numbers (0-9), tabs, new lines, or any of the following characters: _+=, @-/\[\]!\$%^&*()~;"'

Step 1: Select trusted entities [Edit](#)

Trust policy

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Effect": "Allow"
```

Create policy | IAM | Global

ssajo-lab - S3 bucket | S3 | us-east-1

Documento sin título - Document: X

https://us-east-1.console.aws.amazon.com/iam/home?region=us-east-1#/roles/details/ssajo-lab-27/createPolicy

Account ID: 6546-5447-8122

bsajonero@unaL.edu.co

IAM > Roles > ssajo-lab-27 > Create policy

Policy editor

Visual **JSON** Actions [Add](#)

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Effect": "Allow",
6       "Action": [
7         "dynamodb:PutItem",
8         "dynamodb:GetItem"
9       ],
10      "Resource": "arn:aws:dynamodb:us-east-1:654654478122:table/clientes-ap
11    },
12    {
13      "Effect": "Allow",
14      "Action": [
15        "s3:PutObject"
16      ],
17      "Resource": "arn:aws:s3:::ssajo-lab/*"
18    }
19  ]
20 }
```

Edit statement [Remove](#)

Add actions

Choose a service

Included

S3

Available

AI Operations
AMP
API Gateway
API Gateway V2
ADC Device switch

https://us-east-1.console.aws.amazon.com/iam/home?region=us-east-1#/roles/details/ssajo-lab-27/createPolicy

Account ID: 6546-5447-8122

bsajonero@unaL.edu.co

IAM > Roles > ssajo-lab-27 > Create policy

Review and create [Info](#)

Review the permissions, specify details, and tags.

Policy details

Policy name
Enter a meaningful name to identify this policy.

politica-role-sajo



Maximum 128 characters. Use alphanumeric and '+=, @-/_' characters.

Permissions defined in this policy [Info](#) [Edit](#)

Permissions defined in this policy document specify which actions are allowed or denied. To define permissions for an IAM identity (user, user group, or role), attach a policy to it

Allow (2 of 465 services) [Show remaining 463 services](#)

Service	Access level	Resource	Request condition
---------	--------------	----------	-------------------

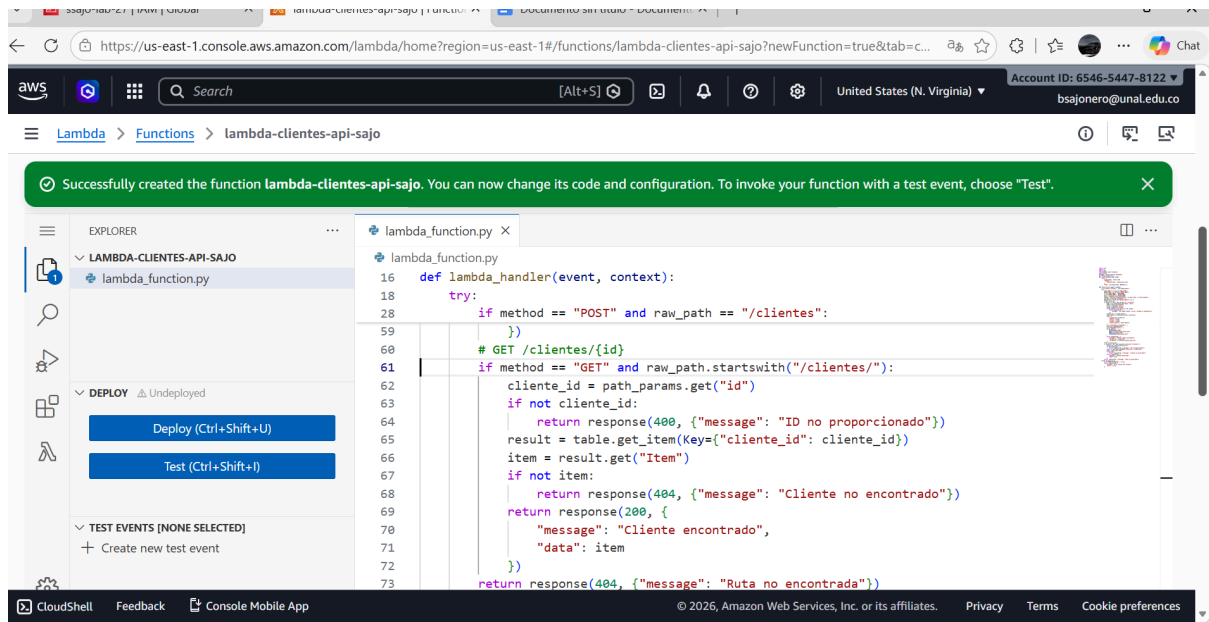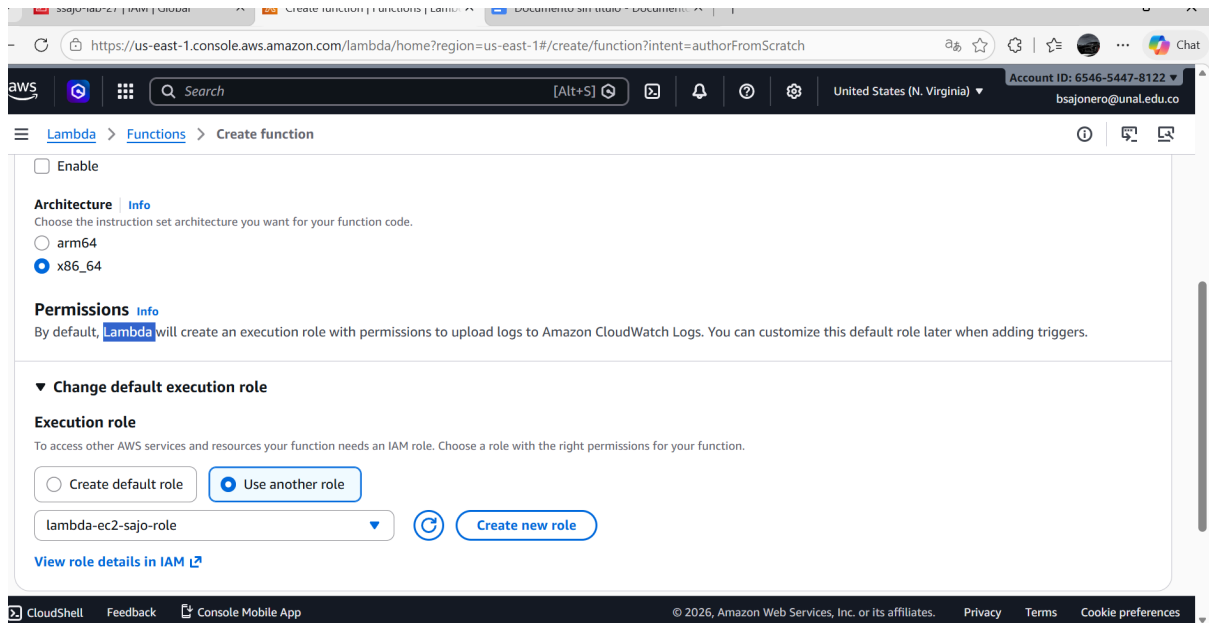

ssajo-lab-27 | IAM | Global Edit environment variables | lambda Documento sin título - Document: x +

https://us-east-1.console.aws.amazon.com/lambda/home?region=us-east-1#/functions/lambda-clientes-api-sajo/edit/environment-variable...

aws Search [Alt+S] United States (N. Virginia) Account ID: 6546-5447-8122 bsajonero@unaL.edu.co

Lambda > Functions > lambda-clientes-api-sajo > Edit environment variables

Edit environment variables

Environment variables

You can define environment variables as key-value pairs that are accessible from your function code. These are useful to store configuration settings without the need to change function code. [Learn more](#)

Key	Value	
TABLE_NAME		<button>Remove</button>
BUCKET_NAME		<button>Remove</button>

Add environment variable

► Encryption configuration

Cancel Save

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

https://us-east-1.console.aws.amazon.com/dynamodbv2/home?region=us-east-1#create-table

aws Search [Alt+S] United States (N. Virginia) Account ID: 6546-5447-8122 bsajonero@unaL.edu.co

DynamoDB > Tables > Create table

Create table

Table details [Info](#)

DynamoDB is a schemaless database that requires only a table name and a primary key when you create the table.

Table name

This will be used to identify your table.

clientes-api-sajo

Between 3 and 255 characters, containing only letters, numbers, underscores (_), hyphens (-), and periods (.).

Partition key

The partition key is part of the table's primary key. It is a hash value that is used to retrieve items from your table and allocate data across hosts for scalability and availability.

client_id String

1 to 255 characters and case sensitive.

Sort key - optional

You can use a sort key as the second part of a table's primary key. The sort key allows you to sort or search among all items sharing the same partition key.

Enter the sort key name String

1 to 255 characters and case sensitive.

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

https://us-east-1.console.aws.amazon.com/lambda/home?region=us-east-1#/functions/lambda-clientes-api-sajo?newFunction=true&subta...

Search [Alt+S] United States (N. Virginia) Account ID: 6546-5447-8122 bsajonero@unal.edu.co

Lambda > Functions > lambda-clientes-api-sajo

Successfully updated the function lambda-clientes-api-sajo.

EXPLORER

- LAMBDA-CLIENTES-API-SAJO
 - lambda_function.py

DEPLOY Current

Deploy (Ctrl+Shift+U)

Test (Ctrl+Shift+I)

TEST EVENTS [NONE SELECTED]

Create new test event

lambda_function.py

```
16 def lambda_handler(event, context):
18     try:
28         if method == "POST" and raw_path == "/clientes":
59             }
60         # GET /clientes/{id}
61         if method == "GET" and raw_path.startswith("/clientes/"):
62             cliente_id = path_params.get("id")
63             if not cliente_id:
64                 return response(400, {"message": "ID no proporcionado"})
65             result = table.get_item(Key={"cliente_id": cliente_id})
66             item = result.get("Item")
67             if not item:
68                 return response(404, {"mess
69             return response(200, {
70                 "message": "Cliente encontr
71                 "data": item
```

Successfully updated the function lambda-clientes-api-sajo.

See what's new in the code editor

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

https://us-east-1.console.aws.amazon.com/apigateway/main/create?region=us-east-1

Search [Alt+S] United States (N. Virginia) Account ID: 6546-5447-8122 bsajonero@unal.edu.co

API Gateway > APIs > Create API > Create HTTP API

Review and create

IP address type Info

Select the type of IP addresses that can invoke the default endpoint for your API. You don't need to redeploy your API for the update to take effect.

☒ IPv4

Includes only IPv4 addresses.

☐ Dualstack

Includes IPv4 and IPv6 addresses.

Integrations (1) Info

Specify the backend services that your API will communicate with. These are called integrations. For a Lambda integration, API Gateway invokes the Lambda function and responds with the response from the function. For an HTTP integration, API Gateway sends the request to the URL that you specify and returns the response from the URL.

Lambda

AWS Region us-east-1

Lambda function arn:aws:lambda:us-east-1:654654478122:function:lam


Version 2.0

Add integration

Remove

Cancel Review and create Next

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

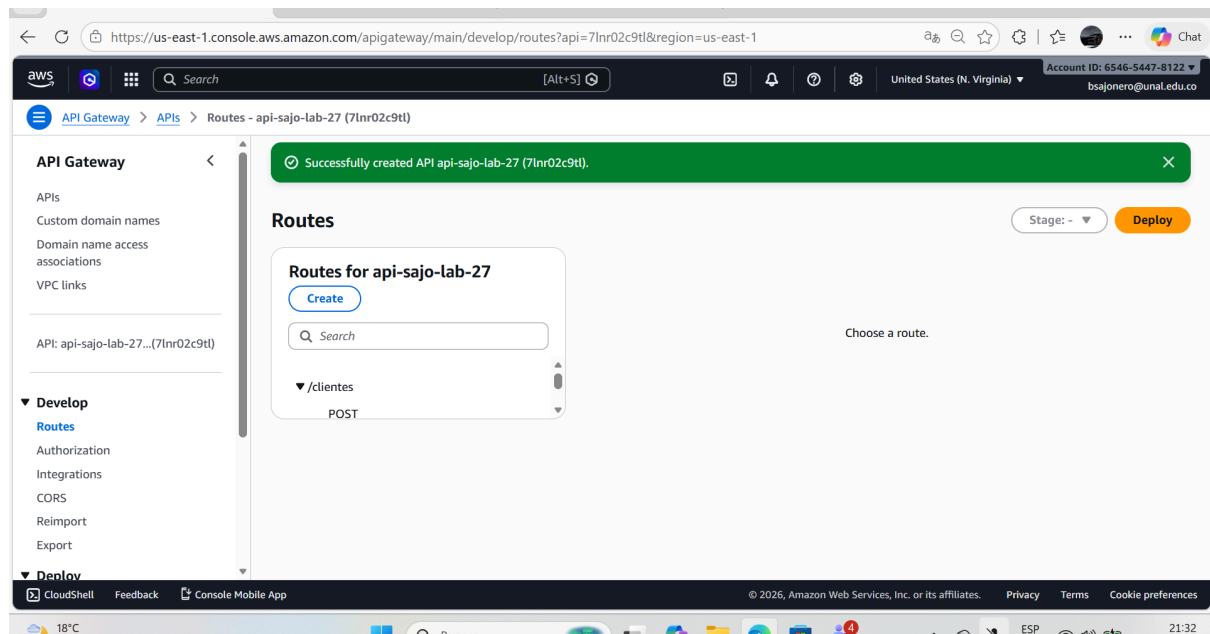

```
curl -X POST "https://7lnr02c9tl.execute-api.us-east-1.amazonaws.com/clientes" \
```

```
-H "Content-Type: application/json" \
```

```
-d '{
```

```
"nombre": "Johan",
```

```
"correo": "johan@democurl.com",
```

```
"ciudad": "Bogotá"
```

```
}'
```

```
{"message": "Cliente creado exitosamente", "cliente_id":
```

```
"6ea01174-85d8-4c35-a6ba-515f5cd894cf", "s3_backup":
```

```
"clientes/6ea01174-85d8-4c35-a6ba-515f5cd894cf.jso
```


```
-----  
$body = @{
```

```
    nombre = "alejandro sajonero"
```

```
    correo = "brayanverg@gmail.com"
```

```
    ciudad = "Medellin"
```

```
} | ConvertTo-Json
```



**Invoke-RestMethod -Uri "<https://7lnr02c9tl.execute-api.us-east-1.amazonaws.com/clientes>"
-Method Post -Body \$body -ContentType "application/json"**