ChatGPT | Create database | Aurora and RDS | SESIÓN 1 - BD RELACIONALES

https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#launch-dbinstance:

Aurora and RDS > Databases > Create database

Settings

DB instance identifier Info

Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.

database-1

The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.

Credentials Settings

Master username Info

Type a login ID for the master user of your DB instance.

admin

1 to 16 alphanumeric characters. The first character must be a letter.

Credentials management

You can use AWS Secrets Manager or manage your master user credentials.

- Managed in AWS Secrets Manager - *most secure*
  RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
- Self managed
  Create your own password or have RDS create a password that you manage.

Auto generate password
Amazon RDS can generate a password for you, or you can specify your own password.

Master password Info

ChatGPT | Create database | Aurora and RDS | SESIÓN 1 - BD RELACIONALES

https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#launch-dbinstance:

Aurora and RDS > Databases > Create database

Credentials management

You can use AWS Secrets Manager or manage your master user credentials.

- Managed in AWS Secrets Manager - *most secure*
  RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
- Self managed
  Create your own password or have RDS create a password that you manage.

Auto generate password
Amazon RDS can generate a password for you, or you can specify your own password.

Master password Info

••••••••••

Password strength Strong

Minimum constraints: At least 8 printable ASCII characters. Can't contain any of the following symbols: / ' " @

Confirm master password Info

••••••••••

Additional credentials settings

Database authentication options Info

- Password authentication
  Authenticates using database passwords.
- Password and IAM database authentication
  Authenticates using the database password and user credentials through AWS IAM users and roles.

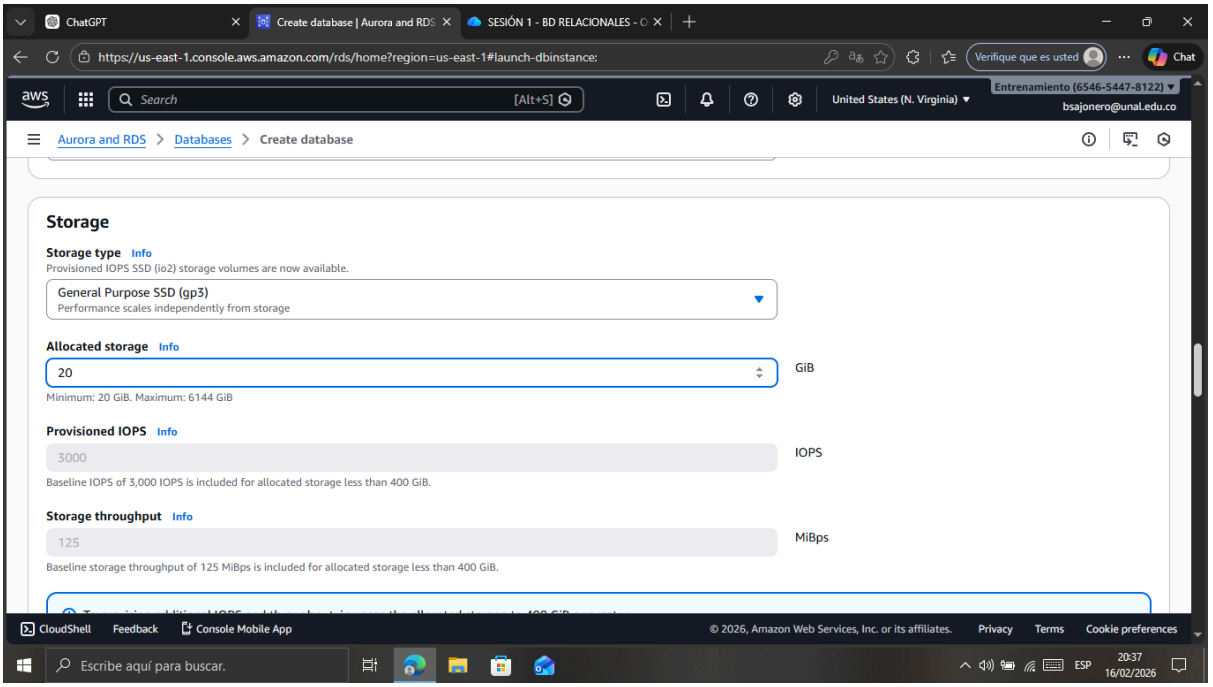
ChatGPT
Create database | Aurora and RDS
SESIÓN 1 - BD RELACIONALES
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#launch-dbinstance:
Verifique que es usted
Chat
aws
Search
[Alt+S]
United States (N. Virginia)
Entrenamiento (6546-5447-8122)
bsajonero@unal.edu.co
Aurora and RDS > Databases > Create database
Storage
Storage type Info
Provisioned IOPS SSD (io2) storage volumes are now available.
General Purpose SSD (gp3)
Performance scales independently from storage
Allocated storage Info
20
GiB
Minimum: 20 GiB. Maximum: 6144 GiB
Provisioned IOPS Info
3000
IOPS
Baseline IOPS of 3,000 IOPS is included for allocated storage less than 400 GiB.
Storage throughput Info
125
MiBps
Baseline storage throughput of 125 MiBps is included for allocated storage less than 400 GiB.
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Escribe aquí para buscar.
ESP
20:37
16/02/2026

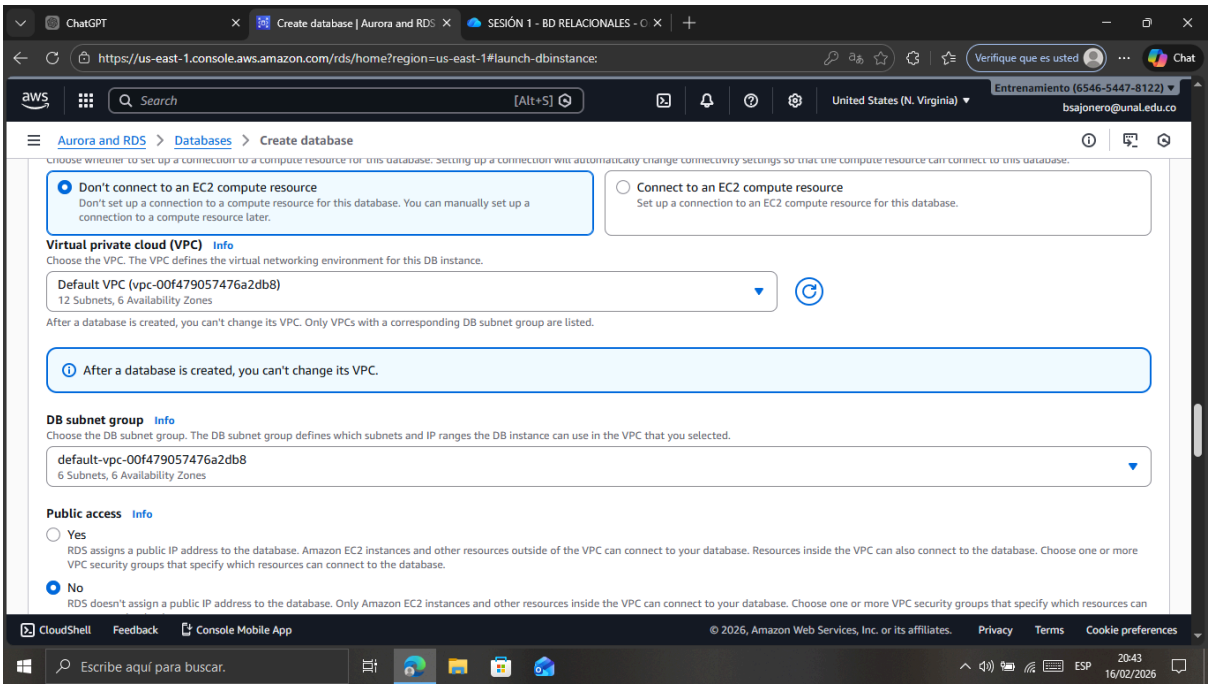
ChatGPT
Create database | Aurora and RDS
SESIÓN 1 - BD RELACIONALES
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#launch-dbinstance:
Verifique que es usted
Chat
aws
Search
[Alt+S]
United States (N. Virginia)
Entrenamiento (6546-5447-8122)
bsajonero@unal.edu.co
Aurora and RDS > Databases > Create database
Don't connect to an EC2 compute resource
Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.
Connect to an EC2 compute resource
Set up a connection to an EC2 compute resource for this database.
Virtual private cloud (VPC) Info
Choose the VPC. The VPC defines the virtual networking environment for this DB instance.
Default VPC (vpc-00f479057476a2db8)
12 Subnets, 6 Availability Zones
After a database is created, you can't change its VPC. Only VPCs with a corresponding DB subnet group are listed.
After a database is created, you can't change its VPC.
DB subnet group Info
Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.
default-vpc-00f479057476a2db8
6 Subnets, 6 Availability Zones
Public access Info
Yes
RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.
No
RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Escribe aquí para buscar.
ESP
20:43
16/02/2026

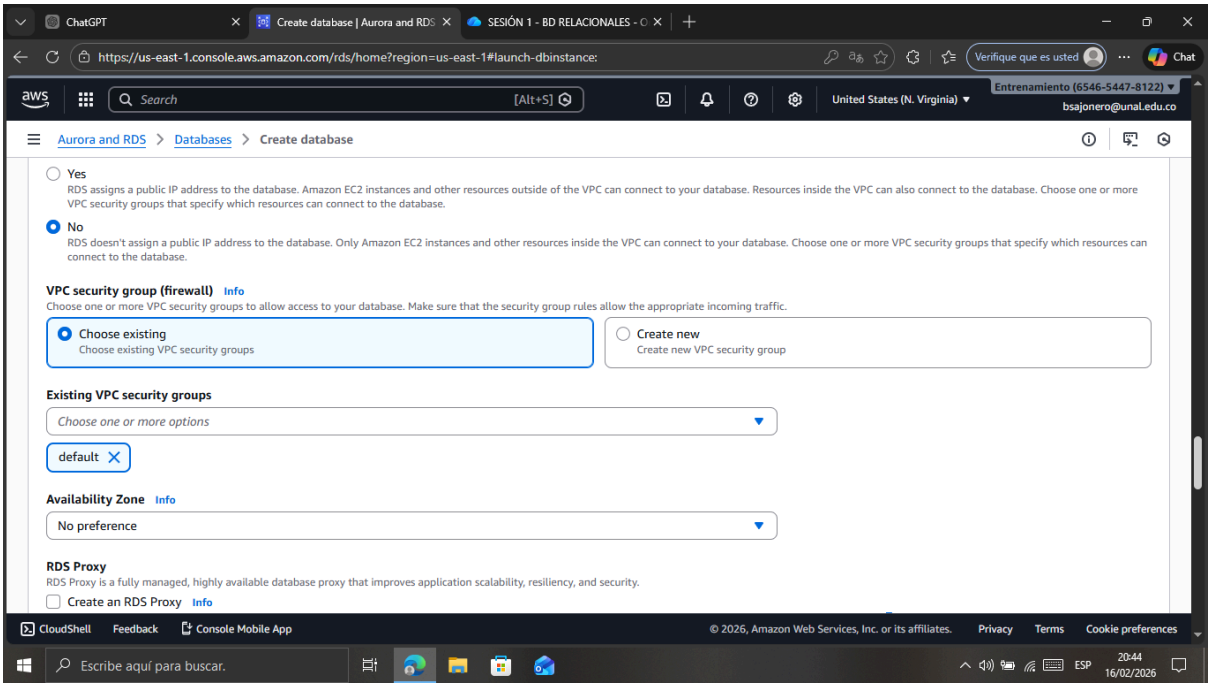
ChatGPT
Create database | Aurora and RDS
SESIÓN 1 - BD RELACIONALES
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#launch-dbinstance:
Verifique que es usted
Chat
aws
Search
[Alt+S]
United States (N. Virginia)
Entrenamiento (6546-5447-8122)
bsajonero@unal.edu.co
Aurora and RDS > Databases > Create database
Yes
RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.
No
RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can connect to the database.
VPC security group (firewall) Info
Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.
Choose existing
Choose existing VPC security groups
Create new
Create new VPC security group
Existing VPC security groups
Choose one or more options
default
Availability Zone Info
No preference
RDS Proxy
RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.
Create an RDS Proxy Info
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Escribe aquí para buscar.
ESP
20:44
16/02/2026

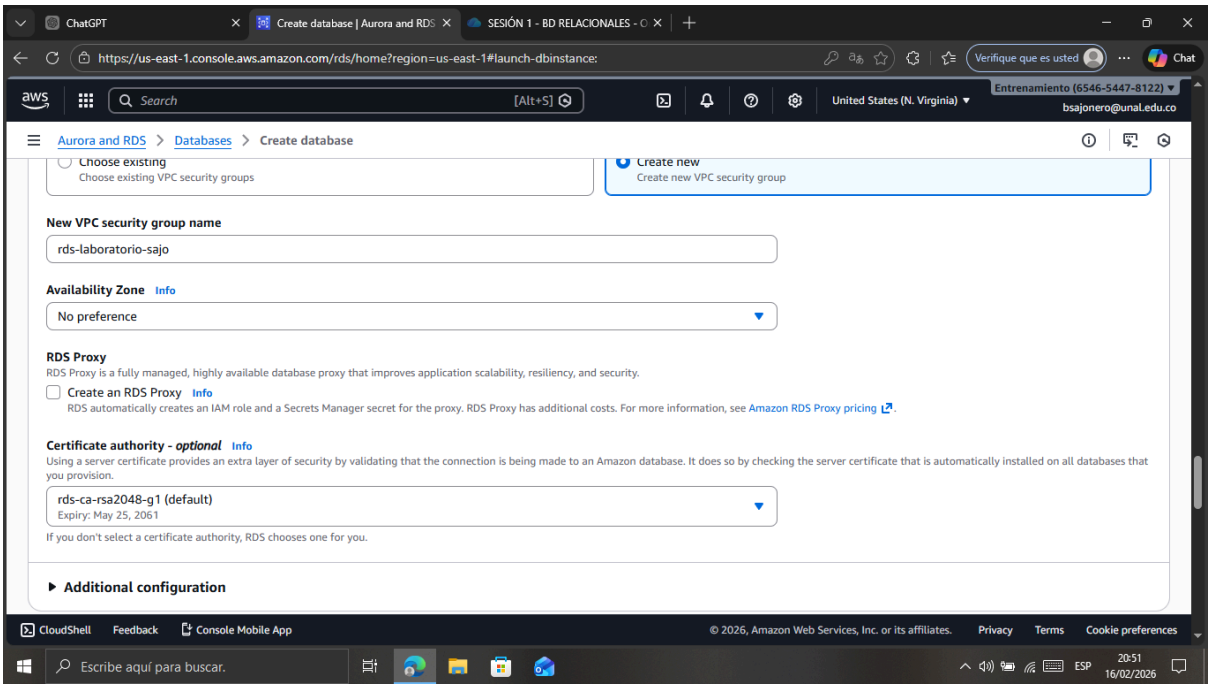
ChatGPT
Create database | Aurora and RDS
SESIÓN 1 - BD RELACIONALES
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#launch-dbinstance:
Verifique que es usted
Chat
aws
Search
[Alt+S]
United States (N. Virginia)
Entrenamiento (6546-5447-8122)
bsajonero@unal.edu.co
Aurora and RDS > Databases > Create database
Choose existing
Choose existing VPC security groups
Create new
Create new VPC security group
New VPC security group name
rds-laboratorio-sajo
Availability Zone Info
No preference
RDS Proxy
RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.
Create an RDS Proxy Info
RDS automatically creates an IAM role and a Secrets Manager secret for the proxy. RDS Proxy has additional costs. For more information, see Amazon RDS Proxy pricing.
Certificate authority - optional Info
Using a server certificate provides an extra layer of security by validating that the connection is being made to an Amazon database. It does so by checking the server certificate that is automatically installed on all databases that you provision.
rds-ca-rsa2048-g1 (default)
Expiry: May 25, 2061
If you don't select a certificate authority, RDS chooses one for you.
Additional configuration
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Escribe aquí para buscar.
ESP
20:51
16/02/2026

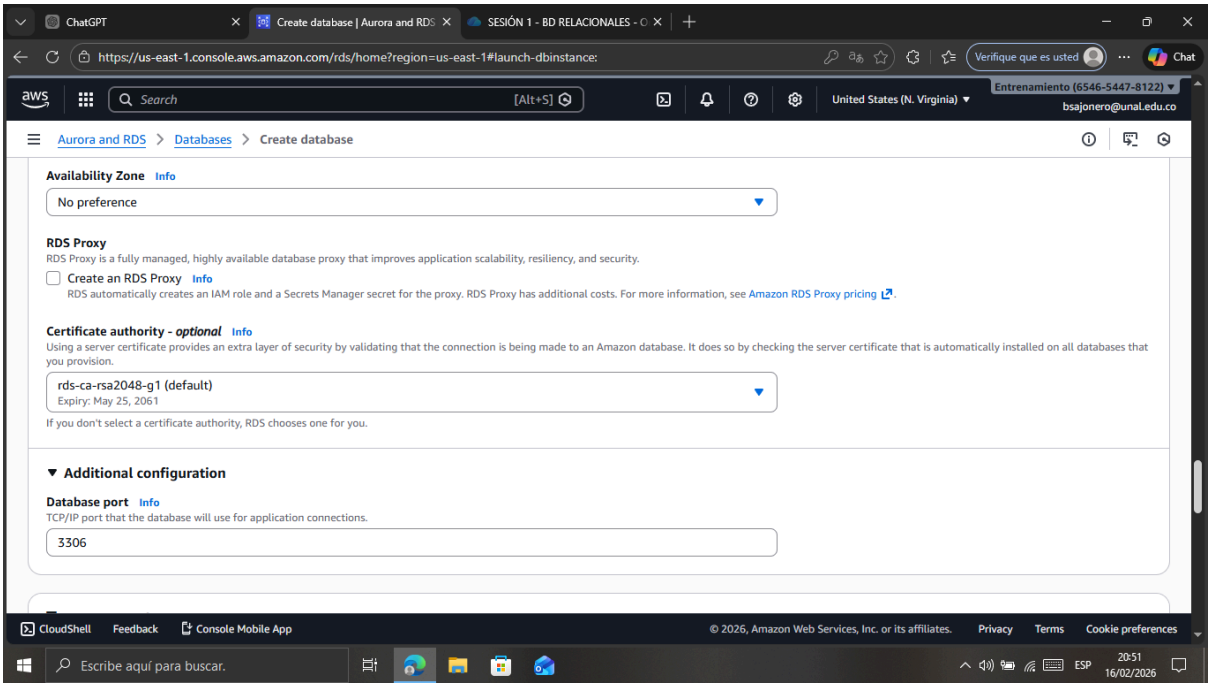
ChatGPT
Create database | Aurora and RDS
SESIÓN 1 - BD RELACIONALES
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#launch-dbinstance:
Verifique que es usted
Chat
Search
[Alt+S]
United States (N. Virginia)
Entrenamiento (6546-5447-8122)
bsajonero@unal.edu.co
Aurora and RDS > Databases > Create database
Availability Zone Info
No preference
RDS Proxy
RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.
Create an RDS Proxy Info
RDS automatically creates an IAM role and a Secrets Manager secret for the proxy. RDS Proxy has additional costs. For more information, see Amazon RDS Proxy pricing.
Certificate authority - optional Info
Using a server certificate provides an extra layer of security by validating that the connection is being made to an Amazon database. It does so by checking the server certificate that is automatically installed on all databases that you provision.
rds-ca-rsa2048-g1 (default)
Expiry: May 25, 2061
If you don't select a certificate authority, RDS chooses one for you.
Additional configuration
Database port Info
TCP/IP port that the database will use for application connections.
3306
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Escribe aquí para buscar.
ESP
20:51
16/02/2026

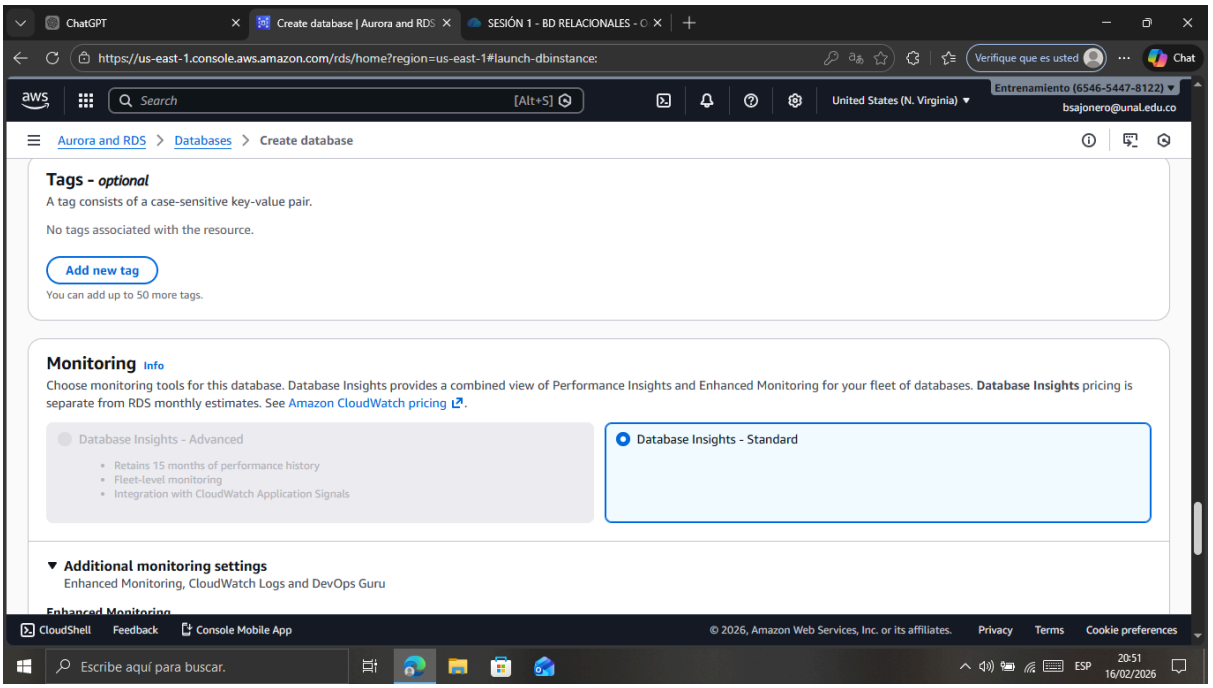
ChatGPT
Create database | Aurora and RDS
SESIÓN 1 - BD RELACIONALES
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#launch-dbinstance:
Verifique que es usted
Chat
Search
[Alt+S]
United States (N. Virginia)
Entrenamiento (6546-5447-8122)
bsajonero@unal.edu.co
Aurora and RDS > Databases > Create database
Tags - optional
A tag consists of a case-sensitive key-value pair.
No tags associated with the resource.
Add new tag
You can add up to 50 more tags.
Monitoring Info
Choose monitoring tools for this database. Database Insights provides a combined view of Performance Insights and Enhanced Monitoring for your fleet of databases. Database Insights pricing is separate from RDS monthly estimates. See Amazon CloudWatch pricing.
Database Insights - Advanced
Retains 15 months of performance history
Fleet-level monitoring
Integration with CloudWatch Application Signals
Database Insights - Standard
Additional monitoring settings
Enhanced Monitoring, CloudWatch Logs and DevOps Guru
Enhanced Monitoring
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Escribe aquí para buscar.
ESP
20:51
16/02/2026

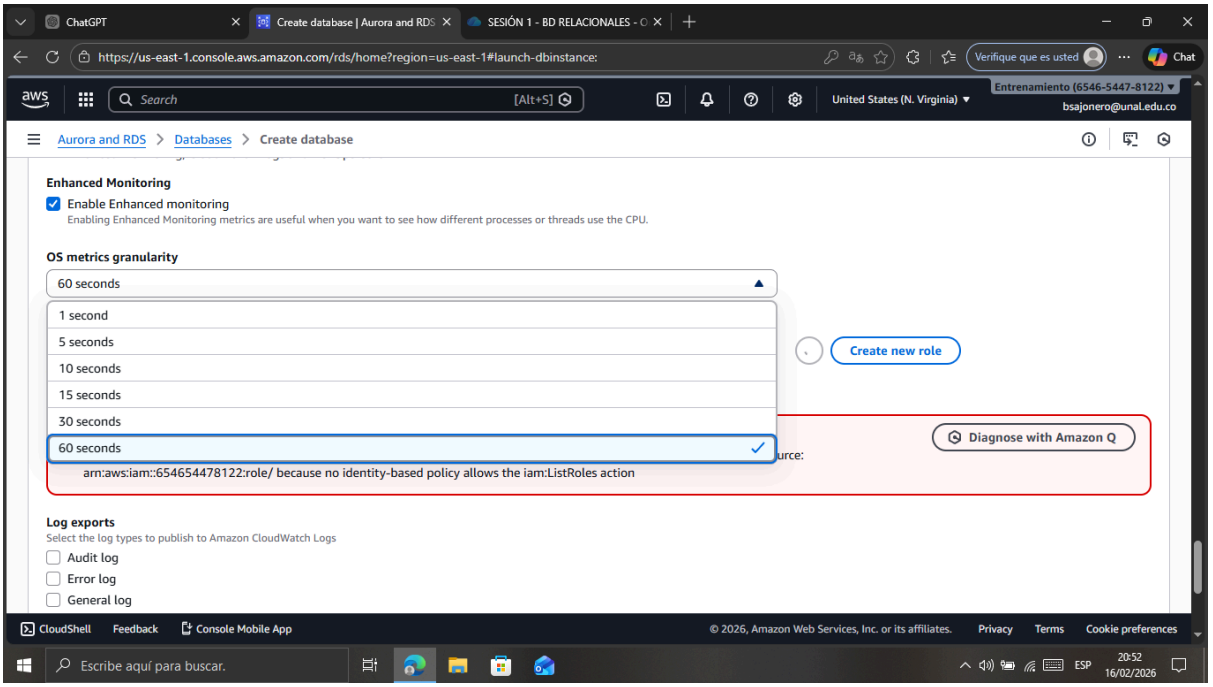
ChatGPT
Create database | Aurora and RDS
SESIÓN 1 - BD RELACIONALES
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#launch-dbinstance:
Search
United States (N. Virginia)
Entrenamiento (6546-5447-8122)
bsajonero@unal.edu.co
Aurora and RDS > Databases > Create database
Enhanced Monitoring
Enable Enhanced monitoring
Enabling Enhanced Monitoring metrics are useful when you want to see how different processes or threads use the CPU.
OS metrics granularity
60 seconds
1 second
5 seconds
10 seconds
15 seconds
30 seconds
60 seconds
Create new role
Diagnose with Amazon Q
arn:aws:iam::654654478122:role/ because no identity-based policy allows the iam:ListRoles action
Log exports
Select the log types to publish to Amazon CloudWatch Logs
Audit log
Error log
General log
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Escribe aquí para buscar.
ESP
20:52
16/02/2026

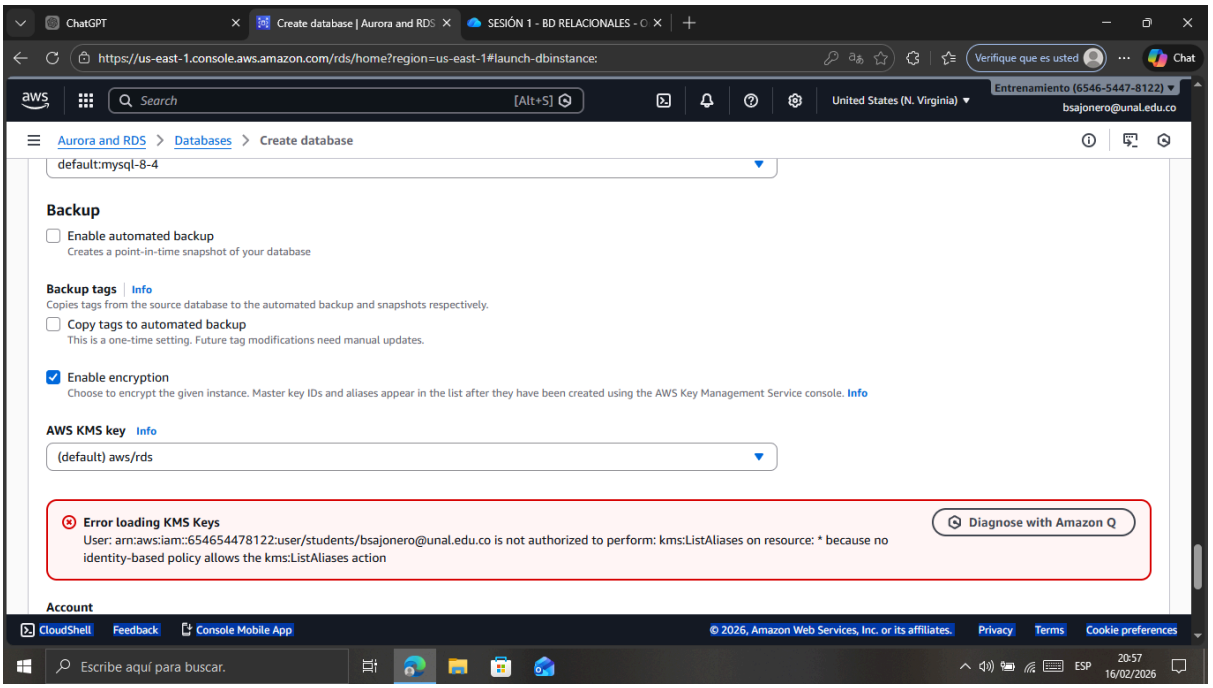
ChatGPT
Create database | Aurora and RDS
SESIÓN 1 - BD RELACIONALES
https://us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#launch-dbinstance:
Search
United States (N. Virginia)
Entrenamiento (6546-5447-8122)
bsajonero@unal.edu.co
Aurora and RDS > Databases > Create database
default:mysql-8-4
Backup
Enable automated backup
Creates a point-in-time snapshot of your database
Backup tags Info
Copies tags from the source database to the automated backup and snapshots respectively.
Copy tags to automated backup
This is a one-time setting. Future tag modifications need manual updates.
Enable encryption
Choose to encrypt the given instance. Master key IDs and aliases appear in the list after they have been created using the AWS Key Management Service console. Info
AWS KMS key Info
(default) aws/rds
Error loading KMS Keys
User: arn:aws:iam::654654478122:user/students/bsajonero@unal.edu.co is not authorized to perform: kms:ListAliases on resource: * because no identity-based policy allows the kms:ListAliases action
Diagnose with Amazon Q
Account
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Escribe aquí para buscar.
ESP
20:57
16/02/2026

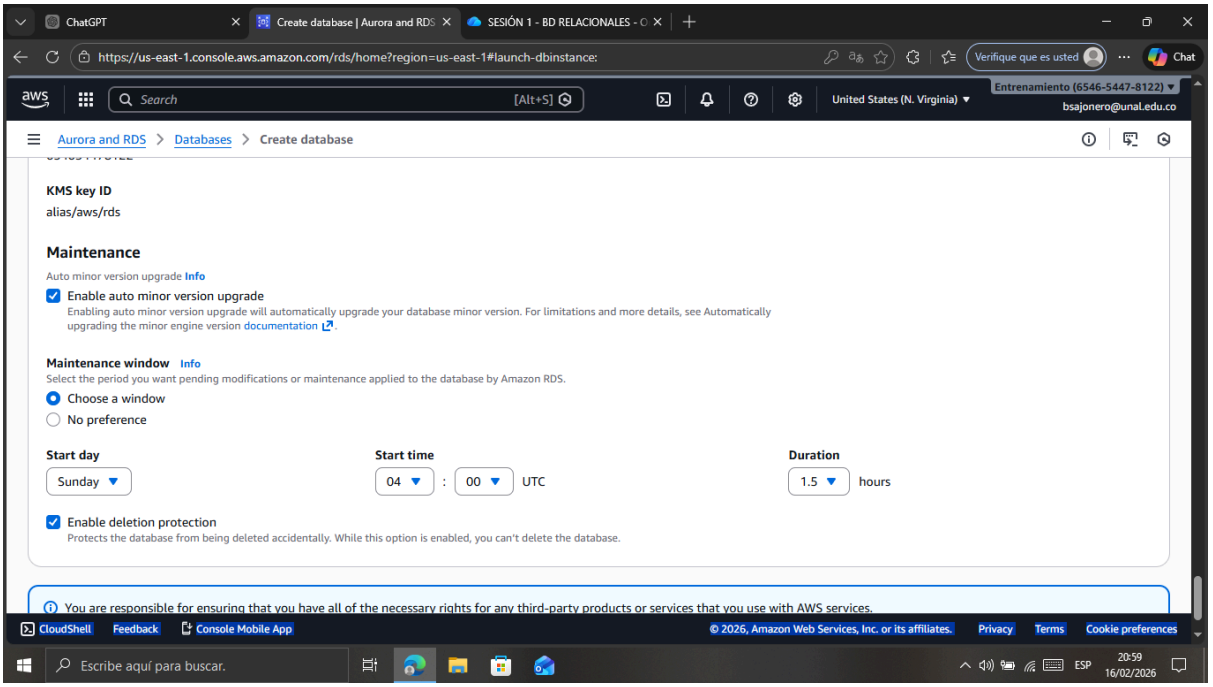

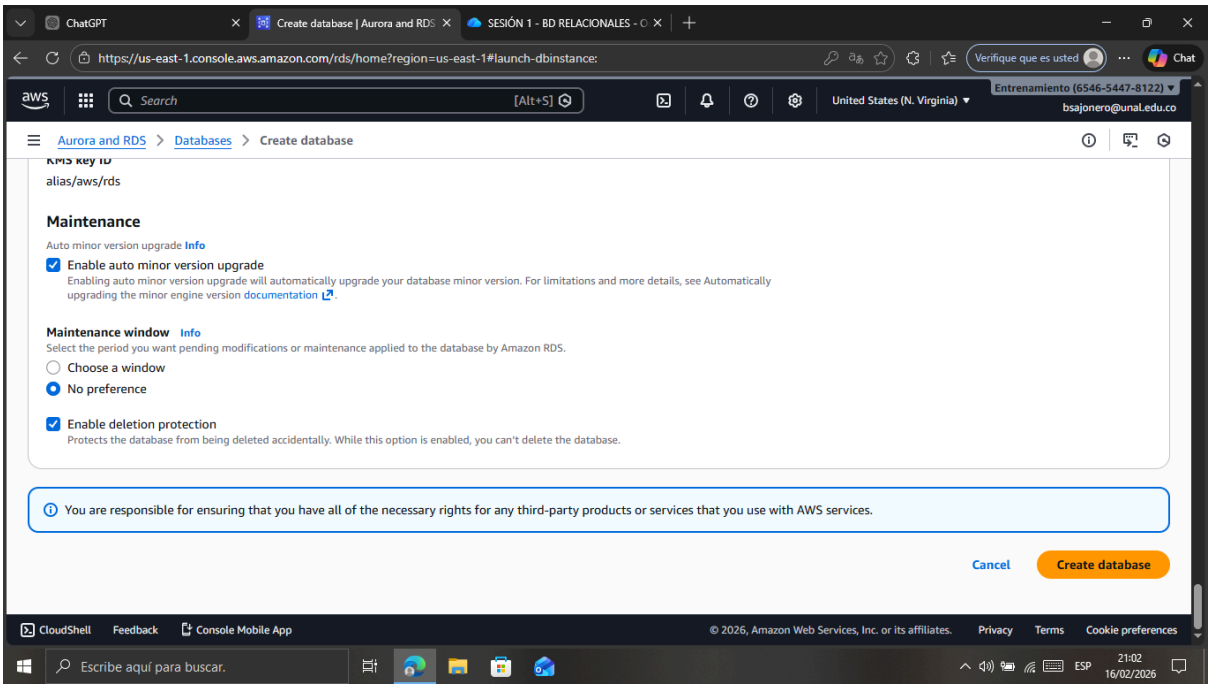

postdata: la parte de mysql no esta porque mi pc presentaba problemas técnicos, ya solucione estos pero no pude hacer esa parte luego por el tema de permisos. igualmente estuve muy atento a la clase.