

Introduction to Programming

Lab Worksheet

Week 5

Prior to attempting this lab tutorial ensure you have read the related lecture notes and/or viewed the lecture videos on MyBeckett. Once you have completed this lab you can attempt the associated exercises.

You can download this file in Word format if you want to make notes in it.

You can complete this work using the Python interpreter in interactive mode. This could be inside an IDE, or just a command prompt.

Topics covered:

- Writing code in files
- Executing program files
- Accessing command line arguments
- Writing and importing modules
- The modules search path

For more information about the module delivery, assessment and feedback please refer to the module within the MyBeckett portal.

Writing code in files

The Python interpreter allows code to be entered interactively in Read-Evaluate-Print and Loop (REPL mode) or executed directly from a text file. REPL mode is mainly used to write very small pieces of code for learning and experimentation purposes.

Larger more complex programs need to be stored in one or more text files, then executed later. Such Python programs are often called *scripts*. Placing code in text files allows the code to grow and evolve over time. It also provides an easy mechanism of re-running programs over and over again.

The files are simple plain text files and there is nothing special about them other than the name which must include the `.py` suffix. The program code within the files is exactly the same as the code that can be typed in REPL mode.

However, there is one important difference between executing statements in interactive-mode compared to from a file. When in REPL mode the result of expressions is automatically printed to the screen (this is the 'P' within REPL). Such output is not done automatically when executing scripts, and an explicit call to the `print()` function is required to generate output.

Text files will often contain many thousands of lines of code. We can also define *functions* and *classes* within our files. These may be reused across several different programs. i.e. we can import the same content (to share the same functionality) between different programs.

Choosing an Editor

The contents of the scripts can be produced in many ways, given that they are simply plain text files. Any generic editor such as 'notepad' on Windows, or 'vi' on Linux can be used.

Many professional programmers tend to use Integrated Development Environments (IDEs). These include text editors that provide additional features such as syntax colouring, auto-completion, and automatic fixes to syntax errors. They also provide a way to directly execute and debug a program from within the same environment. Popular IDEs that support Python development include PyCharm, IDLE, Eclipse and IntelliJ.

These lessons focus on the Python language rather than the chosen development environment, so everything discussed can be done using either a basic text editor, or via a fully blown professional IDE. That being said, it is useful to know how to develop and execute code *manually* without the use of an IDE, so a better understanding of how the whole process actually works can be gained.

Executing a Script

The Python interpreter will attempt to load and execute a *script* from any filename passed when the program is started, e.g. typing the following at the operating system's command line would cause the Python interpreter to load then execute the contents of the `my_program.py` file.

```
python my_program.py
```

For this to work of course, the script file would have to exist (in the current directory) and contain some meaningful Python statements.

Note: when working at the command line it is often better to change into the directory where your programs are stored, allowing easy access for editing and execution.


TASK: Use an editor to input the Python program shown below then save it to a file called `first_prog.py`. Once that has been done, execute the program from the command line.

```
number = input("Enter a number: ")

number = int(number)

print("The numbered entered was", number)

if (number % 2) == 0:
    print("That is an even number")
else:
    print("That is an odd number")
```

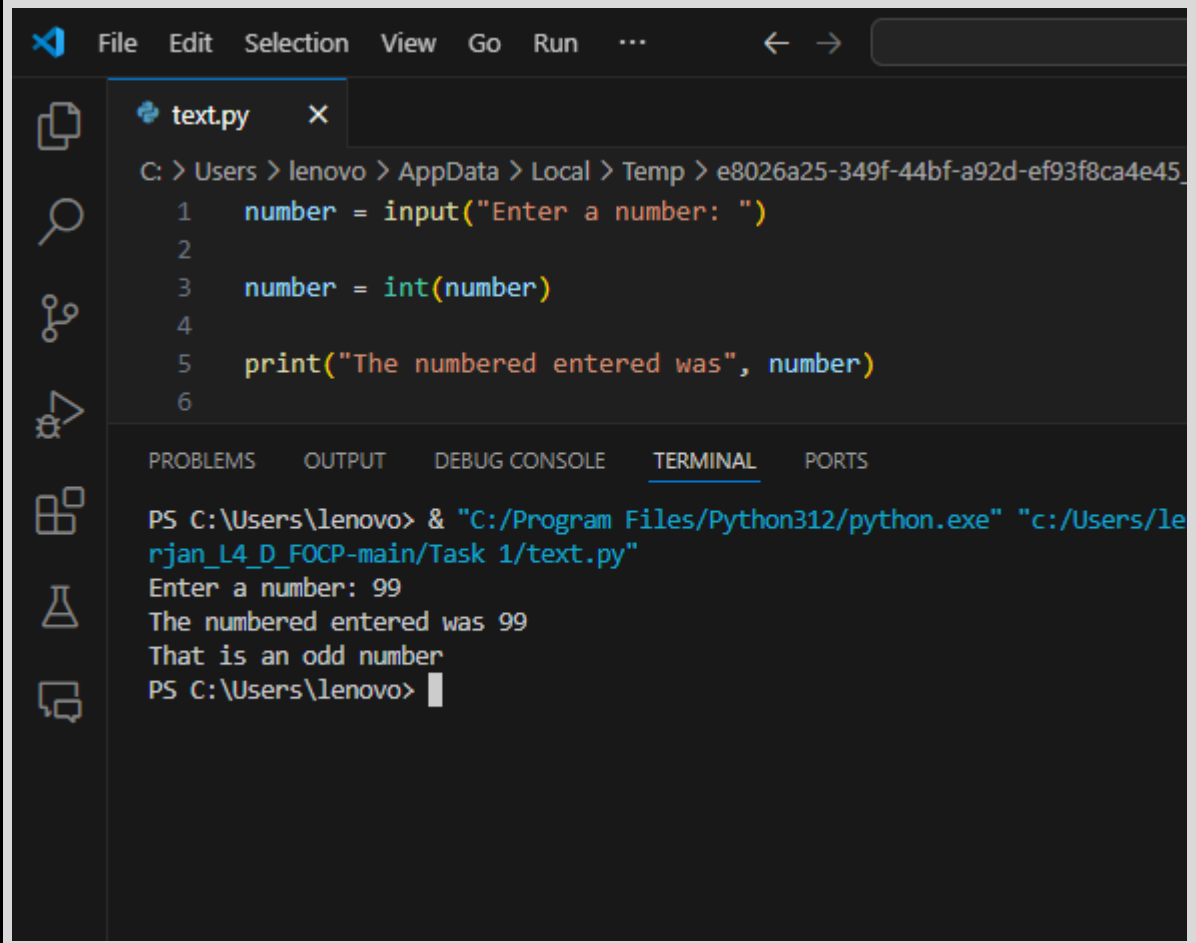

The screenshot shows a code editor window with a file named `text.py` open. The file contains the following Python code:

```
1 number = input("Enter a number: ")
2
3 number = int(number)
4
5 print("The numbered entered was", number)
6
```


Below the code editor is a terminal window. The terminal shows the command prompt `PS C:\Users\lenovo>` and the command `& "C:/Program Files/Python312/python.exe" "c:/Users/lenovo/rjan_L4_D_FOCP-main/Task 1/text.py"` being executed. The output of the program is displayed in the terminal:

```
Enter a number: 99
The numbered entered was 99
That is an odd number
PS C:\Users\lenovo>
```

Execute the program multiple times inputting several different values for testing purposes, and ensure no errors are reported.

Commenting code that is stored within files is good practice, since code evolves over time and becomes very large and complex, having comments that explain what the program does is very useful.


TASK: Open the `first_prog.py` and add comments above each statement within the file describing what that statement does (using a '#' at the beginning of the line) . Save the file and execute it again for testing purposes.

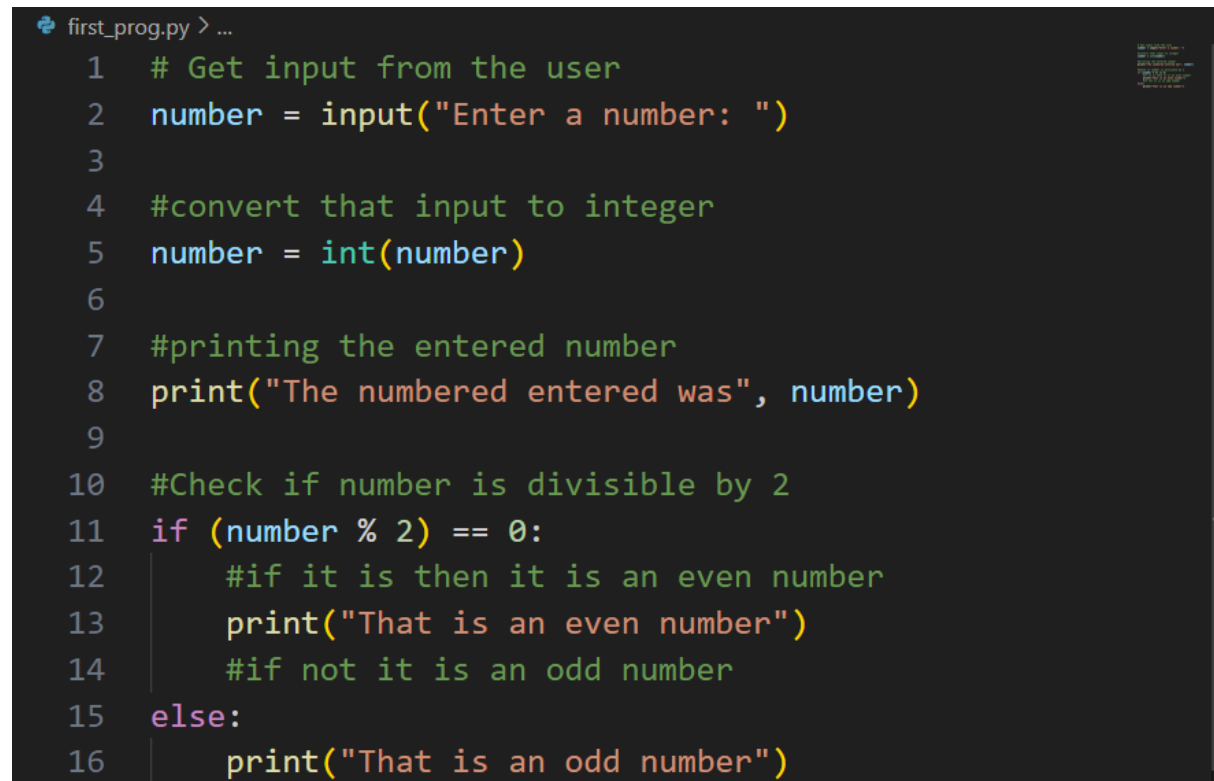

```
first_prog.py > ...
1  # Get input from the user
2  number = input("Enter a number: ")
3
4  #convert that input to integer
5  number = int(number)
6
7  #printing the entered number
8  print("The numbered entered was", number)
9
10 #Check if number is divisible by 2
11 if (number % 2) == 0:
12     #if it is then it is an even number
13     print("That is an even number")
14     #if not it is an odd number
15 else:
16     print("That is an odd number")
```

We now start to see the major benefit of storing programs in files i.e. we can edit and execute the code as many times as we want without having to re-type the whole program.

TASK: Open the `first_prog.py` and add some extra code that identifies and prints a message stating whether the entered number is divisible by 10. You should be able to base the new code on the `if` statement already provided. Once completed, save the file and execute it again for testing.

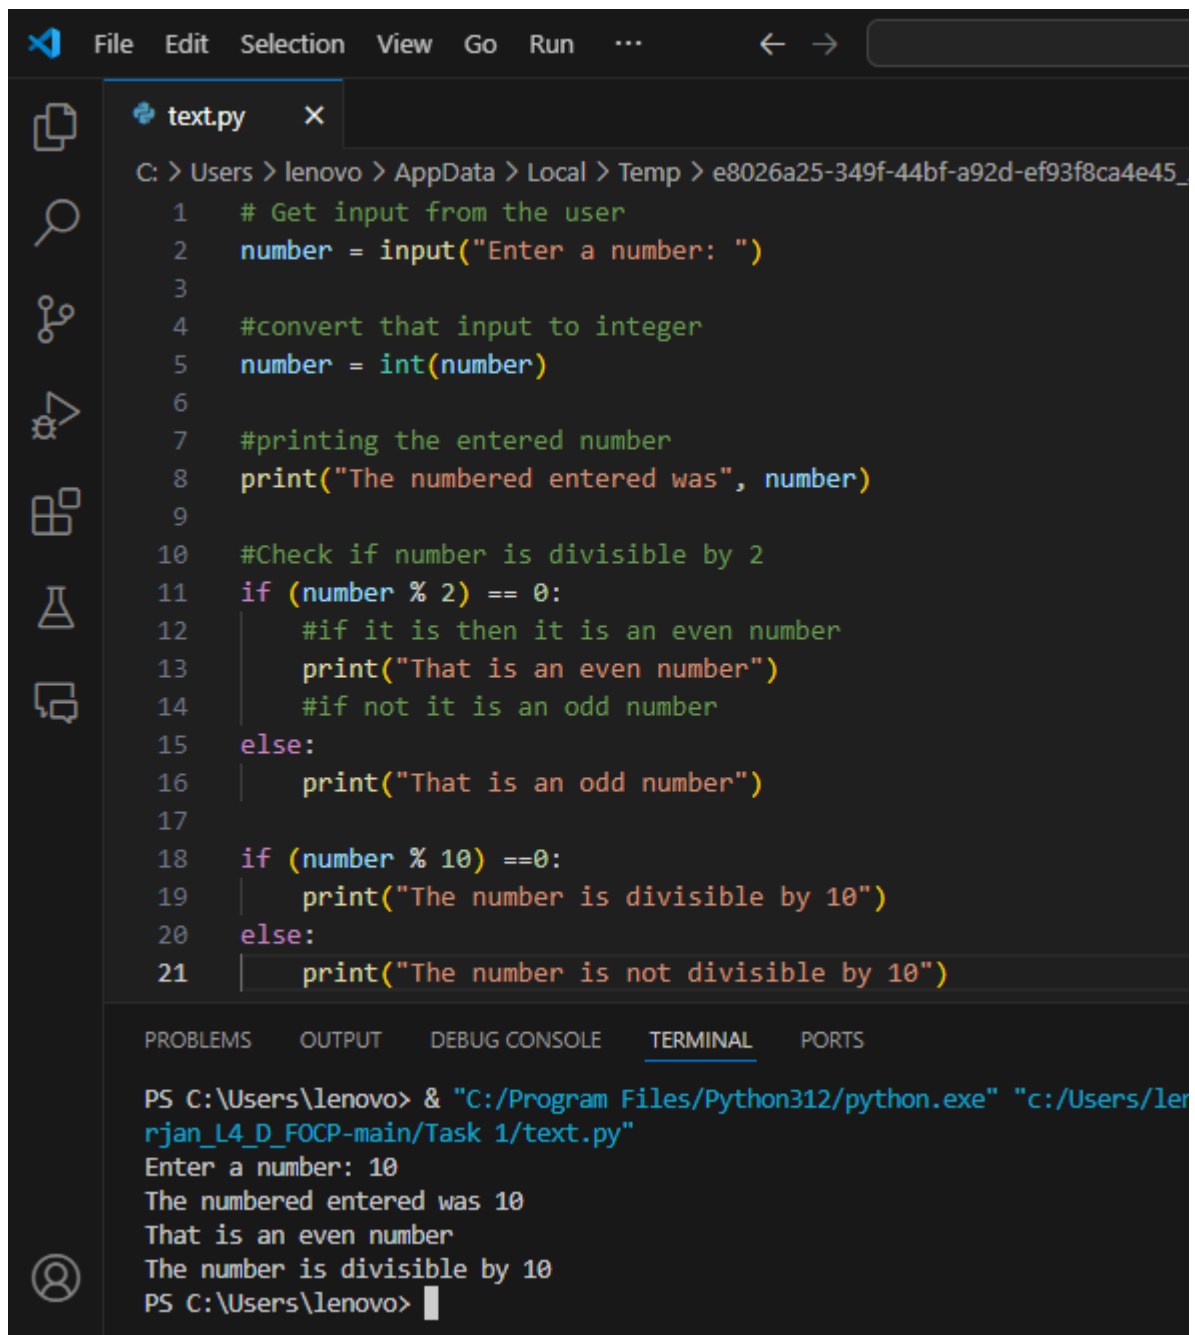

The image shows a code editor window with a dark theme. The top menu bar includes File, Edit, Selection, View, Go, Run, and a search icon. The left sidebar contains icons for Explorer, Search, Source Control, Run and Debug, Extensions, Testing, and a user profile. The main editor area displays a file named `text.py` with the following Python code:

```
1  # Get input from the user
2  number = input("Enter a number: ")
3
4  #convert that input to integer
5  number = int(number)
6
7  #printing the entered number
8  print("The numbered entered was", number)
9
10 #Check if number is divisible by 2
11 if (number % 2) == 0:
12     #if it is then it is an even number
13     print("That is an even number")
14     #if not it is an odd number
15 else:
16     print("That is an odd number")
17
18 if (number % 10) ==0:
19     print("The number is divisible by 10")
20 else:
21     print("The number is not divisible by 10")
```

Below the code editor is a terminal window with tabs for PROBLEMS, OUTPUT, DEBUG CONSOLE, and TERMINAL. The terminal shows the command to run the script and its output:

```
PS C:\Users\lenovo> & "C:/Program Files/Python312/python.exe" "c:/Users/lenovo/rjan_L4_D_FOCP-main/Task 1/text.py"
Enter a number: 10
The numbered entered was 10
That is an even number
The number is divisible by 10
PS C:\Users\lenovo> |
```

Command Line Arguments

All programs take *input*, do some *processing*, then generate *output*. The input can come from many sources, including the user. User input itself can have multiple forms, e.g. if a graphical user interface (GUI) is being used then input may be from the user pressing a button, or selecting a menu option. When running a command line program the user can be prompted to enter values using the `input()` function, as we have seen above.

When working from the command line a common mechanism of providing input to a program is via *command line arguments*. Rather than the user being explicitly asked to provide input, values are provided at the point at which the program is executed. This is done by typing values after the name of the file to be executed, e.g. the following asks the Python interpreter to execute the program `total.py`, but also specifies three values that should be *passed* to the program as arguments.

```
python total.py 25 90 15
```

Arguments passed in this way must be separated by spaces (rather than a comma when calling a function within the Python language).

The argument values can then be accessed from within the program, and treated as user input. This alternative form of user input is very popular with 'utility' type programs, or programs which are designed to be executed automatically as part of a larger process.

The Python interpreter stores any passed arguments in a *List* type variable called `sys.argv` making them extremely easy to access from within the program itself. The first element of this list is always the name of the program itself.


Note: the arguments are always stored as a list of *string* type values, so need explicitly converting if they are to be used as some other type of value. This behaviour is in line with how the `input()` function works.

TASK: Use an editor to input the Python program shown below then save it to a file called `total.py`. Once that has been done, execute the program from the command line, passing several numeric values for testing.

```
import sys

count = len(sys.argv)
total = 0
while count > 1:
    count -= 1
    total += float(sys.argv[count])

print("Total is", total)
```

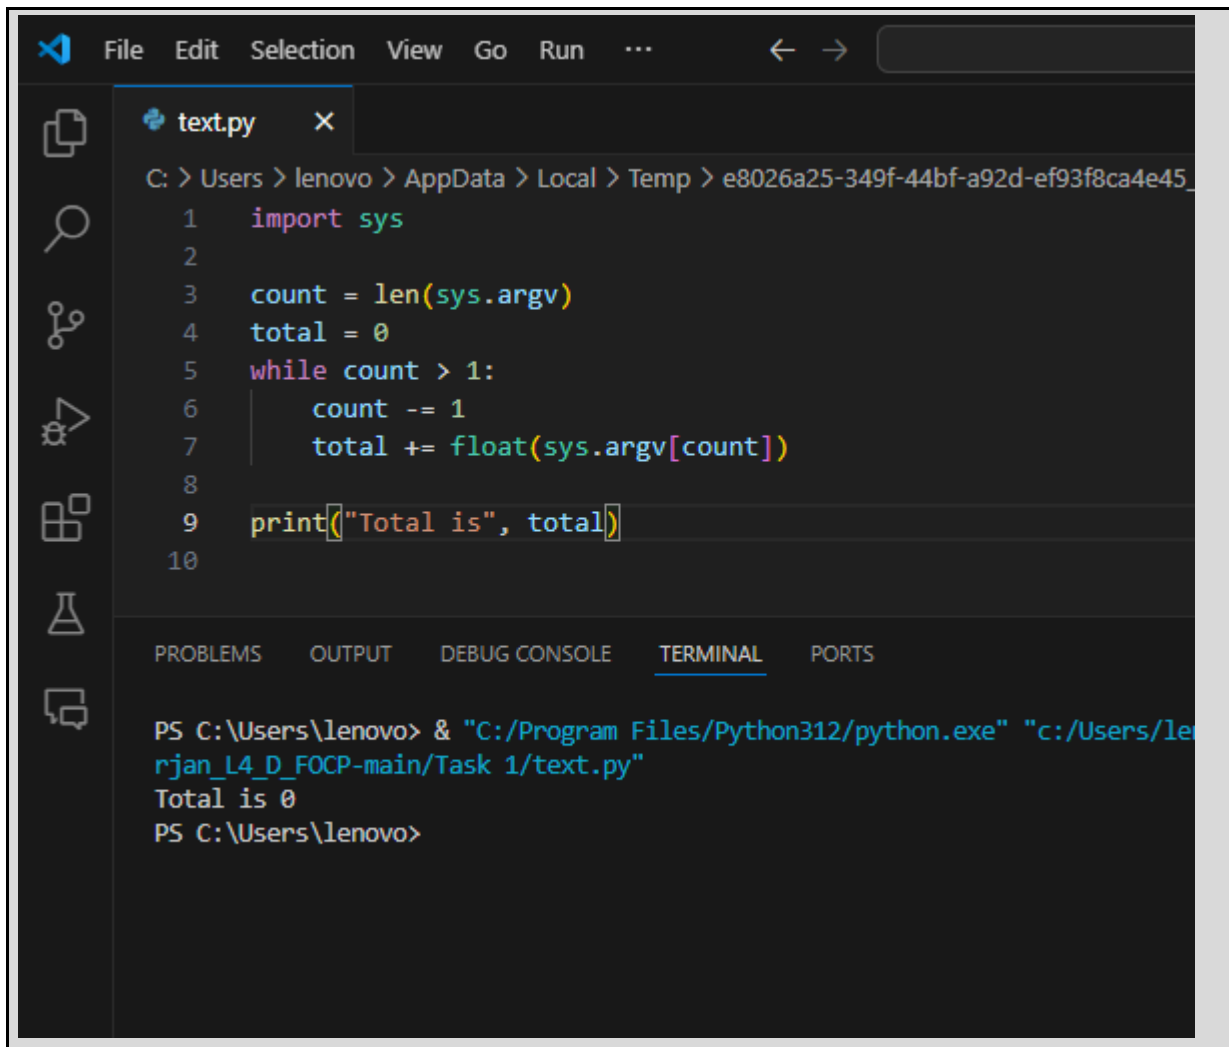


The image shows a Visual Studio Code editor window with a file named `text.py` open. The file path is `C:\Users\lenovo\AppData\Local\Temp\e8026a25-349f-44bf-a92d-ef93f8ca4e45_`. The code in the file is as follows:

```
1 import sys
2
3 count = len(sys.argv)
4 total = 0
5 while count > 1:
6     count -= 1
7     total += float(sys.argv[count])
8
9 print("Total is", total)
10
```

Below the code editor, the **TERMINAL** tab is active, showing the command prompt output:

```
PS C:\Users\lenovo> & "C:/Program Files/Python312/python.exe" "c:/Users/lenovo/rjan_L4_D_FOCP-main/Task 1/text.py"
Total is 0
PS C:\Users\lenovo>
```

TASK: Improve the previous program by adding additional code that not only prints the total of any passed arguments, but also calculates and prints the average. Execute the program several times for testing. What happens if no arguments are passed?

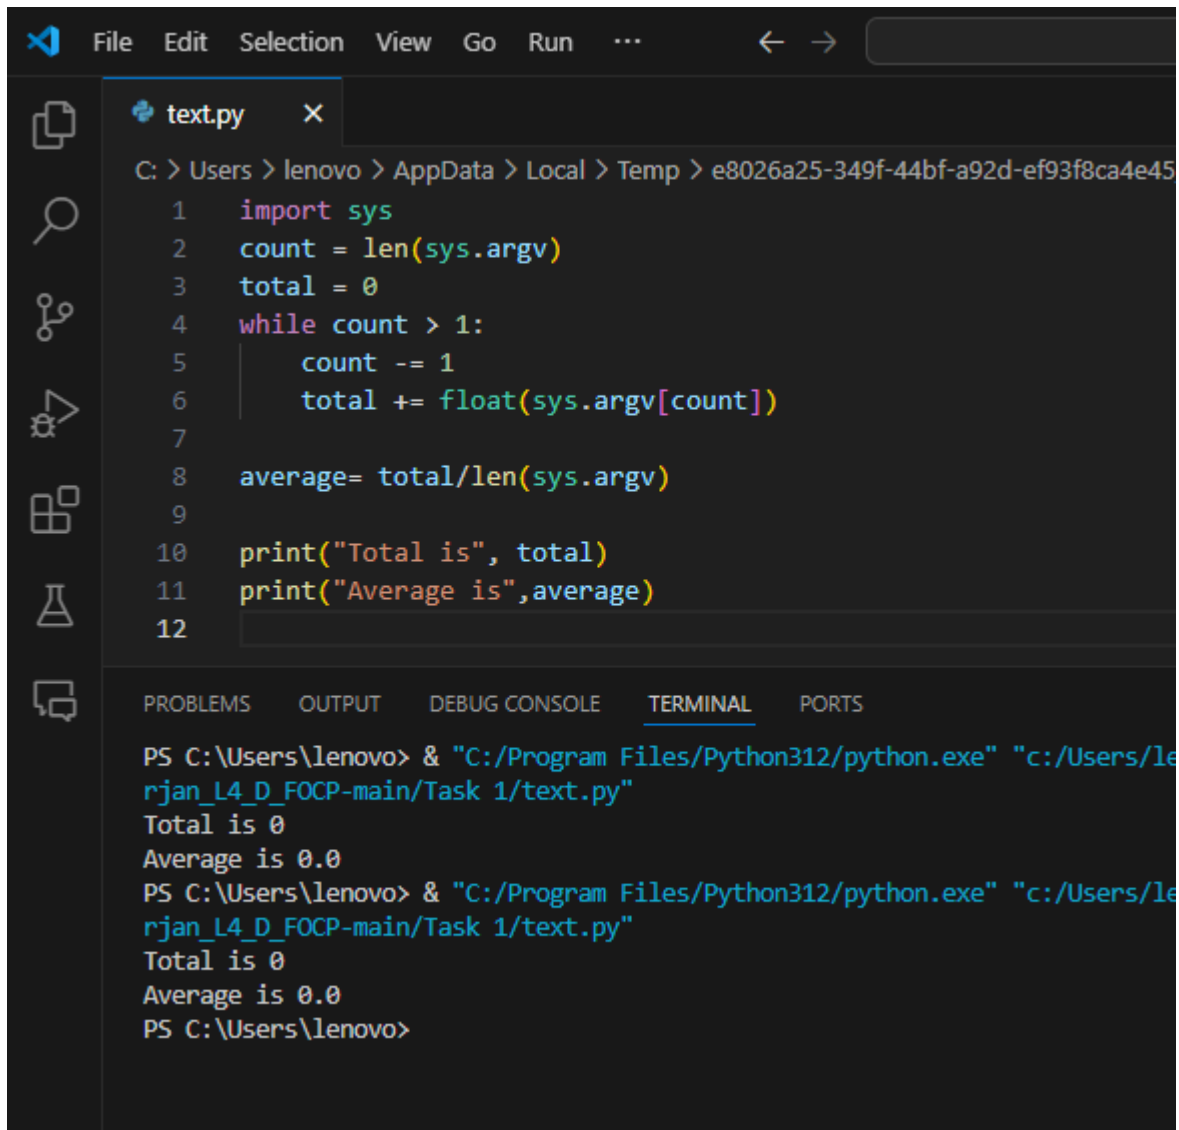

The screenshot shows a code editor with a file named `text.py` open. The file path is `C:\Users\lenovo\AppData\Local\Temp\e8026a25-349f-44bf-a92d-ef93f8ca4e45`. The Python code in the editor is as follows:


```
1 import sys
2 count = len(sys.argv)
3 total = 0
4 while count > 1:
5     count -= 1
6     total += float(sys.argv[count])
7
8 average = total/len(sys.argv)
9
10 print("Total is", total)
11 print("Average is", average)
12
```

Below the code editor is a terminal window with the following output:

```
PS C:\Users\lenovo> & "C:/Program Files/Python312/python.exe" "c:/Users/lenovo/AppData/Local/Temp/e8026a25-349f-44bf-a92d-ef93f8ca4e45/rjan_L4_D_FOCP-main/Task 1/text.py"
Total is 0
Average is 0.0
PS C:\Users\lenovo> & "C:/Program Files/Python312/python.exe" "c:/Users/lenovo/AppData/Local/Temp/e8026a25-349f-44bf-a92d-ef93f8ca4e45/rjan_L4_D_FOCP-main/Task 1/text.py"
Total is 0
Average is 0.0
PS C:\Users\lenovo>
```

Remember, the first element of the `sys.argv` list is the program name itself, so it is not uncommon to ignore or skip processing of that first element.

TASK: Improve the program once more by adding a check to see whether no arguments have been passed, if so print a message saying “no arguments were provided”. Also add comments to the program. Execute the program several times for testing.

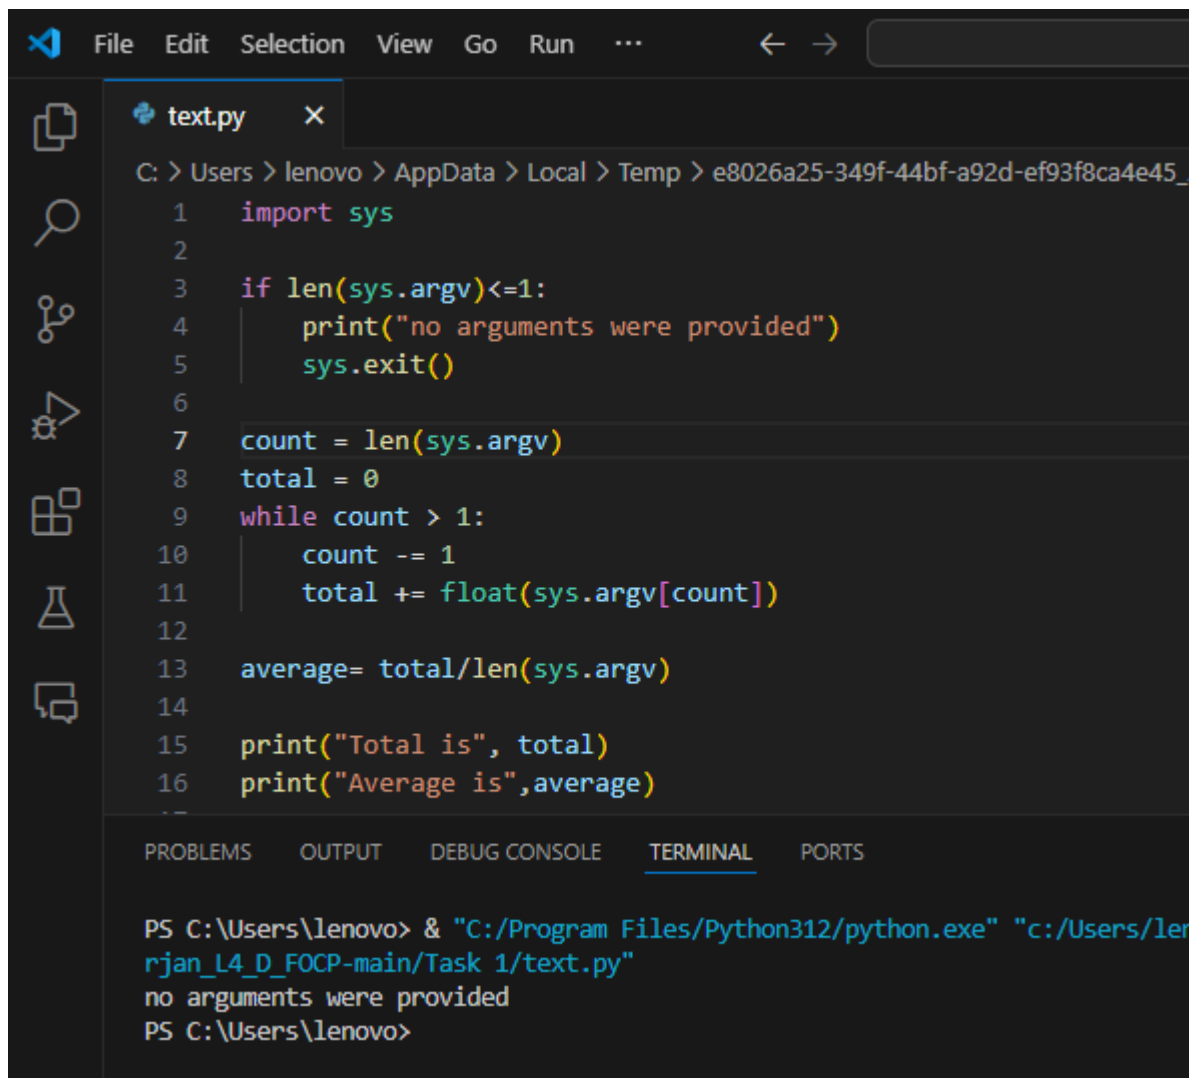

The image shows a code editor window with a file named `text.py`. The code is a Python script that calculates the average of command-line arguments. It uses `sys.argv` to get the arguments, checks if there are any, and then iterates through them to calculate the total and average. The terminal output shows the script being executed with no arguments, resulting in the message "no arguments were provided".

```
File Edit Selection View Go Run ...  
C: > Users > lenovo > AppData > Local > Temp > e8026a25-349f-44bf-a92d-ef93f8ca4e45_  
1 import sys  
2  
3 if len(sys.argv)<=1:  
4     print("no arguments were provided")  
5     sys.exit()  
6  
7 count = len(sys.argv)  
8 total = 0  
9 while count > 1:  
10     count -= 1  
11     total += float(sys.argv[count])  
12  
13 average= total/len(sys.argv)  
14  
15 print("Total is", total)  
16 print("Average is",average)  
--  
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS  
PS C:\Users\lenovo> & "C:/Program Files/Python312/python.exe" "c:/Users/lenovo/rjan_L4_D_FOCP-main/Task 1/text.py"  
no arguments were provided  
PS C:\Users\lenovo>
```

Writing Modules

The code that we write in files can not only be executed as a *script* from the command line, but can be *imported* by other Python programs. Any `.py` file containing definitions and statements is called a *module*. A set of built-in *modules* are provided, e.g. we have just seen the `sys` module being imported. A collection of modules is often called a *library*.


It is possible to write your own *modules* that are designed to be imported into other programs. A module is like any other Python program but often contains specific content such as a set of related *function* definitions. As a module is being imported, any Python statements are executed, these are usually used to initialise the module e.g. setup variable values etc.

Code that is designed to be used as a module is stored in a text file as normal, i.e. the file name ends with a `.py` suffix. When imported however, the `.py` is omitted from the name.

TASK: Use an editor to input the Python program shown below then save it to a file called `my_utils.py`.

```
def average(values):
    """ Calculates the average of the given list. """
    total = 0;
    for n in values:                # total the given values
        total += float(n)
    return total/len(values)        # return calculated average

# initialisation statement
print("Welcome, utils module has been imported and initialised!")
```

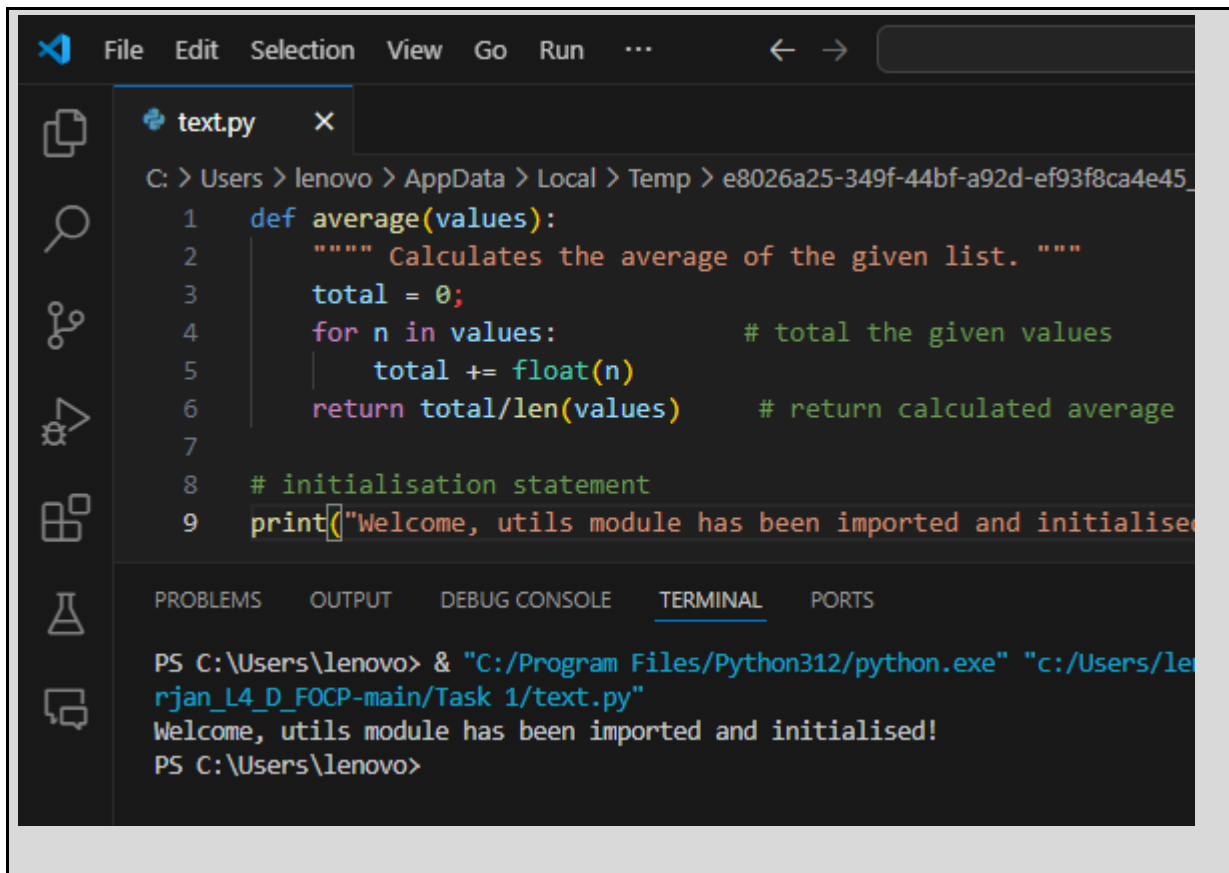A screenshot of a code editor window. The top menu bar includes 'File', 'Edit', 'Selection', 'View', 'Go', 'Run', and a search icon. The left sidebar has icons for Explorer, Search, Source Control, Run and Debug, Extensions, and Testing. The main editor area shows a file named 'text.py' with the following Python code:

```
1 def average(values):
2     """ Calculates the average of the given list. """
3     total = 0;
4     for n in values:          # total the given values
5         total += float(n)
6     return total/len(values)  # return calculated average
7
8 # initialisation statement
9 print("Welcome, utils module has been imported and initialised")
```

The bottom panel has tabs for 'PROBLEMS', 'OUTPUT', 'DEBUG CONSOLE', 'TERMINAL', and 'PORTS'. The 'TERMINAL' tab is active, showing the command prompt output:

```
PS C:\Users\lenovo> & "C:/Program Files/Python312/python.exe" "c:/Users/lenovo/rjan_L4_D_FOCP-main/Task 1/text.py"
Welcome, utils module has been imported and initialised!
PS C:\Users\lenovo>
```


Notice how a comment has been included directly below the function name using a triple quoted string. You may recall this is called a *docstring* and should be provided with function definitions that appear within modules.

Once that file has been saved, execute it from the command line using the Python interpreter. If this is working correctly the 'welcome' message should be displayed.

This particular file however is not really designed to be executed in a stand-alone fashion. It is designed to be imported and used as a *module*.

TASK: Use an editor to input another Python program `utils_test.py`. This program should `import my_utils` then call the `average()` function several times, passing a list of values as a parameter, e.g.

```
print("Average is", my_utils.average([10, 23, 30]))
print("Another average is", my_utils.average([10.2, 8.8, 2.6]))
```

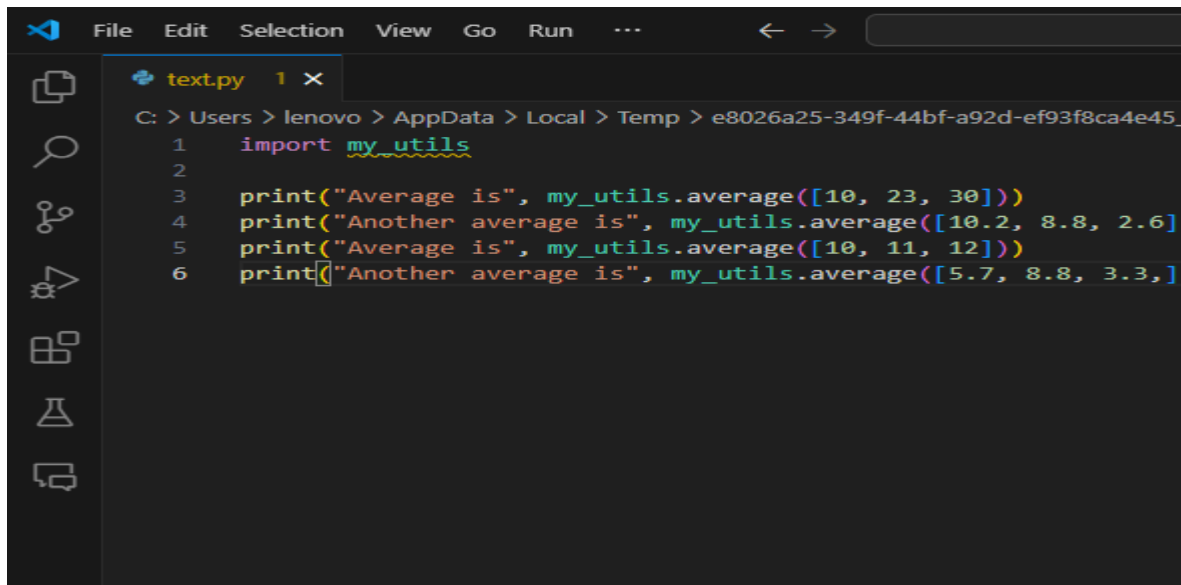

```
File Edit Selection View Go Run ...
text.py 1 x
C: > Users > lenovo > AppData > Local > Temp > e8026a25-349f-44bf-a92d-ef93f8ca4e45_
1 import my_utils
2
3 print("Average is", my_utils.average([10, 23, 30]))
4 print("Another average is", my_utils.average([10.2, 8.8, 2.6])
5 print("Average is", my_utils.average([10, 11, 12]))
6 print("Another average is", my_utils.average([5.7, 8.8, 3.3,])
```

Methods of Importing

Throughout these exercises we have used `import` on several occasions. The need to import from a module is required in just about all non-trivial programs, since it provides access to modules present within the *Python Standard Library* and many other external libraries.

Just to recap:

- Python has a number of functions and types built directly into the language. These do not need to be imported prior to use. e.g. `print()`, `input()`, `len()`.
- The *Python Standard Library* provides a number of very commonly used modules, these do need to be imported prior to use, and are guaranteed to be available to all Python installations. e.g. `math`, `sys`.
- There are many thousands of third party libraries available. These need to be imported, but also may need to be explicitly installed on a specific Python installation prior to use.
- We can use our own modules, which also need to be imported and must be distributed along with any of our programs that rely on them being present.

There are several different approaches to importing module content into a program. Which of these mechanisms is used affects how access to the imported content is performed.

In order to understand why different approaches are available it is necessary to understand the concept of a *symbol table*. This is simply a location where all the names we use in our programs are stored. For example, the names of any variables and functions we define within our programs get stored in the *symbol table*.

Each module has its own *local symbol table*, thus allowing variable and function names not to clash. This means module developers can use variable and function names without the worry that they may be the same as names within programs into which they are imported.

The way in which a module is imported determines how the content is merged into the *symbol-table* of our own program.

We have seen to most basic form of `import` many times already:

```
import math

print("The square root of 20954 is", math.sqrt(20954))
```

This imports the entire module content (all variables, functions etc.), but does not add the names of these into the importing program's *symbol table*. Hence, all access to the content has to be prefixed with the module's name.

We can also explicitly import specific content from a module. In this case however the names are imported into the program's *symbol table*. Hence access no longer needs to be prefixed with the module's name, e.g.

```
from math import sqrt

print("The square root of 20954 is", sqrt(20954))
```

This form is usually safe to use, since we can easily check whether the name of the imported function clashes with any of the names we use within our own program.


The third approach to importing allows all content to be directly imported into the program's own *symbol table*, e.g.

```
from math import *

print("The square root of 20954 is", sqrt(20954))
print("The sine 0.653 is", sin(0.653))
print("The cosine 0.623 is", cos(0.623))
```

This form is not recommended, since unless you are aware of all names defined in the imported module, clashes become very likely to happen. Hence this form tends to be used to save time when programming in *interactive-mode* but should otherwise be avoided.

TASK: Update the previous program `utils_test.py`, so that the `import` statement explicitly imports the `average()` function directly into the program's *symbol table*, allowing the prefix to be removed from the later function calls.

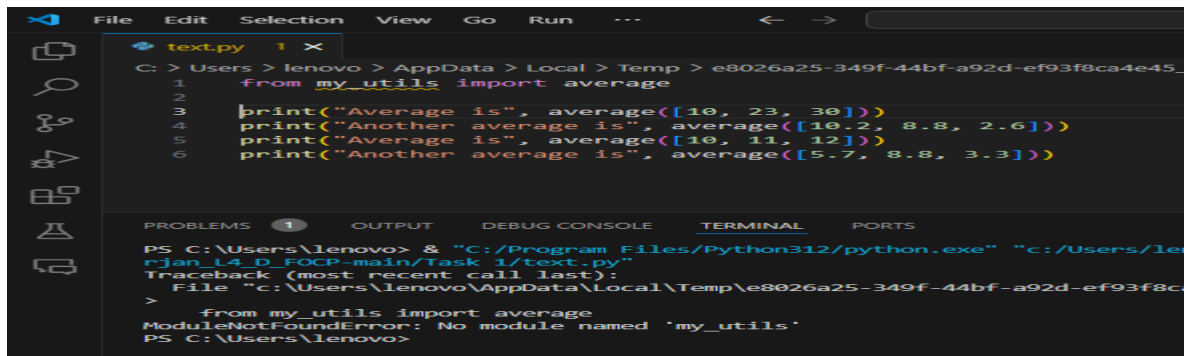

```
File Edit Selection View Go Run ...
text.py 1 x
C: > Users > lenovo > AppData > Local > Temp > e8026a25-349f-44bf-a92d-ef93f8ca4e45_
1 from my_utils import average
2
3 print("Average is", average([10, 23, 30]))
4 print("Another average is", average([10.2, 8.8, 2.6]))
5 print("Average is", average([10, 11, 12]))
6 print("Another average is", average([5.7, 8.8, 3.3]))

PROBLEMS 1 OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\Users\lenovo> & "C:/Program Files/Python312/python.exe" "c:/Users/lenovo/AppData/Local/Temp/e8026a25-349f-44bf-a92d-ef93f8ca4e45/rjan_L4_D_FOCP-main/Task 1/text.py"
Traceback (most recent call last):
  File "c:\Users\lenovo\AppData\Local\Temp\e8026a25-349f-44bf-a92d-ef93f8ca4e45\rjan_L4_D_FOCP-main\Task 1\text.py", line 1, in <module>
    from my_utils import average
ModuleNotFoundError: No module named 'my_utils'
PS C:\Users\lenovo>
```

Using Import Aliases

The above three approaches to importing have been covered within earlier lessons. However there is another mechanism available during importing which helps avoid name clashes, or can be used to save time while typing.

The `import` statement can be extended to allow an alternative name, or *alias*, to be applied to the imported element. This means that the names of either modules or specific elements, such as functions, can be explicitly changed within the current program. This makes avoiding clashes easier, e.g. the following example explicitly changes the name of the imported `sqrt()` function to be `root()` instead.

```
from math import sqrt as root

print("The square root of 20954 is", root(20954))
```

Using an alias is also convenient when a general `import` is being used, since the name of the whole module can be *aliased* into something shorter, therefore avoiding the need to import all content into the program's symbol-table. So:

```
import math as m

print("The square root of 20954 is", m.sqrt(20954))
print("The sine 0.653 is", m.sin(0.653))
print("The cosine 0.623 is", m.cos(0.623))
```

Listing Symbol Table Names

When working with the Python interpreter in *interactive mode* it is sometimes useful to be able to quickly list the names defined within the current *symbol table*, or those within an imported module. This can be done easily using the built-in `dir()` function.

If called with no parameters this lists the names defined within the program's *symbol-table*. If an object name is passed, such as that of an imported module, it will list the names defined in the module's *symbol-table*.

TASK: Start Python in interactive mode and input the following statements.

```
>>> import math

>>> dir(math)

C:\Users\kanch>python
Python 3.13.0 (tags/v3.13.0:60403a5, Oct 7 2024, 09:38:07) [MSC v.1941 64 bit (AMD64)] on win32
Type "help", "copyright", "credits" or "license" for more information.
>>> import math
>>> dir(math)
['__doc__', '__loader__', '__name__', '__package__', '__spec__', 'acos', 'acosh', 'asin', 'asinh', 'atan', 'atan2', 'atanh', 'cbrt', 'ceil', 'comb', 'copysign', 'cos', 'cosh', 'degrees', 'dist', 'e', 'erf', 'erfc', 'exp', 'exp2', 'expm1', 'fabs', 'factorial', 'floor', 'fma', 'fmod', 'frexp', 'fsum', 'gamma', 'gcd', 'hypot', 'inf', 'isclose', 'isfinite', 'isinf', 'isnan', 'isqrt', 'lcm', 'ldexp', 'lgamma', 'log', 'log10', 'log1p', 'log2', 'modf', 'nan', 'nextafter', 'perm', 'pi', 'pow', 'prod', 'radians', 'remainder', 'sin', 'sinh', 'sqrt', 'sumprod', 'tan', 'tanh', 'tau', 'trunc', 'ulp']
>>>
```

Look at the list of names shown, these should generally look familiar by now. These are all of the names defined within the `math` module.

TASK: Now enter the following statements:

```
>>> from math import *
```

```
>>> dir()
```

```
>>> from math import *
>>> dir()
['__annotations__', '__builtins__', '__cached__', '__doc__', '__file__', '__loader__', '__name__', '__package__', '__spec__', 'acos', 'acosh', 'asin', 'asinh', 'atan', 'atan2', 'atanh', 'cbrt', 'ceil', 'comb', 'copysign', 'cos', 'cosh', 'degrees', 'dist', 'e', 'erf', 'erfc', 'exp', 'exp2', 'expm1', 'fabs', 'factorial', 'floor', 'fma', 'fmod', 'frexp', 'fsum', 'gamma', 'gcd', 'hypot', 'inf', 'isclose', 'isfinite', 'isinf', 'isnan', 'isqrt', 'lcm', 'ldexp', 'lgamma', 'log', 'log10', 'log1p', 'log2', 'math', 'modf', 'nan', 'nextafter', 'perm', 'pi', 'pow', 'prod', 'radians', 'remainder', 'sin', 'sinh', 'sqrt', 'sumprod', 'tan', 'tanh', 'tau', 'trunc', 'ulp']
>>>
```

Since an asterisk '*' was used to `import` the entire contents of the `math` module into the program's own *symbol table*, it now contains everything that was defined within the `math` module.


The Module Search Path

The `import` statement looks at specific locations within the host system's directory structure for files to be imported. When executed, the `import` statement first looks for the given name within the modules provided as part of the standard distribution, i.e. those within the Python Standard Library. If the given name is not found in those modules, then a list of directories stored in the `sys.path` variable is searched. The `sys.path` is a list of string values that is initialised when the program starts, and includes the directory from which the input script was loaded, or the current directory if no script was specified.

TASK: Use an editor to input a Python program `show_path.py`. Execute the script and examine the results. Notice the first entry will be the directory in which the program file itself is stored.

```
import sys
```

```
print("The import search path for this program is", sys.path)
```

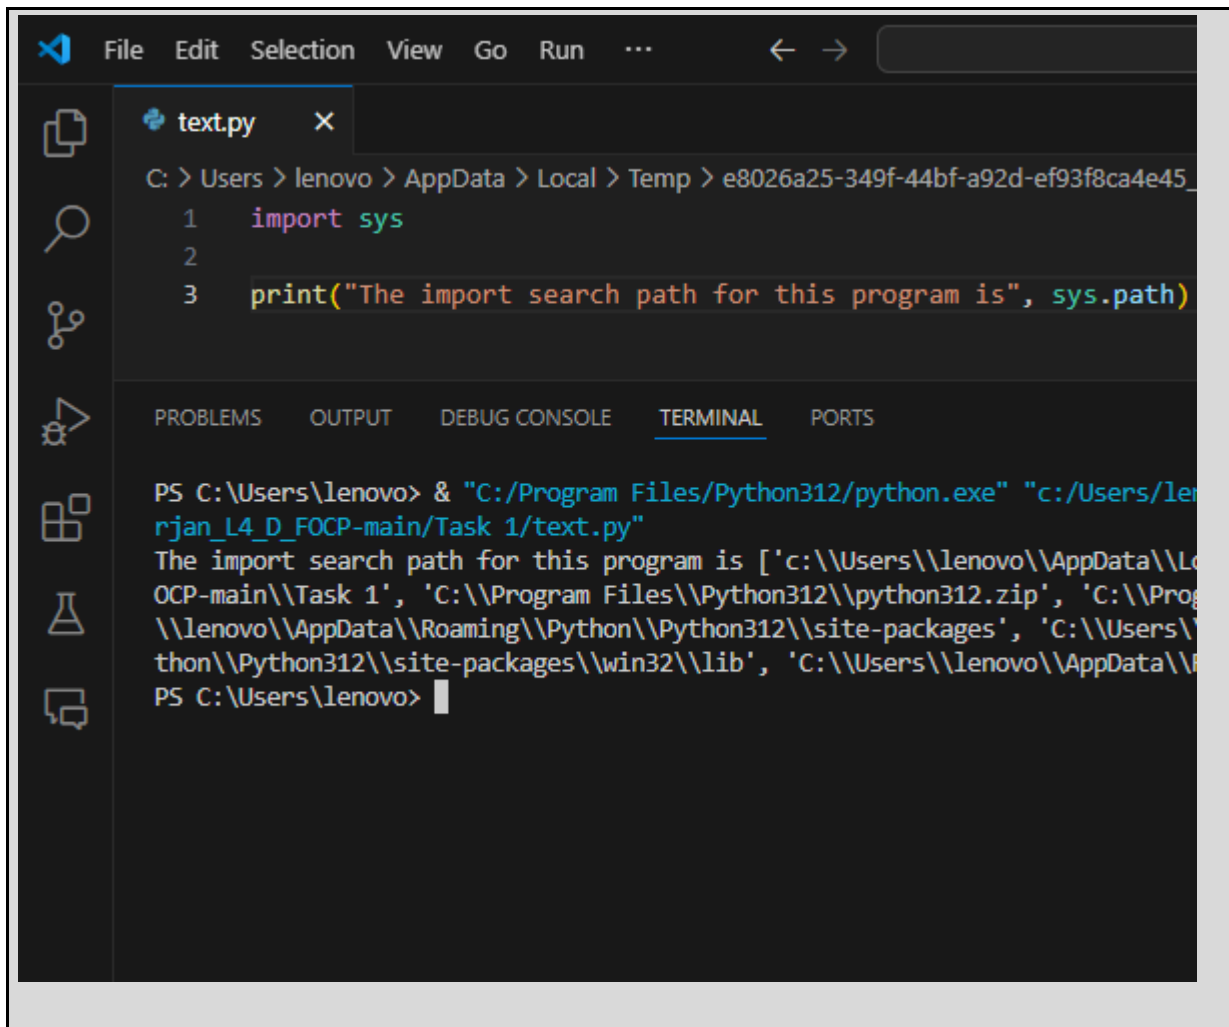The screenshot shows a code editor with a file named `text.py`. The code in the file is:

```
1 import sys
2
3 print("The import search path for this program is", sys.path)
```

Below the code editor is a terminal window. The terminal shows the command to run the script and its output:

```
PS C:\Users\lenovo> & "C:/Program Files/Python312/python.exe" "c:/Users/lenovo/AppData/Local/Temp/e8026a25-349f-44bf-a92d-ef93f8ca4e45/rjan_L4_D_FOCP-main/Task 1/text.py"
The import search path for this program is ['c:\\Users\\lenovo\\AppData\\Local\\Temp\\e8026a25-349f-44bf-a92d-ef93f8ca4e45\\rjan_L4_D_FOCP-main\\Task 1', 'C:\\Program Files\\Python312\\python312.zip', 'C:\\Program Files\\Python312\\Lib\\site-packages', 'C:\\Users\\lenovo\\AppData\\Roaming\\Python\\Python312\\site-packages', 'C:\\Users\\lenovo\\AppData\\Local\\Programs\\Python\\Python312\\Lib\\site-packages\\win32\\lib', 'C:\\Users\\lenovo\\AppData\\Local\\Programs\\Python\\Python312\\Lib\\site-packages']
PS C:\Users\lenovo>
```

The `sys.path` value can be programmatically changed, allowing the program itself to include specific search locations when an `import` statement is being performed. However, hard coding system specific directory paths into code is bad practice, as it reduces program portability. A better option is to use the environment variable called `PYTHONPATH`. This can be setup within the host environment (OS). Any paths included in this variable are also included within the `sys.path` list. How this environment variable is set is Operating System specific, within a Unix type system it could be set as follows -

```
export PYTHONPATH='/my_modules:/util_modules'
```

This example will add two additional paths to the `sys.path` list the next time the python interpreter is used. Setting the search path in this way makes the code more portable between different systems, since only the environment variable needs changing rather than the program code itself.

Writing a 'Script' and 'Module'

Placing code into files allows large programs to be developed, improved and debugged over a long period of time. It is also an extremely useful way of developing reusable modules that may be imported into many other programs.

Python is flexible enough to be able to allow a single file to be used as either a standalone program, or a reusable module. i.e. a single file can either be executed as a *script* from the command-line, or imported by other programs as a reusable *module*. The code within a file has to be deliberately written in such a way to achieve this however.

A program can detect whether it is executing directly as a *script* or is being imported as a *module* by accessing a special variable called `__name__`. The value of this variable is set as follows -

- If a program is being executed directly as a *script*, it is set to `'__main__'`.
- If a program is being imported as a *module*, it is set to the name of the `.py` file.

Therefore a program can examine this variable to determine whether it is executing as a script, or an imported module.

For example, the following code can be used either as a stand-alone program, or be imported:

```
def display_heading(text):
    """ Prints a heading between two bars. """
    print("=====")
    print(text)
    print("=====")

if __name__ == "__main__":
    import sys
    if len(sys.argv) > 1:
        display_heading(sys.argv[1])
```

When this program executes, the `if` statement detects whether it is executing as a script. If so then it calls the `display_heading()` function passing a *command-line argument*. If it is being imported as a module however this call is not made and the program that imported the module is responsible for calling the `display_heading()` function instead.

TASK: Update the earlier program `my_utils.py`, so that when executed directly from the command line it displays the average of any provided *command-line arguments*. However when imported by another program, nothing is displayed until the `average()` function is explicitly called.

Key Terminology

Understanding key terminology is important not only when programming but for understanding computer science in general. Certain terms, technologies and phrases will often re-occur when reading or learning about many computer science topics. Having an awareness of these is important, as it makes learning about the various subjects and communication with others in the field easier.

TASK: Look at each of the phrases below and ensure you understand what each of these means. For any that you do not understand, do a little research to find a definition of each term. This research may involve looking back over these notes, or the associated lecture notes. It may also involve searching for these terms on the Internet.

- IDE
- Module
- Command Line Arguments
- Symbol-table
- Search path

Practical Exercises

You have now completed this tutorial. Now attempt to complete the associated exercises.