SEMINAR REPORT

A seminar Report on

Phishing Website Detection Techniques

Submitted in partial fulfilment for the award of

THIRD YEAR DIPLOMA IN

COMPUTER ENGINEERING

By

Sr. No	Enrollment Number	Seat Number	Name of student
1	24610960226	388534	Pagar Ishan Ashok
2	24610960227	388535	Pagare Mehul Sandip
3	24610960203	388516	Jathar Sarang Arvind
4	24610960220	388528	Patil Manish Chandrakant

FOR THE ACADEMIC YEAR : 2026 – 2027

DEPARTMENT OF COMPUTER ENGINEERING

S.S.V.P.S's Bapusaheb Shivajirao Deore Polytechnic, Dhule

(Institute Code : 0059)

S.S.V.P.S's Bapusaheb Shivajirao Deore Polytechnic, Dhule

(An Affiliated Institute of Maharashtra State Board of Technical Education)

DEPARTMET OF COMPUTER ENGINEERING

CERTIFICATE

Sr. No	Enrollment Number	Seat Number	Name of student
1	24610960226	388534	Pagar Ishan Ashok
2	24610960227	388535	Pagare Mehul Sandip
3	24610960203	388516	Jathar Sarang Arvind
4	24610960220	388528	Patil Manish Chandrakant

of **CO5K** Semester of Diploma in **Computer Engineering** of **S.S.V.P.S's B. S. Deore Polytechnic, Dhule** (Inst.Code: 059) has completed the term work satisfactorily in Course **Seminar Presentation and Project Initiation (Course Code: 315003)** for the academic year **2026 to 2027** as prescribed in the curriculum.

Place : Dhule

Date : .....

Signature:

Name : Shraddha S Hajari

Subject Teacher

Signature:

Name : Nishad D Patel

Head of the Department

Seal of Institution

TABLE OF CONTENT

Sr. No.	Chapter	Page No.
	Abstract	I
	List of Figures	Ii
	List of Tables	Iii
1	Introduction	1
2	Literature Review	2
3	Information/Chapters	7
4	Advantages and Disadvantages	15
5	Conclusion	16
6	Project Initiation :	17
	6.1) Description of problem statement.	17
	6.2) Scope and objectives.	18
	6.3) Stake holder	18
	6.4) Platform/ Equipment/ Resources identification.	19
7	Seminar Presentation	
	Bibliography	
	References	

ABSTRACT

Phishing is a type of cyberattack in which attackers create fake websites that look similar to genuine websites to steal sensitive information such as usernames, passwords, banking details, and personal data. These attacks commonly target online banking, social media, e-commerce, and email users. As internet usage increases, phishing attacks have become a serious cybersecurity concern.

Phishing Website Detection Techniques are methods used to identify and prevent users from accessing fraudulent websites. Various techniques are used for phishing detection, including blacklist-based detection, whitelist-based detection, URL-based analysis, heuristic-based detection, machine learning, and deep learning. Traditional methods use known malicious URLs and predefined rules, while intelligent techniques analyze website features and patterns to identify suspicious websites.

This seminar studies different phishing website detection techniques, their working principles, advantages, limitations, and future scope. It also explains how machine learning and deep learning can improve the accuracy and efficiency of phishing detection. The main objective is to understand how phishing websites can be identified and how users can be protected from online fraud.

Keywords: Phishing, Cybersecurity, Website Detection, Machine Learning, Deep Learning, URL Analysis, Online Security.

LIST OF FIGURES

Fig. No.	Title	Page No.
3.6	Overview of Phishing Website Detection	13
3.7	Working of a Phishing Attack	14

LIST OF TABLES

Table No.	Title	Page No.
2.1	Literature Review	5
3.3	Technology Purpose	10
3.4	Features Use for Detection	12
6.5	Platform	19
6.6	Equipment	19
6.7	Resources	20

CHAPTER 1
INTRODUCTION

The internet has become an essential part of modern life. People use websites for online banking, shopping, education, communication, entertainment, and many other activities. However, the increasing use of online services has also increased the risk of cyberattacks.

One of the most common cyber threats is phishing. In a phishing attack, an attacker creates a fake website that appears to be a legitimate website. The attacker may send a fraudulent email, message, or social media link to convince users to visit the fake website and enter confidential information.

For example, a phishing website may look similar to a genuine banking login page. When users enter their login credentials, the information may be captured by the attacker.

Phishing Website Detection Techniques help identify these malicious websites before users disclose their sensitive information. Detection methods can analyse website URLs, domain information, HTML content, website behaviour, and other characteristics.

Traditional detection techniques rely on blacklists and predefined rules. Modern approaches use machine learning and deep learning to recognize suspicious patterns and detect previously unknown phishing websites.

Therefore, studying phishing website detection is important for improving cybersecurity, protecting user information, and reducing online fraud.

CHAPTER 2
LITERATURE REVIEW

The literature review examines existing research on phishing website detection and identifies the techniques, technologies, strengths, and limitations discussed by researchers.

2.1 A Systematic Literature Review on Phishing Website Detection Techniques

This research area reviews existing phishing detection methods, including blacklists, heuristic approaches, machine learning, and deep learning. Systematic reviews help researchers understand the development of phishing detection and compare the effectiveness of different approaches.

Main contribution: Provides an overview of existing detection methods and their limitations.

Future scope: Developing more accurate, adaptive, and real-time detection systems.

2.2 Blacklist-Based Phishing Detection

Blacklist-based detection compares a website URL with a database of known malicious websites. If a URL matches a listed phishing website, the system can warn the user or block access.

Main contribution: Simple and effective for detecting previously reported phishing websites.

Limitation: Newly created phishing websites may not appear in the blacklist.

2.3 Heuristic-Based Detection

Heuristic detection uses predefined rules to identify suspicious website characteristics. These may include unusual URLs, excessive subdomains, misleading domain names, and suspicious webpage elements.

Main contribution: Can detect suspicious websites without requiring an exact blacklist match.

Limitation: Attackers can modify website characteristics to avoid predefined rules.

2.4 Machine Learning-Based Detection

Machine learning techniques use features extracted from URLs, domains, and webpages to classify websites as legitimate or phishing. Common algorithms include Decision Trees, Random Forest, Support Vector Machines (SVM), Logistic Regression, and Naive Bayes.

Main contribution: Learns patterns from labelled data and can identify phishing websites that are not already listed in a blacklist.

Limitation: Performance depends on training data quality, feature selection, and changes in attack patterns.

2.5 Deep Learning-Based Detection

Deep learning uses neural networks to identify complex patterns in website data. Techniques such as Convolutional Neural Networks (CNNs), Recurrent Neural Networks (RNNs), and other neural architectures may be used for URL, text, or webpage analysis.

Main contribution: Can learn complex patterns and reduce the need for manually designed features in some systems.

Limitation: Often requires more computational resources and substantial training data.

2.6 Research Gap

Existing phishing detection methods face several challenges. Blacklists may fail to identify new attacks, while rule-based systems may be bypassed by changing website characteristics. Machine learning models may lose accuracy when phishing techniques change, and deep learning systems may require more computing power.

Therefore, there is a need for detection systems that are accurate, fast, adaptive, and capable of identifying previously unseen phishing websites while minimizing false warnings.

Table No 2.1: Literature review**:**

Sr. No.	Research Paper / Year	Approach Type	Technologies Used	Datasets	Key Objective	Limitations
1	A Systematic Literature Review on Phishing Website Detection Techniques (2023)	Systematic Literature Review	Blacklists, Visual Similarity, ML, DL	80 research papers; PhishTank and Alexa discussed	To review and compare phishing detection techniques	Results vary across datasets and studies
2	A Survey of Machine Learning-Based Solutions for Phishing Website Detection (2021)	ML-Based Survey	Feature Extraction, ML Classifiers	Multiple datasets from reviewed studies	To study ML methods for phishing detection	Dataset quality and changing attacks affect performanc e
3	Phishing or Not Phishing? A Survey on the Detection of Phishing Websites (2023)	Survey-Based	List-Based, Similarity-Based, ML	Datasets from reviewed studies	To compare detection methods and identify research gaps	New phishing websites are challenging to detect
4	Web Phishing Detection Techniques: A Survey on the State-of-the-Art, Taxonomy	Survey and Taxonomy	URL Analysis, Heuristics, Visual Similarity, ML	Not specified in summary	To classify detection techniques and identify future directions	Performanc e varies across datasets

Sr. No.	Research Paper / Year	Approach Type	Technologies Used	Datasets	Key Objective	Limitations
5	Machine Learning Approach for Phishing Website Detection: A Literature Survey	ML-Based Survey	ML Algorithms, Feature Extraction	Not specified in summary	To review ML approaches for phishing detection	No single algorithm performs best in every situation
6	Across the Spectrum: In-Depth Review of AI-Based Models for Phishing Detection (2024)	AI-Based Survey	Machine Learning, Deep Learning	Research from 2020–2024	To compare AI models and identify research gaps	Different datasets make comparisons difficult
7	A High-Accuracy Phishing Website Detection Method Based on Machine Learning (2023)	Supervised ML	Logistic Regression, KNN, Naive Bayes, Random Forest, SVM, XGBoost	58,000 legitimate and 30,647 phishing websites; 112 attributes	To compare six ML algorithms	Results depend on data quality and testing methods
8	Detection of Malicious URLs Using Machine Learning (2024)	URL-Based ML	URL Feature Extraction, ML Classifier	Not specified in summary	To detect malicious URLs automatically	URL patterns change and data needs updating

Sr. No.	Research Paper / Year	Approach Type	Technologies Used	Datasets	Key Objective	Limitations
9	Machine Learning Techniques for Detecting Phishing URL Attack	Feature-Based ML	Neural Networks, Naive Bayes, AdaBoost	Over 11,000 websites from Kaggle; 30 features	To compare ML algorithms for phishing URL detection	Accuracy alone is insufficient
10	Phishing Website Detection Using Machine Learning: A Review (2024)	ML-Based Review	ML Classifiers, Feature Selection	Not specified in summary	To understand ML-based phishing website classification	Models may struggle when attack patterns change
11	A Survey and Classification of Web Phishing Detection Schemes	Survey and Classification	Blacklists, Heuristics, Similarity-Based Methods, ML	Not specified in summary	To classify and compare detection schemes	Trade-offs in speed, accuracy and maintenance
12	Phishing Website Detection: General Methods and Research Directions	General Synthesis	URL Analysis, Domain Analysis, ML, DL	No independent dataset	To summarize common findings and future research	Not an independent published research paper

CHAPTER 3
INFORMATION

3.1 Chapter One: Fundamentals of Phishing

Phishing is a social engineering technique used to deceive people into revealing confidential information. Attackers often exploit trust in familiar brands, organizations, and online services.

A typical phishing attack follows these stages:

1. The attacker creates a fraudulent website.
2. The attacker shares the website link through email, SMS, advertisements, or social media.
3. The victim opens the link and believes the website is genuine.
4. The victim may enter sensitive information.
5. The attacker may misuse the captured information.

Phishing website detection attempts to identify the fraudulent website before the user is harmed.

3.2 Chapter Two: Phishing Website Detection Techniques

This technique checks the requested URL against a database of known malicious URLs. If a match is found, the website is flagged as suspicious.

2. Whitelist-Based Detection

A whitelist contains websites that are considered trusted. A website not included in the whitelist may be treated as unverified or require further checking. Being absent from a whitelist does not automatically mean that a website is malicious.

3. URL-Based Detection

URL-based detection examines the address of a website for suspicious characteristics, such as:

- Unusually long URLs.
- Misleading use of a trusted brand name.
- Excessive subdomains.
- Unusual characters or URL structures.
- IP addresses used instead of conventional domain names.
- Suspicious combinations of words in the domain.

4. Content-Based Detection

Content-based detection examines webpage elements, including HTML code, forms, links, page text, and other characteristics. It attempts to identify similarities to legitimate websites or patterns associated with phishing.

5. Heuristic-Based Detection

This approach uses security rules to identify suspicious properties. It is useful when a website has not yet been reported to a blacklist.

6. Machine Learning-Based Detection

Machine learning models learn from labelled examples of legitimate and phishing websites. The model analyzes extracted features and predicts the likely class of a new website.

7. Deep Learning-Based Detection

Deep learning models learn complex patterns from URLs, text, HTML, and other available data. They can be useful for identifying patterns that are difficult to express through fixed rules.

8. Hybrid Detection

Hybrid systems combine two or more techniques, such as blacklists, URL analysis, and machine learning. Combining complementary methods may improve detection coverage, although performance depends on system design and evaluation.

Tabel No 3.3: Technology Purpose:

Sr. No.	Technology	Purpose
1	Python	To develop phishing website detection algorithms.
2	Visual Studio Code	To write, edit, and run Python programs.
3	Pandas	To load, organize, and process website datasets.
4	NumPy	To perform numerical calculations and data analysis.
5	Scikit-learn	To implement and evaluate machine learning algorithms.
6	TensorFlow / PyTorch	To develop deep learning models for phishing detection.
7	HTML and CSS	To understand webpage structure and design a simple user interface.
8	Flask	To connect the detection model with a web-based application.
9	Phishing URL Datasets	To provide phishing and legitimate website examples for training and testing.
10	Web Browser	To access websites and test the detection system.
11	Microsoft Word / WPS Office	To prepare and format the seminar report.
12	Microsoft PowerPoint / WPS Presentation	To prepare seminar presentation slides.3.4 Chapter Four: System Architecture

A general phishing website detection system can be divided into the following stages:

1. Website URL Input

User enters or submits a URL

2. Feature Extraction

URL, domain, and webpage characteristics

3. Detection Engine

Rules, blacklist checks, or trained ML model

4. Classification

Likely legitimate, suspicious, or phishing

5. Result and Warning

Display the result to the user

Working explanation:

1. The user submits a website URL.
2. The system extracts relevant characteristics from the URL or webpage.
3. The detection engine evaluates the characteristics using its selected technique.
4. The system classifies the URL based on the evidence and model output.
5. A warning or classification result is shown to the user.

A classification result is not a guarantee of safety. Unknown websites should be treated cautiously, even if a detection system does not flag them.

Tabel No 3.4 : Features Used for Detection

Feature	Description
URL length	Measures the length of the website address
Domain age	Indicates how long the domain has existed, if reliable data is available
HTTPS status	Indicates whether the connection uses HTTPS
Subdomain count	Measures the number of subdomains
Special characters	Identifies unusual characters in the URL
IP address usage	Checks whether an IP address is used directly in the URL
Redirect behaviour	Examines how the browser is redirected
HTML characteristics	Analyzes webpage structure and elements
External links	Examines links pointing to other domains
Brand similarity	Checks for possible impersonation of trusted brands

No single feature can reliably determine whether every website is malicious. For example, HTTPS protects data in transit but does not prove that the website itself is trustworthy.

3.5 : Evaluation of Detection Systems

A phishing detection model should be tested using appropriate data that was not used to train it.

Common evaluation metrics include:

- Accuracy: The proportion of all predictions that are correct.
- Precision: The proportion of websites predicted as phishing that are actually phishing.
- Recall: The proportion of actual phishing websites that the system correctly detects.
- F1-score: A combined measure of precision and recall.
- False positive rate: The proportion of legitimate websites incorrectly flagged as phishing. Accuracy alone may be misleading if the dataset contains many more legitimate websites than phishing websites. A good evaluation should report several metrics and use a representative test dataset.

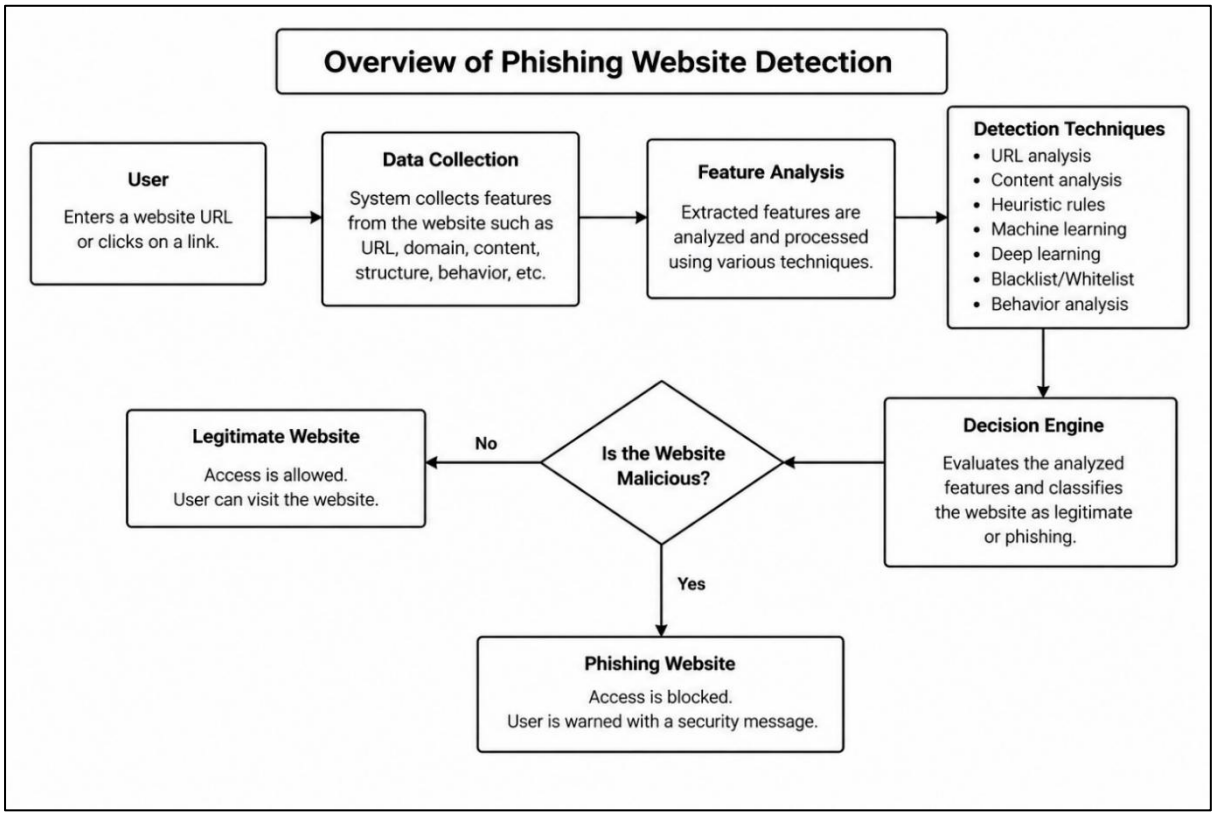


Fig No 3.6: overview of phishing website detection

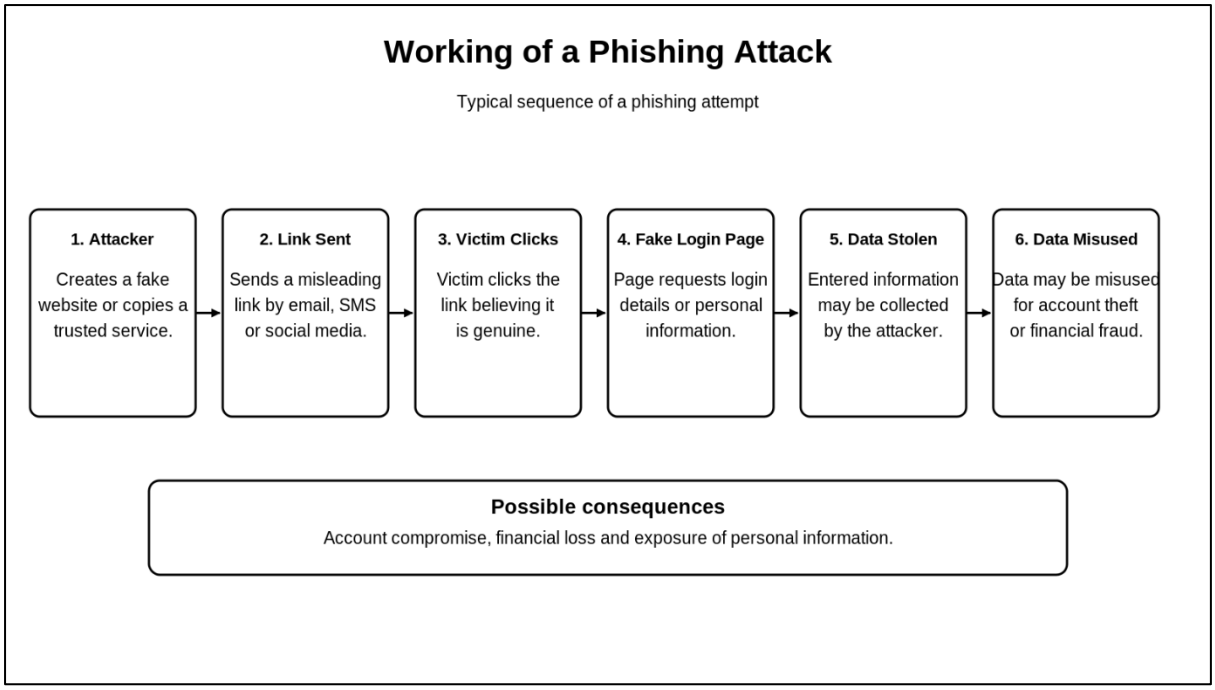


Fig 3.7: working of a phishing attack

CHAPTER 4
ADVANTAGES AND DISADVANTAGES

4.1 Advantages

1. Improved security: Helps protect users from fraudulent websites.
2. Early detection: Can identify suspicious websites before users submit confidential information.
3. Reduced financial fraud: Helps reduce exposure to fraudulent banking and payment pages.
4. Automated analysis: Machine learning can analyze many website features automatically.
5. Detection of new threats: Some heuristic and learning-based systems can identify previously unseen phishing patterns.
6. Scalability: Automated detection can process large numbers of URLs.
7. Better user awareness: Warnings help users recognize potentially dangerous websites.

4.2 Disadvantages

1. False positives: Legitimate websites may sometimes be incorrectly flagged.
2. False negatives: Some phishing websites may escape detection.
3. Dataset dependency: Machine learning performance depends on the quality and diversity of training data.
4. Changing attack techniques: Attackers continually modify websites to evade detection.
5. Computational requirements: Complex models may require additional processing power.
6. Maintenance requirements: Blacklists, detection rules, and models need regular updates.

CHAPTER 5
CONCLUSION

Phishing website detection is an important part of cybersecurity because phishing attacks can lead to the theft of passwords, banking information, and other sensitive data. Different detection techniques have been developed to identify fraudulent websites and protect internet users.

Traditional methods, such as blacklists and whitelists, are useful in specific situations but have limitations when dealing with new or changing threats. URL-based and heuristic methods can identify suspicious characteristics, while machine learning and deep learning provide additional capabilities for analyzing complex patterns.

Hybrid detection systems can combine multiple methods to improve detection coverage. However, their effectiveness must be evaluated using reliable datasets and suitable metrics, including precision, recall, F1-score, and false positive rate.

In conclusion, no single technique can detect every phishing website. A combination of technical detection, regular updates, secure browsing practices, and user awareness offers a stronger approach to phishing prevention. Future research can focus on real-time detection, explainable artificial intelligence, privacy-preserving analysis, and better identification of previously unseen phishing attacks.

CHAPTER 6

PROJECT INITIATION

6.1 Description of Problem Statement:

Phishing websites are fraudulent websites designed to imitate legitimate websites and deceive users into revealing confidential information. These websites can cause financial losses, identity theft, account compromise, and privacy violations.

Traditional detection techniques often depend on previously identified malicious URLs or predefined rules. Therefore, newly created phishing websites may not be detected immediately. Attackers also change domain names, URLs, and webpage content to avoid detection.

The main problem is to identify phishing websites accurately and efficiently while reducing false positives and false negatives. The detection approach should analyze suitable website features and provide a clear classification or warning to the user.

Problem statement: To study and evaluate different phishing website detection techniques and understand how URL analysis, heuristic methods, machine learning, and deep learning can be used to identify phishing websites and improve online security.

6.2 Scope and Objectives

Scope:

The scope of this seminar includes:

- Studying the fundamentals and types of phishing attacks.
- Understanding traditional and modern phishing detection methods.
- Examining URL-based, content-based, and domain-based features.
- Studying machine learning and deep learning approaches.
- Comparing the strengths and limitations of different techniques.
- Understanding the metrics used to evaluate detection performance.
- Exploring possible future improvements in phishing detection.

The seminar focuses on the detection and prevention of phishing websites. It does not require building a complete commercial security product.

Objectives

1. To understand phishing attacks and their impact on internet users.
2. To study different phishing website detection techniques.
3. To understand the role of machine learning and deep learning in cybersecurity.
4. To identify useful features for phishing website classification.
5. To compare detection methods based on their advantages and limitations.
6. To study evaluation metrics for measuring detection performance.
7. To explore future research directions for accurate and efficient phishing detection

6.3 Stakeholders:

Sr. No.Stakeholder Role and Responsibility

1. Internet Users: Use phishing detection systems to identify suspicious websites and protect personal information.

2. Students and Researchers: Study phishing detection techniques and conduct research to improve detection methods.

3. Cybersecurity Professionals: Develop, test, and maintain phishing detection systems.

4. Banks and Financial Institutions: Protect customers from fake banking websites and online financial fraud.

5. Website Owners: Protect their websites and users against phishing attacks and website impersonation.

6. Educational Institutions: Promote cybersecurity awareness and provide resources for learning.

7. Software Developers: Design and implement phishing detection applications and maintain their functionality.

8. Organizations: Implement security measures to reduce phishing risks

6.4 Platform/Equipment/Resources:

Tabel No 6.5: Platform:

Sr. No.	Platform	Purpose
1	Windows Operating System	To run software and prepare the seminar project.
2	Python	To implement phishing website detection algorithms.
3	Visual Studio Code	To write and execute Python programs.
4	Microsoft Word / WPS Office	To prepare and format the seminar report.
5	Microsoft PowerPoint / WPS Presentation	To prepare seminar presentation slides.
6	Google Scholar	To search for academic research papers.
7	Google Chrome / Web Browser	To access websites and test the detection system

Tabel No 6.6: Equipment:

Sr. No.	Equipment	Purpose
1	Laptop / Computer	To conduct research, write code, and prepare the report.
2	Internet Connection	To access research papers, datasets, and technical documentation.
3	Smartphone	To access online resources and review the presentation when required.
4	Projector	To display seminar presentation slides to the audience.
5	Pen Drive / External Storage	To store and transfer project files and presentation documents.
6	Power Supply / Charger	To keep the laptop operational during project work and presentation.

a Tabel No 6.7: Resources

Sr. No.	Resource	Purpose
1	Research Papers	To study existing phishing website detection techniques.
2	Phishing URL Dataset	To obtain examples of known phishing websites for analysis.
3	Legitimate URL Dataset	To obtain examples of legitimate websites for comparison.
4	Python Libraries	To process data and implement detection algorithms.
5	Pandas and NumPy	To organize, process, and analyze website data.
6	Scikit-learn	To train and evaluate machine learning models.
7	TensorFlow / PyTorch	To develop deep learning models, if required.
8	Technical Documentation	To understand algorithms, libraries, and detection methods.
9	Internet Security References	To understand phishing attacks and website security practices.

CHAPTER 7

Seminar Presentation

S.S.V.P.S's B. S. Deore Polytechnic, Dhule Department of Computer Engineering *Academic Year : 2026-2027*		
SEMINAR AND PROJECT INITIATION COURSE		
Sem : CO 5 K	**SPI – 315003**	**Date : 17/10/2026**
Topic : Phishing Website Detection System		
Roll No.	**Name of Student**	
48	Mehul Pagare	
47	Ishan Pagar	
41	Manish Patil	
30	Sarang Jathar	

Contents

- Abstract
1. Introduction
2. Literature Survey
3. Information to Seminar topic
4. Advantages and Disadvantages
5. Conclusion
6. Project Initiation :
   - 6. 1 Description of problem statement.
   - 6. 2 Scope and objectives.
   - 6. 3 Stake holder
   - 6. 4 seminar exsicussion plan
   - 6.5 Platform/ Equipment/ Resources identification.
1. Bibliography
2. References

Abstract

- Phishing means making a fake website that looks like a real one (like a bank or Instagram) to steal passwords and money.
- Many people cannot tell a fake website from a real one.
- Our project checks a website link and tells the user if it is Safe or Phishing.
- It uses Machine Learning: the computer learns from many real and fake websites.

3

1. Introduction

- **What is phishing?** A trick to steal personal information by pretending to be a trusted website.
- **How does it spread?** Fake links come by SMS, WhatsApp, e-mail and social media.
- **Example:** A message says "Your bank account is blocked, click here". The link opens a fake bank page.
- **Why is it dangerous?** People lose money and their accounts get hacked.
- **Our solution:** A system that checks the link and warns the user.

4

2. Literature Survey

Sr.	Author and Year	Method used	Finding
1	Zhang, Hong and Cranor, 2007 [1]	CANTINA: checks the words on the web page (TF-IDF) plus some extra clues	Finds fake pages by their content
2	Ma et al., 2009 [2]	Checks the link (URL) and host details using machine learning	Finds bad websites without a blacklist
3	Mohammad et al., 2014 [3]	Neural network that learns from website features (UCI dataset)	Network adjusts to new phishing patterns
4	Sahingoz et al., 2019 [4]	Compared 7 algorithms using words found in the URL	Random Forest was best: 97.98% accuracy
5	Korkmaz et al., 2020 [5]	Compared 8 algorithms on 3 datasets using URL analysis	Machine learning is useful for new fake sites
6	Garera et al., 2007 [6]	Studied clues in phishing links and used logistic regression	Found about 97% of phishing links with few false alarms

5

2. Literature Survey

Sr.	Author and Year	Method used	Finding
7	Abu-Nimeh et al., 2007 [7]	Compared 6 machine learning methods on phishing e-mails	No single method was best in every test
8	Sheng et al., 2009 [8]	Checked how fast phishing blacklists add new fake sites	Blacklists miss most new fake sites in the first hours
9	Whittaker et al., 2010 [9]	Google system that automatically classifies pages using page and link features	Found most phishing pages with very few false alarms
10	Marchal et al., 2014 [10]	PhishStorm: checks how the words in a link are related to each other	About 95% accuracy using only the link
11	Bahnsen et al., 2017 [11]	Deep learning (LSTM) learns directly from the characters of the URL	Did better than Random Forest with hand-made clues
12	Le et al., 2018 [12]	URLNet: deep learning (CNN) on both characters and words of the URL	Better than older methods at finding bad links

6

3. Information to seminar topic

How phishing works

1. Attacker copies a real website.
2. Sends the fake link to people.
3. Person enters password or card number.
4. Attacker steals the data.

Common types

- Email phishing – fake emails
- Smishing – fake SMS
- Vishing – fake phone calls

7

3.1 How we find fake websites

We look at some clues in the link and website:


- **Very long link** – fake links are often long.
- **Has "@" symbol or IP address** – real sites do not use these.
- **No HTTPS (no lock)** – not secure.
- **Too many dots or "-"** – like paypal-login-secure.com
- **New domain** – fake sites are made only a few days ago.

Each clue is turned into a number and given to the computer.

8

3.2 How our system works

Steps of the system

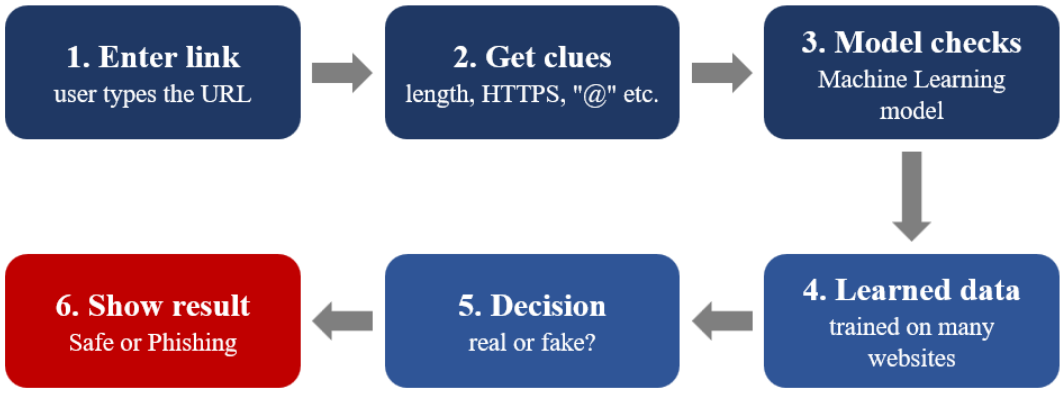

Training: first we give the computer many real and fake websites so it can learn.

9

3.3 Machine Learning used

Decision Tree

- Asks yes/no questions, like a flow chart. Example: Is the link very long? Is there "@"?

Random Forest (we use this)

- Many decision trees vote together. The answer with most votes wins, so result is more correct.

Accuracy

- Out of 100 websites, how many are found correctly.

10

4. Advantages / Disadvantages

Advantages

- Finds new fake websites.
- Gives result in seconds.
- Saves users from fraud.
- Easy to use.
- Can become a browser extension.

Disadvantages

- Needs a lot of data to learn.
- Can make mistakes sometimes.
- Attackers keep changing tricks.
- Needs internet connection.
- Needs updating regularly.

11

5. Conclusion

- Phishing websites are a big danger for online users.
- Our system checks a link and says Safe or Phishing.
- It uses Machine Learning (Random Forest) to learn from data.
- It can protect people from losing money and data.
- Future: make a Chrome extension and a mobile app.

12

6. Project Initiation

- **Project title:** Phishing Website Detection System
- **Subject:** Seminar and Project Initiation (SPI – 315003)
- **Group members:** Mehul Pagare, Ishan Pagar, Manish Patil, Sarang Jathar
- **Next slides:** problem, scope, objectives, stakeholders, plan and resources.

13

6.1 Description of problem statement

Problem

- Fake websites look exactly like real ones.
- Users click on them and lose money or data.
- Old blacklist methods cannot catch new fake sites.

Problem statement

To make a system that checks a website link and tells whether it is Safe or Phishing using Machine Learning.

14

6.2 Scope and objectives

Objectives

- To understand what phishing is.
- To collect data of real and fake websites.
- To train a Machine Learning model.
- To show result: Safe or Phishing.

Scope

- Checks website links (URLs) given by the user.
- Can be extended to a browser extension later.

15

6.3 Stake holder

Stakeholder	How they are related
Internet users	Use the system to check links
Students (our team)	Make and present the project
Project guide / teacher	Guides and checks our work
HOD / Department	Gives approval
Banks and shops	Safe from fake website fraud

16

6.4 Seminar execution plan

Step	Work to do	Time
1	Select topic and study phishing	Week 1
2	Literature survey (read papers)	Week 2
3	Collect website data (dataset)	Week 3
4	Clean and prepare the data	Week 4
5	Find clues (features) from links	Week 5
6	Train the Machine Learning model	Week 6
7	Test the model and check accuracy	Week 7
8	Make a simple web screen	Week 8
9	Final testing and corrections	Week 9
10	Make report and presentation	Week 10

17

6.5 Platform / Equipment / Resources

Hardware

- Laptop / computer with 4 GB RAM and internet

Software

- Python and Jupyter Notebook (or VS Code)
- Libraries: pandas, scikit-learn

Data (Dataset)

- UCI Phishing Websites dataset (free)
- PhishTank (list of fake websites)

18

Bibliography

Books

- Introduction to Machine Learning with Python – Andreas Müller and Sarah Guido, O'Reilly.
- Phishing Dark Waters – Christopher Hadnagy and Michele Fincher, Wiley.

Websites

- https://easydmarc.com/tools/phishing-url
- https://zvelo.com/phishing-detection-in-depth/
- https://en.wikipedia.org/wiki/Phishing

19

References

[1] Y. Zhang, J. I. Hong, and L. F. Cranor, "CANTINA: A content-based approach to detecting phishing web sites," in Proc. 16th Int. Conf. World Wide Web, Banff, AB, Canada, 2007, pp. 639–648.

[2] J. Ma, L. K. Saul, S. Savage, and G. M. Voelker, "Beyond blacklists: Learning to detect malicious web sites from suspicious URLs," in Proc. 15th ACM SIGKDD Int. Conf. Knowl. Discovery Data Mining, Paris, France, 2009, pp. 1245–1254.

[3] R. M. Mohammad, F. Thabtah, and L. McCluskey, "Predicting phishing websites based on self-structuring neural network," Neural Comput. Appl., vol. 25, no. 2, pp. 443–458, 2014.

[4] O. K. Sahingoz, E. Buber, O. Demir, and B. Diri, "Machine learning based phishing detection from URLs," Expert Syst. Appl., vol. 117, pp. 345–357, Mar. 2019, doi: 10.1016/j.eswa.2018.09.029.

[5] M. Korkmaz, O. K. Sahingoz, and B. Diri, "Detection of phishing websites by using machine learning-based URL analysis," in Proc. 11th Int. Conf. Comput., Commun. Netw. Technol. (ICCCNT), 2020, doi: 10.1109/ICCCNT49239.2020.9225561.

[6] S. Garera, N. Provos, M. Chew, and A. D. Rubin, "A framework for detection and measurement of phishing attacks," in Proc. ACM Workshop Recurring Malcode (WORM), Alexandria, VA, USA, 2007, pp. 1–8.

[7] S. Abu-Nimeh, D. Nappa, X. Wang, and S. Nair, "A comparison of machine learning techniques for phishing detection," in Proc. APWG eCrime Researchers Summit, Pittsburgh, PA, USA, 2007, pp. 60–69.

[8] S. Sheng, B. Wardman, G. Warner, L. F. Cranor, J. Hong, and C. Zhang, "An empirical analysis of phishing blacklists," in Proc. 6th Conf. Email Anti-Spam (CEAS), Mountain View, CA, USA, 2009.

20

References

[9] C. Whittaker, B. Ryner, and M. Nazif, "Large-scale automatic classification of phishing pages," in Proc. 17th Annu. Netw. Distrib. Syst. Secur. Symp. (NDSS), San Diego, CA, USA, 2010.

[10] S. Marchal, J. François, R. State, and T. Engel, "PhishStorm: Detecting phishing with streaming analytics," IEEE Trans. Netw. Service Manag., vol. 11, no. 4, pp. 458–471, Dec. 2014.

[11] A. C. Bahnsen, E. C. Bohorquez, S. Villegas, J. Vargas, and F. A. González, "Classifying phishing URLs using recurrent neural networks," in Proc. APWG Symp. Electron. Crime Res. (eCrime), Scottsdale, AZ, USA, 2017, pp. 1–8.

[12] H. Le, Q. Pham, D. Sahoo, and S. C. H. Hoi, "URLNet: Learning a URL representation with deep learning for malicious URL detection," arXiv:1802.03162, 2018.

[13] "Phishing websites," UCI Machine Learning Repository. [Online]. Available: https://archive.ics.uci.edu/dataset/327/phishing+websites. [Accessed: Oct. 16, 2026].

[14] PhishTank, "Join the fight against phishing." [Online]. Available: https://www.phishtank.com. [Accessed: Oct. 16, 2026].

[15] scikit-learn developers, "scikit-learn: Machine learning in Python." [Online]. Available: https://scikit-learn.org. [Accessed: Oct. 16, 2026].

Thank you

BIBLIOGRAPHY

1. Safi, A., and Singh, S. (2023). “A Systematic Literature Review on Phishing Website Detection Techniques.” *Journal of King Saud University – Computer and Information Sciences*, Volume 35, Issue 2, pp. 590–611. Available at: https://doi.org/10.1016/j.jksuci.2023.01.004

2. Tang, L., and Mahmoud, Q. H. (2021). “A Survey of Machine Learning-Based Solutions for Phishing Website Detection.” *Machine Learning and Knowledge Extraction*, Volume 3, Issue 3, pp. 672–694. Available at: https://doi.org/10.3390/make3030034

3. Zieni, R., Massari, L., and Calzarossa, M. C. (2023). “Phishing or Not Phishing? A Survey on the Detection of Phishing Websites.” *IEEE Access*, Volume 11, pp. 18499–18519. Available at: https://doi.org/10.1109/ACCESS.2023.3247135

4. Ma, J., Saul, L. K., Savage, S., and Voelker, G. M. (2009). “Beyond Blacklists: Learning to Detect Malicious Web Sites from Suspicious URLs.” *Proceedings of the 15th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pp. 1245–1254. Available at: https://doi.org/10.1145/1557019.1557153

5. Le, A., Markopoulou, A., and Faloutsos, M. (2011). “PhishDef: URL Names Say It All.” *Proceedings of IEEE INFOCOM*, pp. 191–195. Available at: https://doi.org/10.1109/INFCOM.2011.5934995

6. Reyes-Dorta, N., Caballero-Gil, P., and Rosa-Remedios, C. (2024). “Detection of Malicious URLs Using Machine Learning.” *Wireless Networks*, Volume 30, pp. 7543–7560. Available at: https://doi.org/10.1007/s11276-024-03700-w

7. Mohammad, R., and McCluskey, L. (2012). “Phishing Websites” [Dataset]. UCI Machine Learning Repository. Available at: https://archive.ics.uci.edu/dataset/327/phishing

8. Prasad, A., and Chandra, S. (2024). “PhiUSIIL Phishing URL (Website) Dataset.” UCI Machine Learning Repository. Available at: https://archive.ics.uci.edu/dataset/967/phiusil-phishing-url-dataset

9. OpenPhish. “Phishing Feeds.” Available at: https://openphish.com/phishing_feeds.html

10. Google. “Google Safe Browsing API Documentation.” Available at: https://developers.google.com/safe-browsing/reference/rest

11. Python Software Foundation. “Python Documentation.” Available at: https://docs.python.org/3/

12. NumPy Developers. “NumPy Documentation.” Available at: https://numpy.org/doc/stable/

REFERENCES

1. Safi, A., and Singh, S. (2023). "A Systematic Literature Review on Phishing Website Detection Techniques." *Journal of King Saud University – Computer and Information Sciences*, Volume 35, Issue 2, pp. 590–611. Available at: https://doi.org/10.1016/j.jksuci.2023.01.004

2. Tang, L., and Mahmoud, Q. H. (2021). "A Survey of Machine Learning-Based Solutions for Phishing Website Detection." *Machine Learning and Knowledge Extraction*, Volume 3, Issue 3, pp. 672–694. Available at: https://doi.org/10.3390/make3030034

3. Zieni, R., Massari, L., and Calzarossa, M. C. (2023). "Phishing or Not Phishing? A Survey on the Detection of Phishing Websites." *IEEE Access*, Volume 11, pp. 18499–18519. Available at: https://doi.org/10.1109/ACCESS.2023.3247135

4. Ma, J., Saul, L. K., Savage, S., and Voelker, G. M. (2009). "Beyond Blacklists: Learning to Detect Malicious Web Sites from Suspicious URLs." *Proceedings of the 15th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pp. 1245–1254. Available at: https://doi.org/10.1145/1557019.1557153

5. Le, A., Markopoulou, A., and Faloutsos, M. (2011). "PhishDef: URL Names Say It All." *Proceedings of IEEE INFOCOM*, pp. 191–195. Available at: https://doi.org/10.1109/INFCOM.2011.5934995

6. Reyes-Dorta, N., Caballero-Gil, P., and Rosa-Remedios, C. (2024). "Detection of Malicious URLs Using Machine Learning." *Wireless Networks*, Volume 30, pp. 7543–7560. Available at: https://doi.org/10.1007/s11276-024-03700-w

7. Mohammad, R., and McCluskey, L. (2012). "Phishing Websites" [Dataset]. UCI Machine Learning Repository. Available at: https://archive.ics.uci.edu/dataset/327/phishing

8. Prasad, A., and Chandra, S. (2024). "PhiUSIIL Phishing URL (Website) Dataset." UCI Machine Learning Repository. Available at: https://archive.ics.uci.edu/dataset/967/phiusil-phishing-url-dataset

9. OpenPhish. “Phishing Feeds.” Available at: https://openphish.com/phishing_feeds.html

10. Google. “Google Safe Browsing API Documentation.” Available at: https://developers.google.com/safe-browsing/reference/rest

SEMINAR and PROJECT INITIATION Assessment / Evaluation

Sr. No	Enrollment Number	Seat Number	Name of student
1	24610960226	388534	Pagar Ishan Pagar
2	24610960227	388535	Pagare Mehul Sandip
3	24610960203	388516	Jathar Sarang Arvind
4	24610960220	388528	Patil Manish Chandrakant

Formative Assessment

Sr. No.	Criteria	Weightage	Obtained
1	Selection Topic / Theme of seminar	5	
2	Literature review and data presentation	5	
3	Quality of Preparation and innovativeness	5	
4	Q-A handling	5	
5	Time Management	5	
6	Seminar Presentation report	10	
7	Selection of Theme of Problem Statement and its innovativeness	5	
8	Stages of development of Action plan	5	
9	Prototyping	5	
	Total	**50**	
	Scaled to 25		

Sign :
Name : **Shraddha S Hajari**
(Course Expert/s)