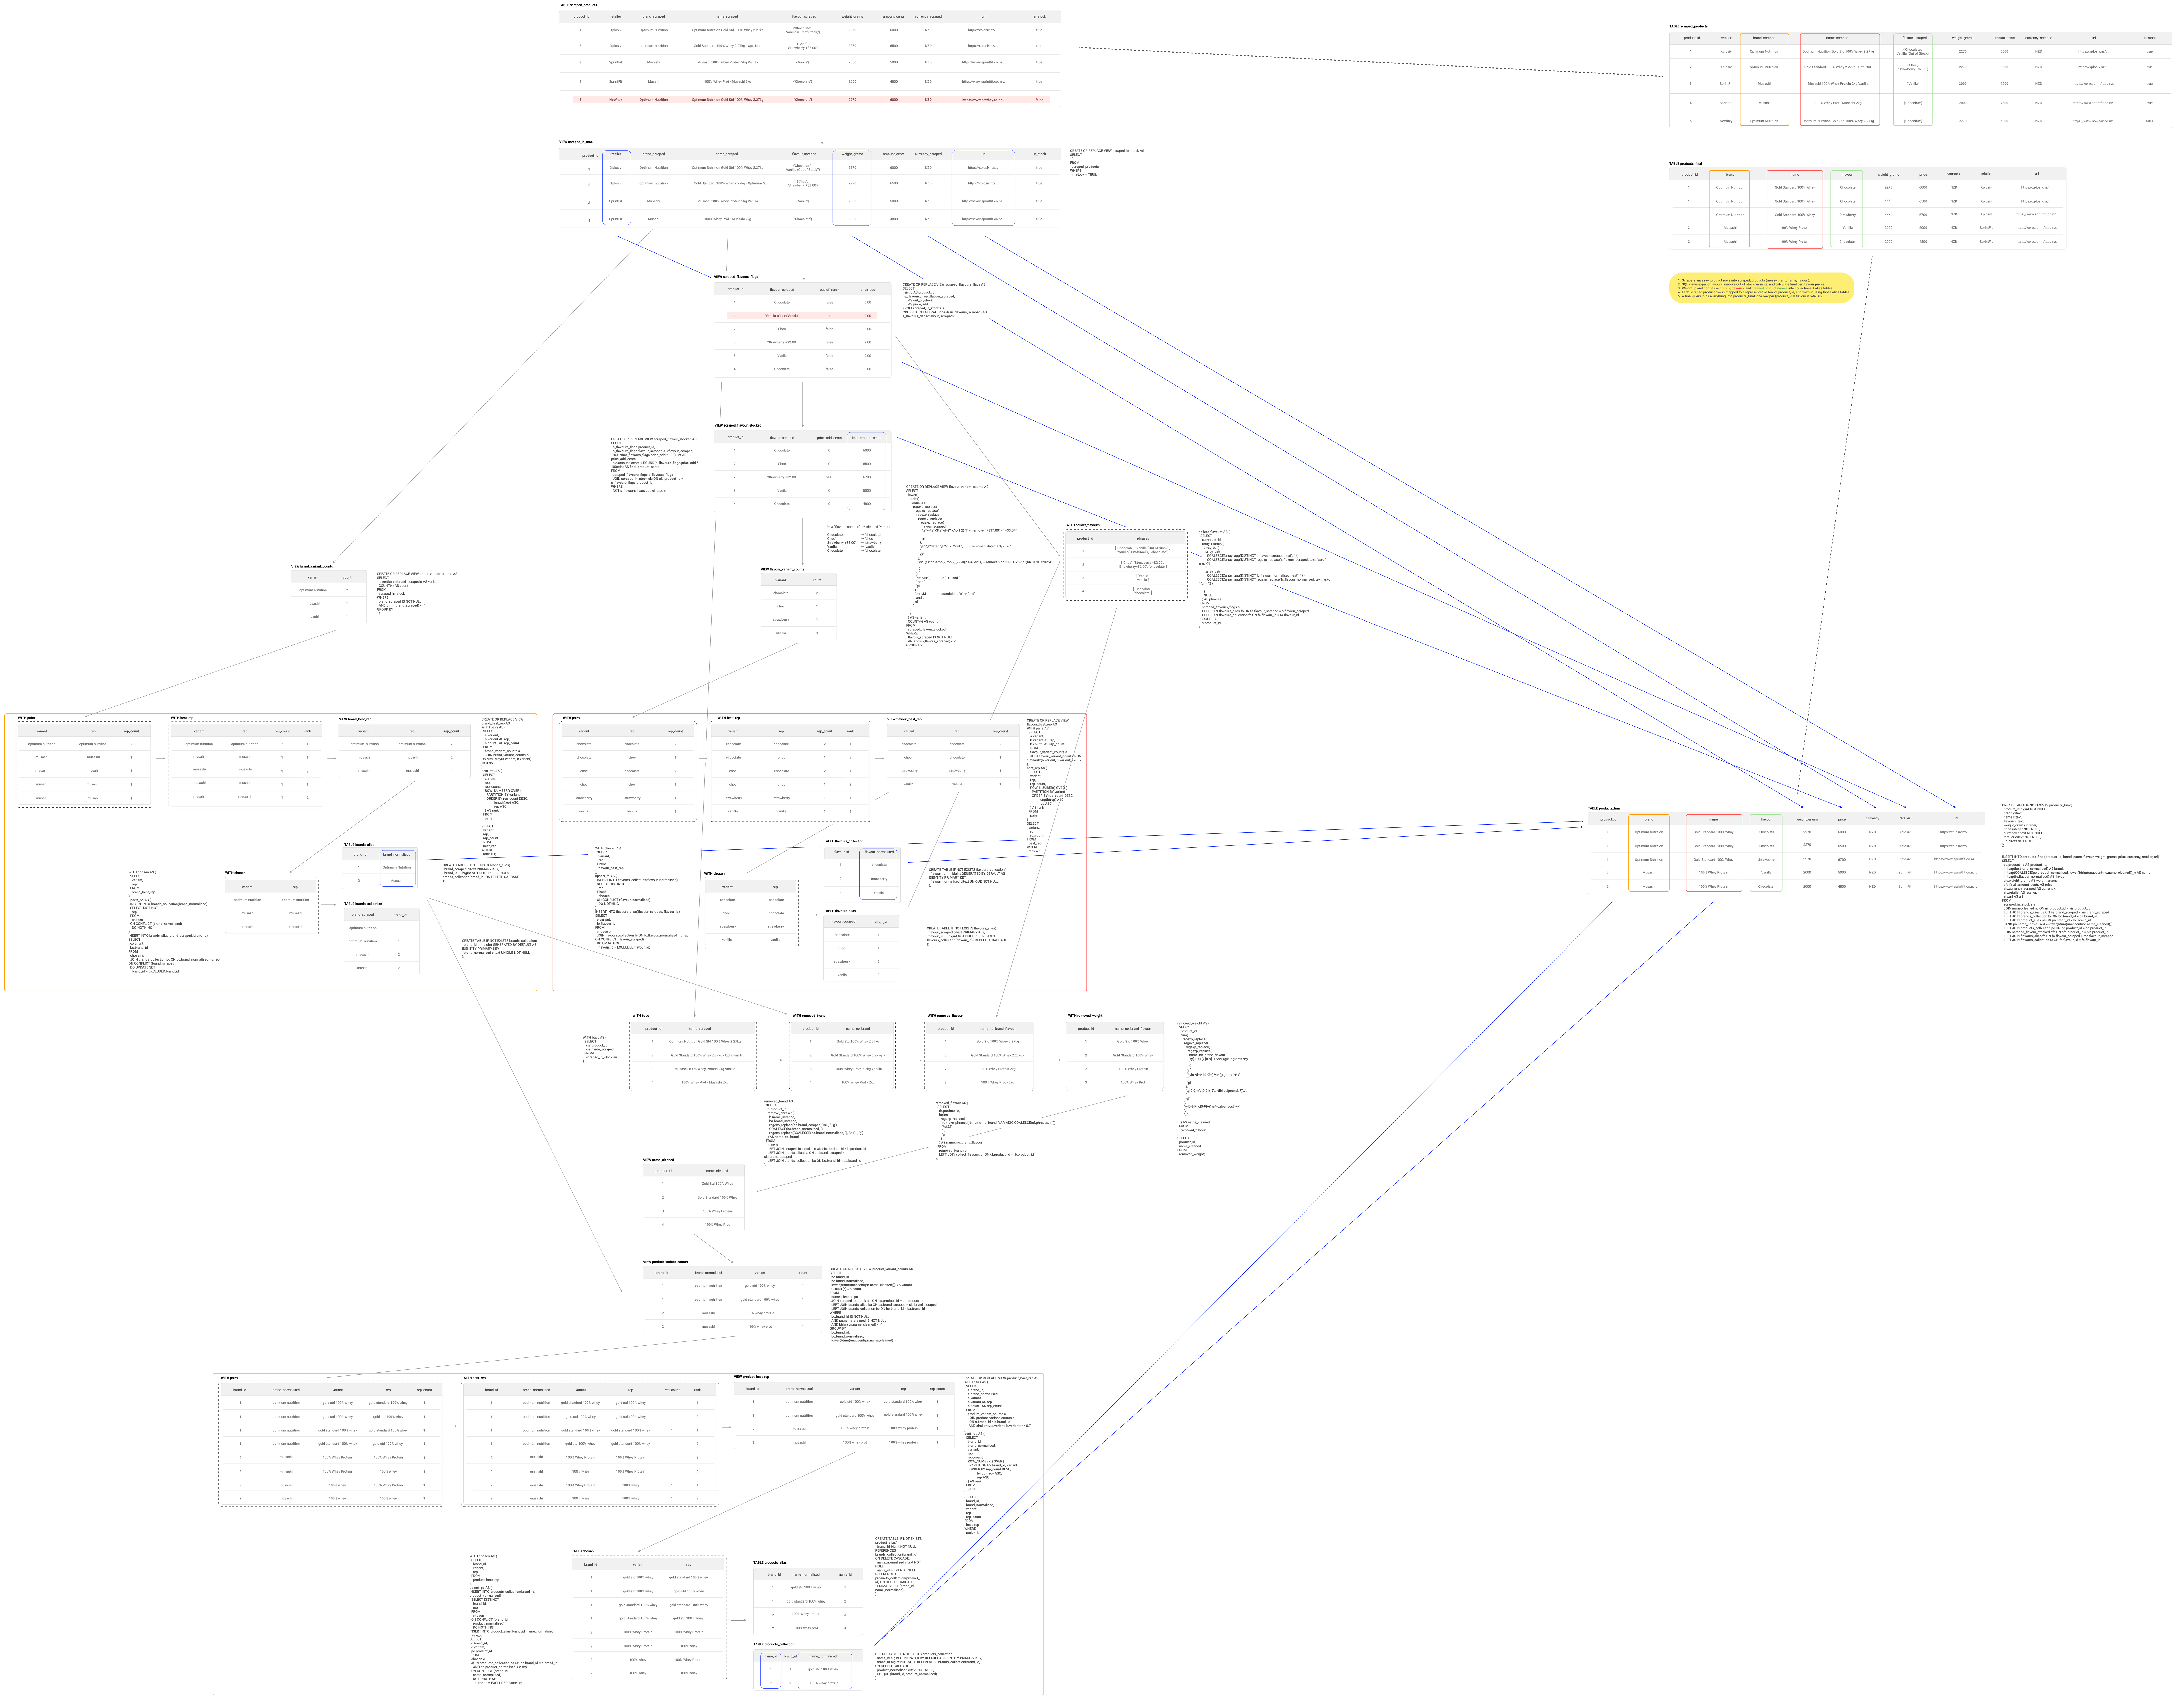

TABLE scraped_products

product_id	retailer	brand_scraped	name_scraped	flavour_scraped	weight_grams	amount_cents	currency_scraped	url	in_stock
1	Xplosiv	Optimum Nutrition	Optimum Nutrition Gold Std 100% Whey 2.27kg	{'Chocolate', 'Vanilla (Out of Stock)'}	2270	6000	NZD	https://xplosiv.nz/...	true
2	Xplosiv	optimum nutrition	Gold Standard 100% Whey 2.27kg - Opt. Nut.	{'Choc', 'Strawberry +$2.00'}	2270	6500	NZD	https://xplosiv.nz/...	true
3	SprintFit	Musashi	Musashi 100% Whey Protein 2kg Vanilla	{'Vanila'}	2000	5000	NZD	https://www.sprintfit.co.nz...	true
4	SprintFit	Musahi	100% Whey Prot - Musashi 2kg	{'Chocolate'}	2000	4800	NZD	https://www.sprintfit.co.nz...	true
5	NoWhey	Optimum Nutrition	Optimum Nutrition Gold Std 100% Whey 2.27kg	{'Chocolate'}	2270	6000	NZD	https://www.nowhey.co.nz...	false

VIEW scraped_in_stock

product_id	retailer	brand_scraped	name_scraped	flavour_scraped	weight_grams	amount_cents	currency_scraped	url	in_stock
1	Xplosiv	Optimum Nutrition	Optimum Nutrition Gold Std 100% Whey 2.27kg	{'Chocolate', 'Vanilla (Out of Stock)'}	2270	6000	NZD	https://xplosiv.nz/...	true
2	Xplosiv	optimum nutrition	Gold Standard 100% Whey 2.27kg - Optimum N..	{'Choc', 'Strawberry +$2.00'}	2270	6500	NZD	https://xplosiv.nz/...	true
3	SprintFit	Musashi	Musashi 100% Whey Protein 2kg Vanilla	{'Vanila'}	2000	5000	NZD	https://www.sprintfit.co.nz...	true
4	SprintFit	Musahi	100% Whey Prot - Musashi 2kg	{'Chocolate'}	2000	4800	NZD	https://www.sprintfit.co.nz...	true

```
CREATE OR REPLACE VIEW scraped_in_stock AS
SELECT
  *
FROM
  scraped_products
WHERE
  in_stock = TRUE;
```

VIEW scraped_flavours_flags

product_id	flavour_scraped	out_of_stock	price_add
1	'Chocolate'	false	0.00
1	'Vanilla (Out of Stock)'	true	0.00
2	'Choc'	false	0.00
2	'Strawberry +$2.00'	false	2.00
3	'Vanila'	false	0.00
4	'Chocolate'	false	0.00

```
CREATE OR REPLACE VIEW scraped_flavours_flags AS
SELECT
  sis.id AS product_id
  s_flavours_flags.flavour_scraped,
  ... AS out_of_stock,
  ... AS price_add
FROM scraped_in_stock sis
CROSS JOIN LATERAL unnest(sis.flavours_scraped) AS
s_flavours_flags(flavour_scraped);
```

```
CREATE OR REPLACE VIEW scraped_flavour_stocked AS
SELECT
  s_flavours_flags.product_id,
  s_flavours_flags.flavour_scraped AS flavour_scraped,
  ROUND(s_flavours_flags.price_add * 100)::int AS
price_add_cents,
  sis.amount_cents + ROUND(s_flavours_flags.price_add *
100)::int AS final_amount_cents
FROM
  scraped_flavours_flags s_flavours_flags
  JOIN scraped_in_stock sis ON sis.product_id =
s_flavours_flags.product_id
WHERE
  NOT s_flavours_flags.out_of_stock;
```

VIEW scraped_flavour_stocked

product_id	flavour_scraped	price_add_cents	final_amount_cents
1	'Chocolate'	0	6000
2	'Choc'	0	6500
2	'Strawberry +$2.00'	200	6700
3	'Vanila'	0	5000
4	'Chocolate'	0	4800

Raw `flavour_scraped` → cleaned `variant`

'Chocolate' → 'chocolate'
'Choc' → 'choc'
'Strawberry +$2.00' → 'strawberry'
'Vanila' → 'vanila'
'Chocolate' → 'chocolate'

```
CREATE OR REPLACE VIEW flavour_variant_counts AS
SELECT
  lower(
    btrim(
      unaccent(
        regexp_replace(
          regexp_replace(
            regexp_replace(
              regexp_replace(
                regexp_replace(
                  flavour_scraped,
                  '\s*\+\s*\$\s*\d+(?:\.\d{1,2})?', -- remove " +$37.00" / " +$3.04"
                  '',
                  'gi'
                ),
                '\s*-\s*dated:\s*\d{2}/\d{4}',      -- remove "- dated: 01/2026"
                '',
                'gi'
              ),
              '\s*\(\s*bb\s*\d{2}/\d{2}(?:/\d{2,4})?\s*\)', -- remove "(bb 31/01/26)" / "(bb 31/01/2026)"
              '',
              'gi'
            ),
            '\s*&\s*',        -- "&" -> " and "
            ' and ',
            'gi'
          ),
          '\mn\M',          -- standalone "n" -> "and"
          ' and ',
          'gi'
        )
      )
    )
  ) AS variant,
  COUNT(*) AS count
FROM
  scraped_flavour_stocked
WHERE
  flavour_scraped IS NOT NULL
  AND btrim(flavour_scraped) <> ''
GROUP BY
  1;
```

VIEW flavour_variant_counts

variant	count
chocolate	2
choc	1
strawberry	1
vanilla	1

WITH collect_flavours

product_id	phrases
1	['Chocolate', 'Vanilla (Out of Stock)', 'Vanilla(OutofStock)', 'chocolate']
2	['Choc', 'Strawberry +$2.00', 'Strawberry+$2.00', 'chocolate']
3	['Vanila', 'vanilla']
4	['Chocolate', 'chocolate']

```
collect_flavours AS (
  SELECT
    s.product_id,
    array_remove(
      array_cat(
        array_cat(
          COALESCE(array_agg(DISTINCT s.flavour_scraped::text), '{}'),
          COALESCE(array_agg(DISTINCT regexp_replace(s.flavour_scraped::text, '\s+', '',
'g')), '{}')
        ),
        array_cat(
          COALESCE(array_agg(DISTINCT fc.flavour_normalised::text), '{}'),
          COALESCE(array_agg(DISTINCT regexp_replace(fc.flavour_normalised::text, '\s+',
'', 'g')), '{}')
        )
      ),
      NULL
    ) AS phrases
  FROM
    scraped_flavours_flags s
    LEFT JOIN flavours_alias fa ON fa.flavour_scraped = s.flavour_scraped
    LEFT JOIN flavours_collection fc ON fc.flavour_id = fa.flavour_id
  GROUP BY
    s.product_id
),
```

VIEW brand_variant_counts

variant	count
optimum nutrition	2
musashi	1
musahi	1

```
CREATE OR REPLACE VIEW brand_variant_counts AS
SELECT
  lower(btrim(brand_scraped)) AS variant,
  COUNT(*) AS count
FROM
  scraped_in_stock
WHERE
  brand_scraped IS NOT NULL
  AND btrim(brand_scraped) <> ''
GROUP BY
  1;
```

WITH pairs

variant	rep	rep_count
optimum nutrition	optimum nutrition	2
musashi	musashi	1
musashi	musahi	1
musahi	musashi	1
musahi	musahi	1

WITH best_rep

variant	rep	rep_count	rank
optimum nutrition	optimum nutrition	2	1
musahi	musahi	1	1
musashi	musashi	1	2
musashi	musahi	1	1
musahi	musashi	1	2

VIEW brand_best_rep

variant	rep	rep_count
optimum nutrition	optimum nutrition	2
musashi	musashi	2
musahi	musashi	1

```
CREATE OR REPLACE VIEW
brand_best_rep AS
WITH pairs AS (
  SELECT
    a.variant,
    b.variant AS rep,
    b.count   AS rep_count
  FROM
    brand_variant_counts a
    JOIN brand_variant_counts b
ON similarity(a.variant, b.variant)
>= 0.85
),
best_rep AS (
  SELECT
    variant,
    rep,
    rep_count,
    ROW_NUMBER() OVER (
      PARTITION BY variant
      ORDER BY rep_count DESC,
          length(rep) ASC,
          rep ASC
    ) AS rank
  FROM
    pairs
)
SELECT
  variant,
  rep,
  rep_count
FROM
  best_rep
WHERE
  rank = 1;
```

TABLE brands_alias

brand_id	brand_normalised
1	Optimum Nutrition
2	Musashi

```
CREATE TABLE IF NOT EXISTS brands_alias(
  brand_scraped citext PRIMARY KEY,
  brand_id      bigint NOT NULL REFERENCES
brands_collection(brand_id) ON DELETE CASCADE
);
```

```
WITH chosen AS (
  SELECT
    variant,
    rep
  FROM
    brand_best_rep
),
upsert_bc AS (
  INSERT INTO brands_collection(brand_normalised)
  SELECT DISTINCT
    rep
  FROM
    chosen
  ON CONFLICT (brand_normalised)
    DO NOTHING
)
INSERT INTO brands_alias(brand_scraped, brand_id)
SELECT
  c.variant,
  bc.brand_id
FROM
  chosen c
  JOIN brands_collection bc ON bc.brand_normalised = c.rep
ON CONFLICT (brand_scraped)
  DO UPDATE SET
    brand_id = EXCLUDED.brand_id;
```

WITH chosen

variant	rep
optimum nutrition	optimum nutrition
musashi	musashi
musahi	musashi

TABLE brands_collection

brand_scraped	brand_id
optimum nutrition	1
optimum nutrition	1
musashi	2
musahi	2

```
CREATE TABLE IF NOT EXISTS brands_collection(
  brand_id       bigint GENERATED BY DEFAULT AS
IDENTITY PRIMARY KEY,
  brand_normalised citext UNIQUE NOT NULL
);
```

WITH pairs

variant	rep	rep_count
chocolate	chocolate	2
chocolate	choc	1
choc	chocolate	2
choc	choc	1
strawberry	strawberry	1
vanilla	vanilla	1

WITH best_rep

variant	rep	rep_count	rank
chocolate	chocolate	2	1
chocolate	choc	1	2
choc	chocolate	2	1
choc	choc	1	2
strawberry	strawberry	1	1
vanilla	vanilla	1	1

VIEW flavour_best_rep

variant	rep	rep_count
chocolate	chocolate	2
choc	chocolate	1
strawberry	strawberry	1
vanilla	vanilla	1

```
CREATE OR REPLACE VIEW
flavour_best_rep AS
WITH pairs AS (
  SELECT
    a.variant,
    b.variant AS rep,
    b.count   AS rep_count
  FROM
    flavour_variant_counts a
    JOIN flavour_variant_counts b ON
similarity(a.variant, b.variant) >= 0.7
),
best_rep AS (
  SELECT
    variant,
    rep,
    rep_count,
    ROW_NUMBER() OVER (
      PARTITION BY variant
      ORDER BY rep_count DESC,
          length(rep) ASC,
          rep ASC
    ) AS rank
  FROM
    pairs
)
SELECT
  variant,
  rep,
  rep_count
FROM
  best_rep
WHERE
  rank = 1;
```

```
WITH chosen AS (
  SELECT
    variant,
    rep
  FROM
    flavour_best_rep
),
upsert_fc AS (
  INSERT INTO flavours_collection(flavour_normalised)
  SELECT DISTINCT
    rep
  FROM
    chosen
  ON CONFLICT (flavour_normalised)
    DO NOTHING
)
INSERT INTO flavours_alias(flavour_scraped, flavour_id)
SELECT
  c.variant,
  fc.flavour_id
FROM
  chosen c
  JOIN flavours_collection fc ON fc.flavour_normalised = c.rep
ON CONFLICT (flavour_scraped)
  DO UPDATE SET
    flavour_id = EXCLUDED.flavour_id;
```

TABLE flavours_collection

flavour_id	flavour_normalised
1	chocolate
2	strawberry
3	vanilla

```
CREATE TABLE IF NOT EXISTS flavours_collection(
  flavour_id       bigint GENERATED BY DEFAULT AS
IDENTITY PRIMARY KEY,
  flavour_normalised citext UNIQUE NOT NULL
);
```

WITH chosen

variant	rep
chocolate	chocolate
choc	chocolate
strawberry	strawberry
vanilla	vanilla

TABLE flavours_alias

flavour_scraped	flavour_id
chocolate	1
choc	1
strawberry	2
vanila	3

```
CREATE TABLE IF NOT EXISTS flavours_alias(
  flavour_scraped citext PRIMARY KEY,
  flavour_id      bigint NOT NULL REFERENCES
flavours_collection(flavour_id) ON DELETE CASCADE
);
```

WITH base

product_id	name_scraped
1	Optimum Nutrition Gold Std 100% Whey 2.27kg
2	Gold Standard 100% Whey 2.27kg - Optimum N..
3	Musashi 100% Whey Protein 2kg Vanilla
4	100% Whey Prot - Musashi 2kg

```
WITH base AS (
  SELECT
    sis.product_id,
    sis.name_scraped
  FROM
    scraped_in_stock sis
),
```

WITH removed_brand

product_id	name_no_brand
1	Gold Std 100% Whey 2.27kg
2	Gold Standard 100% Whey 2.27kg -
3	100% Whey Protein 2kg Vanilla
4	100% Whey Prot - 2kg

```
removed_brand AS (
  SELECT
    b.product_id,
    remove_phrases(
      b.name_scraped,
      ba.brand_scraped,
      regexp_replace(ba.brand_scraped, '\s+', '', 'g'),
      COALESCE(bc.brand_normalised, ''),
      regexp_replace(COALESCE(bc.brand_normalised, ''), '\s+', '', 'g')
    ) AS name_no_brand
  FROM
    base b
    LEFT JOIN scraped_in_stock sis ON sis.product_id = b.product_id
    LEFT JOIN brands_alias ba ON ba.brand_scraped =
sis.brand_scraped
    LEFT JOIN brands_collection bc ON bc.brand_id = ba.brand_id
),
```

WITH removed_flavour

product_id	name_no_brand_flavour
1	Gold Std 100% Whey 2.27kg
2	Gold Standard 100% Whey 2.27kg -
2	100% Whey Protein 2kg
3	100% Whey Prot - 2kg

```
removed_flavour AS (
  SELECT
    rb.product_id,
    btrim(
      regexp_replace(
        remove_phrases(rb.name_no_brand, VARIADIC COALESCE(cf.phrases, '{}')),
        '\s{2,}',
        ' ',
        'g'
      )
    ) AS name_no_brand_flavour
  FROM
    removed_brand rb
    LEFT JOIN collect_flavours cf ON cf.product_id = rb.product_id
),
```

WITH removed_weight

product_id	name_no_brand_flavour
1	Gold Std 100% Whey
2	Gold Standard 100% Whey
2	100% Whey Protein
3	100% Whey Prot

```
removed_weight AS (
  SELECT
    product_id,
    trim(
      regexp_replace(
        regexp_replace(
          regexp_replace(
            regexp_replace(
              name_no_brand_flavour,
              '\y[0-9]+(\.[0-9]+)?\s*(kg|kilograms?)\y',
              '',
              'gi'
            ),
            '\y[0-9]+(\.[0-9]+)?\s*(g|grams?)\y',
            '',
            'gi'
          ),
          '\y[0-9]+(\.[0-9]+)?\s*(lb|lbs|pounds?)\y',
          '',
          'gi'
        ),
        '\y[0-9]+(\.[0-9]+)?\s*(oz|ounces?)\y',
        '',
        'gi'
      )
    ) AS name_cleaned
  FROM
    removed_flavour
)
SELECT
  product_id,
  name_cleaned
FROM
  removed_weight;
```

VIEW name_cleaned

product_id	name_cleaned
1	Gold Std 100% Whey
2	Gold Standard 100% Whey
3	100% Whey Protein
4	100% Whey Prot

VIEW product_variant_counts

brand_id	brand_normalised	variant	count
1	optimum nutrition	gold std 100% whey	1
1	optimum nutrition	gold standard 100% whey	1
2	musashi	100% whey protein	1
2	musashi	100% whey prot	1

```
CREATE OR REPLACE VIEW product_variant_counts AS
SELECT
  bc.brand_id,
  bc.brand_normalised,
  lower(btrim(unaccent(pn.name_cleaned))) AS variant,
  COUNT(*) AS count
FROM
  name_cleaned pn
  JOIN scraped_in_stock sis ON sis.product_id = pn.product_id
  LEFT JOIN brands_alias ba ON ba.brand_scraped = sis.brand_scraped
  LEFT JOIN brands_collection bc ON bc.brand_id = ba.brand_id
WHERE
  bc.brand_id IS NOT NULL
  AND pn.name_cleaned IS NOT NULL
  AND btrim(pn.name_cleaned) <> ''
GROUP BY
  bc.brand_id,
  bc.brand_normalised,
  lower(btrim(unaccent(pn.name_cleaned)));
```

WITH pairs

brand_id	brand_normalised	variant	rep	rep_count
1	optimum nutrition	gold std 100% whey	gold standard 100% whey	1
1	optimum nutrition	gold std 100% whey	gold std 100% whey	1
1	optimum nutrition	gold standard 100% whey	gold standard 100% whey	1
1	optimum nutrition	gold standard 100% whey	gold std 100% whey	1
2	musashi	100% Whey Protein	100% Whey Protein	1
2	musashi	100% Whey Protein	100% whey	1
2	musashi	100% whey	100% Whey Protein	1
2	musashi	100% whey	100% whey	1

WITH best_rep

brand_id	brand_normalised	variant	rep	rep_count	rank
1	optimum nutrition	gold standard 100% whey	gold std 100% whey	1	1
1	optimum nutrition	gold std 100% whey	gold std 100% whey	1	2
1	optimum nutrition	gold standard 100% whey	gold standard 100% whey	1	1
1	optimum nutrition	gold std 100% whey	gold standard 100% whey	1	2
2	musashi	100% Whey Protein	100% Whey Protein	1	1
2	musashi	100% whey	100% Whey Protein	1	2
2	musashi	100% Whey Protein	100% whey	1	1
2	musashi	100% whey	100% whey	1	2

VIEW product_best_rep

brand_id	brand_normalised	variant	rep	rep_count
1	optimum nutrition	gold std 100% whey	gold standard 100% whey	1
1	optimum nutrition	gold standard 100% whey	gold standard 100% whey	1
2	musashi	100% whey protein	100% whey protein	1
2	musashi	100% whey prot	100% whey protein	1

```
CREATE OR REPLACE VIEW product_best_rep AS
WITH pairs AS (
  SELECT
    a.brand_id,
    a.brand_normalised,
    a.variant,
    b.variant AS rep,
    b.count   AS rep_count
  FROM
    product_variant_counts a
    JOIN product_variant_counts b
      ON a.brand_id = b.brand_id
      AND similarity(a.variant, b.variant) >= 0.7
),
best_rep AS (
  SELECT
    brand_id,
    brand_normalised,
    variant,
    rep,
    rep_count,
    ROW_NUMBER() OVER (
      PARTITION BY brand_id, variant
      ORDER BY rep_count DESC,
          length(rep) ASC,
          rep ASC
    ) AS rank
  FROM
    pairs
)
SELECT
  brand_id,
  brand_normalised,
  variant,
  rep,
  rep_count
FROM
  best_rep
WHERE
  rank = 1;
```

```
WITH chosen AS (
  SELECT
    brand_id,
    variant,
    rep
  FROM
    product_best_rep
),
upsert_pc AS (
INSERT INTO products_collection(brand_id,
product_normalised)
  SELECT DISTINCT
    brand_id,
    rep
  FROM
    chosen
  ON CONFLICT (brand_id,
    product_normalised)
    DO NOTHING)
INSERT INTO product_alias(brand_id, name_normalised,
name_id)
SELECT
  c.brand_id,
  c.variant,
  pc.product_id
FROM
  chosen c
  JOIN products_collection pc ON pc.brand_id = c.brand_id
    AND pc.product_normalised = c.rep
  ON CONFLICT (brand_id,
    name_normalised)
    DO UPDATE SET
      name_id = EXCLUDED.name_id;
```

WITH chosen

brand_id	variant	rep
1	gold std 100% whey	gold standard 100% whey
1	gold std 100% whey	gold std 100% whey
1	gold standard 100% whey	gold standard 100% whey
1	gold standard 100% whey	gold std 100% whey
2	100% Whey Protein	100% Whey Protein
2	100% Whey Protein	100% whey
2	100% whey	100% Whey Protein
2	100% whey	100% whey

TABLE products_alias

brand_id	name_normalised	name_id
1	gold std 100% whey	1
1	gold standard 100% whey	2
2	100% whey protein	3
2	100% whey prot	4

```
CREATE TABLE IF NOT EXISTS
product_alias(
  brand_id bigint NOT NULL
REFERENCES
brands_collection(brand_id)
ON DELETE CASCADE,
  name_normalised citext NOT
NULL,
  name_id bigint NOT NULL
REFERENCES
products_collection(product_
id) ON DELETE CASCADE,
  PRIMARY KEY (brand_id,
name_normalised)
);
```

TABLE products_collection

name_id	brand_id	name_normalised
1	1	gold std 100% whey
2	2	100% whey protein

```
CREATE TABLE IF NOT EXISTS products_collection(
  name_id bigint GENERATED BY DEFAULT AS IDENTITY PRIMARY KEY,
  brand_id bigint NOT NULL REFERENCES brands_collection(brand_id)
ON DELETE CASCADE,
  product_normalised citext NOT NULL,
  UNIQUE (brand_id, product_normalised)
);
```

TABLE scraped_products

product_id	retailer	brand_scraped	name_scraped	flavour_scraped	weight_grams	amount_cents	currency_scraped	url	in_stock
1	Xplosiv	Optimum Nutrition	Optimum Nutrition Gold Std 100% Whey 2.27kg	{'Chocolate', 'Vanilla (Out of Stock)'}	2270	6000	NZD	https://xplosiv.nz/...	true
2	Xplosiv	optimum nutrition	Gold Standard 100% Whey 2.27kg - Opt. Nut.	{'Choc', 'Strawberry +$2.00'}	2270	6500	NZD	https://xplosiv.nz/...	true
3	SprintFit	Musashi	Musashi 100% Whey Protein 2kg Vanilla	{'Vanila'}	2000	5000	NZD	https://www.sprintfit.co.nz...	true
4	SprintFit	Musashi	100% Whey Prot - Musashi 2kg	{'Chocolate'}	2000	4800	NZD	https://www.sprintfit.co.nz...	true
5	NoWhey	Optimum Nutrition	Optimum Nutrition Gold Std 100% Whey 2.27kg	{'Chocolate'}	2270	6000	NZD	https://www.nowhey.co.nz...	false

TABLE products_final

product_id	brand	name	flavour	weight_grams	price	currency	retailer	url
1	Optimum Nutrition	Gold Standard 100% Whey	Chocolate	2270	6000	NZD	Xplosiv	https://xplosiv.nz/...
1	Optimum Nutrition	Gold Standard 100% Whey	Chocolate	2270	6500	NZD	Xplosiv	https://xplosiv.nz/...
1	Optimum Nutrition	Gold Standard 100% Whey	Strawberry	2270	6700	NZD	Xplosiv	https://www.sprintfit.co.nz...
2	Musashi	100% Whey Protein	Vanilla	2000	5000	NZD	SprintFit	https://www.sprintfit.co.nz...
2	Musashi	100% Whey Protein	Chocolate	2000	4800	NZD	SprintFit	https://www.sprintfit.co.nz...

1. Scrapers save raw product rows into scraped_products (messy brand/name/flavour).
2. SQL views expand flavours, remove out of stock variants, and calculate final per-flavour prices.
3. We group and normalise brands, flavours, and cleaned product names into collections + alias tables.
4. Each scraped product row is mapped to a representative brand, product_id, and flavour using those alias tables.
5. A final query joins everything into products_final, one row per (product_id × flavour × retailer).

TABLE products_final

product_id	brand	name	flavour	weight_grams	price	currency	retailer	url
1	Optimum Nutrition	Gold Standard 100% Whey	Chocolate	2270	6000	NZD	Xplosiv	https://xplosiv.nz/...
1	Optimum Nutrition	Gold Standard 100% Whey	Chocolate	2270	6500	NZD	Xplosiv	https://xplosiv.nz/...
1	Optimum Nutrition	Gold Standard 100% Whey	Strawberry	2270	6700	NZD	Xplosiv	https://www.sprintfit.co.nz...
2	Musashi	100% Whey Protein	Vanilla	2000	5000	NZD	SprintFit	https://www.sprintfit.co.nz...
2	Musashi	100% Whey Protein	Chocolate	2000	4800	NZD	SprintFit	https://www.sprintfit.co.nz...

```
CREATE TABLE IF NOT EXISTS products_final(
  product_id bigint NOT NULL,
  brand citext,
  name citext,
  flavour citext,
  weight_grams integer,
  price integer NOT NULL,
  currency citext NOT NULL,
  retailer citext NOT NULL,
  url citext NOT NULL
);


INSERT INTO products_final(product_id, brand, name, flavour, weight_grams, price, currency, retailer, url)
SELECT
  pc.product_id AS product_id,
  initcap(bc.brand_normalised) AS brand,
  initcap(COALESCE(pc.product_normalised, lower(btrim(unaccent(nc.name_cleaned))))) AS name,
  initcap(fc.flavour_normalised) AS flavour,
  sis.weight_grams AS weight_grams,
  sfs.final_amount_cents AS price,
  sis.currency_scraped AS currency,
  sis.retailer AS retailer,
  sis.url AS url
FROM
  scraped_in_stock sis
  JOIN name_cleaned nc ON nc.product_id = sis.product_id
  LEFT JOIN brands_alias ba ON ba.brand_scraped = sis.brand_scraped
  LEFT JOIN brands_collection bc ON bc.brand_id = ba.brand_id
  LEFT JOIN product_alias pa ON pa.brand_id = bc.brand_id
    AND pa.name_normalised = lower(btrim(unaccent(nc.name_cleaned)))
  LEFT JOIN products_collection pc ON pc.product_id = pa.product_id
  JOIN scraped_flavour_stocked sfs ON sfs.product_id = sis.product_id
  LEFT JOIN flavours_alias fa ON fa.flavour_scraped = sfs.flavour_scraped
  LEFT JOIN flavours_collection fc ON fc.flavour_id = fa.flavour_id;
```