


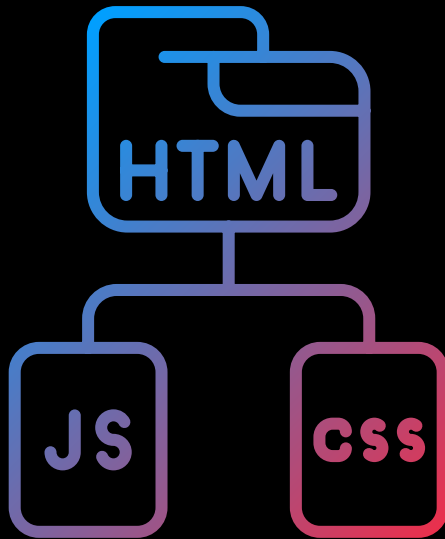

DOM Manipulation

Ali Samir

- **getElementById():** Returns element by ID.
- **getElementsByClassName():** Returns elements by class.
- **getElementsByTagName():** Returns elements by tag.
- **querySelector():** Returns first element matching CSS selector.
- **querySelectorAll():** Returns all elements matching CSS selector.

Ali Samir

- **createElement():** Creates new element.
- **appendChild():** Appends child to parent.
- **insertBefore():** Inserts child before reference node.
- **removeChild():** Removes child from DOM.
- **replaceChild():** Replaces child with another.
- **setAttribute():** Sets attribute.
- **getAttribute():** Gets attribute value.

Ali Samir

- **removeAttribute():** Removes attribute.
- **textContent:** Sets/gets text content.
- **innerHTML:** Sets/gets HTML content.
- **parentNode:** This is a property that returns the parent node of the specified node.
- **nextSibling:** This property returns the next node at the same node tree level.
- **previousSibling:** Returns the previous node at the same node tree level.

Ali Samir

- **firstChild:** Returns the first child node of an element.
- **lastChild:** Returns the last child node of an element.
- **childNodes:** Returns a collection of child nodes of a node.
- **nodeValue:** Sets or returns the value of a node.
- **createElementNS():** Creates an element with a specified namespace.

Ali Samir

- **getAttributeNode():** Returns the attribute node for a specified attribute.
- **setAttributeNode():** Sets an attribute node as part of a node.
- **removeAttributeNode():** Removes a specified attribute node and returns the removed node.
- **hasAttribute():** Returns true if the element has the specified attribute, otherwise it returns false.
- **cloneNode():** Clones a node.

Ali Samir

- **hasChildNodes():** Returns true if an element has any child nodes, otherwise false.
- **isSameNode():** Checks if two elements are the same node.
- **contains():** Returns true if a node is a descendant of a node, otherwise false.
- **normalize():** Joins adjacent text nodes and removes empty text nodes in an element.
- **compareDocumentPosition():** Compares the position of two nodes and returns a number representing the position.

Ali Samir

- **addEventListener():** Adds an event listener to an element.
- **removeEventListener():** Removes an event listener from an element.
- **dispatchEvent():** Dispatches an event to an element.

The methods and properties mentioned above offer various means to modify and navigate the document. Each serves a specific purpose, tailored to your requirements for the document's layout.

Ali Samir



Ali Samir

Software Engineer

*Follow
-US-*

