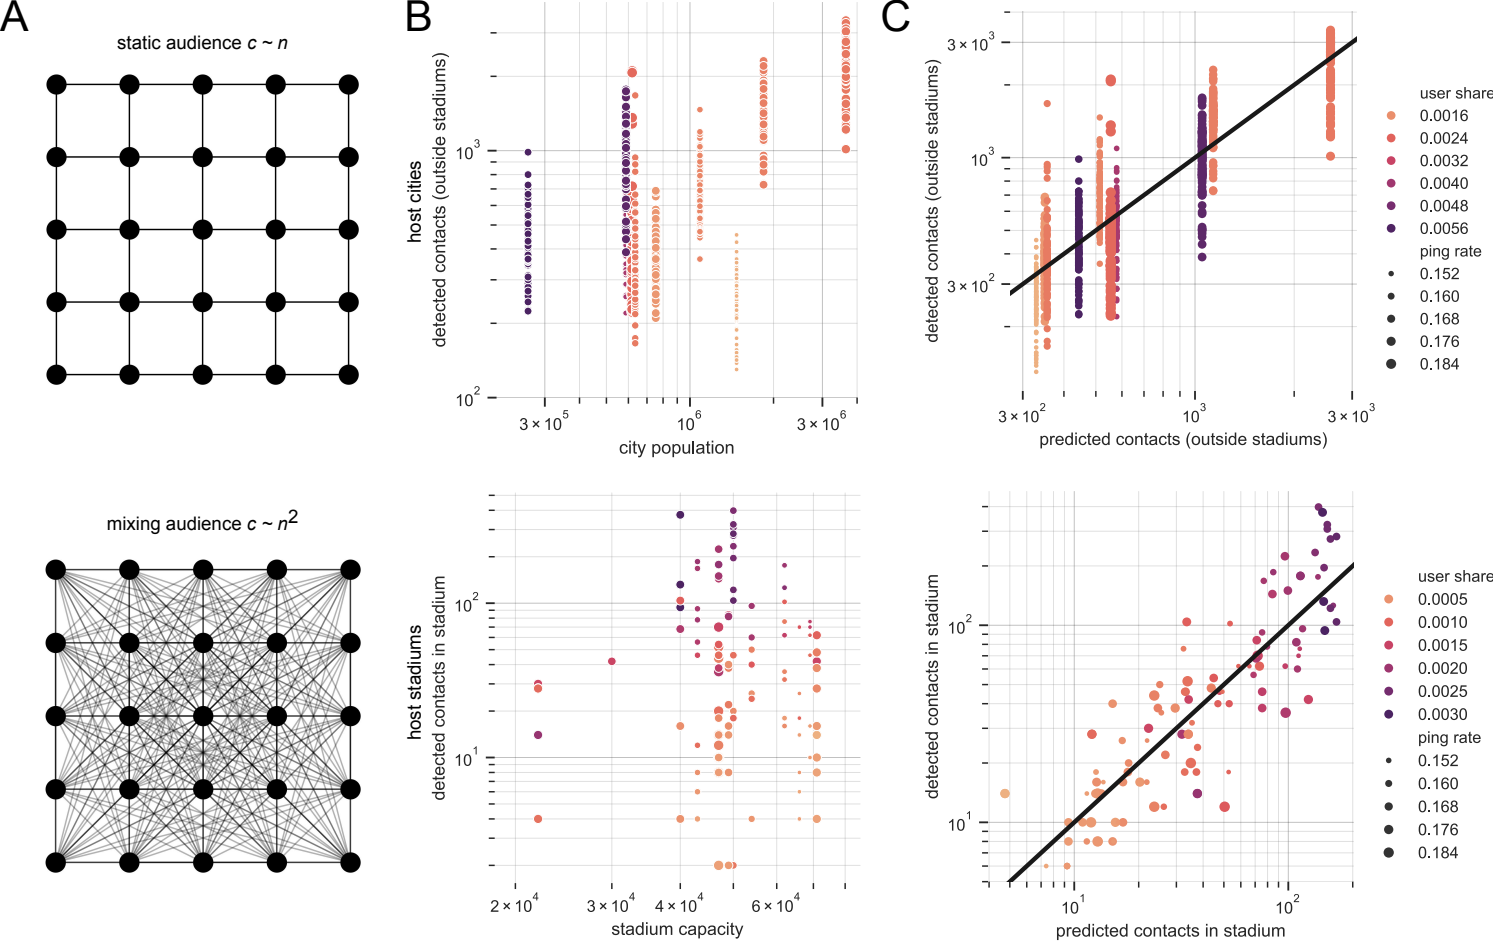
A
static audience $c \sim n$
mixing audience $c \sim n^2$
B
host cities
detected contacts (outside stadiums)
$10^3$
$10^2$
$3 \times 10^5$
$10^6$
$3 \times 10^6$
city population
host stadiums
detected contacts in stadium
$10^2$
$10^1$
$2 \times 10^4$
$3 \times 10^4$
$4 \times 10^4$
$6 \times 10^4$
stadium capacity
C
detected contacts (outside stadiums)
$3 \times 10^3$
$10^3$
$3 \times 10^2$
$3 \times 10^2$
$10^3$
$3 \times 10^3$
predicted contacts (outside stadiums)
user share
0.0016
0.0024
0.0032
0.0040
0.0048
0.0056
ping rate
0.152
0.160
0.168
0.176
0.184
detected contacts in stadium
$10^2$
$10^1$
$10^1$
$10^2$
predicted contacts in stadium
user share
0.0005
0.0010
0.0015
0.0020
0.0025
0.0030
ping rate
0.152
0.160
0.168
0.176
0.184