


Use Copilot to create a topic

1. On the command bar for the agent, select **Topics**.
2. Select Add a topic and then select **Add from description with Copilot**.
3. Use the following information to complete the Add from description with Copilot dialog and then select **Create**.

Name your topic - Support Ticket

Create a topic to - Create a support ticket, including a title, severity (high / medium / low), description, and an email address to send update notifications to. Define variables following this naming pattern: Topic.TicketTitle.

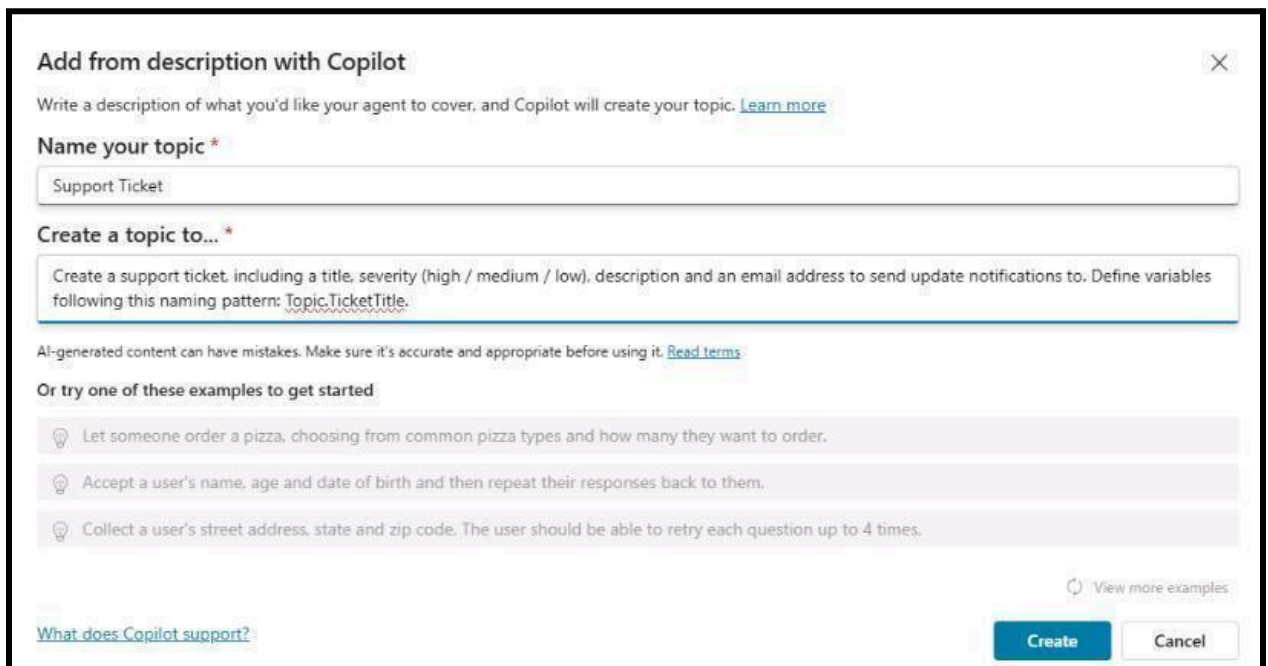

The screenshot shows a dialog box titled "Add from description with Copilot" with a close button (X) in the top right corner. Below the title is a text area with the instruction: "Write a description of what you'd like your agent to cover, and Copilot will create your topic. [Learn more](#)".

Below this is a section labeled "Name your topic *" with a text input field containing "Support Ticket".

Below that is a section labeled "Create a topic to..." with a text input field containing the text: "Create a support ticket, including a title, severity (high / medium / low), description and an email address to send update notifications to. Define variables following this naming pattern: Topic.TicketTitle."

Below the input fields is a disclaimer: "AI-generated content can have mistakes. Make sure it's accurate and appropriate before using it. [Read terms](#)".


Below the disclaimer is a section labeled "Or try one of these examples to get started" with three example prompts, each preceded by a lightbulb icon:

- Let someone order a pizza, choosing from common pizza types and how many they want to order.
- Accept a user's name, age and date of birth and then repeat their responses back to them.
- Collect a user's street address, state and zip code. The user should be able to retry each question up to 4 times.


Below the examples is a link: "What does Copilot support?".

At the bottom right are two buttons: "Create" (in blue) and "Cancel" (in white).

3. On the command bar for the agent, select **Copilot** to display the **Edit with Copilot** pane.

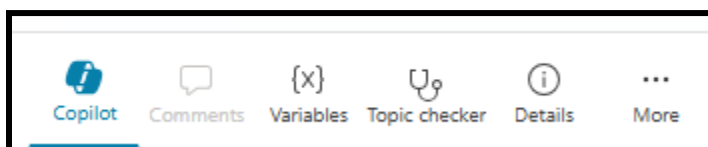

4. On the **Edit with Copilot** pane, in the **What do you want to do?** field, enter the following text and then select Update:
Before the last message, ask a question to find the user's preferred contact method, choosing from **email, phone or SMS**.

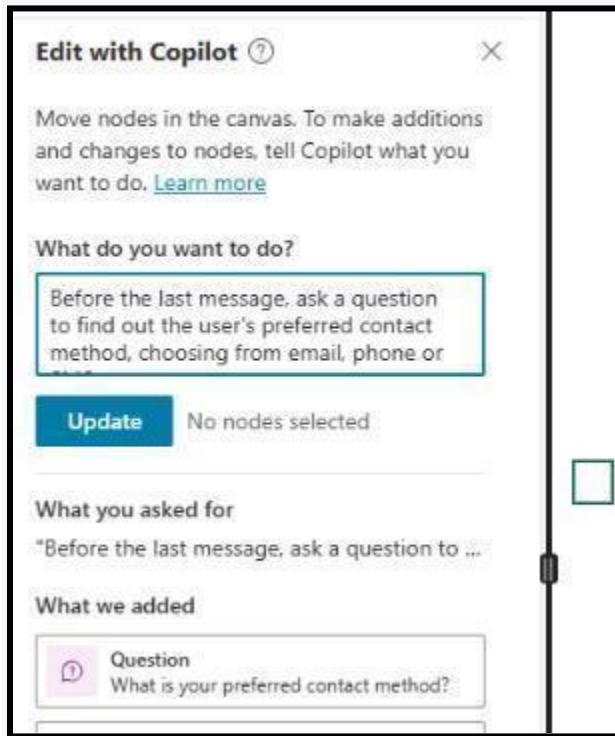

Edit with Copilot ⓘ

Move nodes in the canvas. To make additions and changes to nodes, tell Copilot what you want to do. [Learn more](#)

What do you want to do?

Before the last message, ask a question to find out the user's preferred contact method, choosing from email, phone or SMS

Update No nodes selected


What you asked for

"Before the last message, ask a question to ..."

What we added

Question
What is your preferred contact method?

Copilot **adds a Question node** which asks the customer for their **contact method** and stores their choice in a variable.

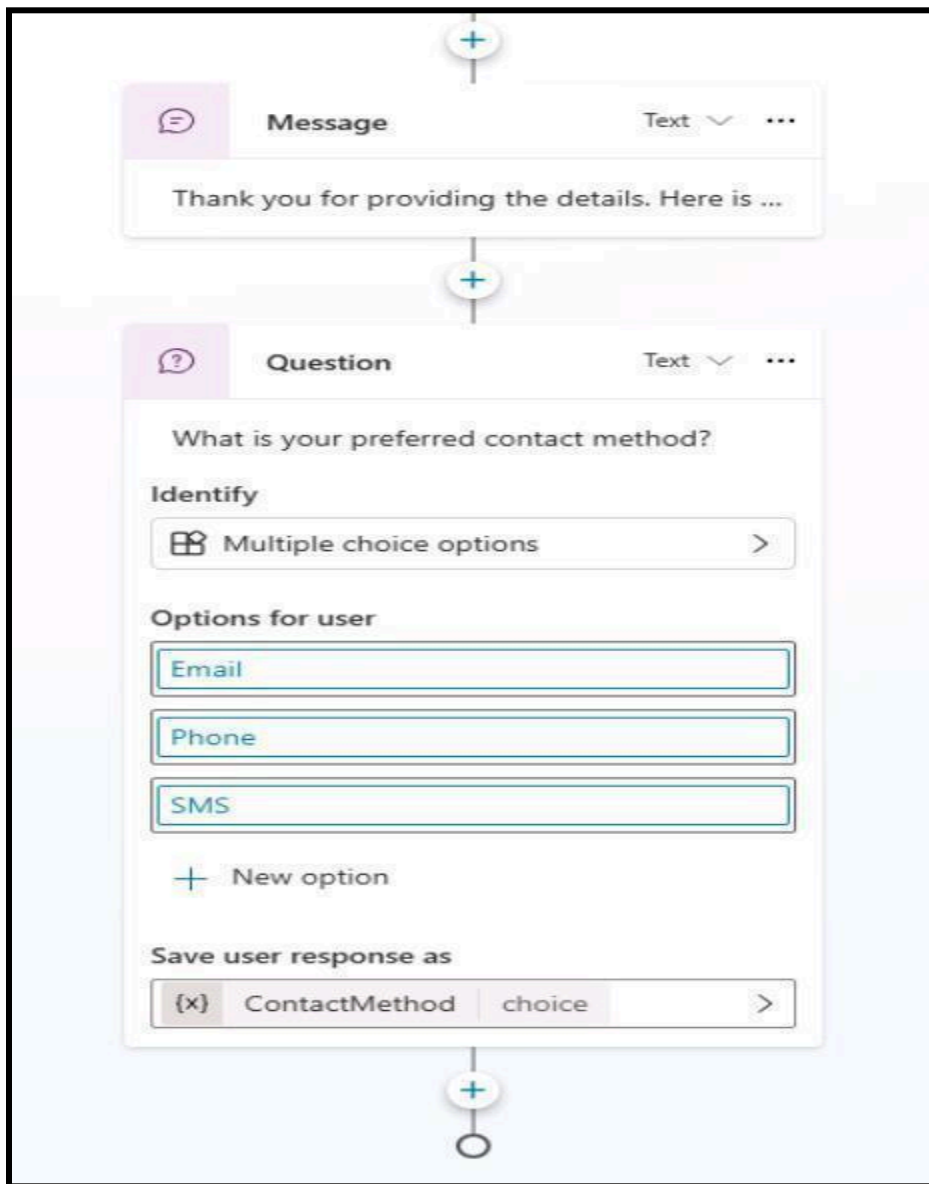

On the command bar for the agent, select **Save**.

Use entities

An entity represents **key information** you're trying to extract from a sentence and then saves it for later use.

Example scenario

If the user enters “**I want fifty red coffee machines**” the agent can understand that:

“**Fifty**” is the number “50” and it’s also the number of products to purchase.

“**Red**” is a color and is the color of the products to purchase.

“**Coffee machine**” refers to the product that the person wants to purchase.


Task 1: Create a Custom Entity

In this task, you will create a custom entity named **Order Action** that can be used to recognise order-related actions in your conversations.

1. On the command bar, select **Settings**.
2. From the list of settings, select **Entities**.




3. On the **Entities** page, select **Add an entity** and then select **+ New entity**.

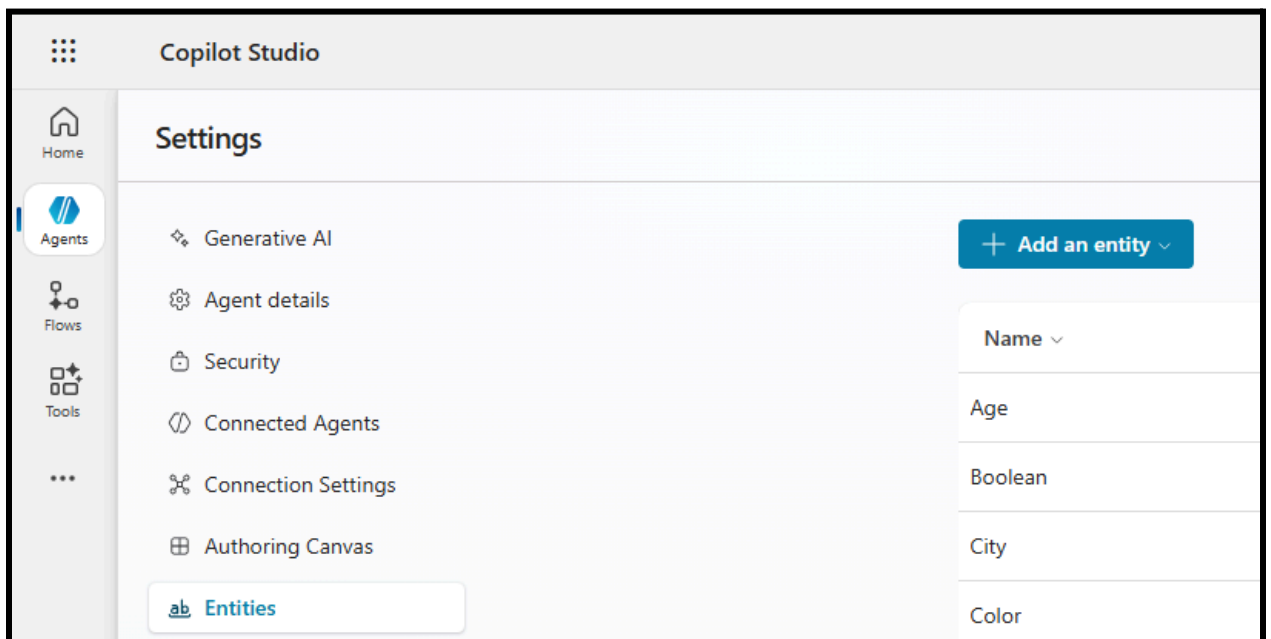

4. Create a **new entity** with the following details:
Select **Closed List**

Create an entity

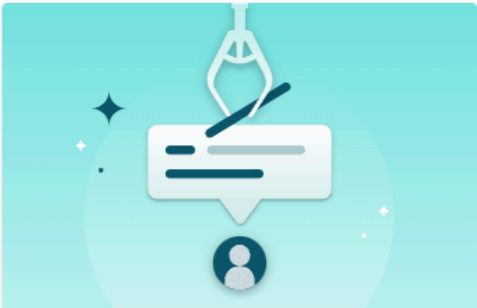

Make your agent smarter with entities.

An entity is a piece of information (person, place, thing, or concept) that the agent might want to pick out from what your customer says.

[Learn more about entities](#)

Choose a method

Closed list

Define a list. Use when you have an exact list of items that is a manageable size (small to medium).

Example: List of sizes

Extra small
Small
Medium
Large

Regular expression (Regex)

Define a specific logical pattern, such as an ID number, credit card number, IP address, and more.

Example: Article ID pattern that starts with "kb" and ends with 6 digits, such as 'kb123456'.

`kb[0-9]{6}`

Use the following values:

Setting	Value
Entity Name	Ticket Severity
Entity Type	Closed List Entity

Task 2 : Add Severity Options

In the **List items** section, add the following values:

- High
- Medium
- Low

Optionally, add synonyms to improve recognition.

The screenshot shows a 'Ticket Severity' configuration window. On the left, an 'Edit synonyms' dialog is open for the 'Low' severity level. It has a text input field for 'Enter a synonym' with a '+' button, and a list of existing synonyms: 'Minor, Low Priority, P3'. On the right, the 'List items' section displays a table of severity levels and their synonyms.

Item	Synonyms
High	Critical, Urgent, P1
Medium	Normal, Moderate, P2
Low	+ Synonyms

List Item	Synonyms
High	Critical, Urgent, P1
Medium	Normal, Moderate, P2
Low	Minor, Low Priority, P3

Task 3 : Enable Smart Matching

- Turn **Smart matching** On.
- Select **Save**.
- Select **Close**.


The screenshot shows the bottom right corner of the configuration window, featuring a blue 'Save' button and a grey 'Close' button.

Update Your Topic to Use the Ticket Severity Entity

Now that you have created the **Ticket Severity** entity, you will update the **Support Ticket** topic to use this entity when collecting the ticket priority from users.

On the command bar for the agent, select **Topics**.

Open the **Support Ticket** topic.

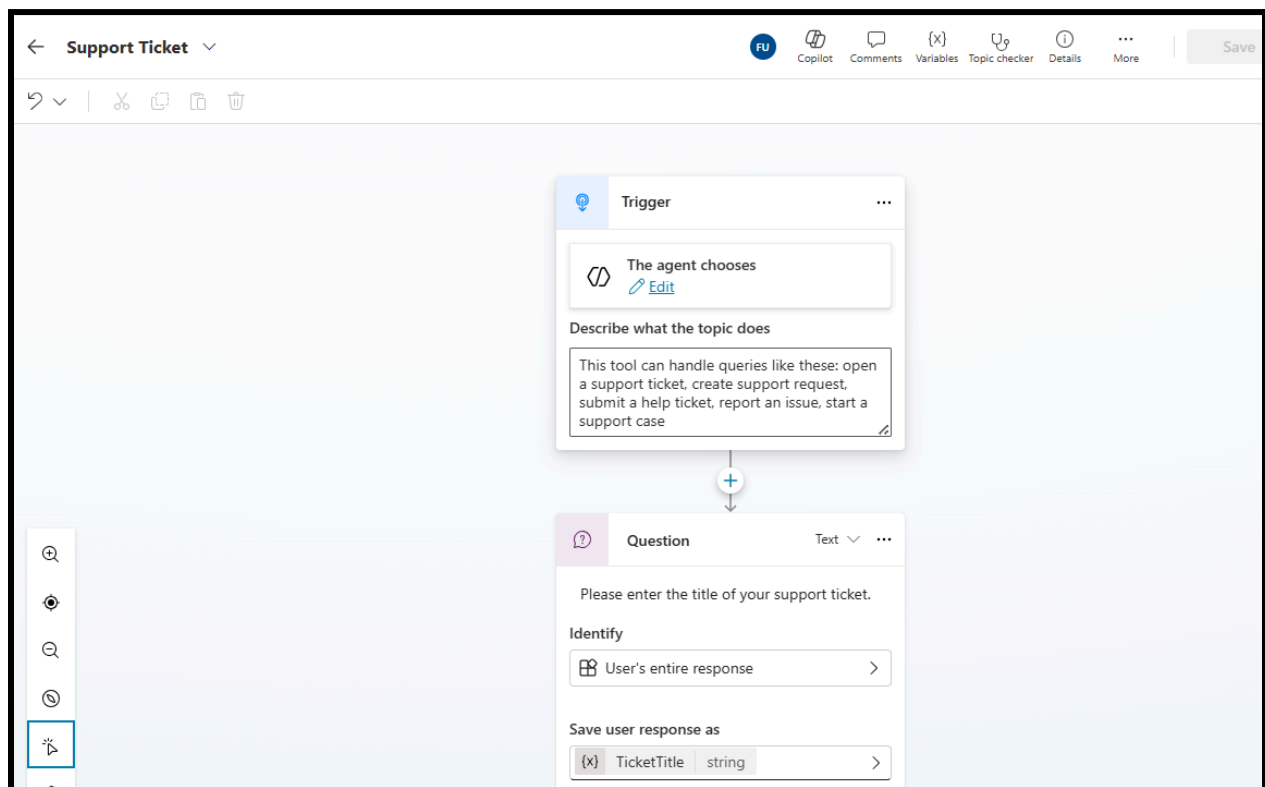


Locate the question that asks:

Please select the severity of your issue.


Or

What is the severity of this issue?

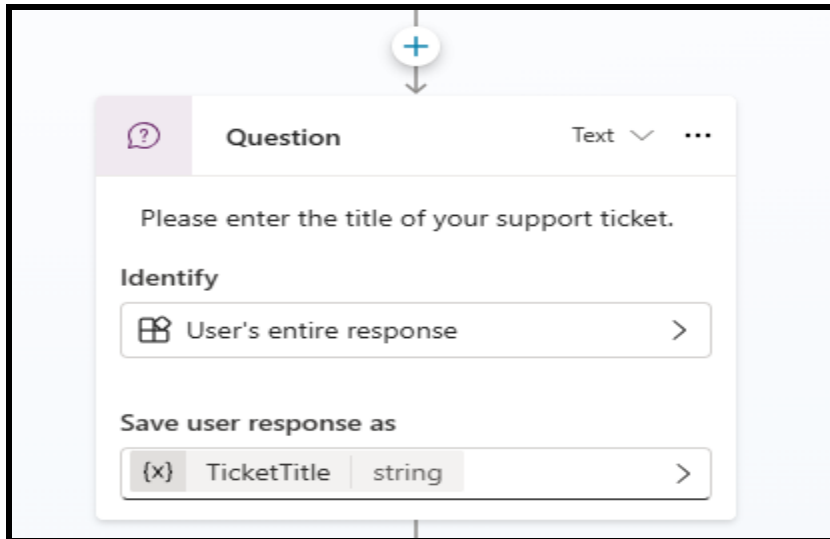

In the **Question** node, under the **Identify** section, select the current value (for example, **User's entire response**).

In the **Choose information to identify** dialog, search for and select the **Ticket Severity** entity.

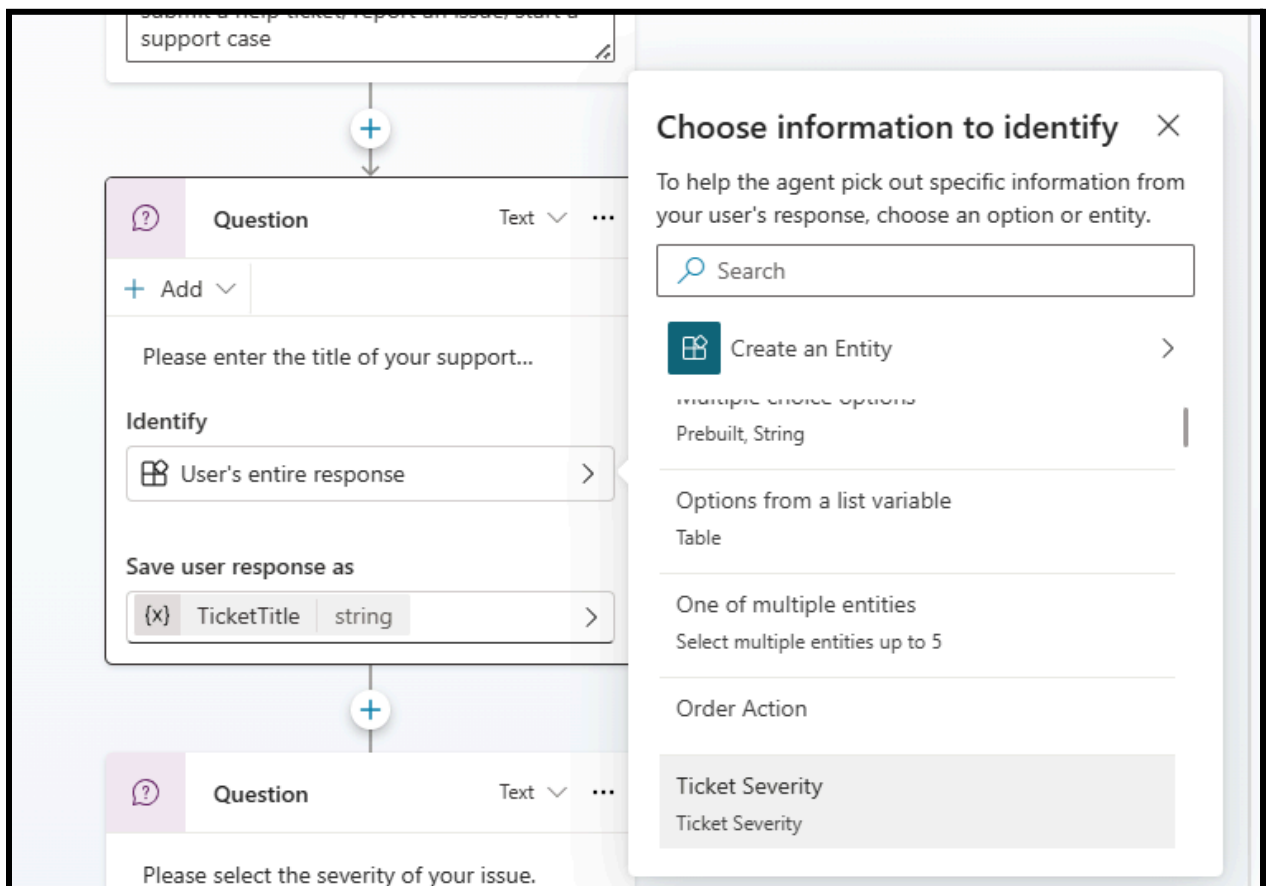


Select **Options for user**.

In the **User options for Ticket Severity** dialog, select all available values:

- High
- Medium
- Low

Close the dialog.

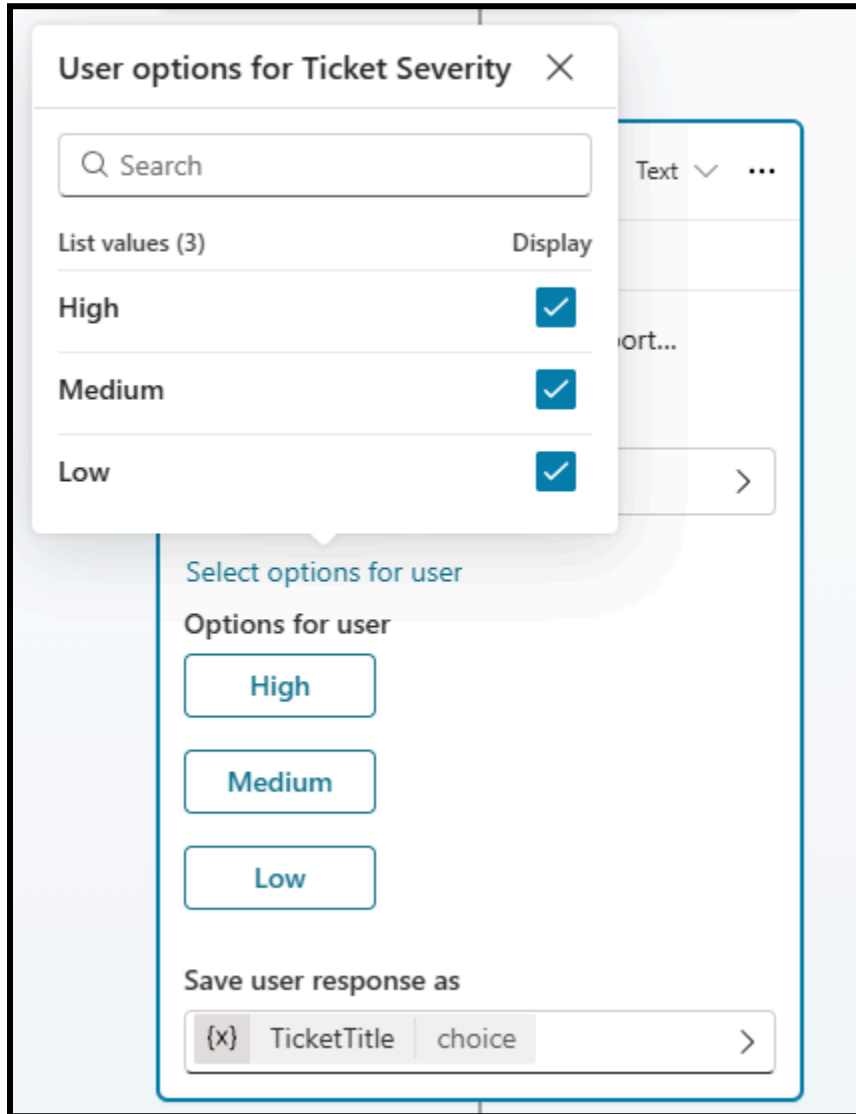

On the command bar, select **Save**.

Use variables

Variables **store information collected from the user** and allow the copilot to reuse that information later in the conversation.

Task 3: Review the Topic Variables

Open the **Support Ticket** topic and review the questions created in the conversation flow.

Verify that the following variables are configured:

Question	Variable
Please enter the title of your support ticket.	TicketTitle
Please select the severity of your issue.	TicketSeverity
Please describe the issue.	TicketDescription
Please provide your email address for updates.	TicketEmail
What is your preferred contact method?	PreferredContact

Expected Outcome

Each question **stores the user's response in a separate variable** that can be referenced later in the topic.

Task 4: Use Variables in a Confirmation Message

Locate the **Thank you! Your support ticket has been...** message node. Update the message to include the values captured during the conversation.

Thank you for submitting your support request.

Support Ticket Summary

Title: {TicketTitle}

Severity: {TicketSeverity}
Description: {TicketDescription}
Email: {TicketEmail}
Preferred Contact Method: {PreferredContact}

Your support ticket has been successfully created.

To insert a variable:

1. Place the cursor where the variable should appear.
2. Select **Insert Variable ({x})**.
3. Select the required variable.
4. Repeat for all variables.

Select **Save**.

The screenshot shows a message editor interface. The main text area contains a message template for a support ticket. The template includes a greeting, a section titled "Support Ticket Summary", and several fields: "Title", "Severity", "Description", "Email", and "Preferred Contact Method". Each field is followed by a variable placeholder {x} and a dropdown menu showing the variable name and its data type. For example, "Title: {x} TicketTitle string". Below the summary section, there is a confirmation message: "Your support ticket has been successfully created." To the right of the message editor, a "Select a variable" panel is open. This panel has tabs for "Custom", "System", and "Environment". The "Custom" tab is selected. It features a search bar labeled "Search variables" and a list of variables. The variables listed are: "PreferredContactMethod (Topic.PreferredContactMethod) choice", "TicketDescription (Topic.TicketDescription) string", "TicketEmail (Topic.TicketEmail) string" (which is highlighted with a tooltip showing "(Topic.TicketEmail)"), "TicketSeverity (Topic.TicketSeverity) choice", and "TicketTitle". A "View details" link is visible next to the "TicketEmail" variable.

Message

Text

+ Add B I [List Bulleted] [List Numbered] {x} fx

Thank you for submitting your support request.

Support Ticket Summary

Title: {x} TicketTitle string

Severity: {x} TicketSeverity choice

Description: {x} TicketDescription string

Email: {x} TicketEmail string

Preferred Contact Method: {x} PreferredContact... choice

Your support ticket has been successfully created.

Select a variable

Custom System Environment

Search variables All

PreferredContactMethod
(Topic.PreferredContactMethod)
choice

TicketDescription
(Topic.TicketDescription)
string

TicketEmail
(Topic.TicketEmail)
string [View details](#)

TicketSeverity
(Topic.TicketSeverity)
choice

TicketTitle


Task 5: Test the Variables

In the **Test your agent** pane, select **Start new test session**.

Create a support ticket

Expected Conversation

Copilot: Please enter the title of your support ticket.

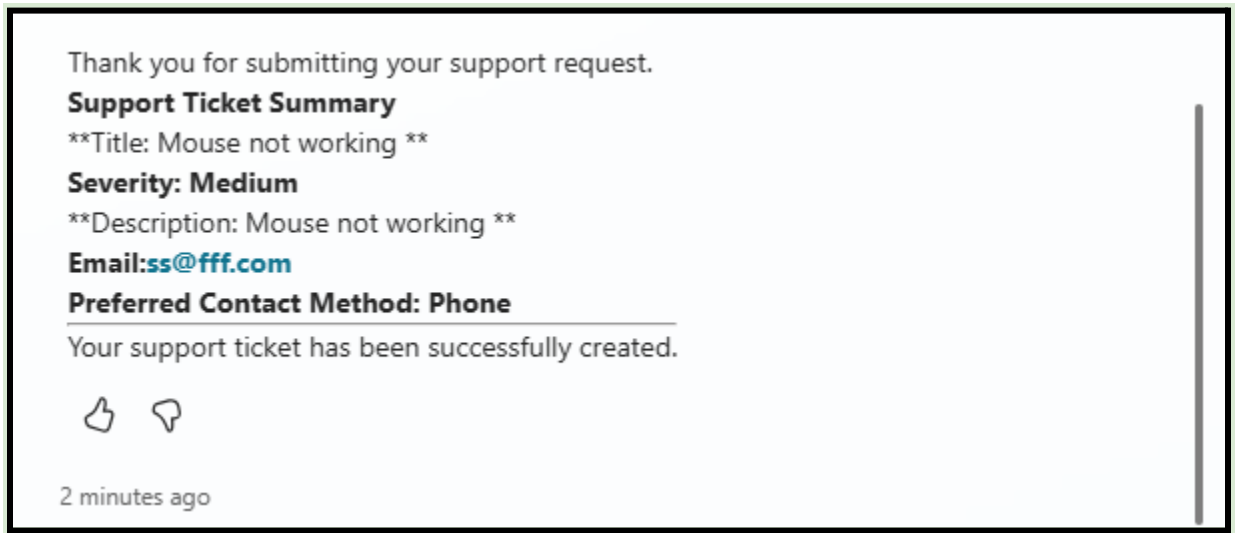

Challenge Exercise (Later – After the Session)

Enhance the topic by:

1. Capturing the employee's phone number using the **Phone Number** entity.
 2. Capturing the number of participants using the **Number** entity.
 3. Creating a condition:
 - o If participants > 10, display:
Group training approval required.
 4. Displaying a final registration summary.
-

References

[Work with variables - Microsoft Copilot Studio](#)

[Variables overview - Microsoft Copilot Studio](#)

[Use entities and slot filling in agents](#)

[Work with entities and variables in Microsoft Copilot Studio](#)