


F3 Completed-attempt failures and finite-window outcomes


2 agents; dependency 0; avoidance 0; fixed repair clock

● Read at dispatch --- First-order (dispatch) ■ Re-read at repair start --- First-order (start)








$p = 0.003435$ (4-line edits)

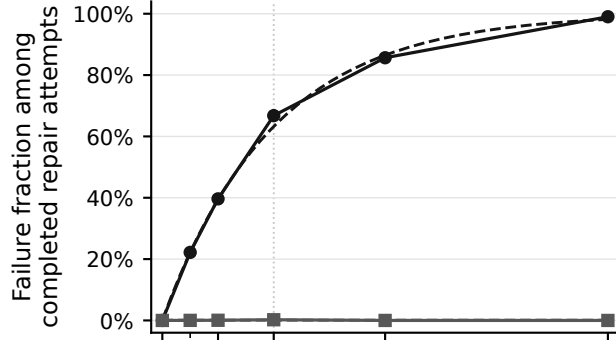

$p = 0.01556$ (16-line edits)

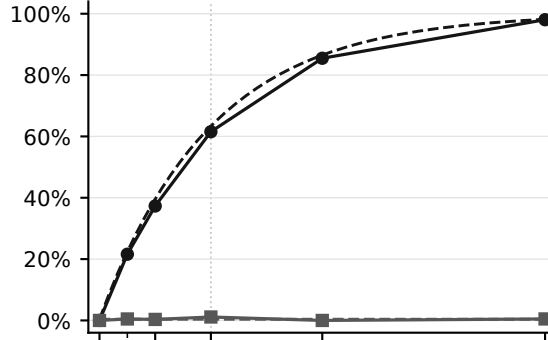

$p = 0.06872$ (64-line edits)

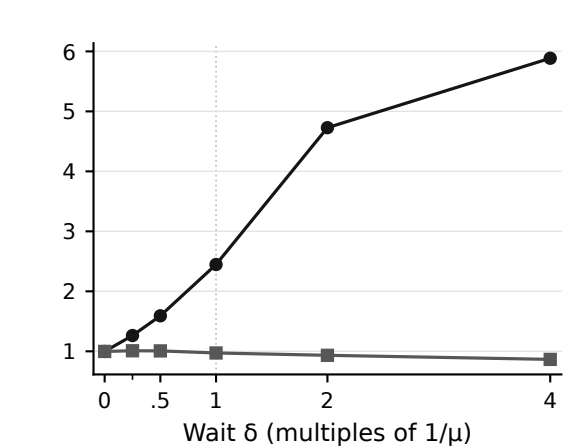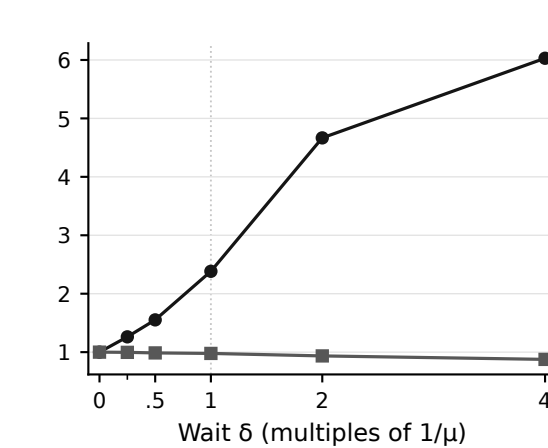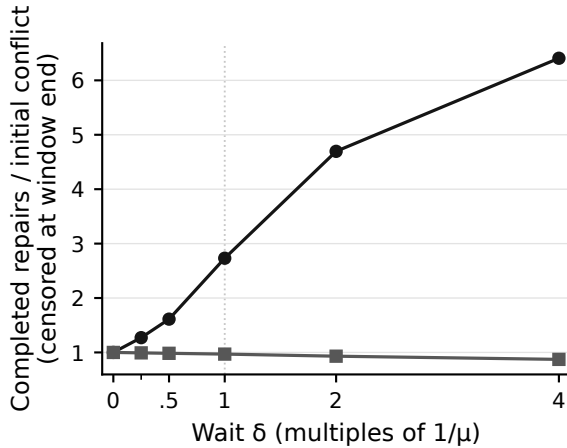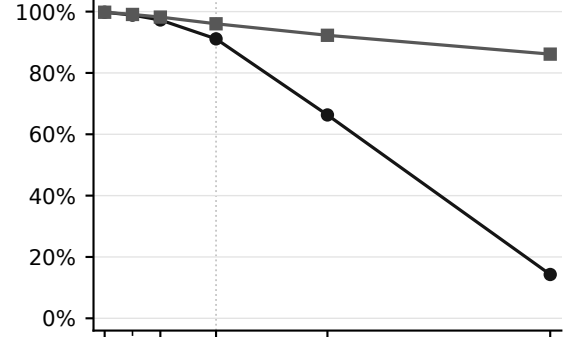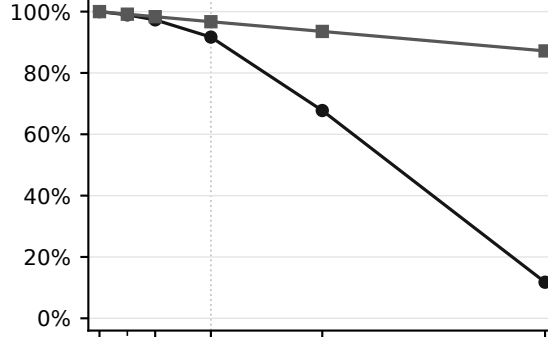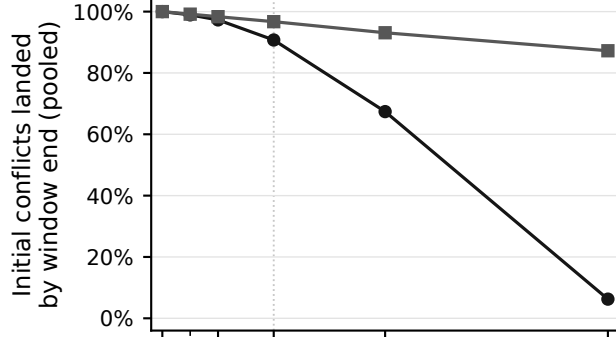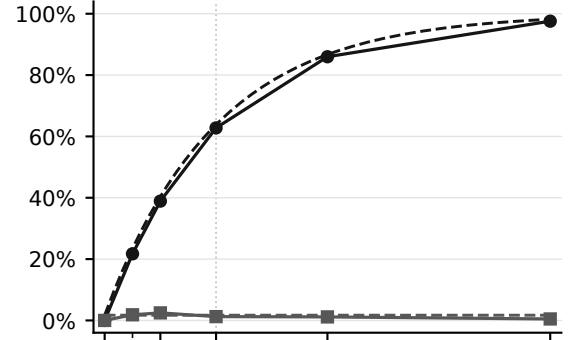

First-order $q = 1 - \exp(-\mu E)$: dispatch uses $E = \delta + R$; re-reading uses $E = R = 0.25$. At $\delta = 0$ both use $E = R$.

All ratios pool 30 seeds. Aggregate inputs do not identify ratio intervals. Completed attempts are selected by the queue and cutoff.


μ is nominal; the vertical line marks waiting time $1/\mu$. Windows are fixed per p ; no uncensored mean or dispatch distribution is inferred.

F3 Completed-attempt failures and finite-window outcomes


2 agents; dependency 0; avoidance 0; context repair clock

● Read at dispatch ■ Re-read at repair start








$p = 0.003435$ (4-line edits)

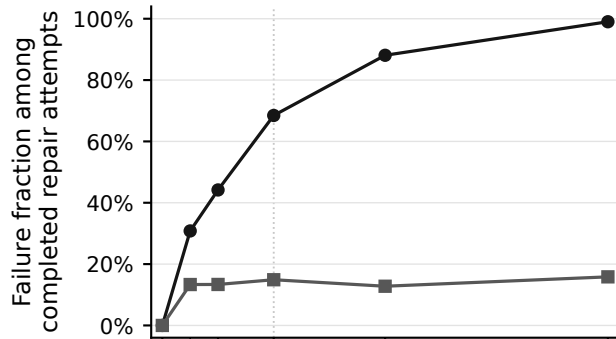

$p = 0.01556$ (16-line edits)

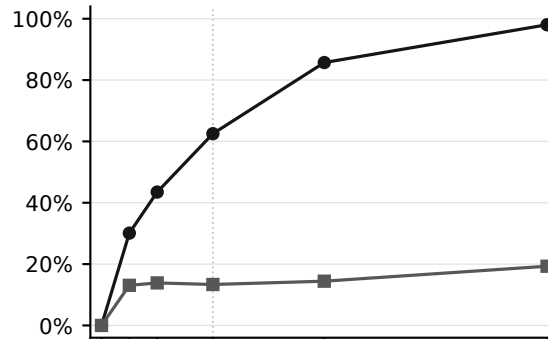

$p = 0.06872$ (64-line edits)

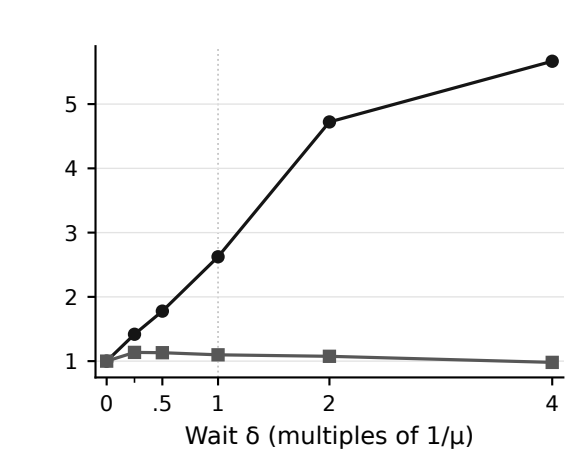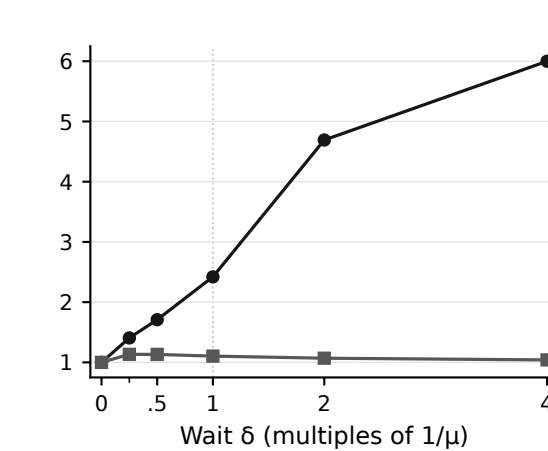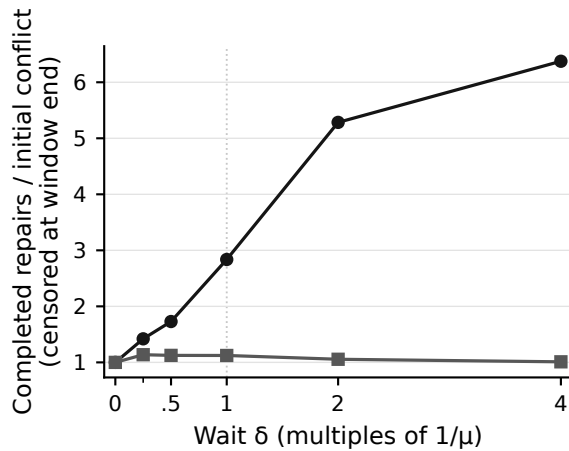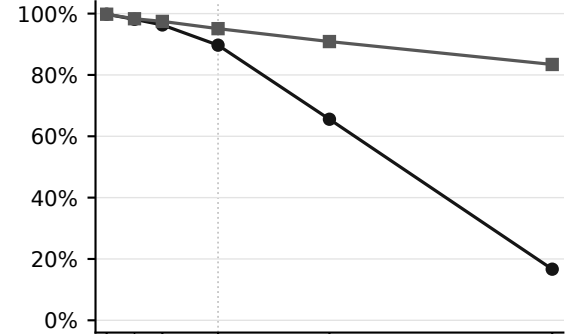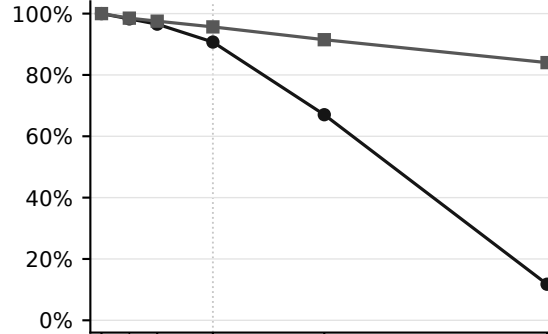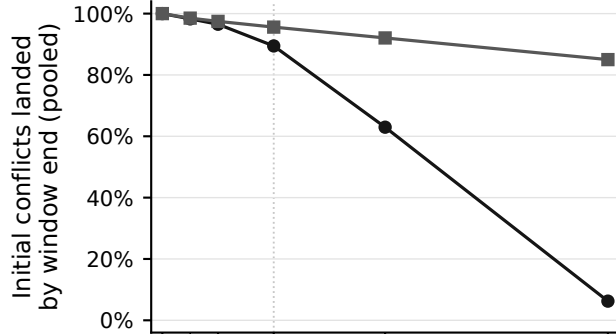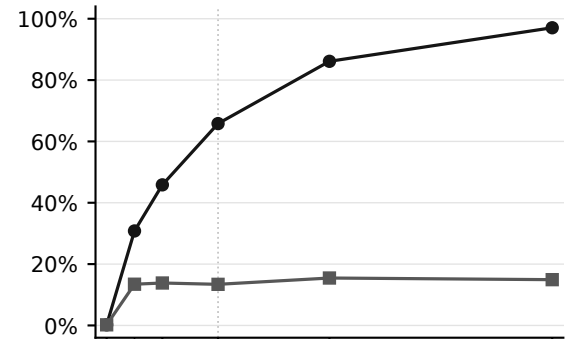

No nominal q is drawn: dependency failures or unobserved context-dependent repair times prevent that comparison.


All ratios pool 30 seeds. Aggregate inputs do not identify ratio intervals. Completed attempts are selected by the queue and cutoff.

μ is nominal; the vertical line marks waiting time $1/\mu$. Windows are fixed per p ; no uncensored mean or dispatch distribution is inferred.


F3 Completed-attempt failures and finite-window outcomes 4 agents; dependency 0; avoidance 0; fixed repair clock

● Read at dispatch --- First-order (dispatch) ■ Re-read at repair start --- First-order (start)








$p = 0.003435$ (4-line edits)

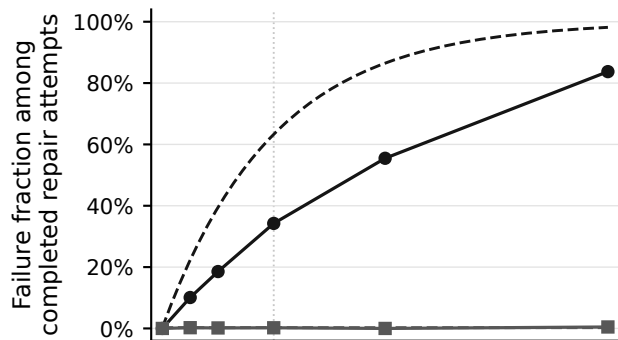

$p = 0.01556$ (16-line edits)

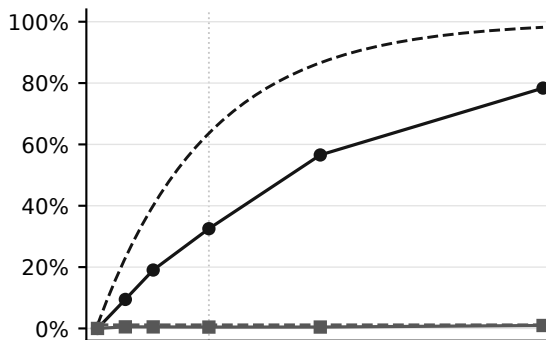

$p = 0.06872$ (64-line edits)

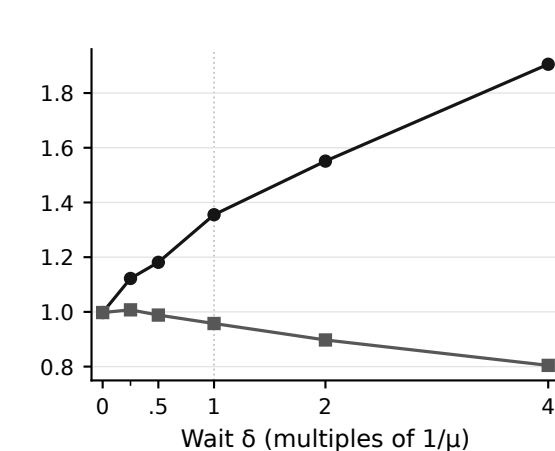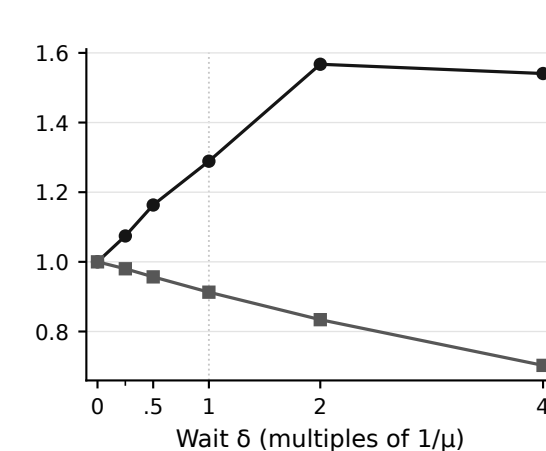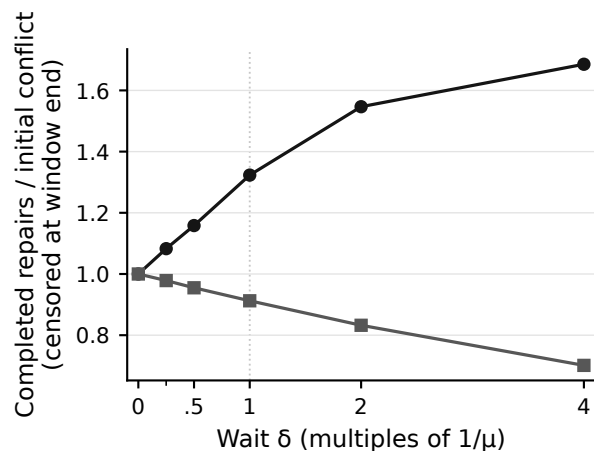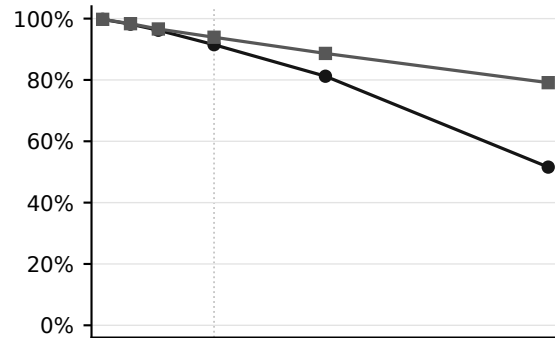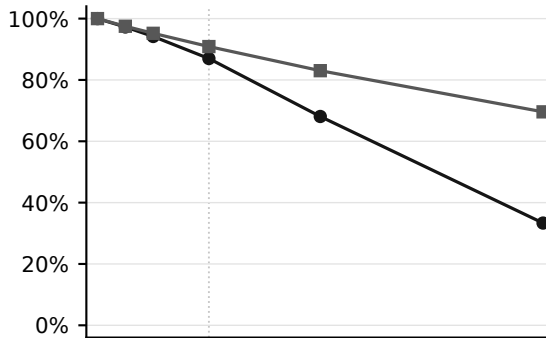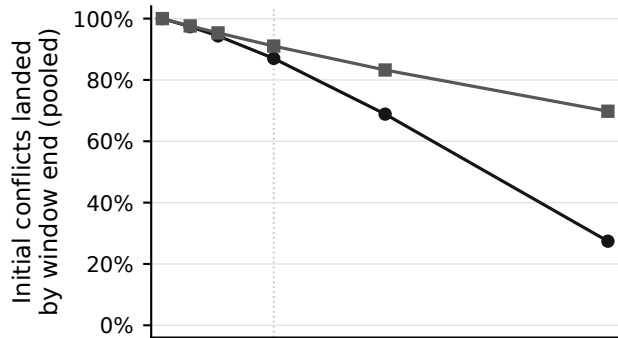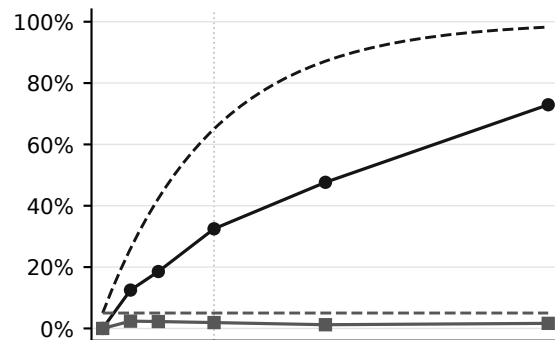

First-order $q = 1 - \exp(-\mu E)$: dispatch uses $E = \delta + R$; re-reading uses $E = R = 0.25$. At $\delta = 0$ both use $E = R$.


All ratios pool 30 seeds. Aggregate inputs do not identify ratio intervals. Completed attempts are selected by the queue and cutoff.

μ is nominal; the vertical line marks waiting time $1/\mu$. Windows are fixed per p ; no uncensored mean or dispatch distribution is inferred.


F3 Completed-attempt failures and finite-window outcomes 4 agents; dependency 0; avoidance 0; context repair clock

● Read at dispatch ■ Re-read at repair start








$p = 0.003435$ (4-line edits)

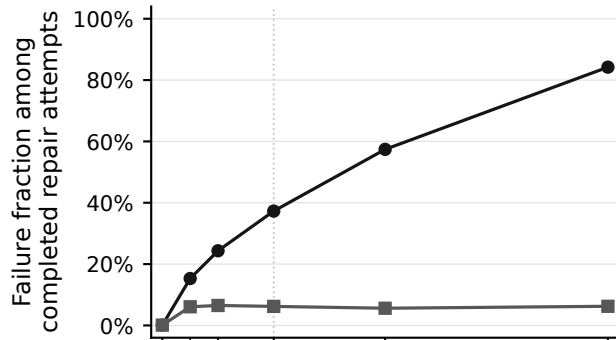

$p = 0.01556$ (16-line edits)

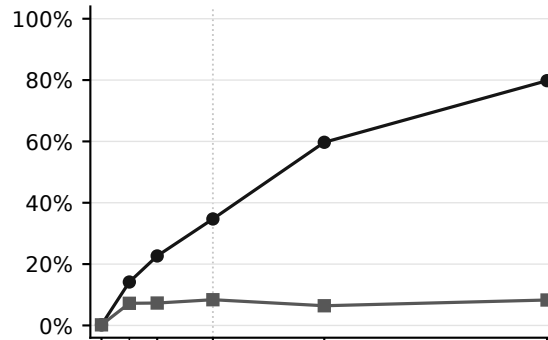

$p = 0.06872$ (64-line edits)

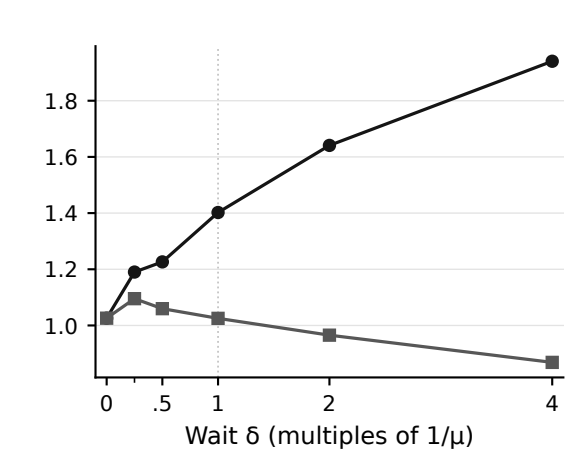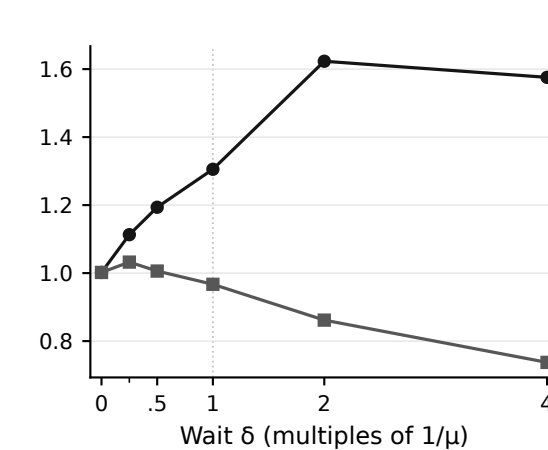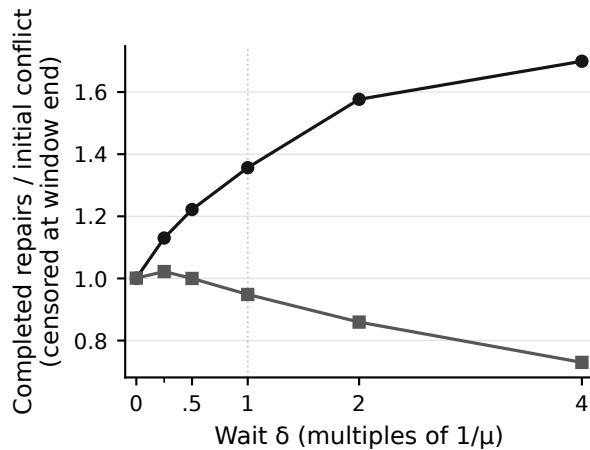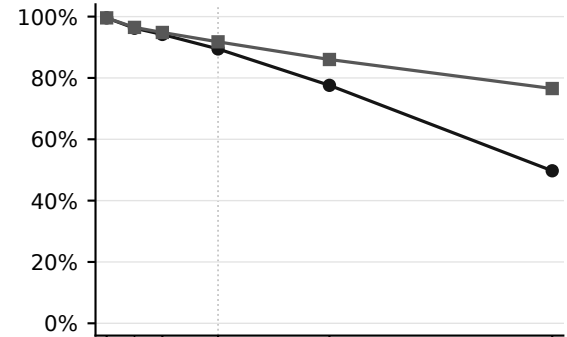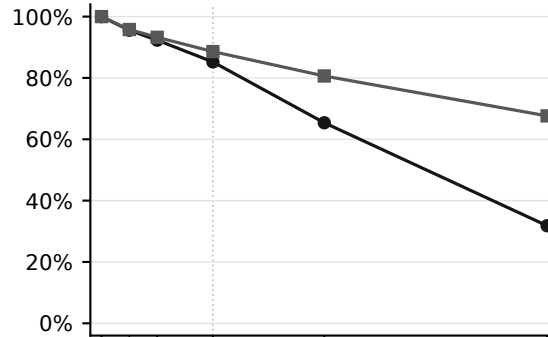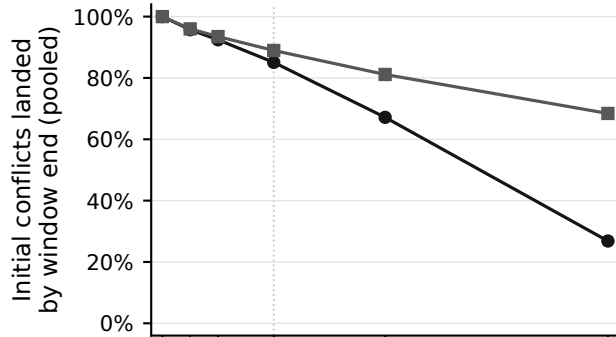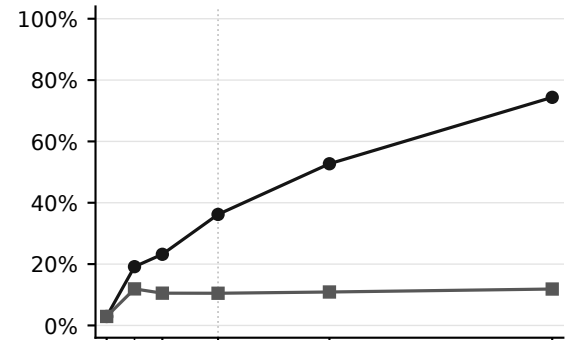

No nominal q is drawn: dependency failures or unobserved context-dependent repair times prevent that comparison.


All ratios pool 30 seeds. Aggregate inputs do not identify ratio intervals. Completed attempts are selected by the queue and cutoff.

μ is nominal; the vertical line marks waiting time $1/\mu$. Windows are fixed per p ; no uncensored mean or dispatch distribution is inferred.


F3 Completed-attempt failures and finite-window outcomes 8 agents; dependency 0; avoidance 0; fixed repair clock

● Read at dispatch --- First-order (dispatch) ■ Re-read at repair start --- First-order (start)








$p = 0.003435$ (4-line edits)

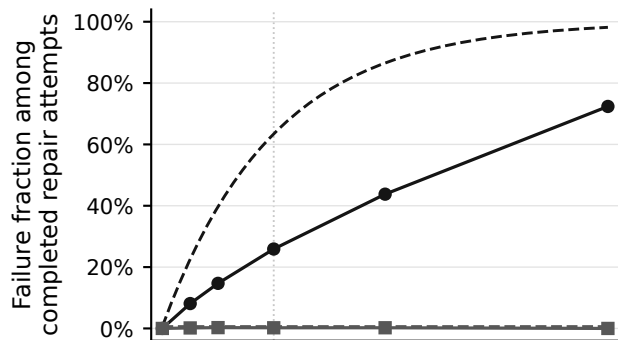

$p = 0.01556$ (16-line edits)

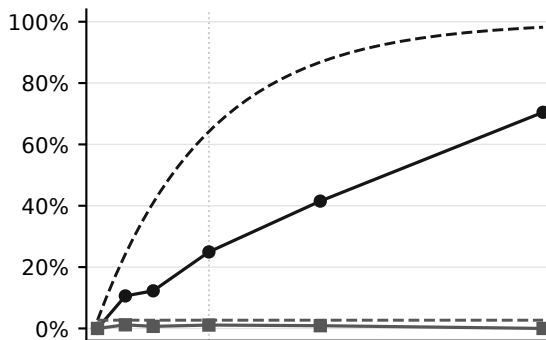

$p = 0.06872$ (64-line edits)

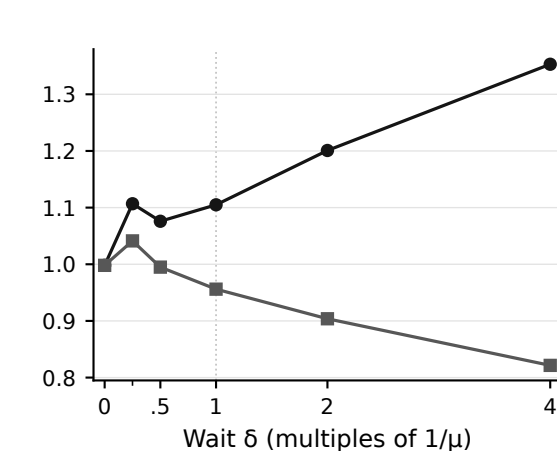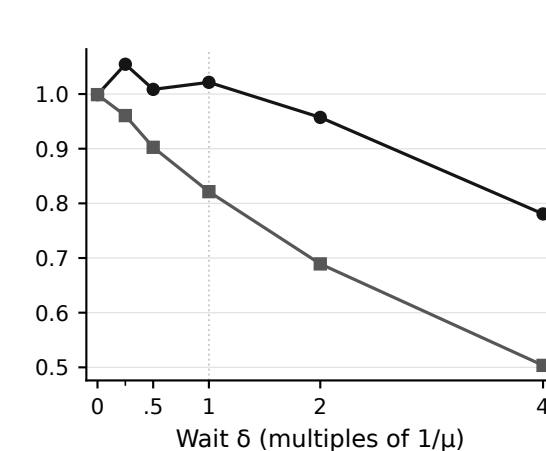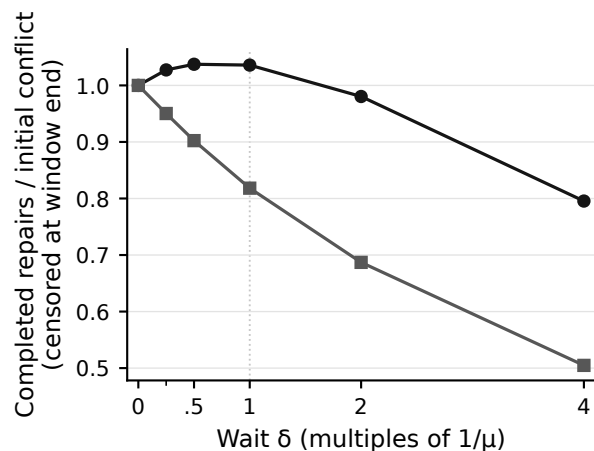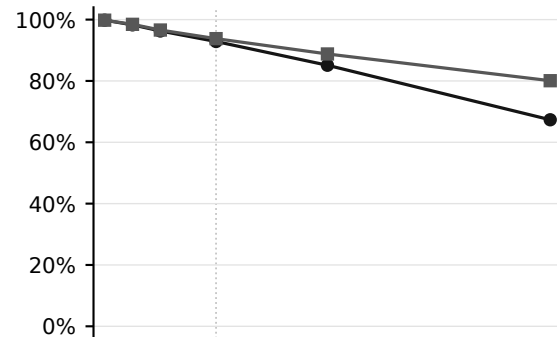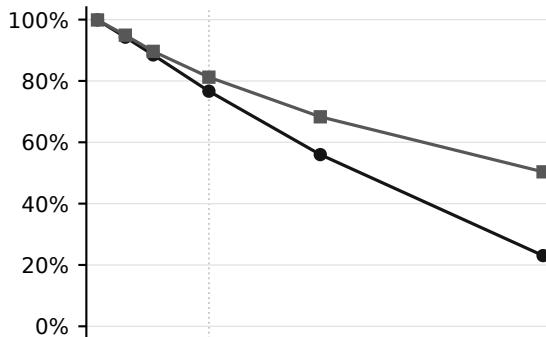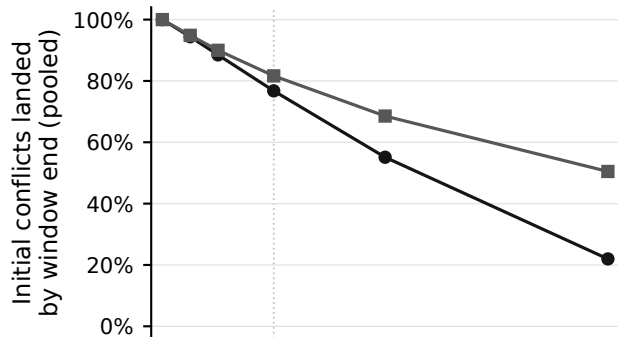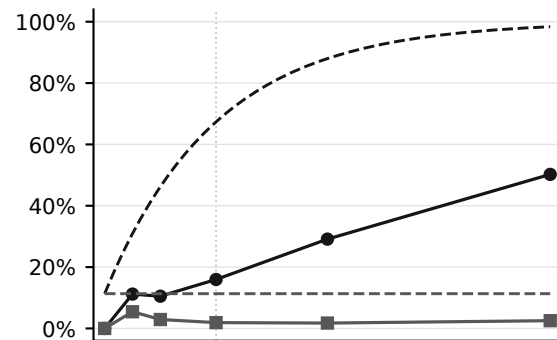

First-order $q = 1 - \exp(-\mu E)$: dispatch uses $E = \delta + R$; re-reading uses $E = R = 0.25$. At $\delta = 0$ both use $E = R$.


All ratios pool 30 seeds. Aggregate inputs do not identify ratio intervals. Completed attempts are selected by the queue and cutoff.

μ is nominal; the vertical line marks waiting time $1/\mu$. Windows are fixed per p ; no uncensored mean or dispatch distribution is inferred.


F3 Completed-attempt failures and finite-window outcomes 8 agents; dependency 0; avoidance 0; context repair clock

● Read at dispatch ■ Re-read at repair start








$p = 0.003435$ (4-line edits)

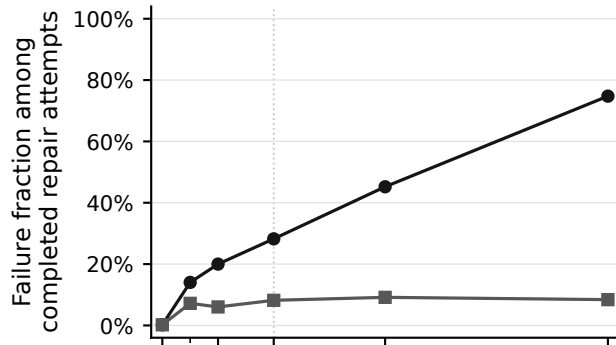

$p = 0.01556$ (16-line edits)

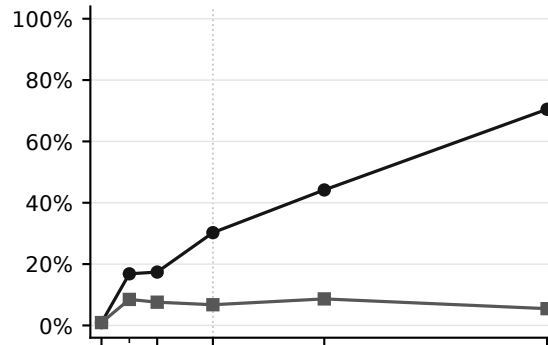

$p = 0.06872$ (64-line edits)

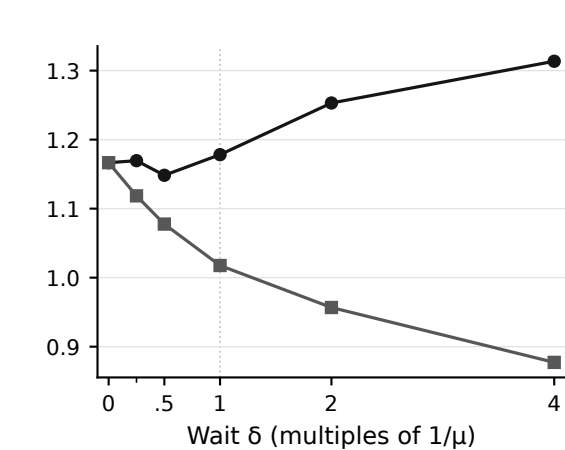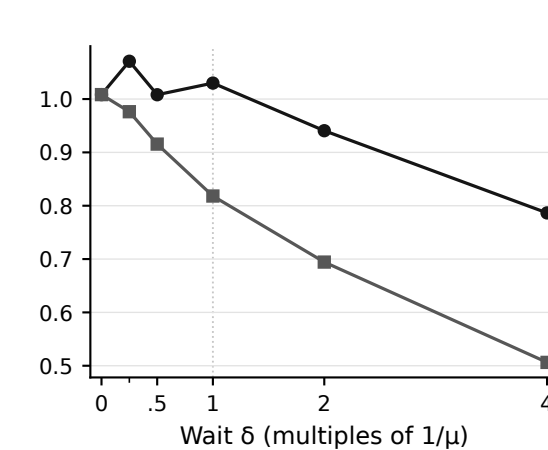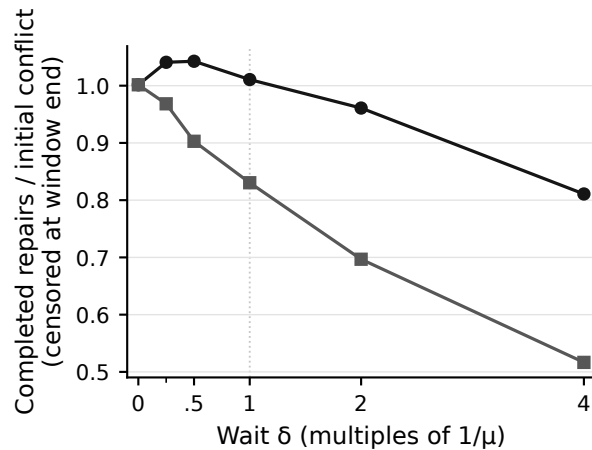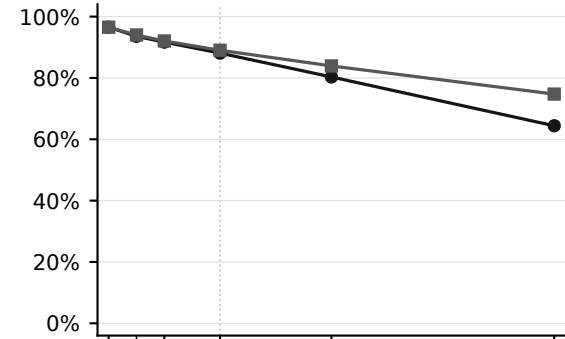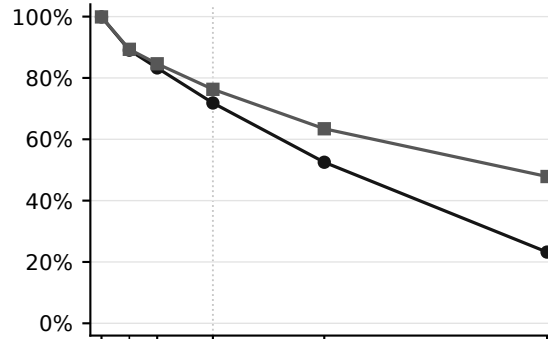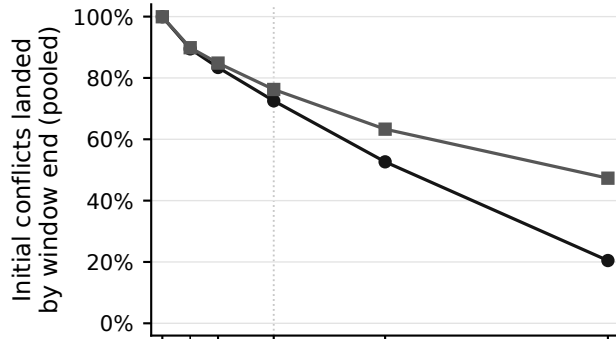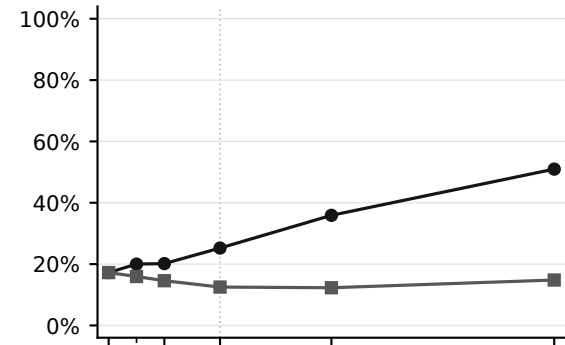

No nominal q is drawn: dependency failures or unobserved context-dependent repair times prevent that comparison.

All ratios pool 30 seeds. Aggregate inputs do not identify ratio intervals. Completed attempts are selected by the queue and cutoff.


μ is nominal; the vertical line marks waiting time $1/\mu$. Windows are fixed per p ; no uncensored mean or dispatch distribution is inferred.

F3 Completed-attempt failures and finite-window outcomes


4 agents; dependency 0.1; avoidance 0; fixed repair clock

● Read at dispatch ■ Re-read at repair start








p = 0.003435 (4-line edits)

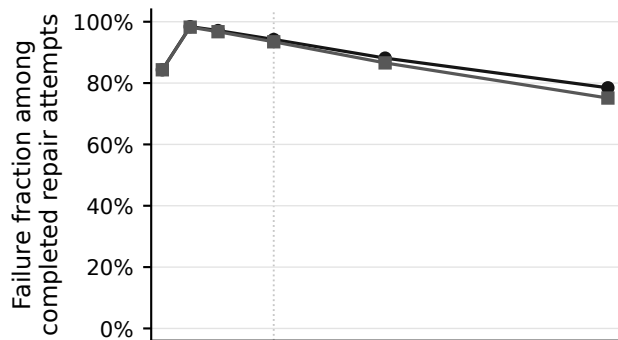

p = 0.01556 (16-line edits)

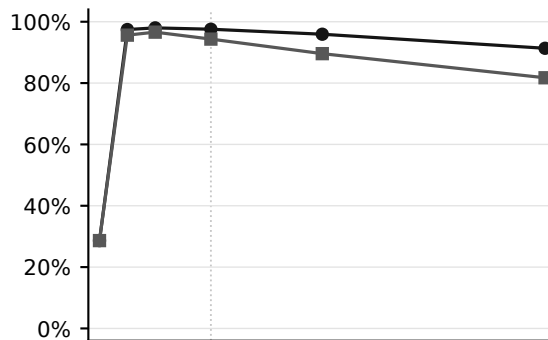

p = 0.06872 (64-line edits)

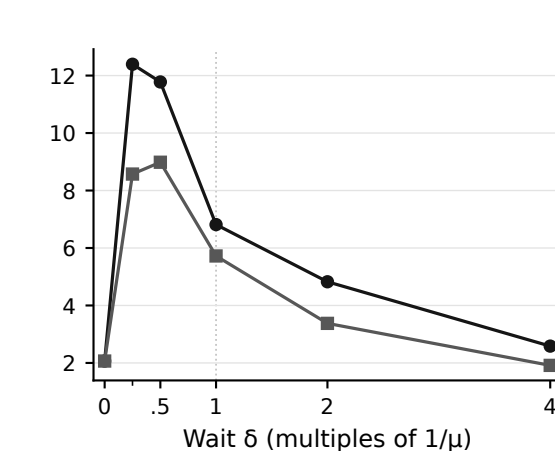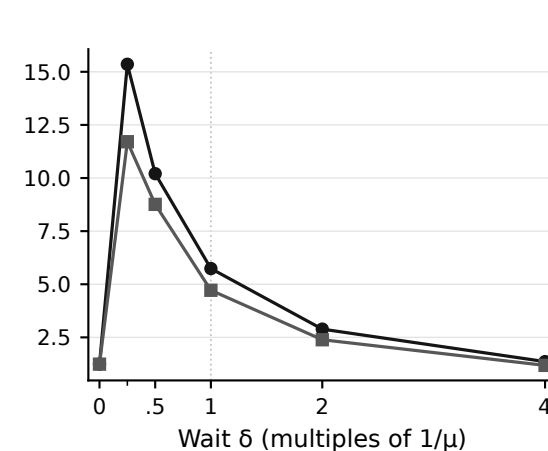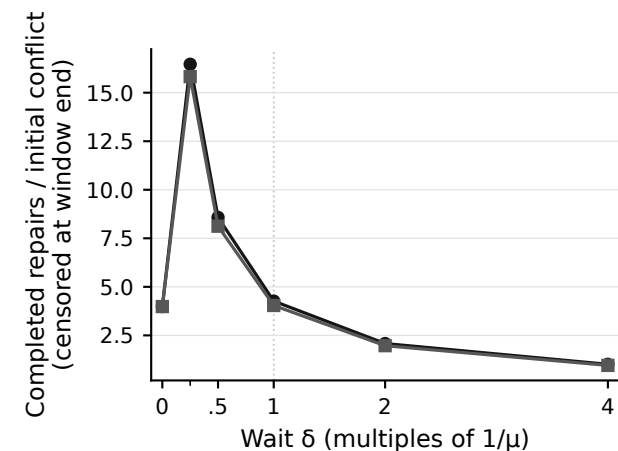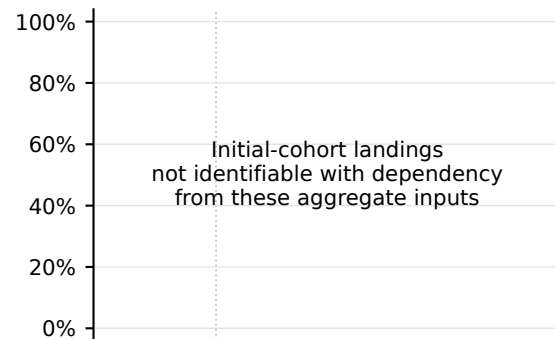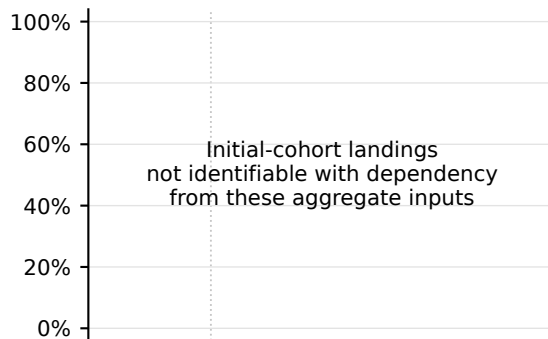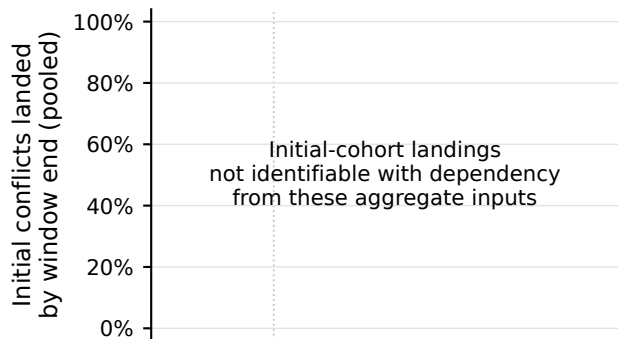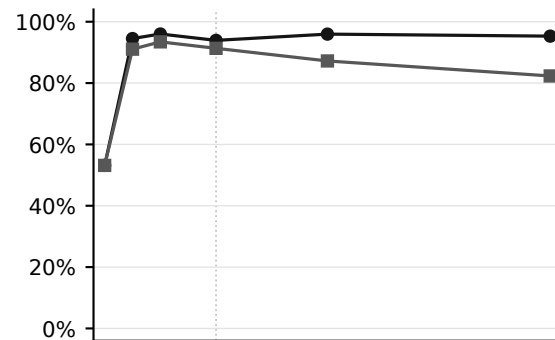

No nominal q is drawn: dependency failures or unobserved context-dependent repair times prevent that comparison.


All ratios pool 30 seeds. Aggregate inputs do not identify ratio intervals. Completed attempts are selected by the queue and cutoff.

μ is nominal; the vertical line marks waiting time $1/\mu$. Windows are fixed per p; no uncensored mean or dispatch distribution is inferred.


F3 Completed-attempt failures and finite-window outcomes 4 agents; dependency 0.1; avoidance 0; context repair clock

● Read at dispatch ■ Re-read at repair start








p = 0.003435 (4-line edits)

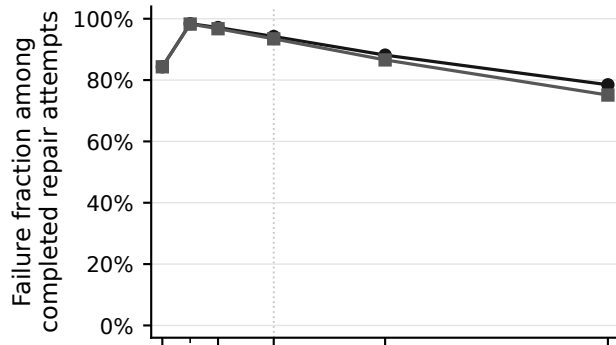

p = 0.01556 (16-line edits)

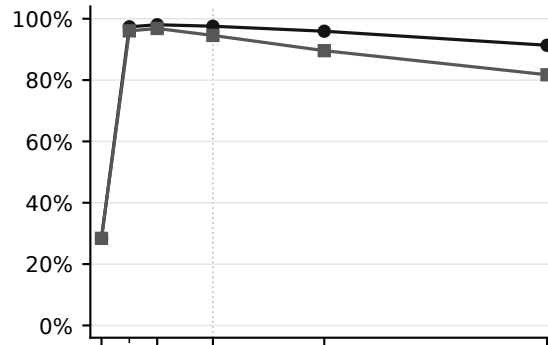

p = 0.06872 (64-line edits)

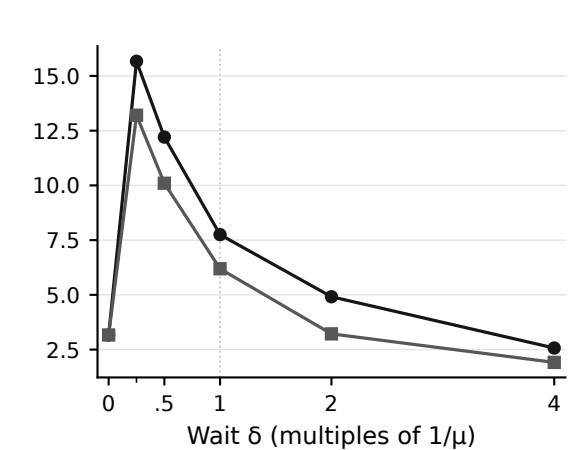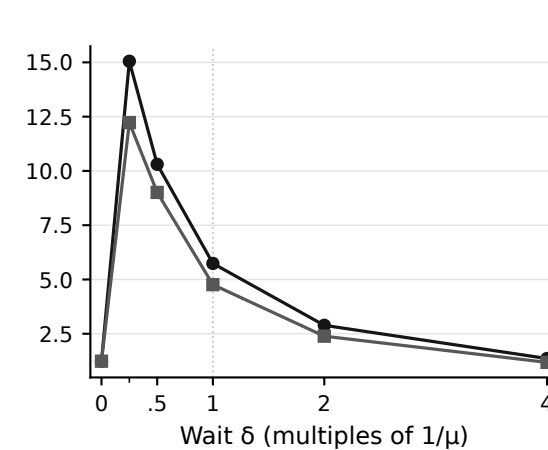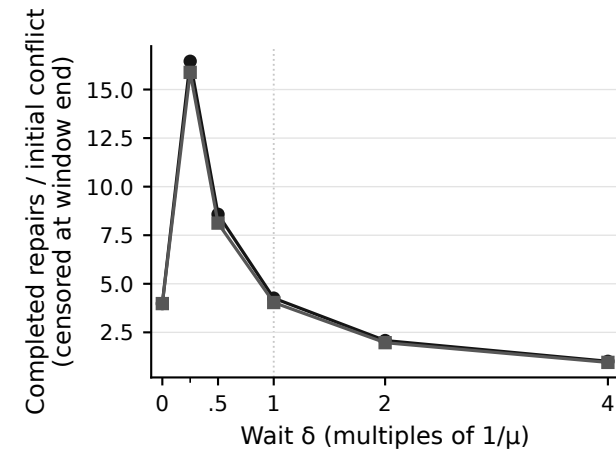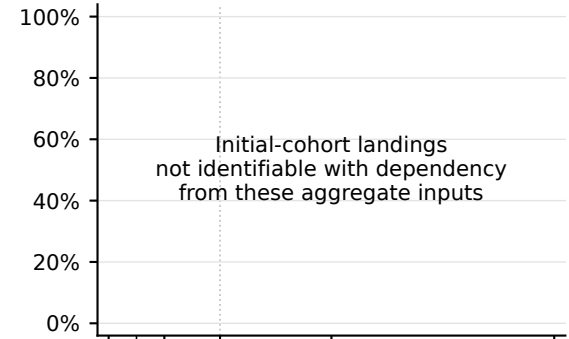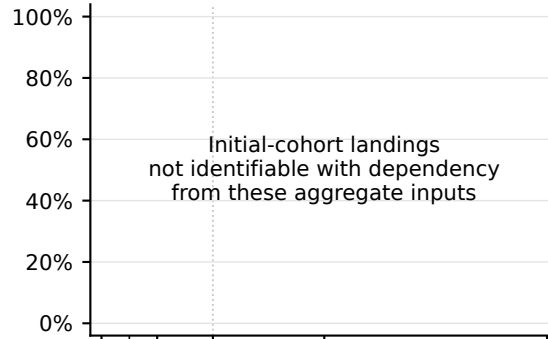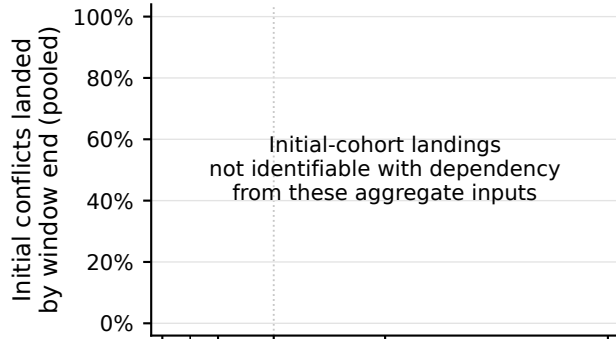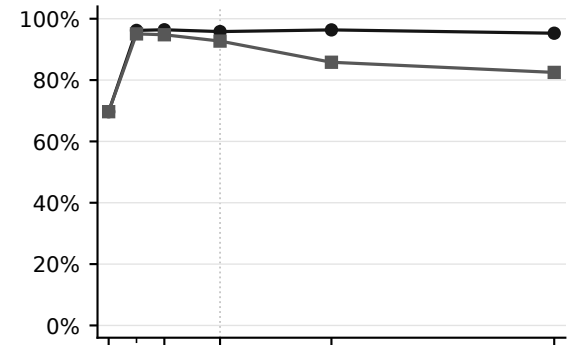

No nominal q is drawn: dependency failures or unobserved context-dependent repair times prevent that comparison.


All ratios pool 30 seeds. Aggregate inputs do not identify ratio intervals. Completed attempts are selected by the queue and cutoff.

μ is nominal; the vertical line marks waiting time $1/\mu$. Windows are fixed per p ; no uncensored mean or dispatch distribution is inferred.


F3 Completed-attempt failures and finite-window outcomes 4 agents; dependency 0.1; avoidance 0.5; fixed repair clock

● Read at dispatch ■ Re-read at repair start








$p = 0.003435$ (4-line edits)

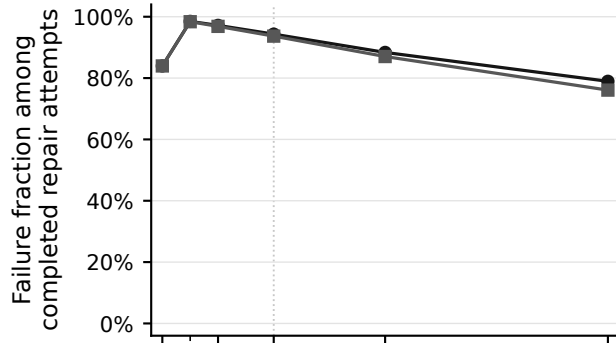

$p = 0.01556$ (16-line edits)

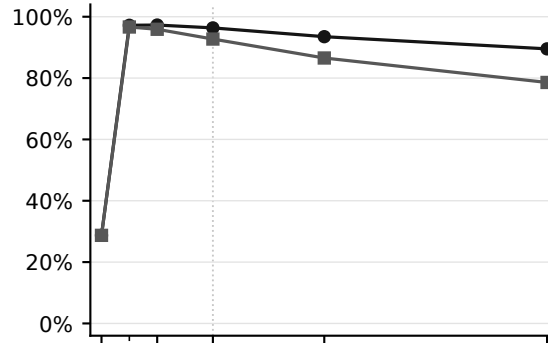

$p = 0.06872$ (64-line edits)

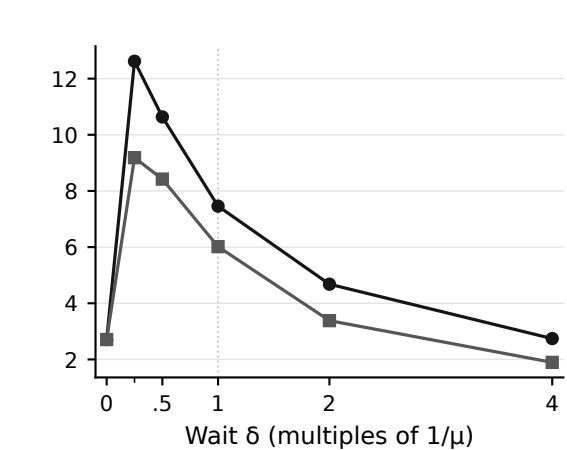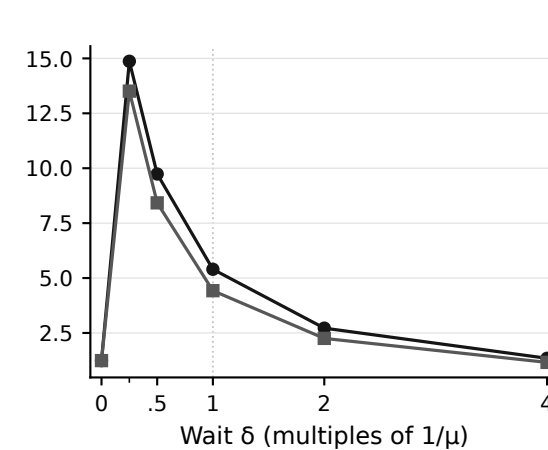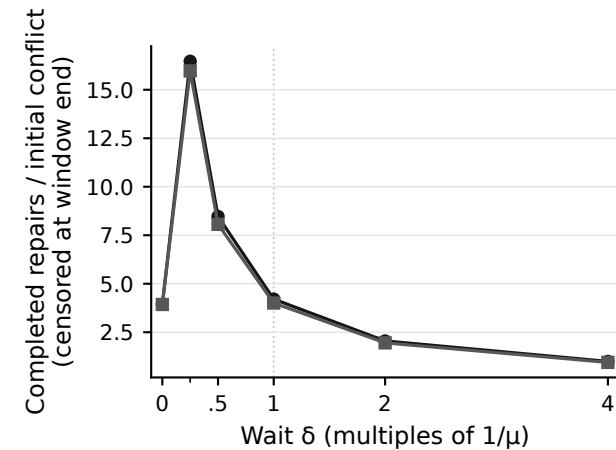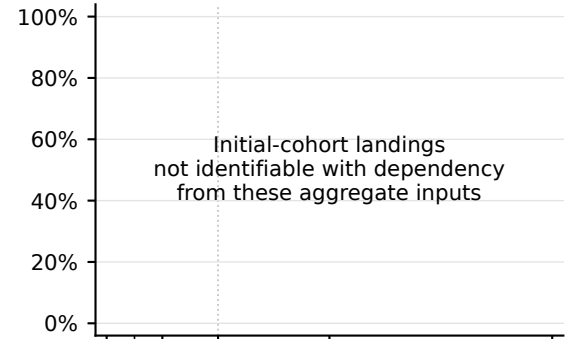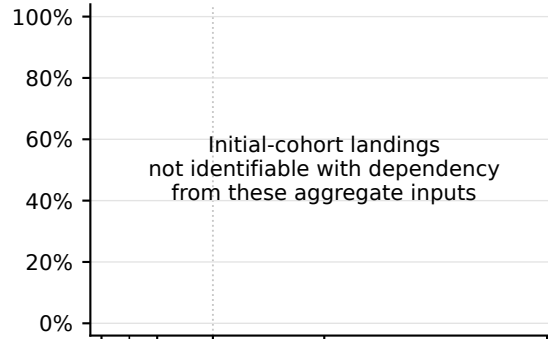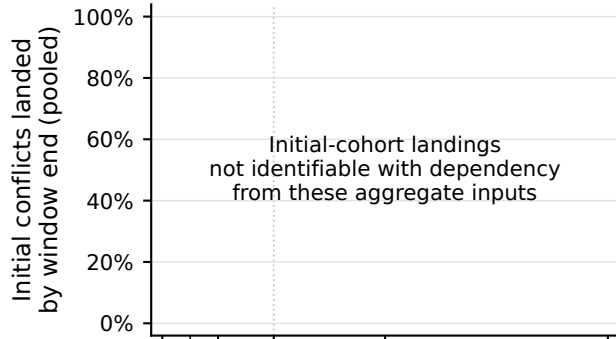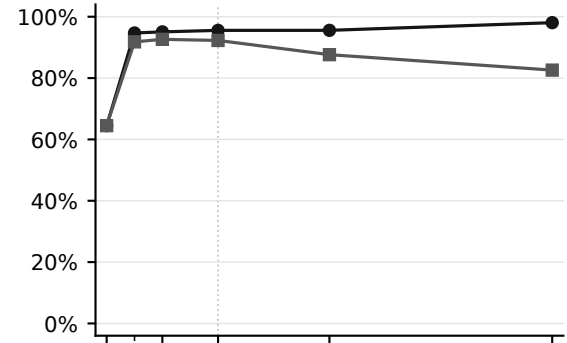

No nominal q is drawn: dependency failures or unobserved context-dependent repair times prevent that comparison.


All ratios pool 30 seeds. Aggregate inputs do not identify ratio intervals. Completed attempts are selected by the queue and cutoff.

μ is nominal; the vertical line marks waiting time $1/\mu$. Windows are fixed per p ; no uncensored mean or dispatch distribution is inferred.


F3 Completed-attempt failures and finite-window outcomes 4 agents; dependency 0.1; avoidance 0.5; context repair clock

● Read at dispatch ■ Re-read at repair start








$p = 0.003435$ (4-line edits)

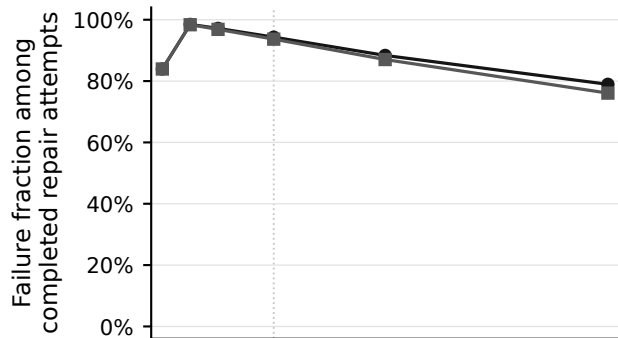

$p = 0.01556$ (16-line edits)

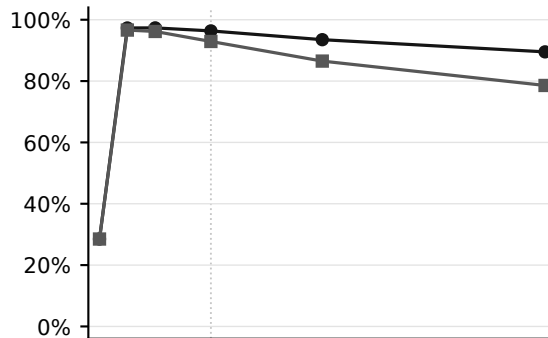

$p = 0.06872$ (64-line edits)

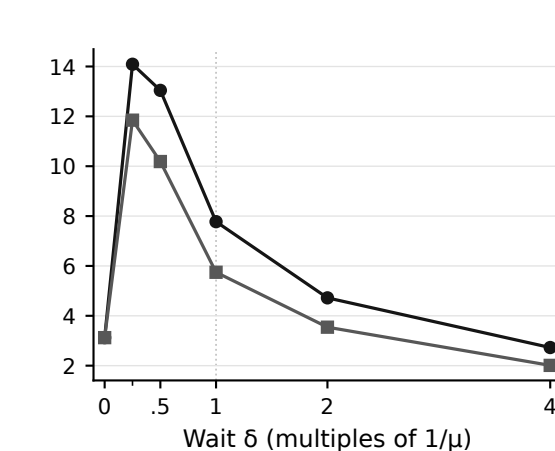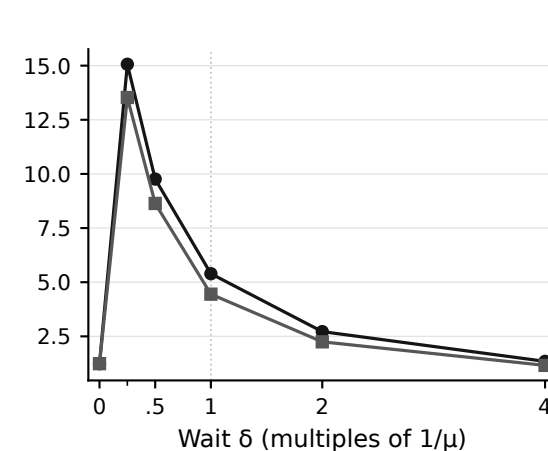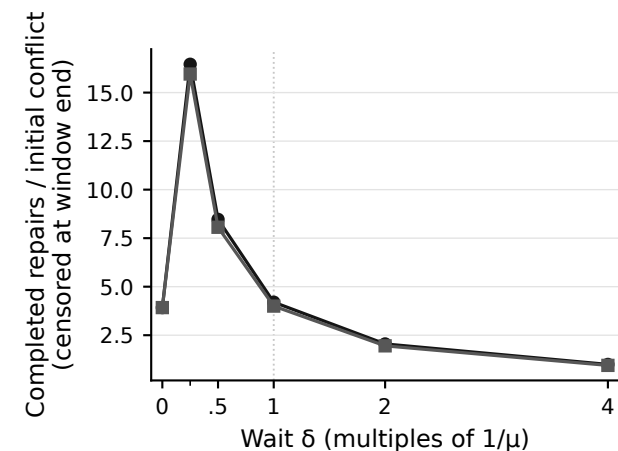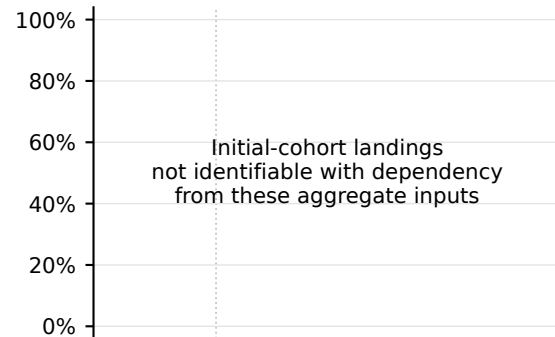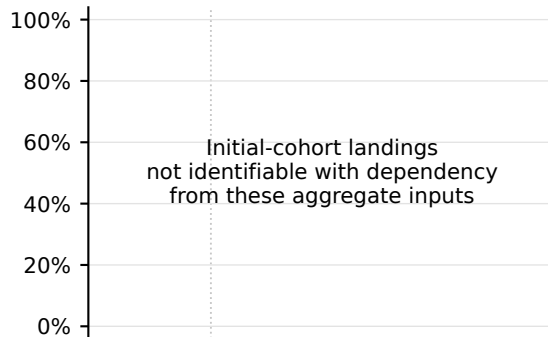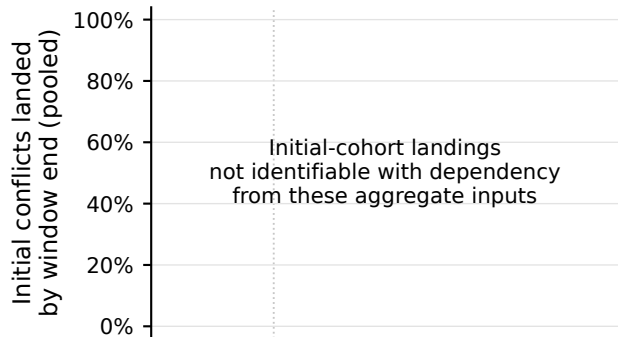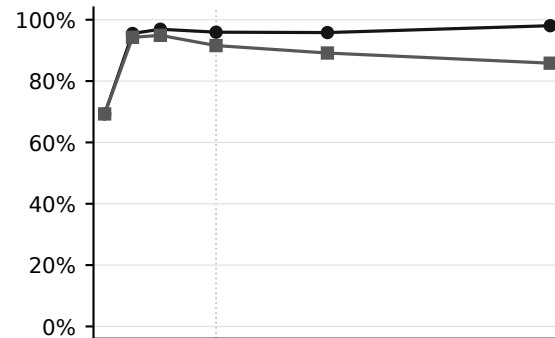

No nominal q is drawn: dependency failures or unobserved context-dependent repair times prevent that comparison.

All ratios pool 30 seeds. Aggregate inputs do not identify ratio intervals. Completed attempts are selected by the queue and cutoff.

μ is nominal; the vertical line marks waiting time $1/\mu$. Windows are fixed per p ; no uncensored mean or dispatch distribution is inferred.