

МИНИСТЕРСТВО НАУКИ И ВЫСШЕГО ОБРАЗОВАНИЯ РФ
Федеральное государственное автономное
образовательное учреждение высшего образования
«МОСКОВСКИЙ ПОЛИТЕХНИЧЕСКИЙ УНИВЕРСИТЕТ»

Лабораторная работа 5
по дисциплине
«Автоматизация процессов жизненного цикла программных средств»

Выполнил:
ст. гр. 2xx-3xx
Иванов И. И.
Проверил:
Красников А. С.

Москва – 2024

План выполнения лабораторной работы

Загрузим файлы проекта на гит:

```
zaa201-331@alicia:/home$ sudo git clone https://github.com/igorshurub/elya_igor_alex.git
[sudo] пароль для zaa201-331:
Клонирование в «elya_igor_alex»...
remote: Enumerating objects: 150, done.
remote: Counting objects: 100% (80/80), done.
remote: Compressing objects: 100% (62/62), done.
remote: Total 150 (delta 21), reused 54 (delta 16), pack-reused 70
Получение объектов: 100% (150/150), 50.34 Миб | 609.00 КиБ/с, готово.
Определение изменений: 100% (40/40), готово.

sis201331@sis201331-VirtualBox:/home/git/elya_igor_alex$ git config --global --add safe.directory
/home/git/elya_igor_alex
sis201331@sis201331-VirtualBox:/home/git/elya_igor_alex$ git remote -v
origin https://github.com/igorshurub/elya_igor_alex (fetch)
origin https://github.com/igorshurub/elya_igor_alex (push)
sis201331@sis201331-VirtualBox:/home/git/elya_igor_alex$ git add .
fatal: Не удалось создать «/home/git/elya_igor_alex/.git/index.lock»: Отказано в доступе
sis201331@sis201331-VirtualBox:/home/git/elya_igor_alex$ sudo git add .

sis201331@sis201331-VirtualBox:/home/git/elya_igor_alex$ git config user.email "zaza3000zaza3000@mail.ru"
error: could not lock config file .git/config: Отказано в доступе
sis201331@sis201331-VirtualBox:/home/git/elya_igor_alex$ sudo git config user.email "zaza3000zaza3000@mail.ru"
sis201331@sis201331-VirtualBox:/home/git/elya_igor_alex$ sudo git config user.name "Igor Shurub"
sis201331@sis201331-VirtualBox:/home/git/elya_igor_alex$ sudo git commit -m "Commit"
[main 61c5375] Commit
 50 files changed, 6697 insertions(+)
 create mode 100644 medhelper_new/Resourses.qrc
 create mode 100644 medhelper_new/biba/abstract-colors-unreal-clouds.jpg
 create mode 100644 medhelper_new/biba/cure.jpg
 create mode 100644 medhelper_new/biba/fon.jpg
 create mode 100644 medhelper_new/database.cpp
 create mode 100644 medhelper_new/database.h
 create mode 100644 medhelper_new/dialog_login.cpp
 create mode 100644 medhelper_new/dialog_login.h
 create mode 100644 medhelper_new/dialog_login.ui
 create mode 100644 medhelper_new/doctor_call.cpp
 create mode 100644 medhelper_new/doctor_call.h
sis201331@sis201331-VirtualBox:/home/git/elya_igor_alex$ sudo git push -u origin main
Username for 'https://github.com': igorshurub
Password for 'https://igorshurub@github.com':
Перечисление объектов: 55, готово.
Подсчет объектов: 100% (55/55), готово.
Сжатие объектов: 100% (54/54), готово.
Запись объектов: 100% (54/54), 9.32 Миб | 2.39 Миб/с, готово.
Всего 54 (изменений 16), повторно использовано 0 (изменений 0), повторно использовано пакетов 0
remote: Resolving deltas: 100% (16/16), done.
To https://github.com/igorshurub/elya_igor_alex
 fd70d14..61c5375 main -> main
Ветка «main» отслеживает внешнюю ветку «main» из «origin».
sis201331@sis201331-VirtualBox:/home/git/elya_igor_alex$
```

1. Добавить к созданным в ходе ЛР4 шагам шаги, осуществляющие развертывание приложения на stage-сервере из образа, загруженного в Docker Hub вместе с базой данных (либо иным сторонним сервисом, добавленным в docker-compose.yaml в ходе ЛР3). Состав шагов и их наполнение выбираются студентом в зависимости от выбранного типа приложения.

Поменяем Dockerfile:

```
12 lines (12 sloc) | 278 Bytes
1 FROM ubuntu:20.04
2 RUN apt update
3 RUN apt install qt5-qmake -y
4 RUN apt install cmake -y
5 RUN apt-get install qt5-default -y
6 RUN apt install build-essential -y
7 COPY . /home/server
8 WORKDIR /home/server/untitled9
9 RUN qmake untitled9.pro
10 RUN make
11 RUN make install
12 CMD ["/untitled9"]
```

Подправим предыдущие шаги:

Build Step (1 of 3): Docker build |

+ Add build step »

Runner type:

Docker

Runner for Docker commands

Step name:

Docker build

Optional, specify to distinguish this build step from other steps.

Execute step: ?

If all previous steps finished successfully

Add condition ▾ ?

Docker command:

☒ build ☐ push ☐ other...

Docker Command Parameters

Dockerfile source: ?

File ▾

Path to file: *

Dockerfile

The specified path should be relative to the checkout directory.

Context folder:

.

If blank, the folder containing the Dockerfile will be used. Use "." to set to the checkout directory path.

Image platform:

<Any> ▾

Allows to choose compatible agents with a specific docker image OS platform.

Image name:tag

photolife/medhelper:latest

Newline-separated list of the image name:tag(s).

Additional arguments for the command:

--pull

Additional arguments that will be passed to the docker command.

Hide advanced options

Build Step (2 of 3): Docker push

Runner type:

Docker

Runner for Docker commands

Step name:

Docker push

Optional, specify to distinguish this build step from other steps.

Execute step: ?

If all previous steps finished successfully

Add condition

?

Docker command:

☐ build ☒ push ☐ other...

Docker Command Parameters

Remove image from agent after push

☒ If selected, TeamCity will remove image with `docker rmi` at the end of the step

Image name:tag *

photolife/medhelper:latest

Newline-separated list of the image name:tag(s).

Additional arguments for the command:

Additional arguments that will be passed to the docker command.

 Hide advanced options

Save

Cancel

Настроим stage-образ:

```
zaa201-331@alicia:~$ sudo systemctl status sshd
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/lib/systemd/system/ssh.service; enabled; vendor preset: enabled)
   Active: active (running) since Tue 2022-10-25 18:53:24 MSK; 3 days ago
     Docs: man:sshd(8)
           man:sshd_config(5)
  Main PID: 6423 (sshd)
    Tasks: 1 (limit: 5684)
   Memory: 1.7M
      CPU: 20ms
   CGroup: /system.slice/ssh.service
           └─6423 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

окт 25 18:53:24 alicia systemd[1]: Starting OpenBSD Secure Shell server...
окт 25 18:53:24 alicia sshd[6423]: Server listening on 0.0.0.0 port 22.
окт 25 18:53:24 alicia sshd[6423]: Server listening on :: port 22.
окт 25 18:53:24 alicia systemd[1]: Started OpenBSD Secure Shell server.

zaa201-331@alicia:/home$ sudo mkdir auto-server
[sudo] пароль для zaa201-331:
zaa201-331@alicia:/home$

zaa201-331@alicia:/home$ cd /home/auto-server
zaa201-331@alicia:/home/auto-server$ ls
docker-compose.yaml
```

```
GNU nano 6.2                                docker-compose.yaml
Version: '3'

services:
  sqlite3: #Имя сервиса
    stdin_open: true
    tty: true
    image: keinos/sqlite3 #образ из которого запускается контейнер
    restart: unless-stopped
  server:
    container_name: server_new
    hostname: server
    image: photolife/medhelper
    # build:
    #   context: /home/server
    #   dockerfile: Dockerfile
    ports:
      - 33333:33333
    # volumes:
    #   - ./volume:/home/server/
    restart: always
    depends_on:
      - sqlite3
```

Добавим новый шаг:

Build Step (3 of 3): Connect SSH | ▾

Runner type:	SSH Exec ▾ Runner able to execute commands over SSH
Step name:	Connect SSH Optional, specify to distinguish this build step from other steps.
Execute step: ?	If all previous steps finished successfully ▾ Add condition ▾ ?
Deployment Target	
Target: *	192.168.31.4 Enter hostname or IP address
Port:	22 Optional. Default value: 22
Use pty:	☐ Optional. By default a pty will not be allocated
Deployment Credentials	
Authentication method:	Password ▾
Username: *	zaa201-331 Enter username
Password:	 Enter password
SSH Commands	
Commands: *	Enter remote commands: cd /home/auto-server docker pull photolife/medhelper docker compose up -d Enter newline delimited set of commands to run

Получившиеся шаги:

Build Steps

In this section you can configure the sequence of build steps to be executed. Each build step is represented by a build runner and provides integration with a specific build or test tool. [?](#)

+ Add build step

Reorder build steps


✎ Auto-detect build steps

Build Step	Parameters Description	
1. Docker build	Docker Docker build; Dockerfile location: Dockerfile ; context directory: . Execute: If all previous steps finished successfully	Edit
2. Docker push	Docker docker push photolife/medhelper:latest; remove image(s) after push Execute: If all previous steps finished successfully	Edit
3. Connect SSH	SSH Exec Target: 192.168.31.4 Port: 22 Commands: cd /home/auto-server docker pull photolife/medhelper docker compose up -d Execute: If all previous steps finished successfully	Edit

2. Развернуть на test-стенде образ jetbrains/teamcity-agent, настроить его для работы с уже запущенным сервером

```
zaa201-331@alicia:~$ sudo docker pull jetbrains/teamcity-agent
[sudo] пароль для zaa201-331:
Using default tag: latest
latest: Pulling from jetbrains/teamcity-agent
675920708c8b: Already exists
7bd5b8fb4890: Pull complete
0d8218547927: Pull complete
f76c285dfc76: Pull complete
bf9e6eff2113: Pull complete
135694447b31: Pull complete
ef6fb3f0ee8e: Pull complete
d298b19e472a: Pull complete
a4ef20f90c7d: Pull complete
85217d5de18a: Pull complete
9409e0abdd98: Pull complete
Digest: sha256:c80947215cef05f9f4545aa1ba8369022c4ae3e69893d4e5c336906691c2c57f
Status: Downloaded newer image for jetbrains/teamcity-agent:latest
docker.io/jetbrains/teamcity-agent:latest
```

```
zaa201-331@alicia:~$ sudo chown -R 1000:1000 /teamcity/agent
```

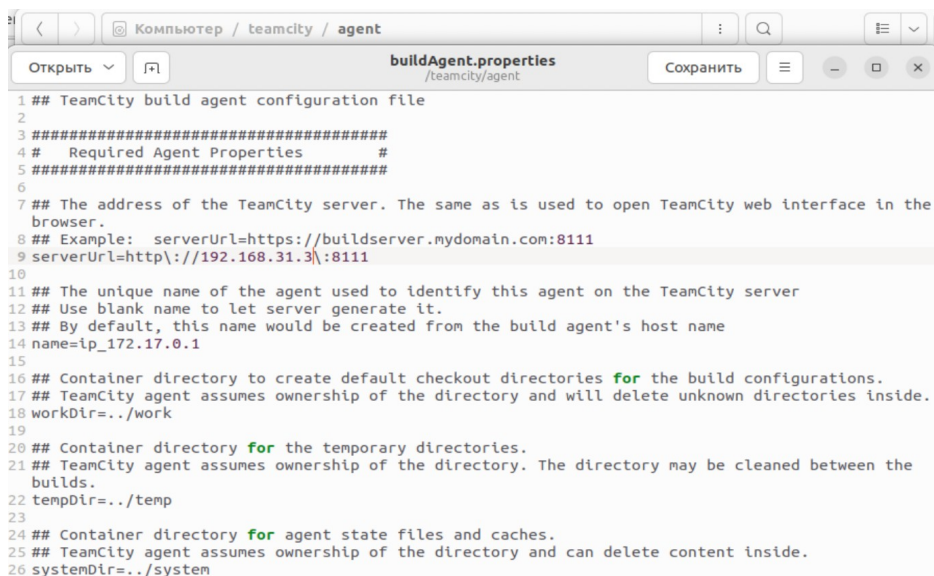

```
1 ## TeamCity build agent configuration file
2
3 #####
4 # Required Agent Properties #
5 #####
6
7 ## The address of the TeamCity server. The same as is used to open TeamCity web interface in the
8 ## browser.
9 ## Example: serverUrl=https://buildserver.mydomain.com:8111
10 serverUrl=http://192.168.31.3:8111
11
12 ## The unique name of the agent used to identify this agent on the TeamCity server
13 ## Use blank name to let server generate it.
14 ## By default, this name would be created from the build agent's host name
15 name=ip_172.17.0.1
16
17 ## Container directory to create default checkout directories for the build configurations.
18 ## TeamCity agent assumes ownership of the directory and will delete unknown directories inside.
19 workDir=./work
20
21 ## Container directory for the temporary directories.
22 ## TeamCity agent assumes ownership of the directory. The directory may be cleaned between the
23 ## builds.
24 tempDir=./temp
25
26 ## Container directory for agent state files and caches.
27 ## TeamCity agent assumes ownership of the directory and can delete content inside.
28 systemDir=./system
```

```

^Czaa201-33i@alicia:~$ docker run -e SERVER_URL="http://192.168.31.3:8111" -u 0 -v /teamcity/agent:/data/teamcity_agent
t/conf -v /var/run/docker.sock:/var/run/docker.sock -v /opt/buildagent/work:/opt/buildagent/work -v /opt/buildagent/te
mp:/opt/buildagent/temp -v /opt/buildagent/tools:/opt/buildagent/tools -v /opt/buildagent/plugins:/opt/buildagent/plug
ins -v /opt/buildagent/system:/opt/buildagent/system jetbrains/teamcity-agent
/run-services.sh
/services/run-docker.sh
/run-agent.sh
File buildAgent.properties was found in /data/teamcity_agent/conf. Will start the agent using it.
Starting TeamCity build agent...
Java executable is found: '/opt/java/openjdk/bin/java'
Starting TeamCity Build Agent Launcher...
Agent home directory is /opt/buildagent
Done [351], see log at /opt/buildagent/logs/teamcity-agent.log
.....

[2022-10-25 17:04:35,766] INFO - s.buildServer.agent.AgentMain2 - =====
=====
[2022-10-25 17:04:35,779] INFO - s.buildServer.agent.AgentMain2 - TeamCity Build Agent 2022.04.4 (build 108763)
[2022-10-25 17:04:35,790] INFO - s.buildServer.agent.AgentMain2 - OS: Linux, version 5.15.0-50-generic, amd64, Curre
nt user: root, Time zone: BST (UTC+01:00)
[2022-10-25 17:04:35,792] INFO - s.buildServer.agent.AgentMain2 - Java: 11.0.15, OpenJDK 64-Bit Server VM (11.0.15+9
-LTS, mixed mode), OpenJDK Runtime Environment (11.0.15+9-LTS), Amazon.com Inc.; JVM parameters: -ea -Xmx384m -Dteamci
ty_logs=../logs/ -Dlog4j2.configurationFile=file:../conf/teamcity-agent-log4j2.xml
[2022-10-25 17:04:35,793] INFO - s.buildServer.agent.AgentMain2 - Agent home is "/opt/buildagent"
[2022-10-25 17:04:35,793] INFO - s.buildServer.agent.AgentMain2 - Starting...
[2022-10-25 17:04:38,654] INFO - jetbrains.buildServer.AGENT - Calculating CPU benchmark index...

[2022-10-25 17:05:19,494] INFO - ldServer.AGENT.PollingProtocol - Start polling server for commands
[2022-10-25 17:05:19,500] INFO - buildServer.AGENT.registration - Registered on server with id 1 and authorization t
oken '0d7420a2a7e40ed8c693ea82e60de6cb'
[2022-10-25 17:05:19,500] INFO - buildServer.AGENT.registration - If this is the first time this agent registered on
the server make sure it is authorized by administrator in the server web UI.
[2022-10-25 17:05:19,510] INFO - r.artifacts.impl.HttpDiskCache - Cleaning up items with life time in cache greater
than 172800 seconds
[2022-10-25 17:05:19,514] INFO - r.artifacts.impl.HttpDiskCache - Finished cleaning up expired items, 0 items remove
d
[2022-10-25 17:05:19,527] INFO - ldServer.AGENT.PollingProtocol - New command is received from server "testLocal" {i
d = 1} (enable debug to see command body)
[2022-10-25 17:05:19,526] INFO - dDirectoryBasedCleanupRegistry - Removing files from /opt/buildagent/temp/.old
[2022-10-25 17:05:19,529] INFO - dDirectoryBasedCleanupRegistry - Removing files from /opt/buildagent/work/.old
[2022-10-25 17:05:19,613] INFO - l.directories.DirectoryMapImpl - Cleaning up old checkout directories. Default life
time = 192 hour(s)
[2022-10-25 17:05:21,528] INFO - jetbrains.buildServer.AGENT - Updating agent parameters on the server: AgentData
ils{Name='ip_172.17.0.1', AgentId=1, BuildId=null, AgentOwnAddress='null', AlternativeAddresses=[], Port=9090, Version
='108763', PluginsVersion='108763-md5-0d4c0bd3a77efc4712410dd56a237184', AvailableRunners=[Ant, cargo-deploy-runner, c
sharpScript, DockerCommand, DockerCompose, dotnet, dotnet-tools-dupfinder, dotnet-tools-inspectcode, Duplicator, ftp-d
eploy-runner, gradle-runner, Inspection, jetbrains_powershell, JPS, kotlinScript, Maven2, nodejs-runner, python-runner
, Qodana, rake-runner, SBT, simpleRunner, smb-deploy-runner, ssh-deploy-runner, ssh-exec-runner], AvailableVcs=[tfs, j
etbrains.git, mercurial, svn, perforce], AuthorizationToken='0d7420a2a7e40ed8c693ea82e60de6cb', PingCode='1gwZ9xu0NpVj
Culw56IQiAsN0S0SNx90'}
[2022-10-25 17:10:19,508] INFO - r.artifacts.impl.HttpDiskCache - Cleaning up items with life time in cache greater
than 172800 seconds
[2022-10-25 17:10:19,509] INFO - r.artifacts.impl.HttpDiskCache - Finished cleaning up expired items, 0 items remove
d
[2022-10-25 17:10:19,512] INFO - dDirectoryBasedCleanupRegistry - Removing files from /opt/buildagent/temp/.old
[2022-10-25 17:10:19,512] INFO - dDirectoryBasedCleanupRegistry - Removing files from /opt/buildagent/work/.old
[2022-10-25 17:10:19,531] INFO - l.directories.DirectoryMapImpl - Cleaning up old checkout directories. Default life
time = 192 hour(s)

```

←

→

↺

localhost:8111/agents.html?tab=unauthorizedAgents

☆

🔍

☰

TC

Projects | ▾

Changes

Agents 0

Queue 4

Administration ? 🔍 AD

Agents

Install Build Agents

Connected 0

Disconnected 0

Unauthorized 1

Pools 1

Parameters Report

Matrix

Statistics

Agent Push


There are 1 currently unauthorized agent. Agent licenses left: 3.

Authorize

🔗 ip_172.17.0.1 Default

Connected

172.17.0.1

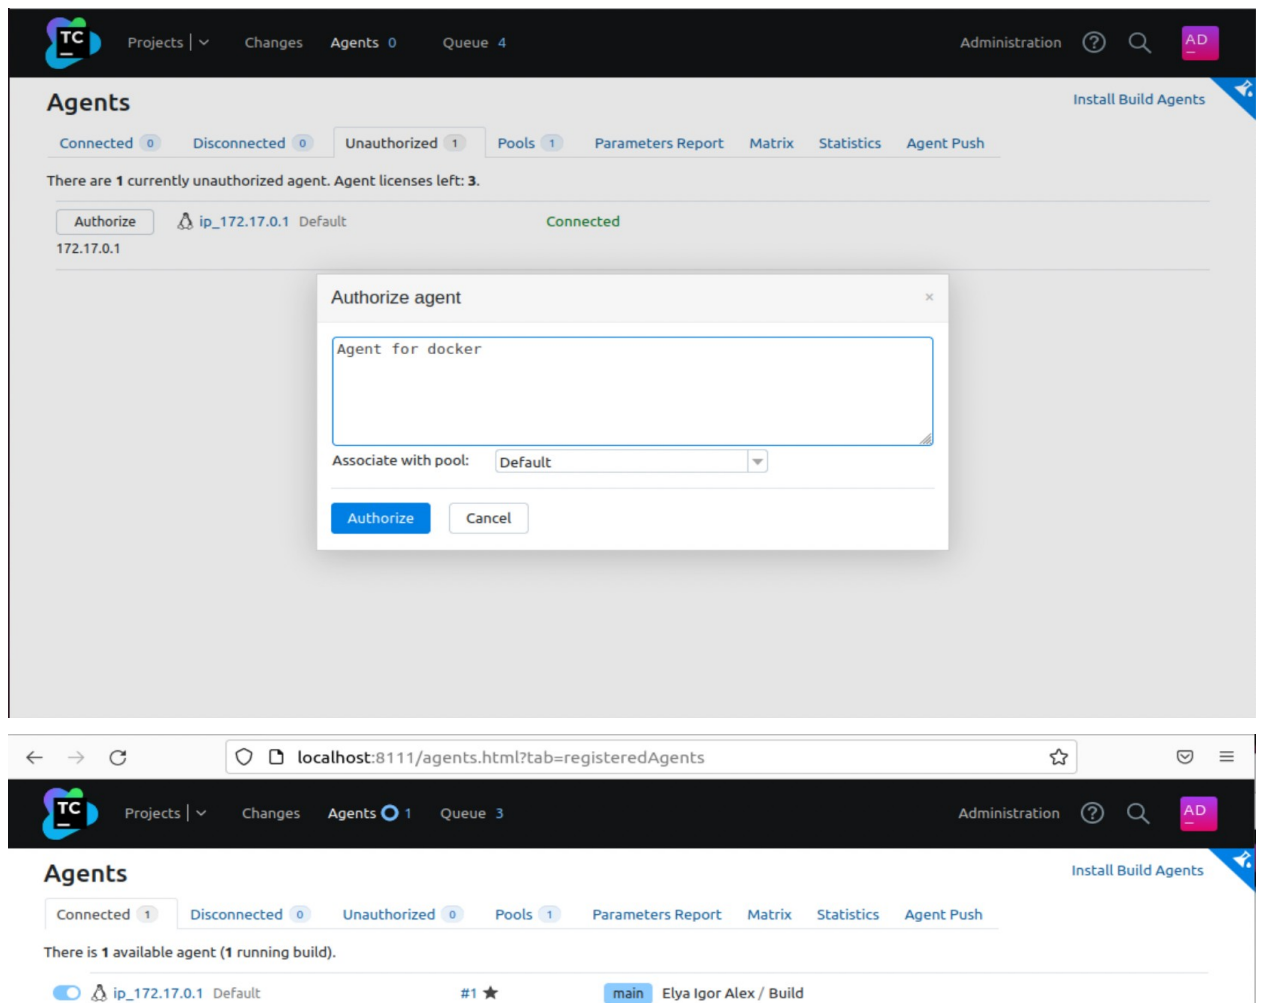

3. Внести в репозиторий какое-либо изменение, касающееся функционала разрабатываемого приложения, в соответствии с требованиями внесения изменений GitFlow, либо другой методологии на выбор студента. В дальнейшем все изменения в код репозитория необходимо вносить согласно выбранной методологии.

```
zaa201-331@alicia:/home/git$ sudo git clone https://github.com/igorshurub/elya_igor_alex.git
[sudo] пароль для zaa201-331:
Клонирование в «elya_igor_alex»...
remote: Enumerating objects: 164, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 164 (delta 0), reused 0 (delta 0), pack-reused 161
Получение объектов: 100% (164/164), 50.34 МиБ | 2.80 МиБ/с, готово.
Определение изменений: 100% (52/52), готово.
zaa201-331@alicia:/home/git$ ls
elya_igor_alex
```

```
zaa201-331@alicia:/home/git$ cd elya_igor_alex
zaa201-331@alicia:/home/git/elya_igor_alex$ ls
Dockerfile  Documets  medhelper_new  README.md  untitled9
zaa201-331@alicia:/home/git/elya_igor_alex$ cd untitled9
zaa201-331@alicia:/home/git/elya_igor_alex/untitled9$ sudo nano mytcpserver.cpp
```

```

qDebug()<<QString::fromStdString(message);
int pos = message.find("&");
message.erase(0,pos+1);

//find login
pos = message.find("&");
log = message.substr(0,pos);
message.erase(0,pos+1);

// find password
pos = message.find("&");
pass = message.substr(0,pos);
message.erase(0,pos+1);

//для работы с PUTTy убираем лишние символы
//pass.pop_back();
//pass.pop_back();

QDebug()<<"login = " <<QString::fromStdString(log)
    <<"password = " <<QString::fromStdString(pass)
    <<"result = " << authorize(log,pass);

array.clear();
array.append(authorize(log,pass));
clientSocket->write(array);
}

//функция отключения клиента, если клиент отключился, выводим сообщение: "Client is disconnected \n"
void MyTcpServer::slotClientDisconnected(){
    QTcpSocket *clientSocket = (QTcpSocket*) sender();
    int id =(int)clientSocket->socketDescriptor();
    clientSocket->close();
    SClients.remove(id);
    qDebug() <<QString::fromUtf8("Client is closed \n");
}

```

```

zaa201-331@alicia:/home/git/elya_igor_alex/untitled9$ sudo git add .
zaa201-331@alicia:/home/git/elya_igor_alex/untitled9$ sudo git config user.email "delfinaz02@icloud.com"
zaa201-331@alicia:/home/git/elya_igor_alex/untitled9$ sudo git config user.name "Alicia Zadneprianskaya"
zaa201-331@alicia:/home/git/elya_igor_alex/untitled9$ sudo git commit -m "Alicia's commit 30.10.22"
[main 1bddc47] Alicia's commit 30.10.22
1 file changed, 1 insertion(+), 1 deletion(-)

```

```

zaa201-331@alicia:/home/git/elya_igor_alex/untitled9$ sudo git branch feature1
zaa201-331@alicia:/home/git/elya_igor_alex/untitled9$ sudo git checkout feature1
Переключено на ветку «feature1»
zaa201-331@alicia:/home/git/elya_igor_alex/untitled9$ sudo git push origin feature1
Username for 'https://github.com': igorshurub
Password for 'https://igorshurub@github.com':
Перечисление объектов: 7, готово.
Подсчет объектов: 100% (7/7), готово.
При сжатии изменений используется до 3 потоков
Сжатие объектов: 100% (3/3), готово.
Запись объектов: 100% (4/4), 379 байтов | 379.00 КиБ/с, готово.
Всего 4 (изменений 3), повторно использовано 1 (изменений 1), повторно использовано пакетов 0
remote: Resolving deltas: 100% (3/3), completed with 3 local objects.
remote:
remote: Create a pull request for 'feature1' on GitHub by visiting:
remote:   https://github.com/igorshurub/elya_igor_alex/pull/new/feature1
remote:
To https://github.com/igorshurub/elya_igor_alex.git
* [new branch]   feature1 -> feature1

```

```

zaa201-331@alicia:/home/git2/elya_igor_alex$ sudo git push origin feature4
Username for 'https://github.com': igorshurub
Password for 'https://igorshurub@github.com':
Перечисление объектов: 583, готово.
Подсчет объектов: 100% (580/580), готово.
При сжатии изменений используется до 3 потоков
Сжатие объектов: 100% (558/558), готово.
Запись объектов: 100% (571/571), 1.88 Миб | 1010.00 КиБ/с, готово.
Всего 571 (изменений 27), повторно использовано 17 (изменений 11), повторно использовано пакетов 0
remote: Resolving deltas: 100% (27/27), completed with 7 local objects.
remote:
remote: Create a pull request for 'feature4' on GitHub by visiting:
remote:   https://github.com/igorshurub/elya_igor_alex/pull/new/feature4
remote:
To https://github.com/igorshurub/elya_igor_alex.git
* [new branch]   feature4 -> feature4

```

igorshurub / elya_igor_alex Public

<> Code Issues Pull requests Actions Projects Wiki Security Insights

feature 3 branches 0 tags Go to file Add file Code

This branch is 1 commit ahead of main. Contribute

	ZadnepryanskayaAlicia Alicia's commit 28.10 18:12	17bb193 11 minutes ago 38 commits
Documets	Add files via upload	14 days ago
medhelper_new	Commit	2 days ago
untitled9	Alicia's commit 28.10 18:12	11 minutes ago
Dockerfile	Add files via upload	18 days ago
README.md	Initial commit	2 months ago

Elya Igor Alex

<Active branches>

no hidden

Build

feature1#27Success

dev#26Success

main#25Success

delfinaz02 (1)

6 minutes ago (2m:09s)

delfinaz02

Alicia's commit 30.10.22

12 files

Run

Elya Igor Alex / Build

RunActionsEdit Configuration Settings

#27 (30 Oct 22 14:07)

OverviewChangesBuild LogParametersArtifactsPerfMonDocker Info

First recorded buildAll historyLast recorded build

Result:Success

Time:30 Oct 22 14:07 - 14:09 (2m:09s)

Branch:feature1

Agent:ip_172.17.0.1

Triggered by:Git on 30 Oct 22 14:07

#27 (30 Oct 22 14:07)

OverviewChangesBuild LogParametersArtifactsPerfMonDocker Info

First recorded buildAll historyLast recorded build

Build revisions

VCS Root(jetbrains.git) main

Revisionrefs/heads/feature1b4aad61a746b343490a22a292e0b19e39ccb0640

Show graph

Show files

Permalink

Alicia's commit 30.10.22

delfinaz02

12 files

b4aad61a746b30 Oct 22 14:01

✓ #27 (30 Oct 22 14:07) | ▾

Overview Changes **1** Build Log Parameters Artifacts PerfMon Docker Info

Tree view | Tail

View: All messages ☐ Console view

```
[14:07:37] The build is removed from the queue to be prepared for the start
[14:07:37] ▶ Collecting changes in 1 VCS root
[14:07:37] Starting the build on the agent "ip_172.17.0.1"
[14:07:38] ▶ Updating tools for build
[14:07:43] Clearing temporary directory: /opt/buildagent/temp/buildTmp
[14:07:43] ▶ Publishing internal artifacts
[14:07:43] Using vcs information from agent file: bbf3569db82ba90.xml
[14:07:43] Checkout directory: /opt/buildagent/work/bbf3569db82ba90
[14:07:43] ▶ Updating sources: auto checkout (on agent) (2s)
[14:07:45] ▶ Step 1/3: Docker build (Docker) (20s)
[14:08:05] ▶ Step 2/3: Docker push (Docker) (57s)
[14:09:02] ▶ Step 3/3: Connect SSH (SSH Exec) (42s)
[14:09:45] ▶ Publishing artifacts
[14:09:46] ▶ Publishing internal artifacts
[14:09:46] Build finished
```

Проверим, что контейнер запущен:

```
zaa201-331@alicia:/home/auto-server$ docker ps -a
CONTAINER ID   IMAGE                  COMMAND                  CREATED        STATUS
60a011cb6821   photolife/medhelper   "./untitled9"           About a minute Up Ab
out a minute   0.0.0.0:33333->33333/tcp, :::33333->33333/tcp   server_new
de540c3bee86   keinos/sqlite3        "/bin/sh -c /usr/bin..." 44 hours ago   Up 44
hours (healthy)                                auto-server-sqlite3-1
```

5. Создать пул-реквест созданной ветки в ветку dev с требованием согласования со стороны другого члена команды

Создаваем pull request:

igorshurub / elya_igor_alex Public Watch 1 Fork 0 Star 0

Code Issues Pull requests Actions Projects Wiki Security Insights

Label issues and pull requests for new contributors [Dismiss](#)

Now, GitHub will help potential first-time contributors [discover issues](#) labeled with [good first issue](#)

Filters is:pr is:open Labels 9 Milestones 0 [New pull request](#)

Comparing changes

Choose two branches to see what's changed or to start a new pull request. If you need to, you can also [compare across forks](#).

 base: dev ← compare: feature1 ✓ **Able to merge.** These branches can be automatically merged.

Discuss and review the changes in this comparison with others. [Learn about pull requests](#) [Create pull request](#)

↩ 1 commit 1 file changed 1 contributor

Commits on Oct 30, 2022

 **Alicia's commit 30.10.22**

 ZadneprianskayaAlicia committed 1 hour ago

 1bddc47 <>

Showing 1 changed file with 1 addition and 1 deletion. Split Unified

untitled9/mytcpserver.cpp

@@ -96,5 +96,5 @@ void MyTcpServer::slotClientDisconnected(){	
96 int id =(int)clientSocket->socketDescriptor();	96 int id =(int)clientSocket->socketDescriptor();
97 clientSocket->close();	97 clientSocket->close();
98 SClients.remove(id);	98 SClients.remove(id);
99 - qDebug() <<QString::fromUtf8("Client is disconnected \n");	99 + qDebug() <<QString::fromUtf8("Client is closed \n");
100 }	100 }

Open a pull request

Create a new pull request by comparing changes across two branches. If you need to, you can also [compare across for](#)

 base: dev ← compare: feature1 ✓ **Able to merge.** These branches can be automatically merged.



Alicia's commit 30.10.22

Write Preview

H B I ≡ <> 🔗 ⋮ ⋮ ⋮ @ ↻ ↩

I've changed file "mytcpserver.cpp". There are changes about disconnected clients.
Alicia Zadneprianskaya.

Attach files by dragging & dropping, selecting or pasting them. 

Create pull request

Remember, contributions to this repository should follow our [GitHub Community Guidelines](#).

Alicia's commit 30.10.22 #7



Open

Zadnepryanska... wants to merge 1 commit into `dev` from `feature1`



Conversation 0



Commits 1



Checks 0



Files changed 1



Zadnepryanska... commented now

Collaborator



I've changed file "mytcpserver.cpp". There are changes about disconnected clients.
Alicia Zadnepryanskaya.



Alicia's commit 30.10.22

1bddc47

<> Code Issues Pull requests 1 Actions Projects Wiki Security Insights

Label issues and pull requests for new contributors

Dismiss

Now, GitHub will help potential first-time contributors [discover issues](#) labeled with `good first issue`

Filters

is:pr is:open

Labels 9

Milestones 0

New pull request

1 Open 6 Closed

Author

Label

Projects

Milestones

Reviews

Assignee

Sort

Alicia's commit 30.10.22

#7 opened 2 minutes ago by ZadnepryanskayaAlicia

ProTip! Find all pull requests that aren't related to any open issues with `-linked:issue`.

Примем pull request Алексея:

Samsonov's commit 30.10 18:12 #8



Open

Samsonov-alek... wants to merge 1 commit into `dev` from `feature3`



Conversation 0



Commits 1



Checks 0



Files changed 1



Samsonov-alek... commented 1 minute ago

Collaborator



Samsonov's pullrequest



Samsonov's commit 30.10 18:12

1c42cca

Add more commits by pushing to the `feature3` branch on `igorshurub/elya_igor_alex`.



This branch has no conflicts with the base branch

Merging can be performed automatically.

Merge pull request



You can also [open this in GitHub Desktop](#) or view [command line instructions](#).

Samsonov's commit 30.10 18:12 #8

 Open Samsonov-alek... wants to merge 1 commit into `dev` from `feature3` 

 Conversation 0

 Commits 1

 Checks 0

 Files changed 1



Samsonov-alek... commented 2 minutes ago

Collaborator



Samsonov's pullrequest



Samsonov's commit 30.10 18:12

1c42cca

Add more commits by pushing to the `feature3` branch on `igorshurub/elya_igor_alex`.



Merge pull request #8 from igorshurub/feature3

Ok

This commit will be authored by 71925051+ZadnepryanskayaAlicia@users.noreply.github.com

Confirm merge

Cancel

Samsonov's commit 30.10 18:12 #8

 Merged Zadneprianska... merged 1 commit into `dev` from `feature3`  38 seconds ago

 Conversation 0

 Commits 1

 Checks 0

 Files changed 1



Samsonov-alek... commented 3 minutes ago

Collaborator



Samsonov's pullrequest



Samsonov's commit 30.10 18:12

1c42cca



ZadnepryanskayaAlicia merged commit `6dbb05a` into `dev` now

Revert



Zadnepryanskaya... commented now

Collaborator



Ok



Pull request successfully merged and closed

You're all set—the `feature3` branch can be safely deleted.

Delete branch

Наши принятые pull request:

☐ 6 Total	Author	Label	Projects	Milestones	Reviews	Assignee	Sort
☐ Samsonov's commit 30.10 18:12							1
#8 by Samsonov-aleksey was merged 5 minutes ago							
☐ Alicia's commit 30.10.22							2
#7 by ZadneprianskayaAlicia was merged 3 minutes ago							
☐ Igor Shurub commit							1
#5 by igorshurub was merged 10 minutes ago							

Active branches			
dev	Updated 7 minutes ago by igorshurub	0 6	New pull request edit delete
feature3	Updated 29 minutes ago by Samsonov-aleksey	0 1	#8 Merged edit delete
feature1	Updated 1 hour ago by ZadneprianskayaAlicia	0 1	#7 Merged edit delete
feature2	Updated 2 hours ago by igorshurub	0 1	#5 Merged edit delete

6. После согласования и создания коммита, зафиксировать сборку приложения из кода в ветке dev и развертывание приложения из созданного образа на stage-сервере

Elya Igor Alex / Build

Run ... Actions Edit Configuration Settings

#34 (30 Oct 22 16:29)

Overview Changes Build Log Parameters Artifacts PerfMon Docker Info

« #33 All history Last recorded build

Result: Success

Time: 30 Oct 22 16:29 - 16:31 (2m:05s)

Branch: dev

Agent: ip_172.17.0.1

Triggered by: you on 30 Oct 22 16:29

★ This build is in your favorites

Elya Igor Alex / Build

Run ... Actions Edit Configuration Settings

#34 (30 Oct 22 16:29)

Overview Changes Build Log Parameters Artifacts PerfMon Docker Info

« #33 All history Last recorded build

Download full build log (~38.65 KB) .zip

Tree view Tail

View: All messages Console view Repeat block names

[16:29:33] The build is removed from the queue to be prepared for the start

[16:29:33] Collecting changes in 1 VCS root

[16:29:33] Starting the build on the agent "ip_172.17.0.1"

[16:29:34] Updating tools for build

[16:29:36] Clearing temporary directory: /opt/buildagent/temp/buildTmp

[16:29:36] Publishing internal artifacts

[16:29:36] Using vcs information from agent file: bbf3569db82ba90.xml

[16:29:36] Checkout directory: /opt/buildagent/work/bbf3569db82ba90

[16:29:36] Updating sources: auto checkout (on agent) (1s)

[16:29:38] Step 1/3: Docker build (Docker) (26s)


[16:30:04] Step 2/3: Docker push (Docker) (51s)

[16:30:55] Step 3/3: Connect SSH (SSH Exec) (42s)

[16:31:39] Publishing artifacts

[16:31:39] Publishing internal artifacts


[16:31:39] Build finished

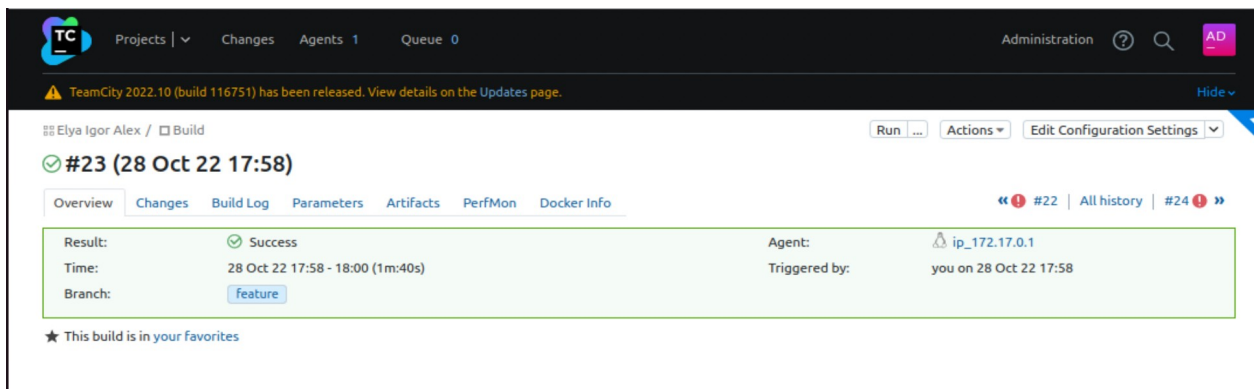

Проверим правильность сборки:

```
zaa201-331@alicia:/home/auto-server$ docker ps -a
CONTAINER ID   IMAGE                     COMMAND                  CREATED        STATUS
9e7b528cb84e   photolife/medhelper      "./untitled9"           52 seconds ago Up 51 sec
onds          0.0.0.0:33333->33333/tcp, :::33333->33333/tcp server_new
3b46310b07d5   keinos/sqlite3           "/bin/sh -c /usr/bin..." 3 hours ago    Up 3 hour
s (healthy)   auto-server-sqlite3-1
```

Поменяем на клиенте (test) ip-адрес сервера (stage):

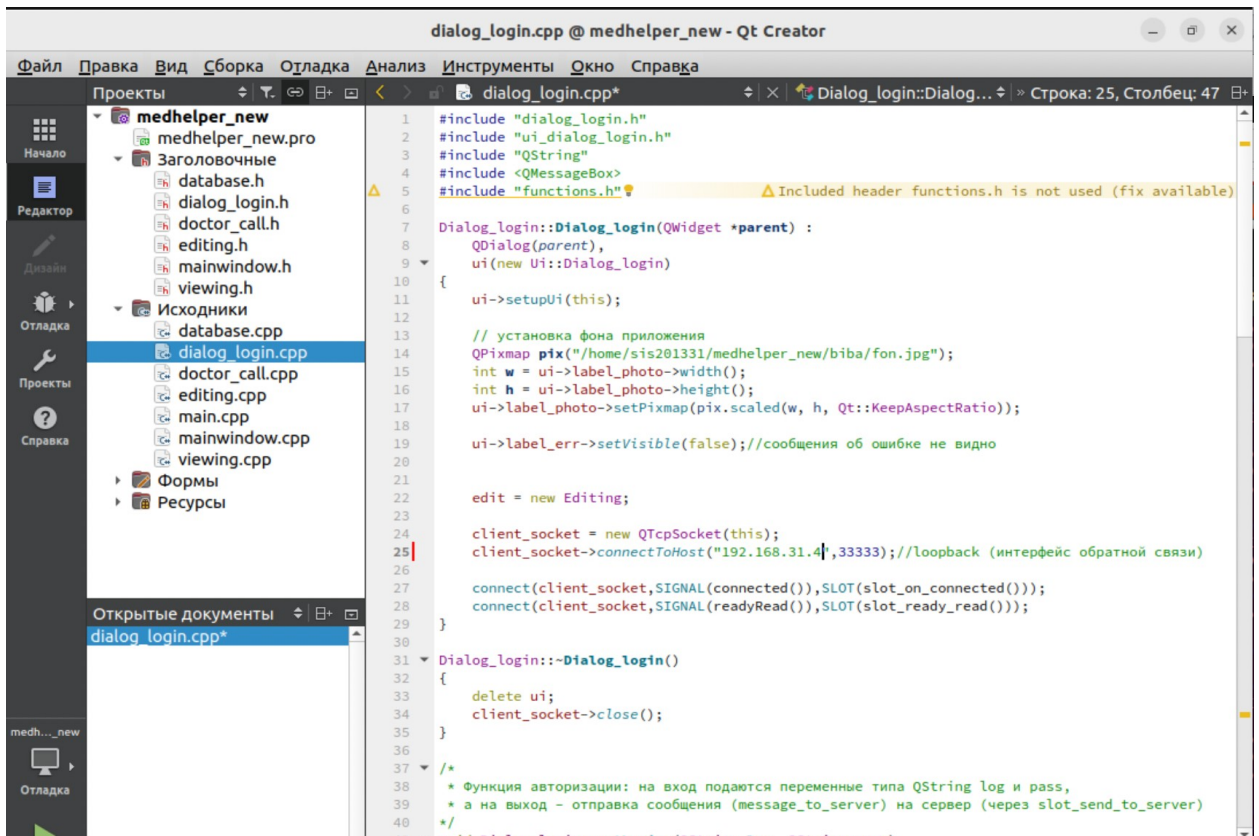

Продemonстрируем все изменения в коде:

```
zaa201-331@alicia:/home/auto-server$ docker logs 9e7b528cb84e
server is run
"auth&ivan&Qwerty123!"
database is open
login = "ivan" password = "Qwerty123!" result = "authorization yes "
QSqlDatabasePrivate::addDatabase: duplicate connection name 'qt_sql_default_connection',
old connection removed.
database is open
"Client is closed \n"
```