


DM42n, time per call

One bar per run, oldest on the left, marked with the time it was taken. Logarithmic. A bar at the bottom of the scale is at or below 0.01 ms, the tick resolution rather than a measurement. Case 01 is the empty control and is subtracted from the rest.


ms per call
bar left out: that case number named a different case in an older run

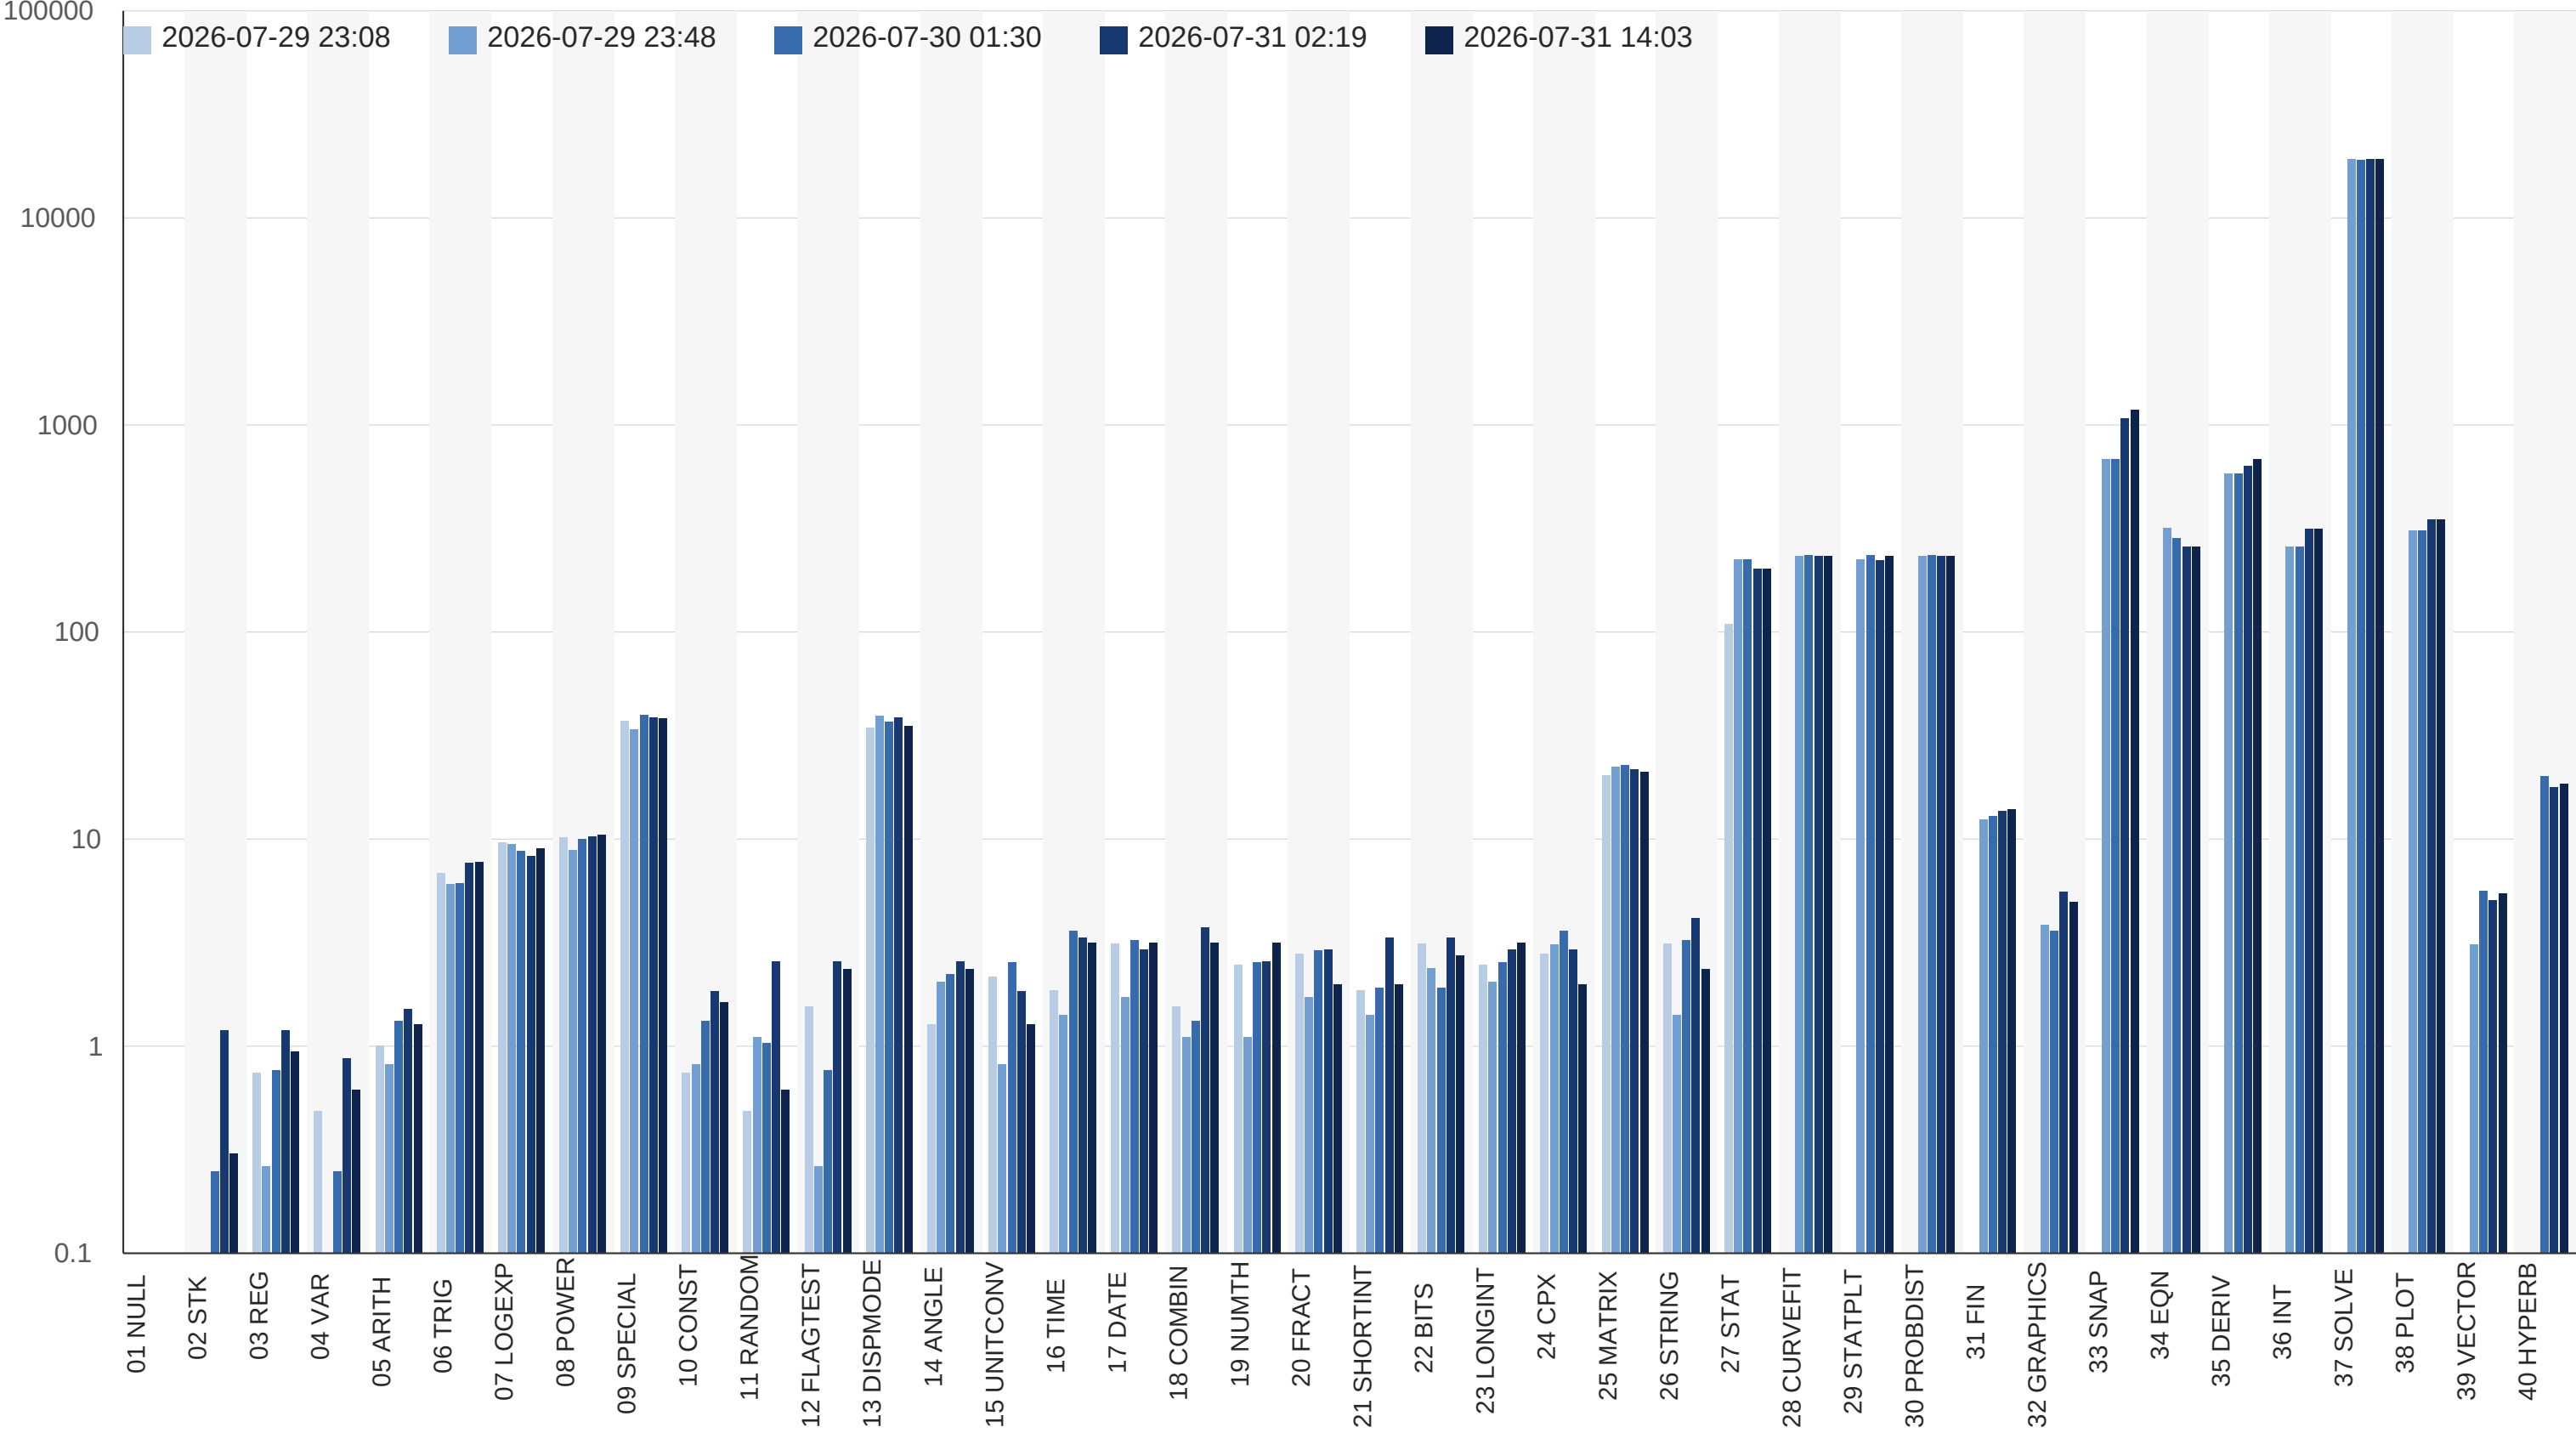

DM42n estimate working memory (stack) used, including overhead for probe and base loading of ca. 2000 bytes.


One bar per run, oldest on the left, marked with the time it was taken. Bytes below the reference point, from one call.
Only a reading with STCKST 0 is drawn, so a missing bar is a case that run could not resolve, being no deeper than the probe itself.

1 bar left out: that case number named a different case in an older run

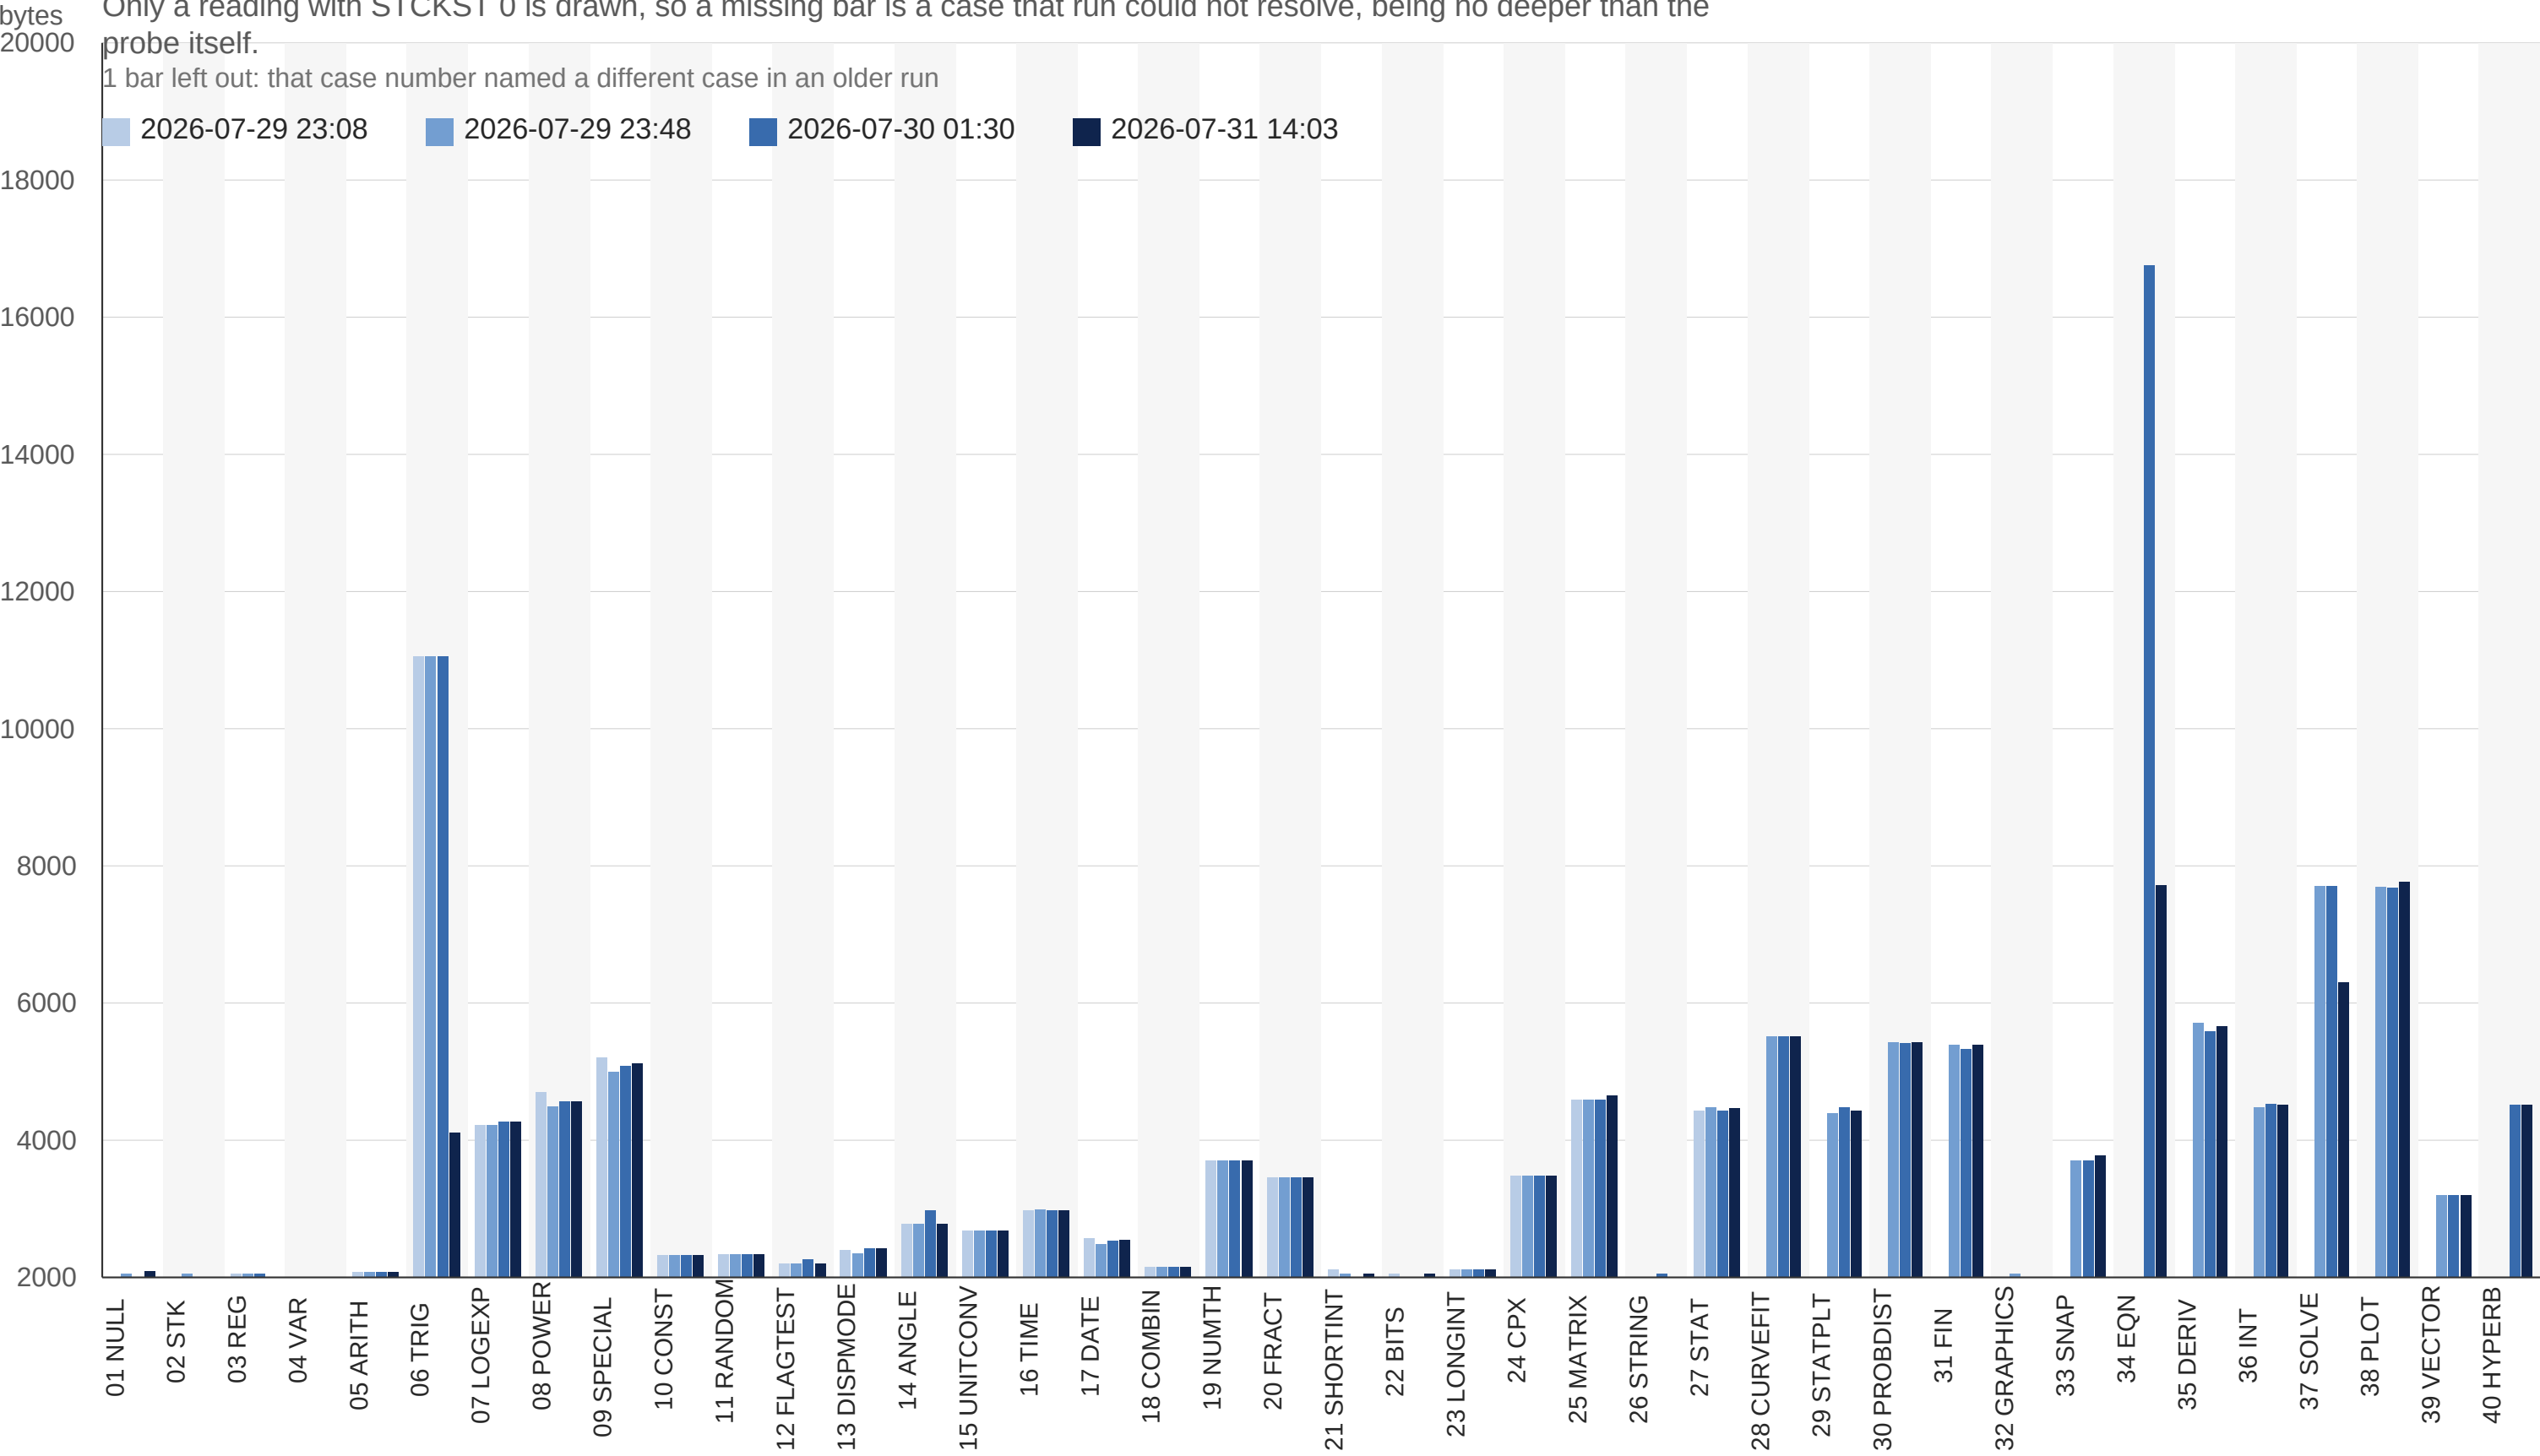


DM42, time per call

One bar per run, oldest on the left, marked with the time it was taken. Logarithmic. A bar at the bottom of the scale is at or below 0.01 ms, the tick resolution rather than a measurement. Case 01 is the empty control and is subtracted from the rest.

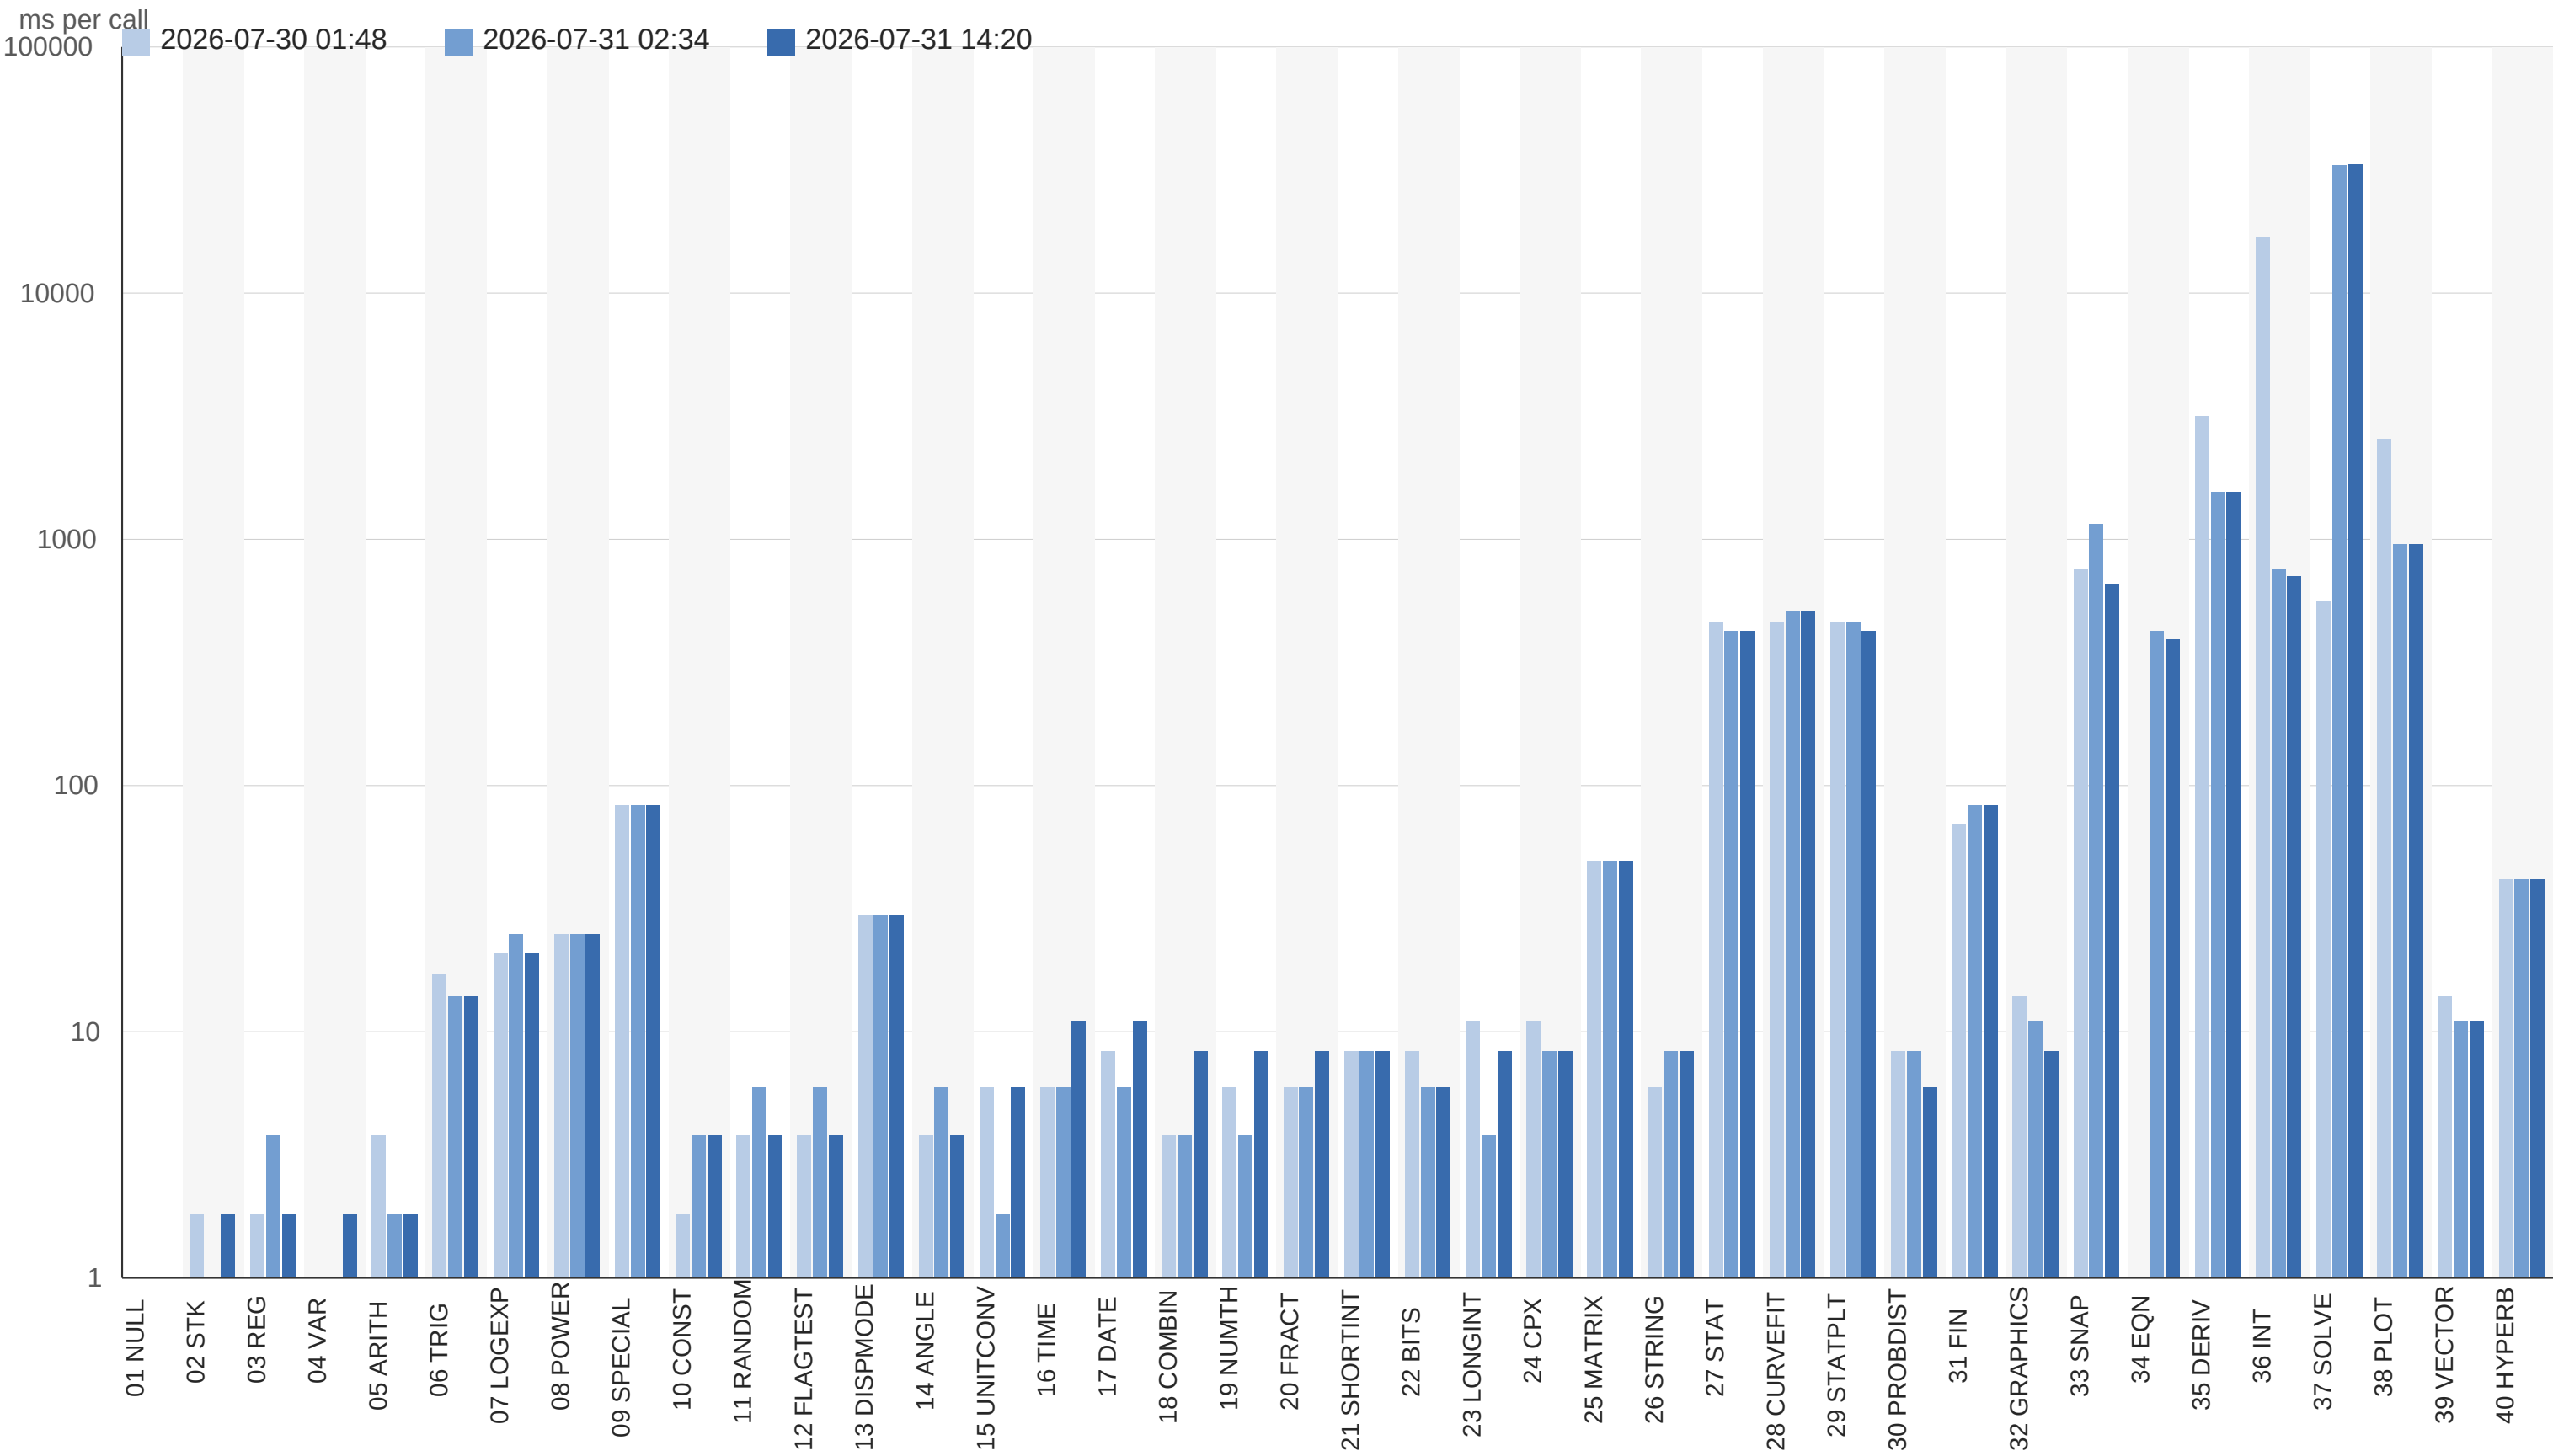


DM42 estimate working memory (stack) used, including overhead for probe and base loading of ca. 2000 bytes.

One bar per run, oldest on the left, marked with the time it was taken. Bytes below the reference point, from one call.
Only a reading with STCKST 0 is drawn, so a missing bar is a case that run could not resolve, being no deeper than the probe itself.

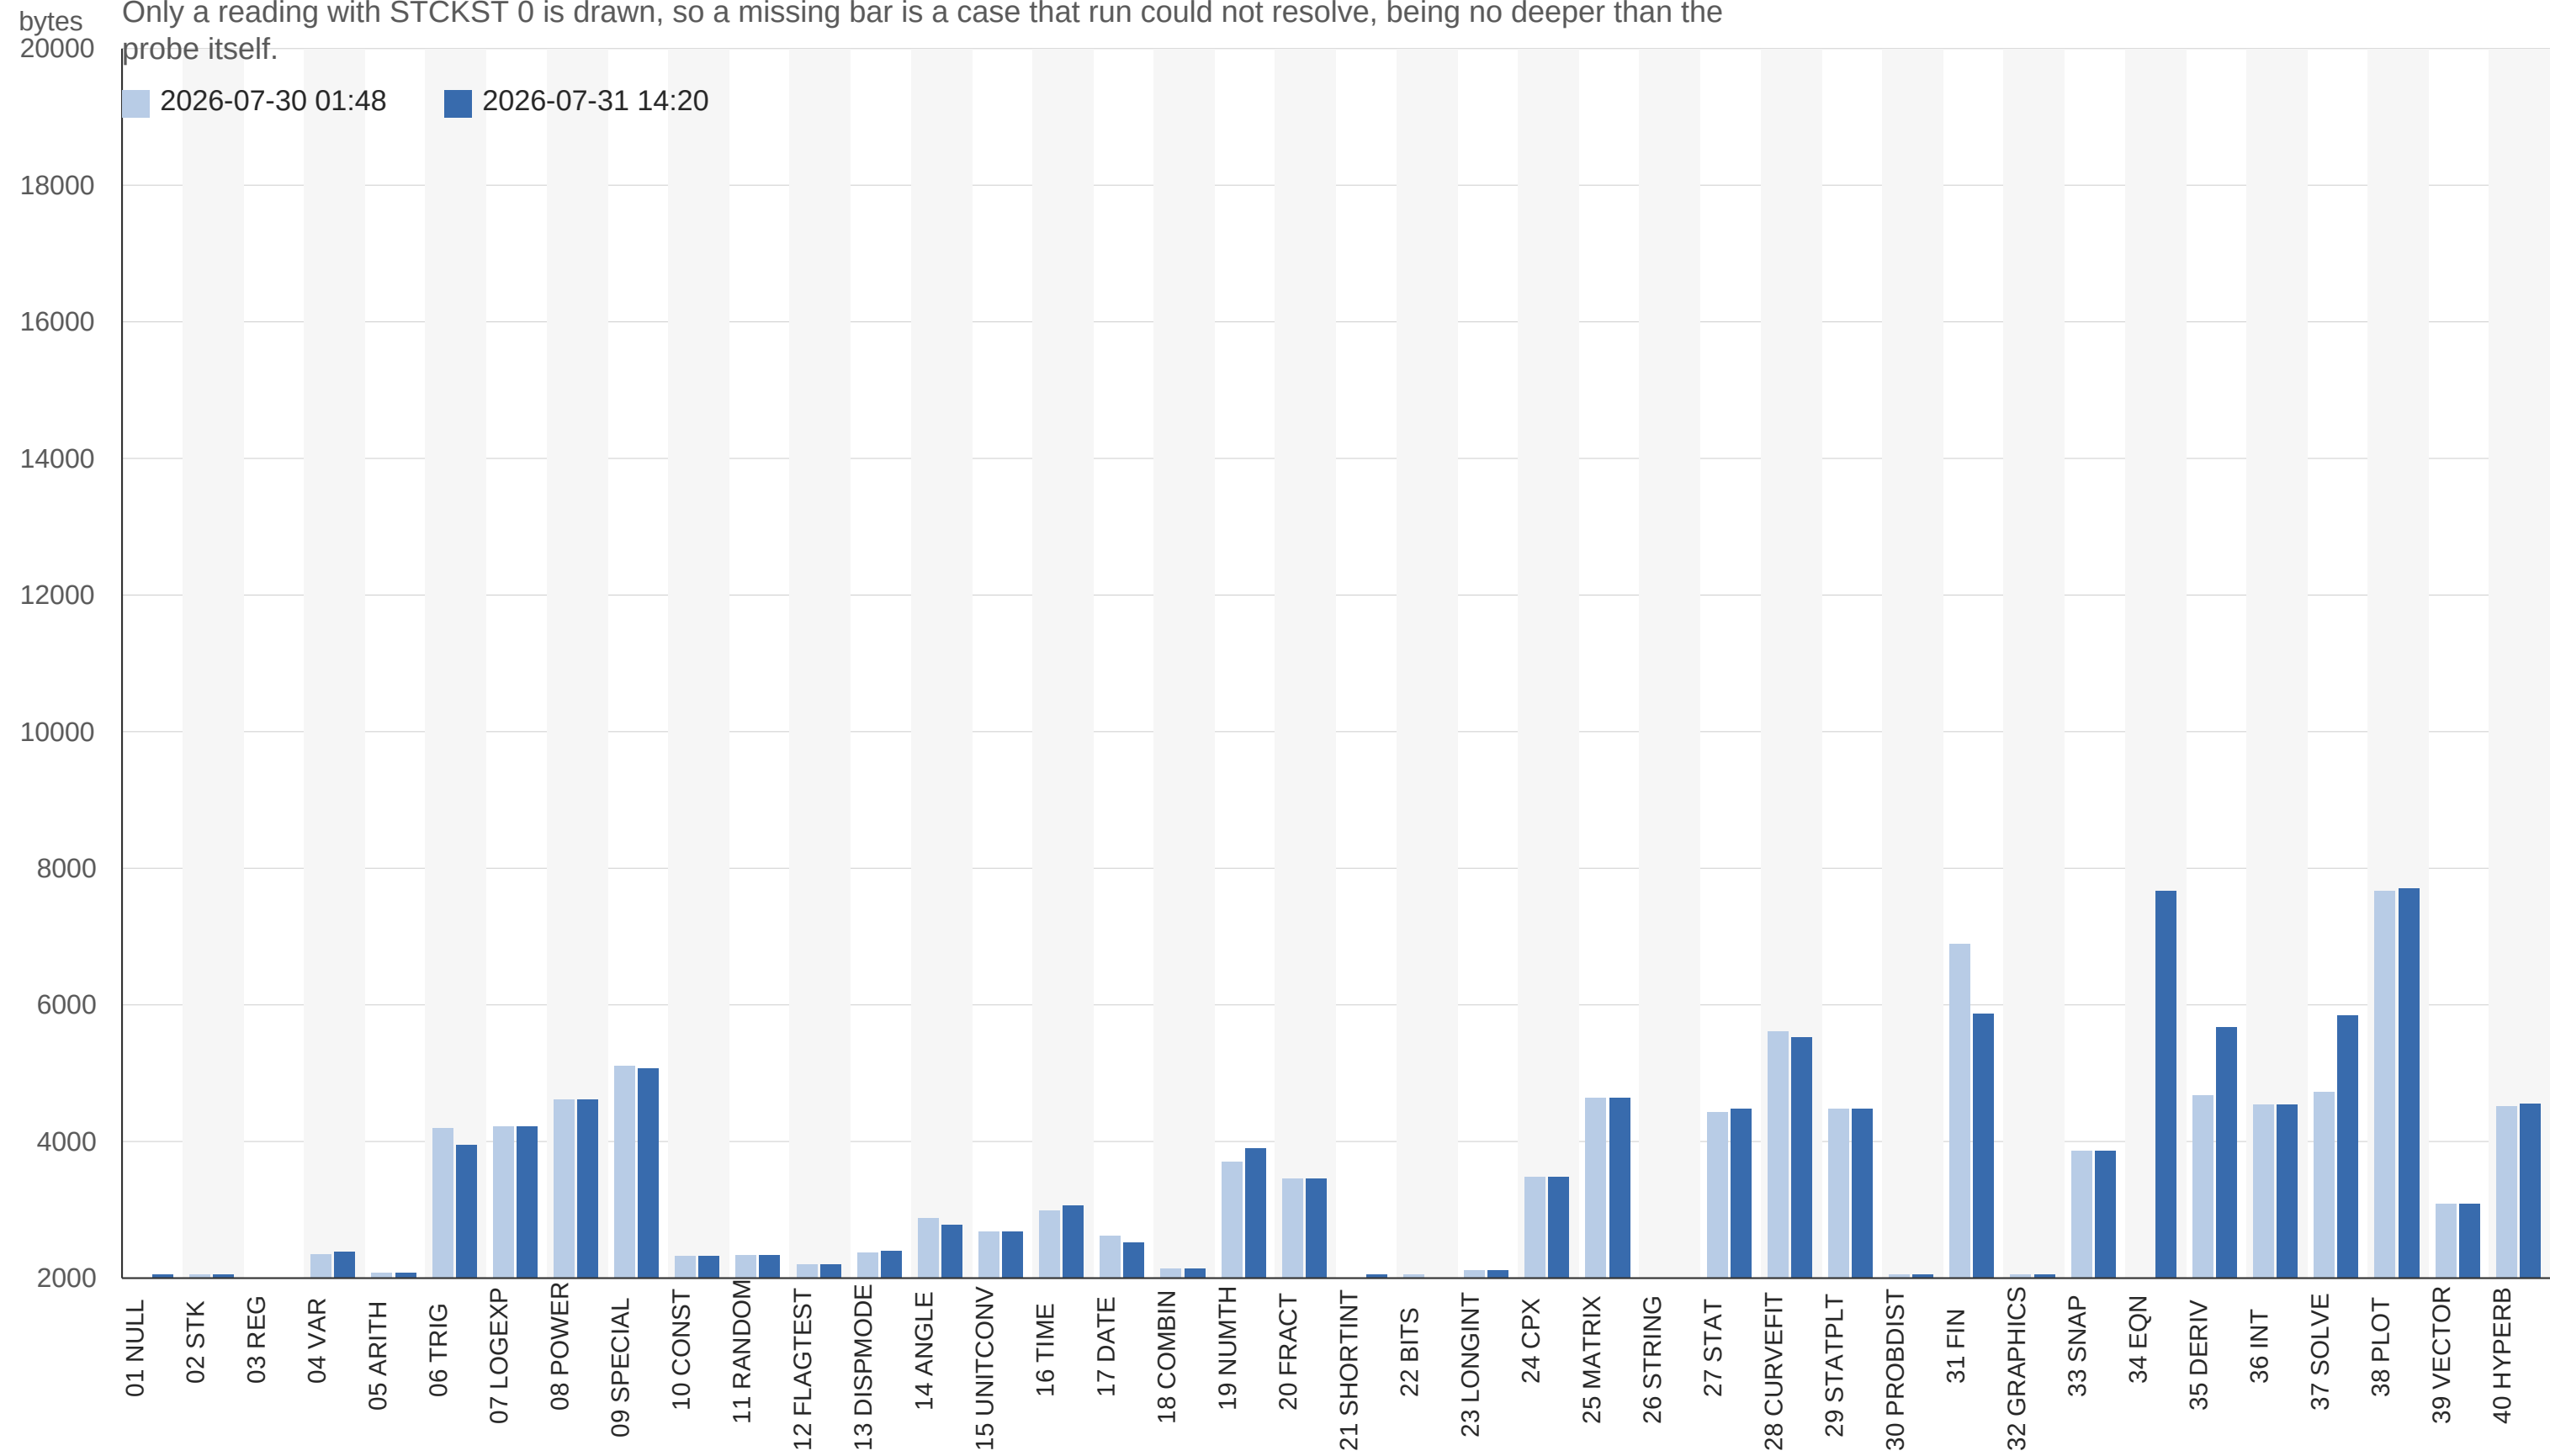

SIM, time per call

One bar per run, oldest on the left, marked with the time it was taken. Logarithmic. A bar at the bottom of the scale is at or below 0.01 ms, the tick resolution rather than a measurement. Case 01 is the empty control and is subtracted from the rest.

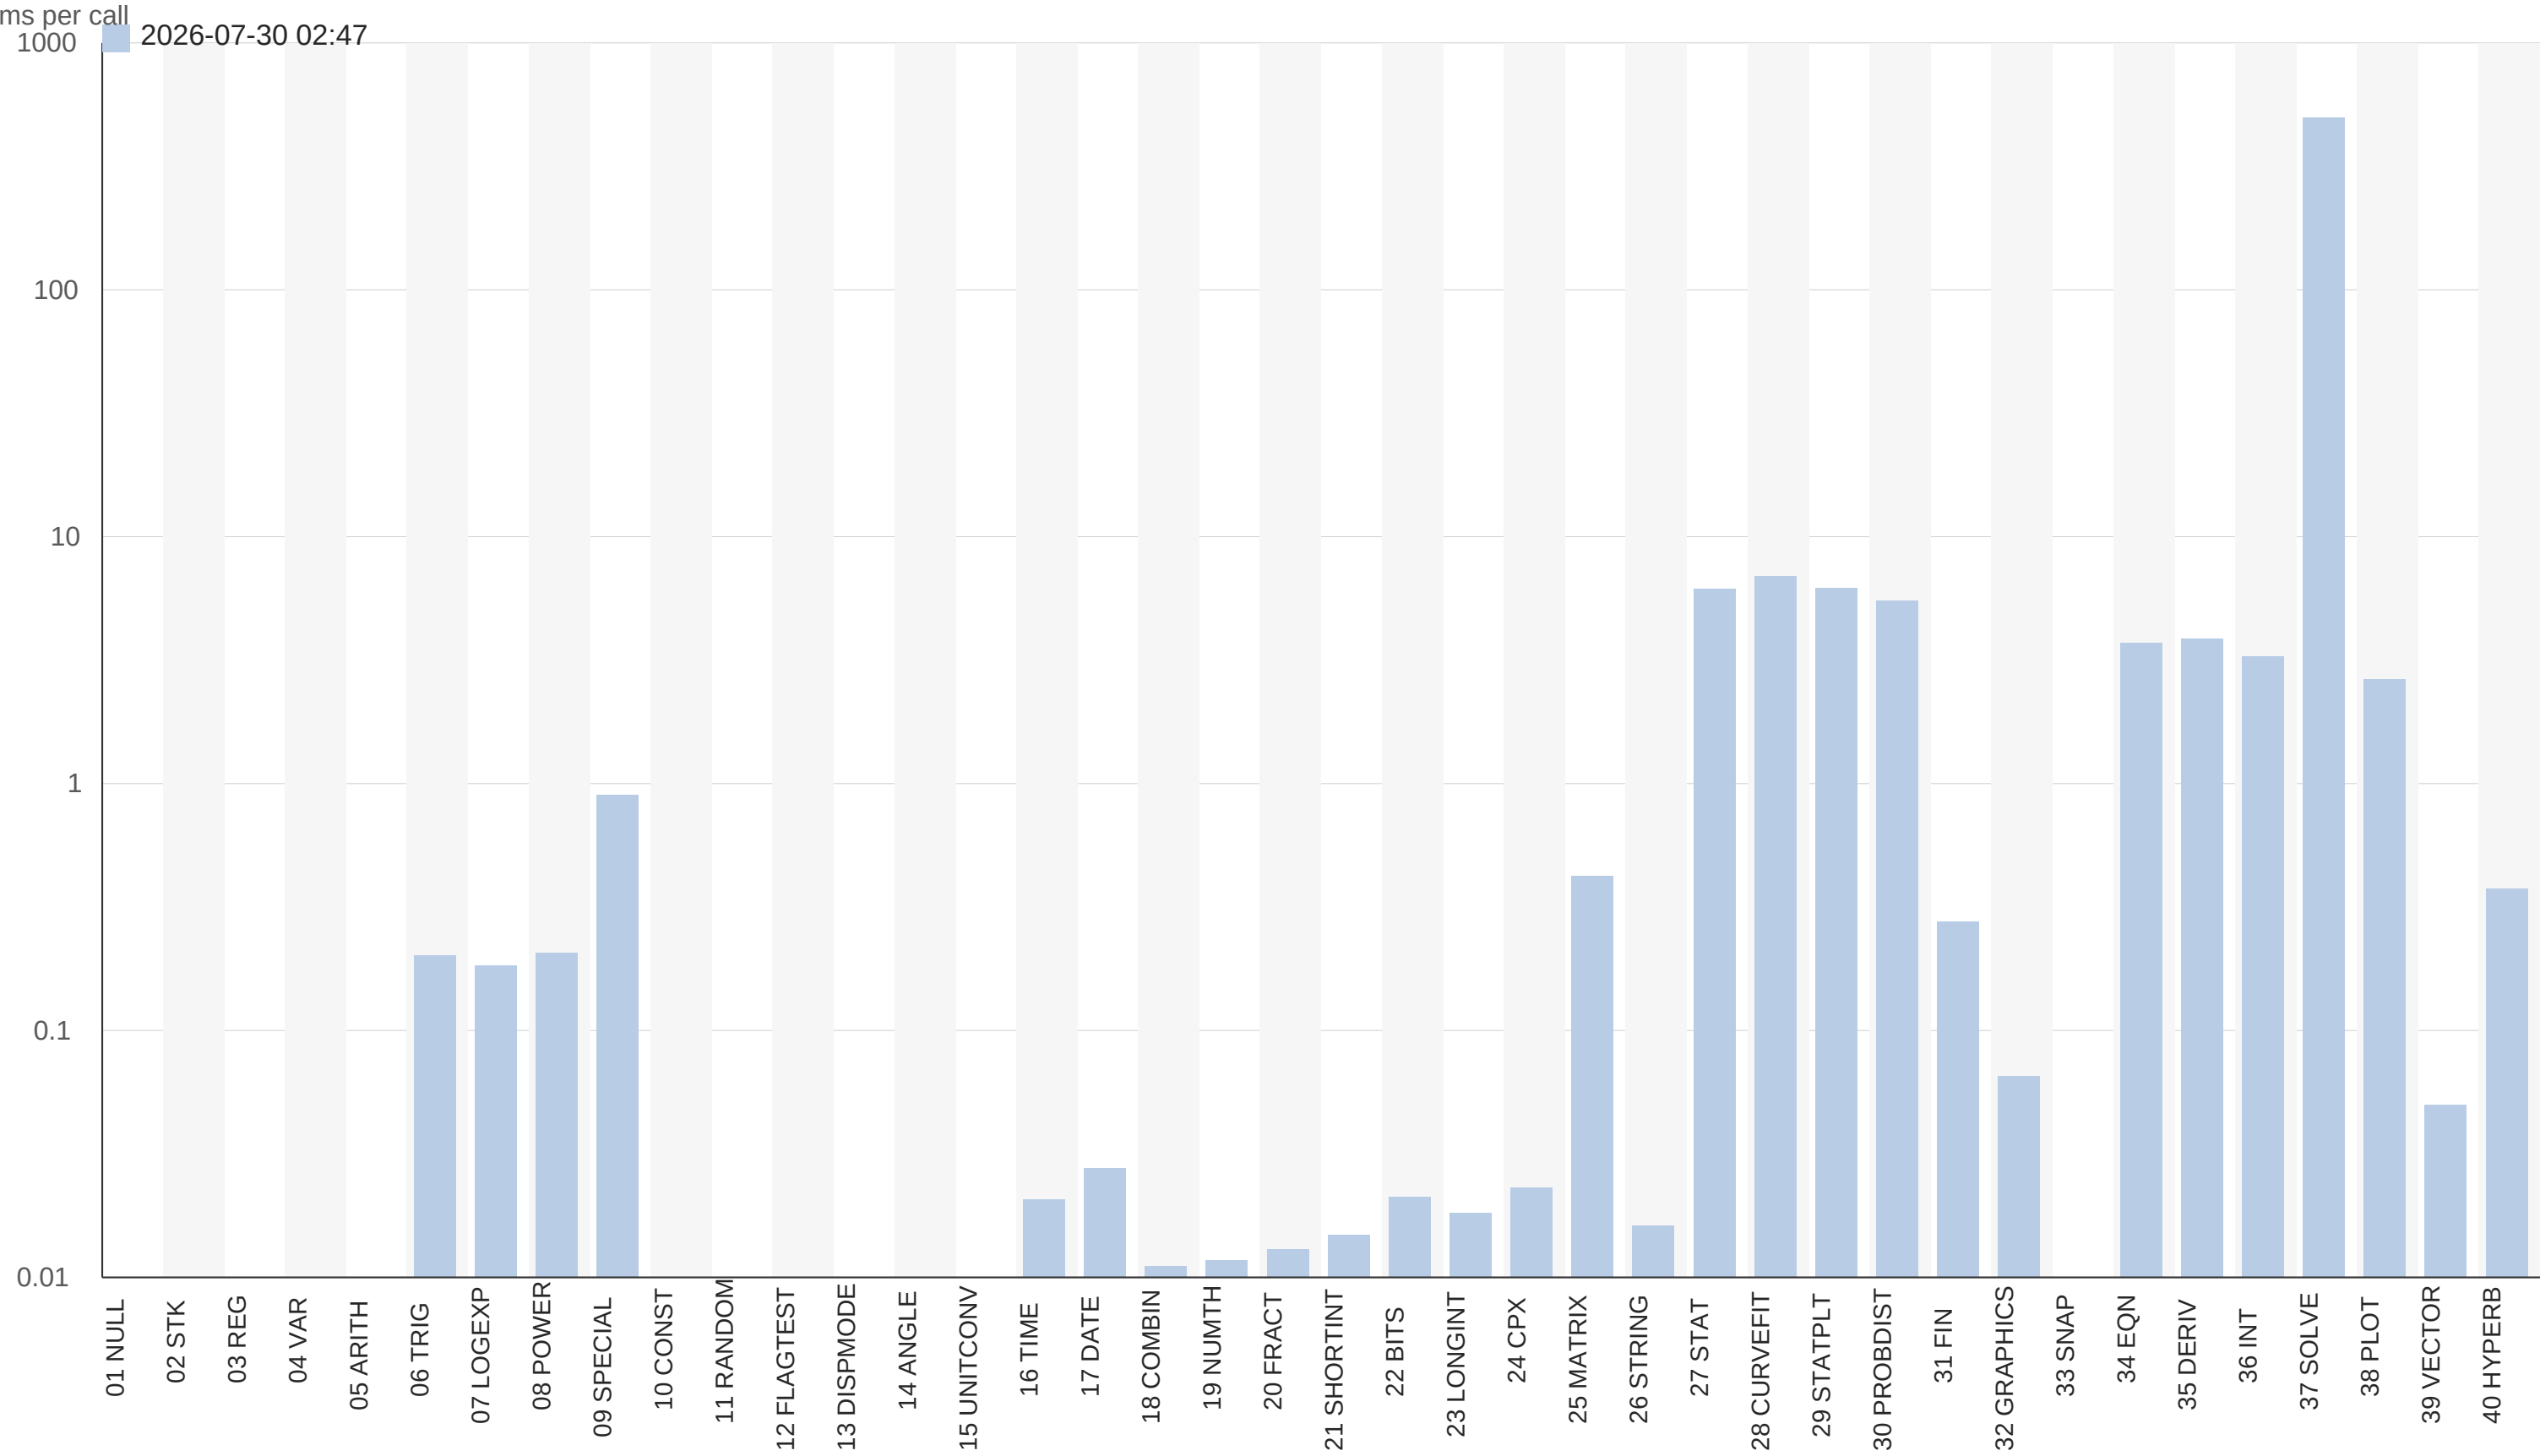

SIM estimate working memory (stack) used, including overhead for probe and base loading of ca. 2000 bytes.

One bar per run, oldest on the left, marked with the time it was taken. Bytes below the reference point, from one call.
Only a reading with STCKST 0 is drawn, so a missing bar is a case that run could not resolve, being no deeper than the probe itself.

