RefData

- ()
-
- 4.0
  -
  - .Net Core
    - Nuget() RefClient 3.0
    - appsettings.json Config
    - Startup.cs Service
    - Constructor
  - Static Factory Method (RefClientFactory)
    - Nuget
    - Initialize Config
    -
  - Static Factory Method (RefData)
    - Initialize Config
    - RefClient
    -
  - Language
  - Api
    - GetAvailabilityGroupIp API
    - Api list RefData Api
  - SiteFilter API
- 3.0 ()
  -
  - Install(.Net Core)
  - Install(.Net Framework), with Autofac
  - Install(.Net Framework), with SimpleInjector (Obsolete)
  - Install(.Net Framework), factory method
  -
  - Response format
    - ResultViewModel
    - ErrorCode
  -

RefData Api

()

.Net Core Remoting .Net Core solution Remoting

Release RefClient 4.0 HttpClient RemotingRefClient 4.0 RefData 2.0(https://onetw.atlassian.net/wiki/spaces/IN/pages/122716196/RefData#Static-Factory-Method-(RefData)-%E5%AE%89%E8%A3%9D%E5%8F%8A%E4%BD%BF%E7%94%A8%E6%96%B9%E5%BC%8F)

RefClient 4.0 .Net Standard 2.0 (.Net Framework 4.6.1.Net Core) library

NLog/4.7.11 log

System.ComponentModel.Annotations/5.0.0 modelSportTypeBetType 0 `http status 400`

RefClientRefClient 4.0 MemoryCacheRedisHttpClient

library

RefData.Standard RefData 2.0 ()

RefClient.Extensions .Net Core extensions

RefClient.Autofac Autofac extensions(.Net Core HttpClient instance)

RefClient.xxx library library

RefData 2.0 RefClient 4.0 library

- RemotingRef
- RefRelayStation
- RefRelayRemoteStation
- RefNewData

- RefDataModel
- RefBaseProvider

1. .Net Core constructor `IRefDataClient` .Net Core
2. .Net Framework Autofac RefClient + RefClient.Autofac constructor .Net Core
3. .Net Framework RefClient 3.0 Static Factory Method (RefClientFactory)
4. .Net Framework RefData 2.0 RefClient.Standard RefClient.Standard Static Factory Method (RefData)

RefClient

RefClient 4.0 config cache!

.Net Core

4.0

Port 9022Redis DatabaseId 3

Environment	InitializeConfig()	Json config
Office (ssh tunnel SIT)	`new ClientConfigModel { RefDataWebApiUrl = new RefDataWebApiUrl { Url = "http://192.168.7.41:9022", }, RefDataLocalRedisConfiguration = new RedisConfiguration { Host = new List<string> { "192.168.7.41:6379", }, DatabaseId = 3, } }`	`"ApiSetting": { "RefDataWebApiUrl": { "Url": "http://192.168.7.41:9022" }, "RefDataLocalRedisConfiguration": { "Host": [ "192.168.7.41:6379" ], "DatabaseId": "3" } }`

SIT	<pre>new ClientConfigModel
	{
	    RefDataWebApiUrl =
	new RefDataWebApiUrl
	    {
	        Url =
	"http://172.16.4.33:
	9022",
	    },
	
	RefDataLocalRedisConfigu
	ration = new
	RedisConfiguration
	    {
	        Host = new
	List<string>
	        {
	
	"172.16.4.13:6379",
	        },
	        DatabaseId = 3,
	    }
	}</pre>
		<pre>"ApiSetting": {
		  "RefDataWebApiUrl": {
		    "Url": "http://172.
		16.4.33:9022"
		  },
		
		"RefDataLocalRedisConfigura
		tion": {
		    "Host": [
		      "172.16.4.13:6379"
		    ],
		    "DatabaseId": "3"
		  }
		}</pre>

UAT	<pre>new ClientConfigModel
	{
	    RefDataWebApiUrl =
	new RefDataWebApiUrl
	    {
	        Url =
	"http://infinity-uat.
	nebula.prod:9022",
	    },
	
	RefDataLocalRedisConfigu
	ration = new
	RedisConfiguration
	    {
	        Host = new
	List<string>
	        {
	
	"10.99.99.168:6379",
	
	"10.99.99.169:
	6379",
	        },
	        DatabaseId = 3,
	    }
	}</pre>
		<pre>"ApiSetting": {
		  "RefDataWebApiUrl": {
		    "Url":
		"http://infinity-uat.
		nebula.prod:9022"
		  },
		
		"RefDataLocalRedisConfigura
		tion": {
		    "Host": [
		      "10.99.99.168:6379",
		      "10.99.99.169:
		6379",
		    ],
		    "DatabaseId": "3"
		  }
		}</pre>

PROD	<pre>new ClientConfigModel
	{
	    RefDataWebApiUrl =
	new RefDataWebApiUrl
	    {
	        Url =
	"http://infinity-
	service.nebula.prod:
	9022",
	    },
	
	RefDataLocalRedisConfigu
	ration = new
	RedisConfiguration
	    {
	        Host = new
	List<string>
	        {
	
	"10.99.99.184:6580",
	
	"10.99.99.185:
	6580",
	        },
	        DatabaseId = 3,
	    }
	}</pre>
		<pre>"ApiSetting": {
		  "RefDataWebApiUrl": {
		    "Url":
		"http://infinity-service.
		nebula.prod:9022"
		  },
		
		"RefDataLocalRedisConfigura
		tion": {
		    "Host": [
		      "10.99.99.184:6580",
		      "10.99.99.185:
		6580",
		    ],
		    "DatabaseId": "3"
		  }
		}</pre>

AWS Cotton Candy (Stopped)		

AWS.DRVPC (Will be discontinued soon)

```
new ClientConfigModel
{
    RefDataWebApiUrl =
new RefDataWebApiUrl
    {
        Url =
"http://refdata2.
foodpandaoh.net",
    },

RefDataLocalRedisConfigu
ration = new
RedisConfiguration
    {
        Host = new
List<string>
        {
            "redis-
cluster-o4one-uat03.
7qxjov.ng.0001.apne1.
cache.amazonaws.com:
6379",
            "redis-
cluster-o4one-uat03-ro.
7qxjov.ng.0001.apne1.
cache.amazonaws.com:
6379",
        },
        DatabaseId = 3,
    }
}
```

```
"ApiSetting": {
  "RefDataWebApiUrl": {
    "Url":
"http://refdata2.
foodpandaoh.net"
  },

"RefDataLocalRedisConfigura
tion": {
    "Host": [
      "redis-cluster-o4one-
uat03.7qxjov.ng.0001.apne1.
cache.amazonaws.com:6379",
      "redis-cluster-o4one-
uat03-ro.7qxjov.ng.0001.
apne1.cache.amazonaws.com:
6379",
    ],
    "DatabaseId": "3"
  }
}
```

ServiceTeam 10.99.78.13:6379 VIP master

AWS.
Jotunheim.UAT

```
new ClientConfigModel
{
    RefDataWebApiUrl =
new RefDataWebApiUrl
    {
        Url =
"http://refdata2.
foodpandaoh.net",
    },

RefDataLocalRedisConfigu
ration = new
RedisConfiguration
    {
        Host = new
List<string>
        {
            "redis-
cluster-o4one-uat01.
7qxjov.ng.0001.apne1.
cache.amazonaws.com:
6379",
            "redis-
cluster-o4one-uat01-ro.
7qxjov.ng.0001.apne1.
cache.amazonaws.com:
6379",
        },
        DatabaseId = 3,
    }
}
```

```
"ApiSetting": {
  "RefDataWebApiUrl": {
    "Url":
"http://refdata2.
foodpandaoh.net"
  },

"RefDataLocalRedisConfigura
tion": {
    "Host": [
      "redis-cluster-o4one-
uat01.7qxjov.ng.0001.apne1.
cache.amazonaws.com:6379",
      "redis-cluster-o4one-
uat01-ro.7qxjov.ng.0001.
apne1.cache.amazonaws.com:
6379",
    ],
    "DatabaseId": "3"
  }
}
```

ServiceTeam 10.99.78.15:6377 VIP master

AWS.
Jotunheim.
PROD
	``
	new ClientConfigModel
	{
	    RefDataWebApiUrl =
	new RefDataWebApiUrl
	    {
	        Url =
	"http://refdata2.
	foodpandaoh.net",
	    },
	
	RefDataLocalRedisConfigu
	ration = new
	RedisConfiguration
	    {
	        Host = new
	List<string>
	        {
	            "redis-
	cluster-o4one-prod01.
	7qxjov.ng.0001.apne1.
	cache.amazonaws.com:
	6379",
	            "redis-
	cluster-o4one-prod01-ro.
	7qxjov.ng.0001.apne1.
	cache.amazonaws.com:
	6379",
	        },
	        DatabaseId = 3,
	    }
	}
	``
		``
		"ApiSetting": {
		  "RefDataWebApiUrl": {
		    "Url":
		"http://refdata2.
		foodpandaoh.net"
		  },
		
		"RefDataLocalRedisConfigura
		tion": {
		    "Host": [
		      "redis-cluster-o4one-
		prod01.7qxjov.ng.0001.
		apne1.cache.amazonaws.com:
		6379",
		      "redis-cluster-o4one-
		prod01-ro.7qxjov.ng.0001.
		apne1.cache.amazonaws.com:
		6379",
		    ],
		    "DatabaseId": "3"
		  }
		}
		``
		
		ServiceTeam 10.99.78.13:6378 VIP master

.Net Core

AddRefClient() HttpClientFactory

Nuget() RefClient 3.0

```
RefClient/4.4.1
RefClient.Extensions/4.1.1
System.ComponentModel.Annotations/5.0.0
```

appsettings.json Config

```
{
  "ApiSetting": {
    "RefDataWebApiUrl": {
      "Url": "http://192.168.7.41:9022"
    },
    "RefDataLocalRedisConfiguration": {
      "Host": [
        "192.168.7.41:6379"
      ],
      "DatabaseId": "3"
    }
  }
}
```

Startup.cs Service

```
services.AddRefClient();
```

Constructor

```
public RefDataService(IRefDataClient refDataClient)
{
    _refDataClient = refDataClient;
}
```

Static Factory Method (RefClientFactory)

Nuget

```
RefClient/4.4.1
System.ComponentModel.Annotations/5.0.0
```

Initialize Config

redis

RefClientFactory.InitializeConfig() RefData.InitializeConfig()

```
RefClientFactory.InitializeConfig(new ClientConfigModel
{
    RefDataWebApiUrl = new RefDataWebApiUrl
    {
        Url = "http://192.168.7.41:9022",
        // Url = "http://localhost:5000"
    },
    RefDataLocalRedisConfiguration = new RedisConfiguration
    {
        Host = new List<string>
        {
            "192.168.7.41:6379",
        },
        DatabaseId = 3,
    },
    HttpClientFactory = httpClientFactory // Optional, avoid http time
out
});
```

```
RefClientFactory.GetRefDataClient(); // 4.0  3.0 service async

// or  3.0  async
RefClientFactory.GetBetRefClientService();
RefClientFactory.GetLeagueRefClientService();
RefClientFactory.GetMarketRefClientService();
RefClientFactory.GetMatchRefClientService();
RefClientFactory.GetOtherRefDataClientService();
RefClientFactory.GetTeamRefClientService();
RefClientFactory.GetThirdPartyRefClientService();
```

Static Factory Method (RefData)

RefData RefClient

```
RefClient/4.4.1
RefData.Standard/4.3.0
System.ComponentModel.Annotations/5.0.0
```

Initialize Config

redis

⚠ RefClientFactory.InitializeConfig() RefData.InitializeConfig()

```
RefData.InitializeConfig(new ClientConfigModel
{
    RefDataWebApiUrl = new RefDataWebApiUrl
    {
        Url = "http://192.168.7.41:9022",
    },
    RefDataLocalRedisConfiguration = new RedisConfiguration
    {
        Host = new List<string>
        {
            "192.168.7.41:6379",
        },
        DatabaseId = 3,
    },
    HttpClientFactory = httpClientFactory // Optional, avoid http time
out
});
```

RefClient

Example :

```
RefData.GetDisplayedTypeId(i.ToString());
// or
RefData.GetRefKey("BlockTryLogin", "en", "true")
```

1. Namespace

```
RefDataModelStandard.Model -> RefDataModelStandard.Models
RefDataModelStandard.Model.Request -> RefDataModelStandard.Models.
Request
RefDataModelStandard.RefEnum -> RefDataModelStandard.Enums
```

2. FastMarket s

```
// Before
marketRefClientService.GetFastMarketsChoice(new
GetFastMarketsChoiceModel
            {
                BetType = int.Parse(betType),
                BetTeam = int.Parse(betTeam),
                Hdp1 = Hdp1,
                Hdp2 = Hdp2,
                Language = Lang.ConvertToLanguageEnum()
            });
// After
marketRefClientService.GetFastMarketChoice(new
GetFastMarketsChoiceModel
            {
                BetType = int.Parse(betType),
                BetTeam = int.Parse(betTeam),
                Hour = Hdp1,
                FastMarketBetOptionsEnum =
(FastMarketBetOptionsEnum)Hdp2,
                Language = Lang.ConvertToLanguageEnum()
            });
```

3. GetBetradarMatchCodeFormat BetRadar

```
// Before
matchRefClientService.GetBetRadarMatchCodeFormat(new
GetBetRadarMatchCodeFormatModel
            {
                MatchCode = matchCode,
                Language = language.ConvertToLanguageEnum()
            })
// After
matchRefClientService.GetBetradarMatchCodeFormat(new
GetBetradarMatchCodeFormatModel
            {
                MatchCode = matchCode,
                Language = language.ConvertToLanguageEnum()
            });
```

4. GetAvailabilityGroupIpConnectionString model

```
// Before
GetAvailabilityGroupIpConnectionString(GetAvailabilityGroupIpModel
model)
// After
GetAvailabilityGroupIpConnectionString
(GetAvailabilityGroupConnectionModel model)
```

5. GetMemberAllowListData model rename

```
// Before
GetMemberAllowListData return Dictionary<int,
NewMemberAllowListModel>
// After
GetMemberAllowListData return Dictionary<int,
MemberAllowListDataModel>
```

6. GetSiteConfig GetSitConfigModel GetSiteConfigModel

```
// Bedore
_otherRefDataClientService.GetSiteConfig(GetSitConfigModel model)
// After
_otherRefDataClientService.GetSiteConfig(GetSiteConfigModel model)
```

7. batch method IRefDataClient extensions method
   a. ILeagueRefClientService GetLeagueLogoBatchGetIsTestLeagueBatchGetLeagueNameBatch IRefDataClient GetLeagueLogoBatch GetIsTestLeagueBatchGetLeagueNameBatch
   b. ITeamRefClientService GetTeamNameBatchGetTeamBatch IRefDataClient GetTeamNameBatchGetTeamBatch

Language

RefClient 4.0 for .Net Core string language string extensions

```
var language = "en";
var languageEnum = language.ConvertToLanguageEnum(); // Output :
LanguageEnum.En
```

Api

GetAvailabilityGroupIp API

```
public class GetAvailabilityGroupIpModel
    {
        public int SiteDbGroupId { get; set; }
        public string Site { get; set; }
        public int SiteId { get; set; }
        public bool ReadOnly { get; set; } = false;
        public ParameterTypeEnum ParameterType { get; set; }
    }

public enum ParameterTypeEnum
    {
        Site = 1,
        SiteId = 2,
        SiteDbGroupId = 3,
    }
```

SiteDbGroupId / Site / SiteId
ParameterType

ReadOnlyFalse

Ex 1:
`SiteDbGroupId : 0`
`Site : ""`
`SiteId : 0`
`ParameterType : "SiteDbGroupId"`

API `SiteDbGroupId : 0`

Ex 2:

`SiteDbGroupId : 0`
`Site : "789y"`
`SiteId : 0`
`ParameterType : "Site"`

API `Site : "789y"`

Api list RefData Api

IRefDataClient Api List

```
        Task<int> GetParentIdByBetTypeId(
            GetParentIdByBetTypeIdModel getParentIdByBetTypeIdModel);

        Task<string> GetBetTypeName(GetBetTypeNameModel
  getBetTypeNameModel);
        Task<List<int>> GetBetTypeIdList();

        Task<string> GetComboParlayLuckyBet(
            GetComboParlayLuckyBetModel getComboParlayLuckyBetModel);

        Task<ResourceDataModel> GetKenoBetChoice(
            GetKenoBetChoiceModel getKenoBetChoiceModel);
```

```
        Task<string> GetKenoBetType(GetKenoBetTypeModel
getKenoBetTypeModel);

        Task<ResourceDataModel> GetLotteryBetChoice(
            GetLotteryBetChoiceModel getLotteryBetChoiceModel);

        Task<string> GetLotteryBetType(
            GetLotteryBetTypeModel getLotteryBetTypeModel);

        Task<ResourceDataModel> GetTableGameBetChoice(
            GetTableGameBetChoiceModel getTableGameBetChoiceModel);

        Task<string> GetTableGameBetType(
            GetTableGameBetTypeModel getTableGameBetTypeModel);

        Task<string> GetCasinoBetItem(GetCasinoBetItemModel
getCasinoBetItemModel);

        Task<string> GetRouletteBetItem(
            GetRouletteBetItemModel getRouletteBetItemModel);

        Task<string> GetSystemAndLuckyParlayDescription(
            GetSystemParlayDescriptionModel
getSystemParlayDescriptionModel);

        Task<List<string>> GetCombinationTypeCombo(
            GetCombinationTypeComboModel2
getCombinationTypeComboModel2);

        Task<int> GetBetTypeOfDisplayTypeId(
            GetBetTypeOfDisplayTypeIdModel
getBetTypeOfDisplayTypeIdModel);

        Task<string> GetOddsTypeName(GetOddsTypeNameModel
getOddsTypeNameModel);

        Task<Dictionary<string, string>> GetOddsTypeNameDictionary(
            GetOddsTypeDictionaryModel getOddsTypeDictionaryModel);

        Task<Dictionary<string, string>> GetOddsTypeFullNameDictionary
(
            GetOddsTypeDictionaryModel getOddsTypeDictionaryModel);

        Task<Dictionary<int, string>> GetBetTypeNameList(
            GetBetTypeNameListModel getBetTypeNameListModel);

        Task<MaxPayoutDataModel> GetParlayMaxPayout(
            GetParlayMaxPayoutModel getParlayMaxPayoutModel);
```

```
        Task<string> GetLeagueName(GetLeagueNameModel
getLeagueNameModel);

        Task<Dictionary<int, string>> GetLeagueNameList(
            GetLeagueNameListModel getLeagueNameListModel);

        Task<LeagueInfoDataModel> GetLeagueInfo(GetLeagueModel
getLeagueModel);

        Task<List<int>> GetSabaLeagueIdList(
            GetSabaLeagueIdListModel getSabaLeagueModel);

        Task<LeagueSessionDataModel> GetLeagueSession(
            GetLeagueSessionTimeModel getLeagueSessionTimeModel);

        Task<string> GetESportGameType(
            GetESportGameTypeModel getESportGameTypeModel);

        Task<string> GetBetradarMatchCodeFormat(
            GetBetradarMatchCodeFormatModel
getBetradarMatchCodeFormatModel);

        Task<string> GetTeamName(GetTeamNameModel getTeamNameModel);
        Task<TeamDataModel> GetTeam(GetTeamModel getTeamModel);

        Task<string> GetThirdPartyTeamName(
            GetThirdPartyTeamNameModel getThirdPartyTeamNameModel);

        Task<string> GetThirdPartyLeagueName(
            GetThirdPartyLeagueNameModel
getThirdPartyLeagueNameModel);

        Task<ResourceDataModel> GetRefKey(GetRefKeyModel
getRefKeyModel);

        Task<DisabledSportControlDto> GetDisableSportControl(
            GetDisabledControlModel getDisabledControlModel);

        Task<DisabledOddsControlDto> GetDisableOddsControl(
            GetDisabledControlModel getDisabledControlModel);

        Task<DisableMatchControlDto> GetDisableMatchControl(
            GetDisabledControlModel getDisabledControlModel);

        Task<DisabledLeagueControlDto> GetDisableLeagueControl(
            GetDisabledControlPlatformModel
getDisabledControlPlatformModel);

        Task<DisabledLeagueGroupControlDto>
GetDisableLeagueGroupControl(
```

```
            GetDisabledControlPlatformModel
getDisabledControlPlatformModel);

        Task<DisabledControlDto> GetDisableControl(
            GetDisabledControlPlatformModel
getDisabledControlPlatformModel);

        Task<List<string>> GetSiteDisableKeyList();

        Task<CreditDisableSportControlDto>
GetCreditDisableSportControl(
            GetCreditDisabledModel getCreditDisabledModel);

        Task<CreditDisabledLeagueControlDto>
GetCreditDisableLeagueControl(
            GetCreditDisabledModel getCreditDisabledModel);

        Task<CreditDisableControlDto> GetCreditDisableControl(
            GetCreditDisabledModel getCreditDisabledModel);

        Task<ServerInfoDataModel> GetServerInfo(GetServerInfoModel
getServerInfoModel);
        Task<ExchangeDataModel> GetExchangeData(GetExchangeDataModel
getExchangeDataModel);
        Task<string> GetSiteType(GetSiteTypeModel getSiteTypeModel);
        Task<double> GetSiteSpread(GetSiteSpreadModel
getSiteSpreadModel);

        Task<string> GetDbBackupConnection(
            GetDbBackupConnectionModel getDbBackupConnectionModel);

        Task<string> GetMemberSiteSetting(GetMemberSiteSettingModel
getMemberSiteSettingModel);
        Task<int> GetCloseAgentSchedule(GetCloseAgentScheduleModel
getCloseAgentScheduleModel);

        Task<bool> IsExistCloseCountrySchedule(
            IsExistCloseCountryScheduleModel
isExistCloseCountryScheduleModel);

        Task<string> GetCountryName(GetCountryNameModel
getCountryNameModel);

        Task<string> GetSettlementStatusName(
            GetSettlementStatusNameModel
getSettlementStatusNameModel);

        Task<bool> ValidCustIdIsStreamingVIP(
            ValidCustIdIsStreamingVIPModel
validCustIdIsStreamingVipModel);
```

```
        Task<Dictionary<int, MemberAllowListDataModel>>
GetMemberAllowListData();
        Task<int> GetUserIdAllowType(GetUserIdAllowTypeModel
getUserIdAllowTypeModel);
        Task<bool> CheckInternalIp(CheckInternalIpModel
checkInternalIpModel);
        Task<RacingMeetingDataModel> GetRaceChannel();
        Task<Dictionary<string, string>> GetSiteConfig
(GetSiteConfigModel getSiteConfigModel);
        Task<SiteDomainDataModel> GetSiteDomain(GetSiteDomainModel
getSiteDomainModel);

        Task<VendorEntryUrlDataModel> GetVendorEntryUrl(
            GetVendorEntryUrlModel getVendorEntryUrlModel);

        Task<Dictionary<int, BetBuilderSelectionDataModel>>
GetBetBuilderSelection(
            GetBetBuilderSelectionModel getBetBuilderSelectionModel);

        Task<Dictionary<int, string>> GetBetBuilderSelectionName(
            GetBetBuilderSelectionNameModel
getBetBuilderSelectionNameModel);

        Task<bool> IsApplyDepSpread(GetLicenseeSiteSettingModel
getLicenseeSiteSettingModel);

        Task<List<LicenseeSiteSpreadSettingDataModel>>
GetLicenseeCustomizedSpreadSettingBySite(
            GetLicenseeCustomizedSpreadSettingBySiteModel
getLicenseeCustomizedSpreadSettingBySiteModel);

        Task<List<LicenseeSiteSpreadSettingDataModel>>
GetLicenseeCustomizedSpreadSettingBySport(
            GetLicenseeCustomizedSpreadSettingBySportModel
getLicenseeCustomizedSpreadSettingBySportModel);

        Task<bool> IsLicenseeVipCust(IsLicenseeVipCustModel
isLicenseeVipCustModel);
        Task<string> GetScoreBoxOddsInfo(GetScoreBoxInfoModel
scoreBoxInfoModel);
        Task<IpInfoDataModel> GetIpInfo(GetIpInfoModel
getIpInfoModel);

        Task<List<CustomerClassSiteLeaguePolicyDataModel>>
GetPeakHourSpreadBySiteId(
            GetPeakHourSpreadListBySiteIdModel
getPeakHourSpreadListBySiteIdModel);

        Task<List<CustomerClassSiteLeaguePolicyDataModel>>
```

```
GetPeakHourSpreadBySiteIdAndSportType(
            GetPeakHourSpreadListBySiteIdAndSportTypeModel
getPeakHourSpreadListBySiteIdAndSportTypeModel);

        Task<decimal> GetVendorGlobalSettingNumber(
            GetVendorGlobalSettingNumberValueModel
getVendorGlobalSettingNumberValueModel);

        Task<List<CreditSiteSpreadSettingDataModel>>
GetCreditSiteSpreadSettingBySite(
            GetCreditSiteSpreadSettingBySiteModel
getCreditSiteSpreadSettingBySiteModel);

        Task<string> GetAvailabilityGroupIp
(GetAvailabilityGroupIpModel getAvailabilityGroupIpModel);

        Task<string> GetAvailabilityGroupConnectionString(
            GetAvailabilityGroupConnectionModel
getAvailabilityGroupConnectionModel);

        Task<string> GetFinancialIndexName(
            GetFinancialIndexNameModel getFinancialIndexNameModel);

        Task<int> GetFinancialPrecision(GetFinancialPrecisionModel
getFinancialPrecisionModel);

        Task<Dictionary<string, ResourceDataModel>>
GetResourceDictionary(
            GetResourceDictionaryModel getResourceDictionaryModel);

        Task<string> GetSportName(GetSportNameModel
getSportNameModel);

        Task<SiteLeagueDto> GetSiteLeague(GetSiteLeagueModel
getSiteLeagueModel);
        Task<SiteMatchDto> GetSiteMatch(GetSiteMatchModel
getSiteMatchModel);
        Task<SiteOddsDto> GetSiteOdds(GetSiteOddsModel
getSiteOddsModel);

        Task<string> GetFastMarketChoice(GetFastMarketsChoiceModel
getFastMarketsChoiceModel);

        /// <summary>
        ///  FastMarket Bet Options
        ///  GetFastMarketsResult
        /// </summary>
        /// <param name="getFastMarketsResultModel"></param>
        /// <returns></returns>
        Task<List<string>> GetFastMarketBetOptionName
```

```
(GetFastMarketsResultModel getFastMarketsResultModel);

        /// <summary>
        /// For bet type 225 : Next 1 Minute Set Piece
        ///  Goal Kick Goal None
        /// </summary>
        /// <param name="getFastMarketsResultModel"></param>
        /// <returns></returns>
        Task<List<string>> GetFastMarketBetOptionNameOfBetType225
(GetFastMarketsResultModel getFastMarketsResultModel);
```

RefData IRefClient

Old	New	
GetResourceDataByRefIdAndResourceId()	IOtherRefDataClientService.GetResourceDictionary()	
GetSiteConfig() GetSiteConfigValue()	IOtherRefDataClientService.GetSiteConfig()	GetSiteConfig() GetSiteConfigValue()(GetSiteConfig dictionaryGetSiteConfigValue key-value) dictionary
IsTestLeague()	ILeagueRefClientService.GetLeagueModel()	

GetSportDisabledStr(string siteId, bool isLive, string operatorId)
GetOddsDisabledCrl(string siteId, bool isLive, string operatorId)
GetMatchDisabledCrl(string siteId, bool isLive, string operatorId)
GetLeagueDisabledCrl(string siteId, bool isLive, Platform platform, string operatorId)
	IOtherRefDataClientService.GetDisabledControl(GetDisabledControlPlatformModel model)
	IOtherRefDataClientService.GetDisabledLeagueControl(GetDisabledControlPlatformModel model)
	IOtherRefDataClientService.GetDisabledLeagueGroupControl(GetDisabledControlPlatformModel model)
	IOtherRefDataClientService.GetDisabledSportControl(GetDisabledControlModel model)
	IOtherRefDataClientService.GetDisabledOddsControl(GetDisabledControlModel model)
	IOtherRefDataClientService.GetDisabledMatchControl(GetDisabledControlModel model)
		IsLive string model IsLive List
		2 usages
		`public List<int> DisableSportList { get; set; }`
		2 usages
		`public List<int> DisableLiveSportList { get; set; }`
		1 usage Darren Lai
		`public string SportDisabledStr => JoinId(DisableSportList);`
		1 usage Darren Lai
		`public string LiveSportDisabledStr => JoinId(DisableLiveSportList);`

GetLeagueGroupDisabledStr(string siteId, bool isLive, Platform platform, string operatorId)		
GetIPInfo()	IOtherRefDataClientService.GetIpInfo()	dbTimeout, redisTimeout ,dbConnection RefDataWebApi RefClient
GetVendorGlobalSettingNumberValue()	sp	
GetLucky3PrizeSettingDetailModelList()		
GetHorseTeamName()	Horse	
GetBetTypeName (string TypeId, string Lang, string Default, string ResourceId)	IBetRefClientService. GetBetTypeName()	**GetBetTypeNameModel.BetTypeReplaceSymbol** resourceId resourceId **GetBetTypeNameModel.CreateModel(int betTypeId, LanguageEnum language, string resourceId)** resourceId **ResourceId format**If betTypeId between 9400 and 9606, resourceId length should be 5 or 3, 6, 9 else resourceId length should be 2, 4, 6
GetBetTypeName (string TypeId, string Lang, string Default, string ResourceId, **long RefNo**)	if(RefNo > 100000000000) IBetRefClientService. GetComboParlayLuckyBet(); IBetRefClientService. GetBetTypeName();	RefNo > 100000000000 ComboParlayLuckyBet
GetScoreBoxOddsInfo()	IOtherRefDataClientService. GetScoreBoxOddsInfo()	**GetScoreBoxInfoModel.ScoreBoxItemModels** scoreText **GetScoreBoxInfoModel.CreateModel(BetTeamEnum betTeam, LanguageEnum language, string scoreText)** scoreText **ScoreText format**"2:-7.02,1:-2.19,0:-0.5,-1:1.18,-2:3.77"
GetComboPlayLuckeyBet()	IBetRefClientService. GetComboParlayLuckyBet()	
GetKenoBetChoice()	IBetRefClientService. GetKenoBetChoice()	out return
GetLotteryBetChoice()	IBetRefClientService. GetLotteryBetChoice()	
GetResourceDic()	IOtherRefDataClientService. GetResourceDictionary()	
GetFastMarketsResult()	IMarketRefClientService. GetFastMarketsResult()	ResultId RecourseId()
GetFastMarkets225Result()	IMarketRefClientService. GetFastMarketsResultExcludeGoalAndGoalKick()	
GetPeakHourSpreadList()	IOtherRefDataClientService. GetPeakHourSpreadListBySiteId() IOtherRefDataClientService. GetPeakHourSpreadListBySiteIdAndSportType()	

SiteFilter API

MenuService disable controlmatch modecan set g streaming…… push node

MenuService RefData 2.0 RefClient 4.0 API API(RefData Client)

http://192.168.7.41:9022/Api/RefData/GetSiteFilterData?SiteId=4100200&Platform=Desktop&OperatorId=any_operator_id&AgentSiteId=0

SiteId	4 7 MessageSiteId
Platform	Desktop or App (**Desktop**)
OperatorId	
AgentSiteId	AgentSiteId Credit Disable League / LeagueGroup

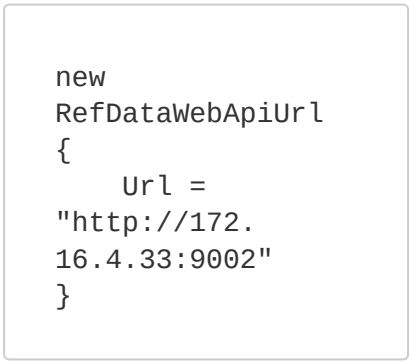
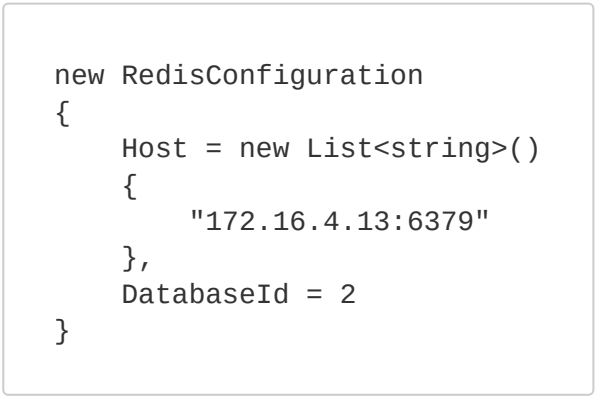
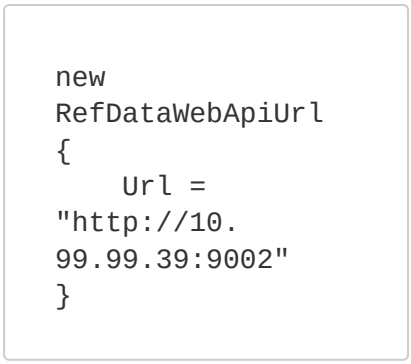
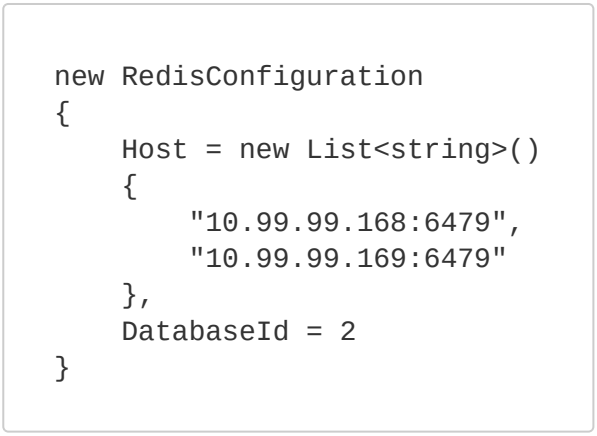
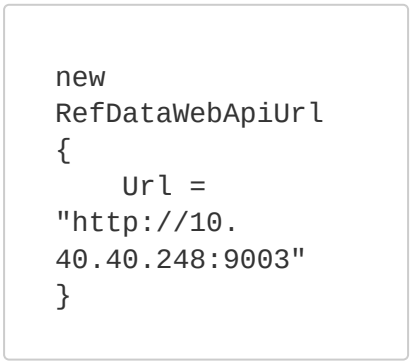
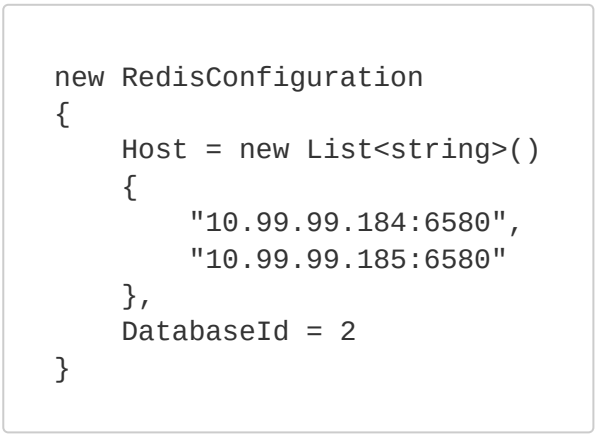
Url

Env	**Url**
Office	http://192.168.7.41:9022/Api/RefData/GetSiteFilterData?SiteId=4100200&Platform=Desktop
Sit	http://172.16.2.33:9022/Api/RefData/GetSiteFilterData?SiteId=4100200&Platform=Desktop
Uat	infinity-uat.nebula.prod 99 load balance uat cluster http://infinity-uat.nebula.prod:9022/Api/RefData/GetSiteFilterData?SiteId=4100200&Platform=Desktop or http://10.99.99.39:9022/Api/RefData/GetSiteFilterData?SiteId=4100200&Platform=Desktop
Prod	http://infinity-service.nebula.prod:9022/Api/RefData/GetSiteFilterData?SiteId=4100200&Platform=Desktop

---

3.0 ()

Environment	**Url**	**Redis**
Office	ssh tunnel SIT `new RefDataWebApiUrl { Url = "http://192.168.7.41:9002" }`	LocalRedis `new RedisConfiguration { Host = new List<string>() { "192.168.7.41:6379" }, DatabaseId = 2 }`

SIT		LocalRedis 
UAT		LocalRedis 
PROD	Virtual IP 	LocalRedis 

PROD(AWS)	infra load balance AWS `new RefDataWebApiUrl { Url = "refdata.foodpandaoh.net" }`	

Install(.Net Core)

: .Net Core 3.1

Nuget

```
RefClient
RefClient.Extensions
```

Startup.cs Service

```
services.AddRefClient();
```

appsettings.json Config

```
{
  "ApiSetting": {
    "RefDataWebApiUrl": {
      "Url": "http://172.16.4.33:9002"
    }
  }
}
```

Install(.Net Framework), with Autofac

: .Net Framework 4.6.1

Nuget

```
RefClient

RefClient.Netframework.Extensions

Autofac 5.2.0

Autofac.Extras.DynamicProxy 5.0.0

Autofac.Mvc5 5.0.0

Autofac.WebApi2 5.0.0
```

AutofacConfig.cs

Line 16 : RefClient 1.3 ClientConfigModel (web api url)

```
 1     public class AutofacConfig
 2     {
 3         public static IContainer Container { get; private set; }
 4
 5         /// <summary>
 6         /// DI
 7         /// </summary>
 8         public static void Register()
 9         {
10             //
11             ContainerBuilder builder = new ContainerBuilder();
12
13             // Controllers
14             builder.RegisterControllers(Assembly.
GetExecutingAssembly());
15             builder.RegisterApiControllers(Assembly.
GetExecutingAssembly());
16             builder.RegisterRefClient(new ClientConfigModel());
17
18             //  DI Container
19             Container = builder.Build();
20
21             // DI ContainerControllerDI Resolver
22             DependencyResolver.SetResolver(new
AutofacDependencyResolver(Container));
23             GlobalConfiguration.Configuration.DependencyResolver =
24                 new AutofacWebApiDependencyResolver(Container);
//Set the WebApi DependencyResolver
25         }
26     }
```

Global.asax.cs Autofac

```
AutofacConfig.Register();
```

Install(.Net Framework), with SimpleInjector (Obsolete)

: .Net Framework 4.6.1

Nuget

```
RefClient

RefClient.SimpleInjector

SimpleInjector 3.1.2
```

IocConfig.cs

```
 1 public class IocConfig
 2 {
 3     public static void Initialize()
 4     {
 5         var container = new Container();
 6         container.RegisterRefClient(() => new ClientConfigModel()
 7         {
 8             RefDataWebApiUrl = new RefDataWebApiUrl()
 9             {
10                 Url = "url"
11             }
12         });
13
14         container.RegisterMvcControllers(Assembly.
GetExecutingAssembly());
15         container.RegisterMvcIntegratedFilterProvider();
16
17         container.Verify();
18
19     }
20 }
```

Global.asax.cs SimpleInjector

```
IocConfig.Initialize();
```

Install(.Net Framework), factory method

: .Net Framework 4.6.1

Nuget

```
RefClient
```

Instance

Line 3 : RefClient 1.3 ClientConfigModel (web api url)

```
1 //  Golbal.asax
2 //  Web.config
3 RefClientFactory.InitializeConfig(new ClientConfigModel());
4
5 var betRefClientService = RefClientFactory.GetBetRefClientService();
```

```
    public class HomeController : Controller
    {
        private IBetRefClientService _betRefClient;

        public HomeController(IBetRefClientService betRefClient)
        {
            _betRefClient = betRefClient;


            Console.WriteLine();
        }

        public ActionResult Index()
        {
            var parentIdByBetTypeId = _betRefClient.
GetParentIdByBetTypeId(new GetParentIdByBetTypeIdModel
            {
                BetTypeId = 1
            });

            return View();
        }

    }
```

Response format

ResultViewModel

```
public class ResultViewModel<TData>
{
    public int ErrorCode { get; set; }
    public string ErrorMsg { get; set; }
    public TData Data { get; set; }
}
```

ErrorCode

```
public enum ErrorEnum
{
    /// <summary>
    /// Success
    /// </summary>
    Success = 0,
    /// <summary>
    ///
    /// </summary>
    ModelValidateError = 1,
    /// <summary>
    /// InternalServerError
    /// </summary>
    InternalServerError = 2,
    /// <summary>
    ///  sql
    /// </summary>
    DataBaseError = 3,
    /// <summary>
    /// Redis
    /// </summary>
    RedisError = 4,
    /// <summary>
    /// Redis  time out
    /// </summary>
    RedisTimeoutError = 5,
    /// <summary>
    ///  Null  Null
    /// </summary>
    NullReferenceError = 6,
    /// <summary>
    /// Error
    /// </summary>
    GetResultModelError = 99
}
```

:

```
System.IO.FileLoadException occurred HResult=0x80131040
Message=Could not load file or assembly 'System.ComponentModel.
Annotations, Version=4.1.0.0, Culture=neutral,
PublicKeyToken=b03f5f7f11d50a3a' or one of its dependencies. The
located assembly's manifest definition does not match the assembly
reference. (Exception from HRESULT: 0x80131040)
```

```
System.IO.FileLoadException: Could not load file or assembly 'Microsoft.
Extensions.Caching.Abstractions, Version=2.1.0.0, Culture=neutral,
PublicKeyToken=adb9793829ddae60' or one of its dependencies. The
located assembly's manifest definition does not match the assembly
reference. (Exception from HRESULT: 0x80131040)
```

: [.Net]DllDLL - Dll(Dll Hell)

Web自動設定binding

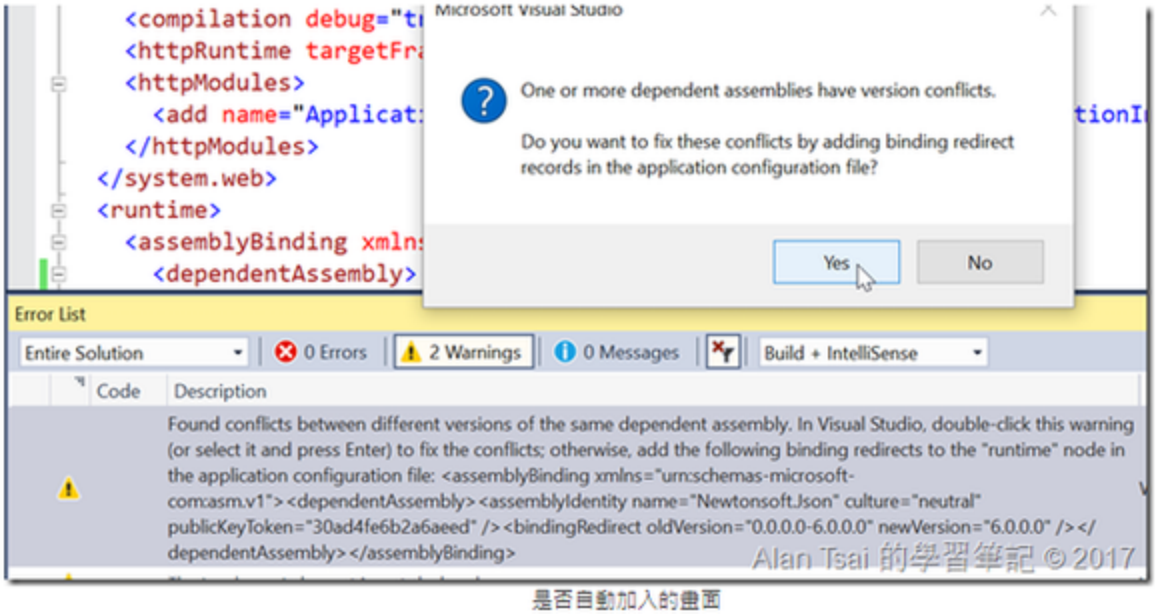
和console不同，VS不會自動調整`Web.config`，但是VS會有提示。

當build完之後，檢查`Warning`頁簽



可以看到有告知版本問題

可以直接對warning點兩下，會自動問說要不要加入，如果要加入，會自動修改Web.confi。



是否自動加入的畫面

以上就是解決Dll版本問題的處理方式，如果對於如何重現問題有興趣可以往下看。