


THE INDIAN HIGH SCHOOL - DUBAI

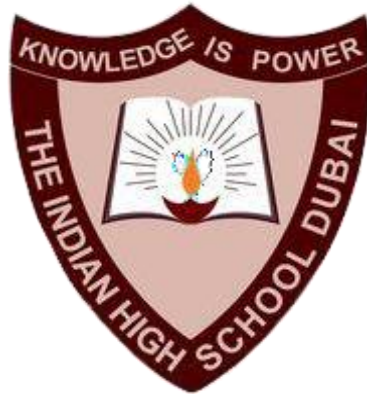

SUBJECT

Comp. Sci Journal
2025-26

Name: Abyaz Javid
Roll no.: 4

CERTIFICATE

This is to certify that the work in this journal is the bonafide work of
Master _____

Class _____ *Div* _____

recorded in the school lab during the academic year
20xx - 20xx

Date: _____

Teacher in charge: _____



Proud winner of the Sheikh Hamdan bin Rashid Al Maktoum Award for Distinguished School & School Administration, 2002 & 2005



ACKNOWLEDGEMENT

I would like to take this opportunity to thank the Central Board of Secondary Education (CBSE) and The Indian High School-Dubai, for granting me the opportunity to deepen my knowledge in my favorite subject, Computer Science

I would also like to thank my teacher Mrs. Swapnil Verma for guiding me and sharing her wide variety of knowledge

INDEX

S. No.	Title	Page No.
FUNCTIONS		
1.	Count number of odd and even elements	1
2.	Evaluate the series $1 + x^2 + x^3 + \dots + x^n$	2
3.	Find the factorial of number	3
4.	Get valid email id's	4
5.	Find words longer than 5 letters	5
6.	Menu driven program to <ul style="list-style-type: none">• Check if number is odd or even• Check if number is prime	6
7.	Find greater number	7
8.	Move elements divisible by 5 to the end of list	8
9.	Find cars released in 2020 & sort the dict alphabetically	9
10.	Take tuple and return indices of non-zero elements	10
11.	Count number of vowels in user input	11

Program 1

Aim: To write a function that takes 'n' number of integers and count the number of odd and even numbers.

Modules used: N/A

Data types used: Int

Script:

```
def count(*a) -> None:
    o, e = 0, 0
    for i in a:
        (e := e + 1) if i % 2 == 0 else (o := o + 1)
    print(f"No. of odd elements: {o}\nNo. of even elements: {e}")

count(1,2,3,4,5,6,7,8)
```

Output:

```
No. of odd elements: 4
No. of even elements: 4
>>> |
```

Program 2

Aim: To write a function to find the sum of the series: $1 + x^2 + x^3 + \dots + x^n$

Modules used: N/A

Data types used: Int

Script:

```
def series(x: int, n: int) -> None:
    s = 1
    for i in range(n): s += x**(i+1)
    print(f"Sum of the series is: {s}")

series(2, 16)
```

Output:

```
>>> | Sum of the series is: 131071
```

Program 3

Aim: To write a function to find the factorial of a number without taking an argument

Modules used: N/A

Data types used: Int

Script:

```
n = int(input(">>> "))
def fact() -> int:
    global n
    return n * (n := n - 1, fact())[1] if n > 1 else 1

print(f"Factorial of {n} is: {fact()}")
|
```

Output:

```
| >>> 5
| Factorial of 5 is: 120
```

Program 4

Aim: To write a function that takes a list of strings and return the emails that contain the substring "@cmail"

Modules used: N/A

Data types used: String, List

Script:

```
r = input(">>> ").split()
def validMailID(l: list) -> list:
    return [i for i in l if "@cmail" in i]

print(f"Valid email IDs are:\n - " + "\n - ".join(validMailID(r)))
```

Output:

```
>>> asdf@cmail.com fdsa@cmail.com asdf@gmail.com swag@yahoo.gov
Valid email IDs are:
- asdf@cmail.com
- fdsa@cmail.com
.
```


Program 5

Aim: To write a function that takes a list of strings and returns the strings that are longer than 5 characters.

Modules used: N/A

Data types used: String, List

Script:

```
r = input(">>> ").split()
def longWords(l: list):
    return [i for i in l if len(i) > 5]

print(f"Words longer than 5 letters are:\n - " + "\n - ".join(longWords(r)))
```

Output:

```
>>> word1 antidisestablishmentarianism word2 wee asdf fdsa
Words longer than 5 letters are:
- antidisestablishmentarianism
```

Program 6

Aim: To write a menu driven program to find odd/even numbers and prime numbers.

Modules used: math

Data types used: Int, Bool

Script:

```
import math

print("""
#-----#
|           NUMBERS           |
| 1. even/odd                 |
| 2. prime/consonant         |
| 3. exit                     |
#-----#""")

def evenity(n: int) -> bool:
    return True if n % 2 == 0 else False

def primality(n: int) -> bool:
    return False if n <= 1 else (True if n == 2 else (False if n % 2 == 0 else all(n % i != 0 for i in range(3, int(math.sqrt(n)) + 1, 2))))

while True:
    o = int(input(">>> "))
    if o == 1:
        print(evenity(int(input("n: "))))
    elif o == 2:
        print(primality(int(input("n: "))))
    elif o == 3:
        break
    else:
        print("Invalid option selected")
```

Output:

```
#-----#
|           NUMBERS           |
| 1. even/odd                 |
| 2. prime/consonant         |
| 3. exit                     |
#-----#

>>> 1
n: 43
False
>>> 2
n: 5
True
>>> 4
Invalid option selected
>>> 3
```

Program 7

Aim: To write a function that returns the greater of two numbers.

Modules used: N/A

Data types used: Tuple, Float

Script:

```
a, b = tuple(*map(float, input(">>> ").split()))
def findBig() -> float:
    global a, b
    return a if a > b else b

print(f"Bigger number: {findBig()}")
```

Output:

```
>>> 1 3
Bigger number: 3.0
```

Program 8

Aim: To write a function that takes a list and moves all the elements divisible by 5 to the end of the list.

Modules used: N/A

Data types used: List, Int

Script:

```
x = [*map(int, input(">>> ").split())]
def move(l: list) -> None:
    l[:] = [x for x in l if x % 5] + [x for x in l if x % 5 == 0]
    print(f"Ordered list is: {l}")

move(x)
```

Output:

```
>>> 1 2 5 4 6 58 65 2350 15
Ordered list is: [1, 2, 4, 6, 58, 5, 65, 2350, 15]
```

Program 9

Aim: Given a dictionary containing information about vehicles, display the vehicles that were released in 2020 and order the dict in alphabetical order by brand name.

Modules used: N/A

Data types used: Dict, Int, List, String

Script:

```
vehicle = {
    "car1": ["Toyota", "Camry", 2020, 25_000],
    "car2": ["Ford", "Explorer", 2019, 32_000],
    "car3": ["Chevy", "Silverado", 2021, 40_000],
    "car4.5": ["Honda", "Civic", 2020, 22_000],
    "car5": ["anotherRealCarBrand", "Model nine", 2023, 45_000]
}

def _2020(D: dict):
    print(f"No. of vehicles released in 2020: {len([c for c in D if c[2] == 2020])}")

def sort(cars_dict):
    sorted_cars = sorted(cars_dict.items(), key=lambda x: x[1][0].lower())
    for key, value in sorted_cars:
        print(f"{key}: {value}")

_2020(vehicle)
print("\nSorted dict:")
sort(vehicle)
```

Output:

```
No. of vehicles released in 2020: 0
```

```
Sorted dict:
```

```
car5: ['anotherRealCarBrand', 'Model nine', 2023, 45000]
car3: ['Chevy', 'Silverado', 2021, 40000]
car2: ['Ford', 'Explorer', 2019, 32000]
car4.5: ['Honda', 'Civic', 2020, 22000]
car1: ['Toyota', 'Camry', 2020, 25000]
```

Program 10

Aim: To write a function that takes a tuple and returns the indices of the non-zero elements.

Modules used: N/A

Data types used: Int, Tuple, List

Script:

```
t = tuple([*map(int, input(">>> ").split())])
def indexTuple(t: tuple) -> list:
    return [i for i, v in enumerate(t) if v != 0]

print(f"Non zero indices are: {indexTuple(t)}")
```

Output:

```
>>> 1 0 25 03 64 00 5
Non zero indices are: [0, 2, 3, 4, 6]
```

Program 11

Aim: To write a function to count the number of vowels in user input.

Modules used: N/A

Data types used: String

Script:

```
r = input(">>> ")
def vowelCount() -> None:
    global r
    print(f"No. of vowels: {sum(i in "AEIOUaeiou" for i in r)}")

vowelCount()
```

Output:

```
>>> hello my name is star.stalker9160
No. of vowels: 8
```