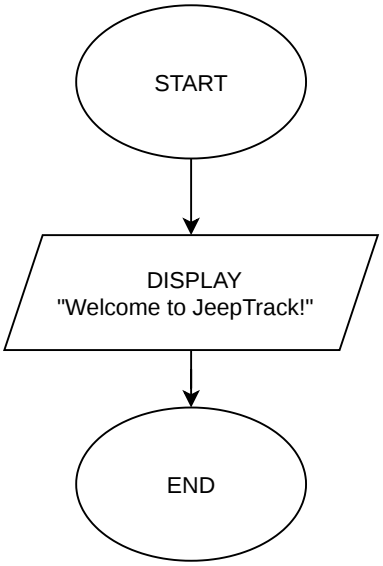
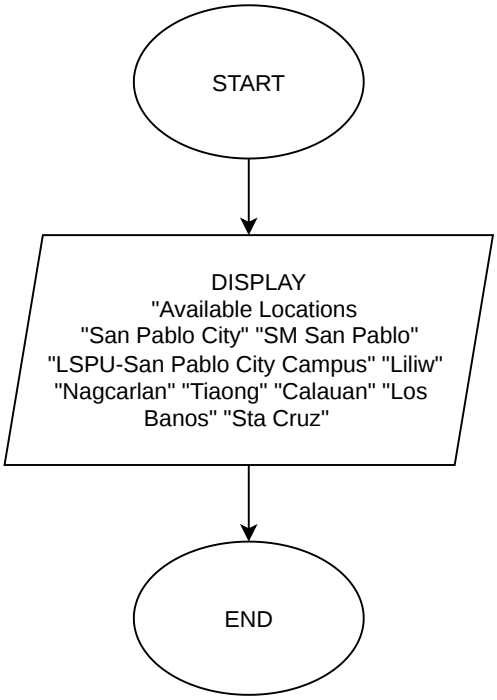
METHODS

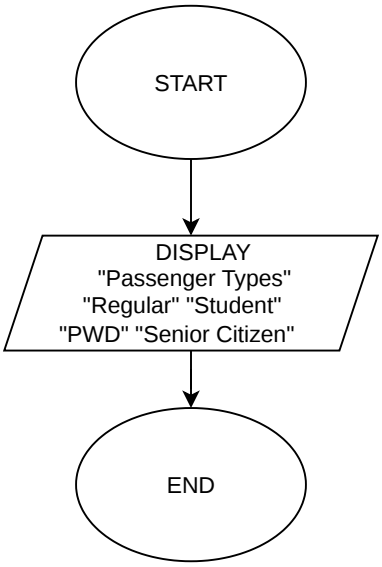
WelcomeMessage

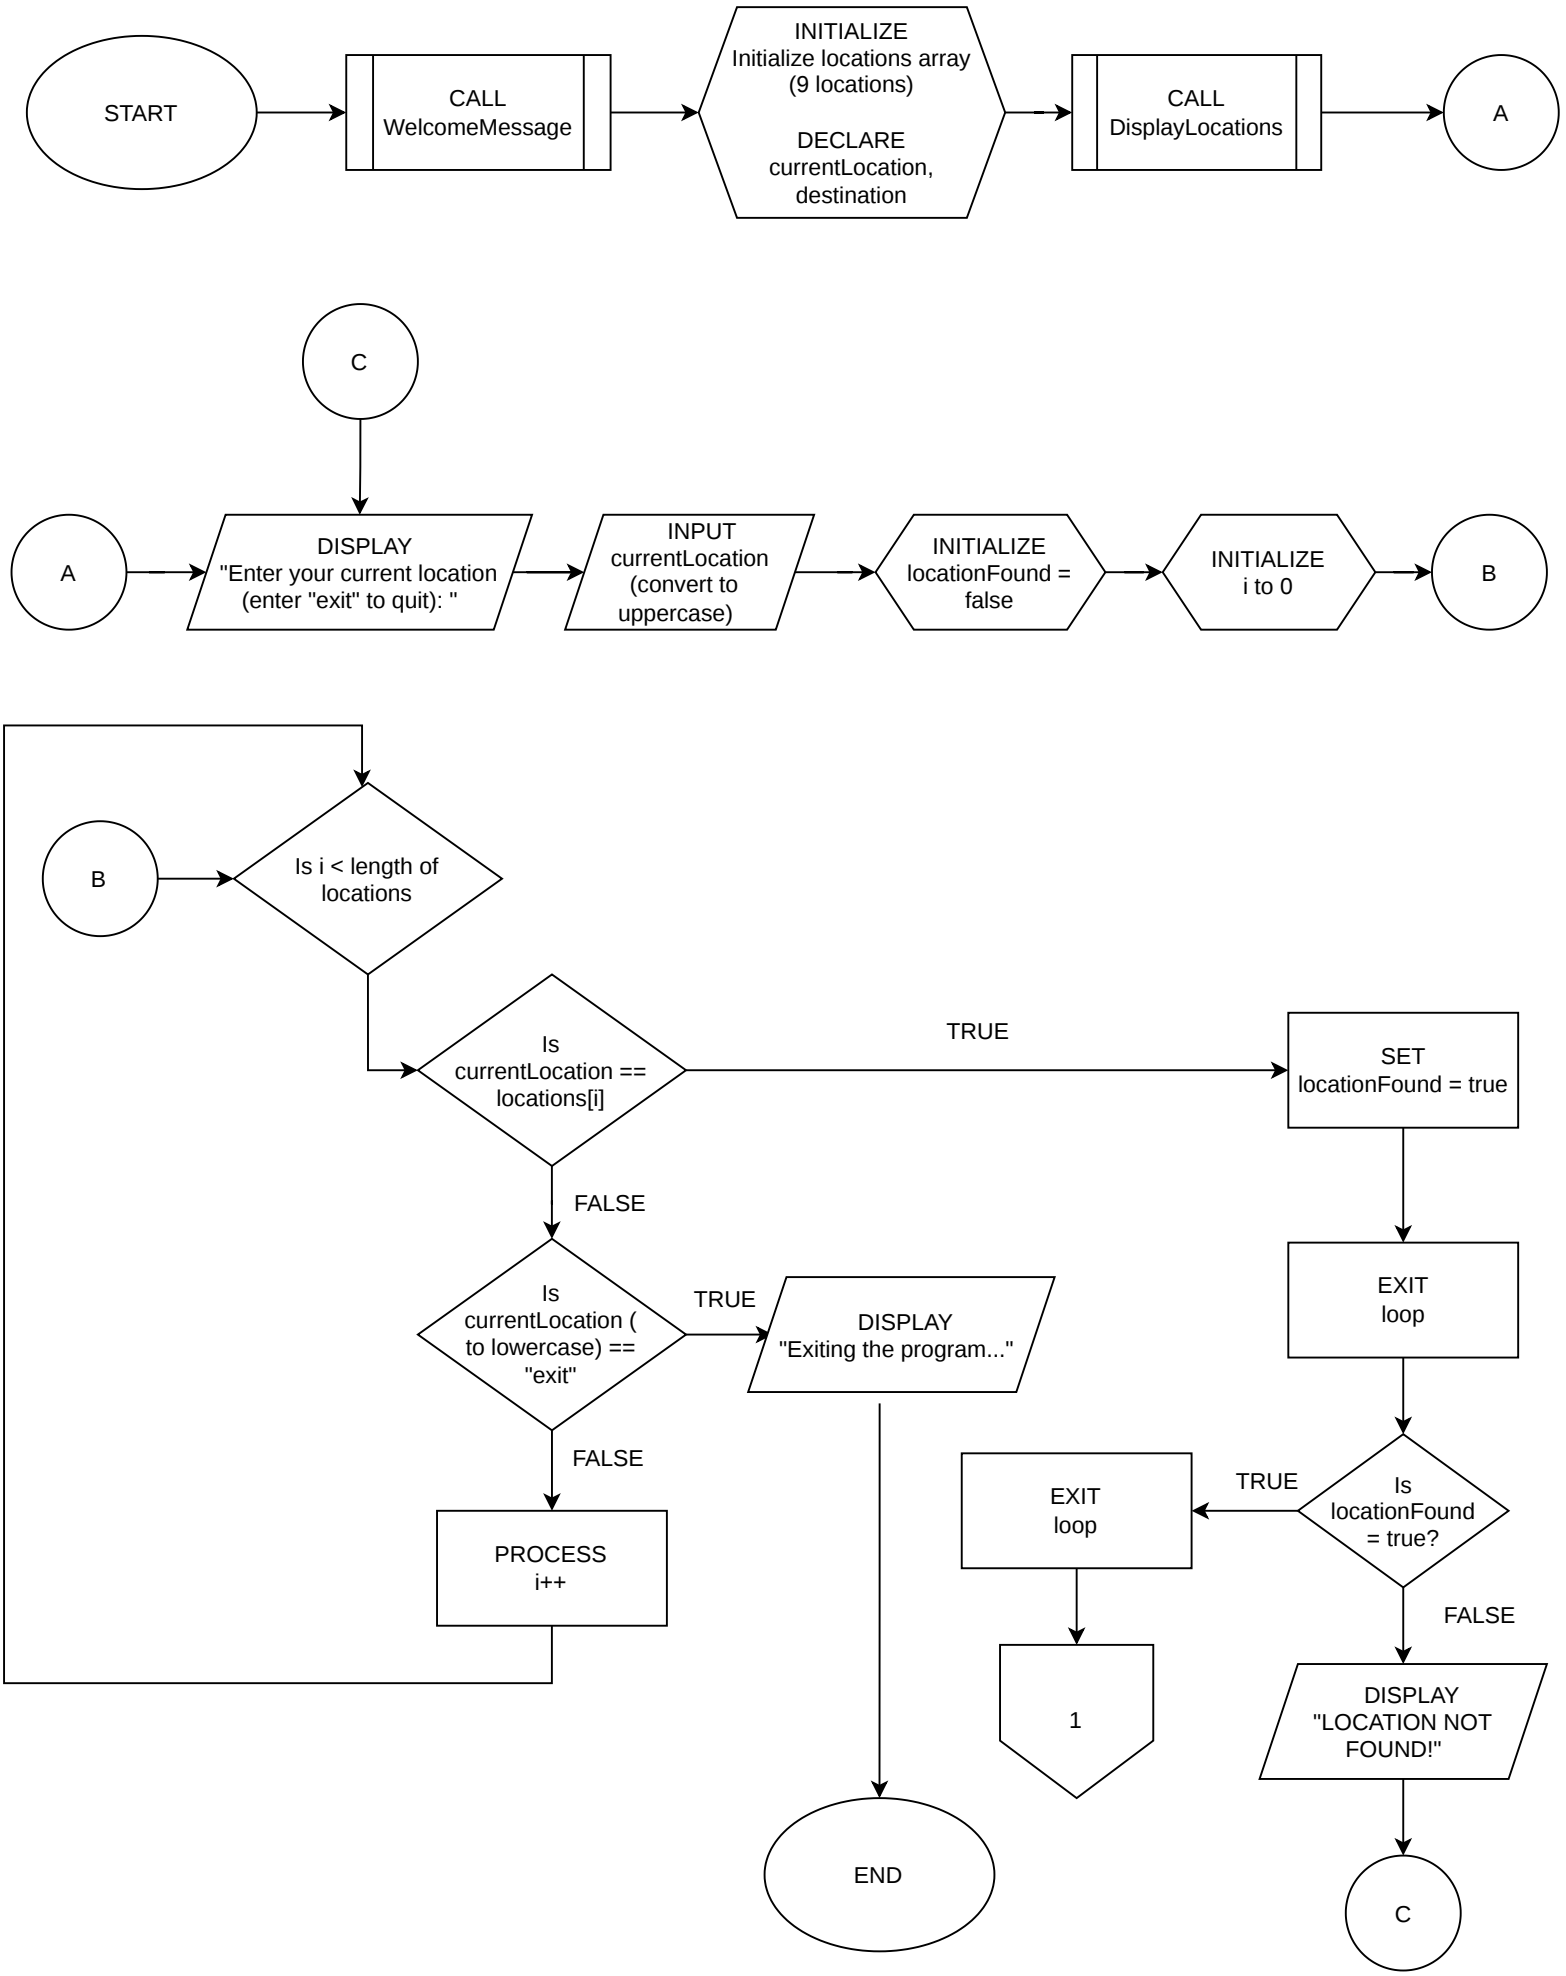


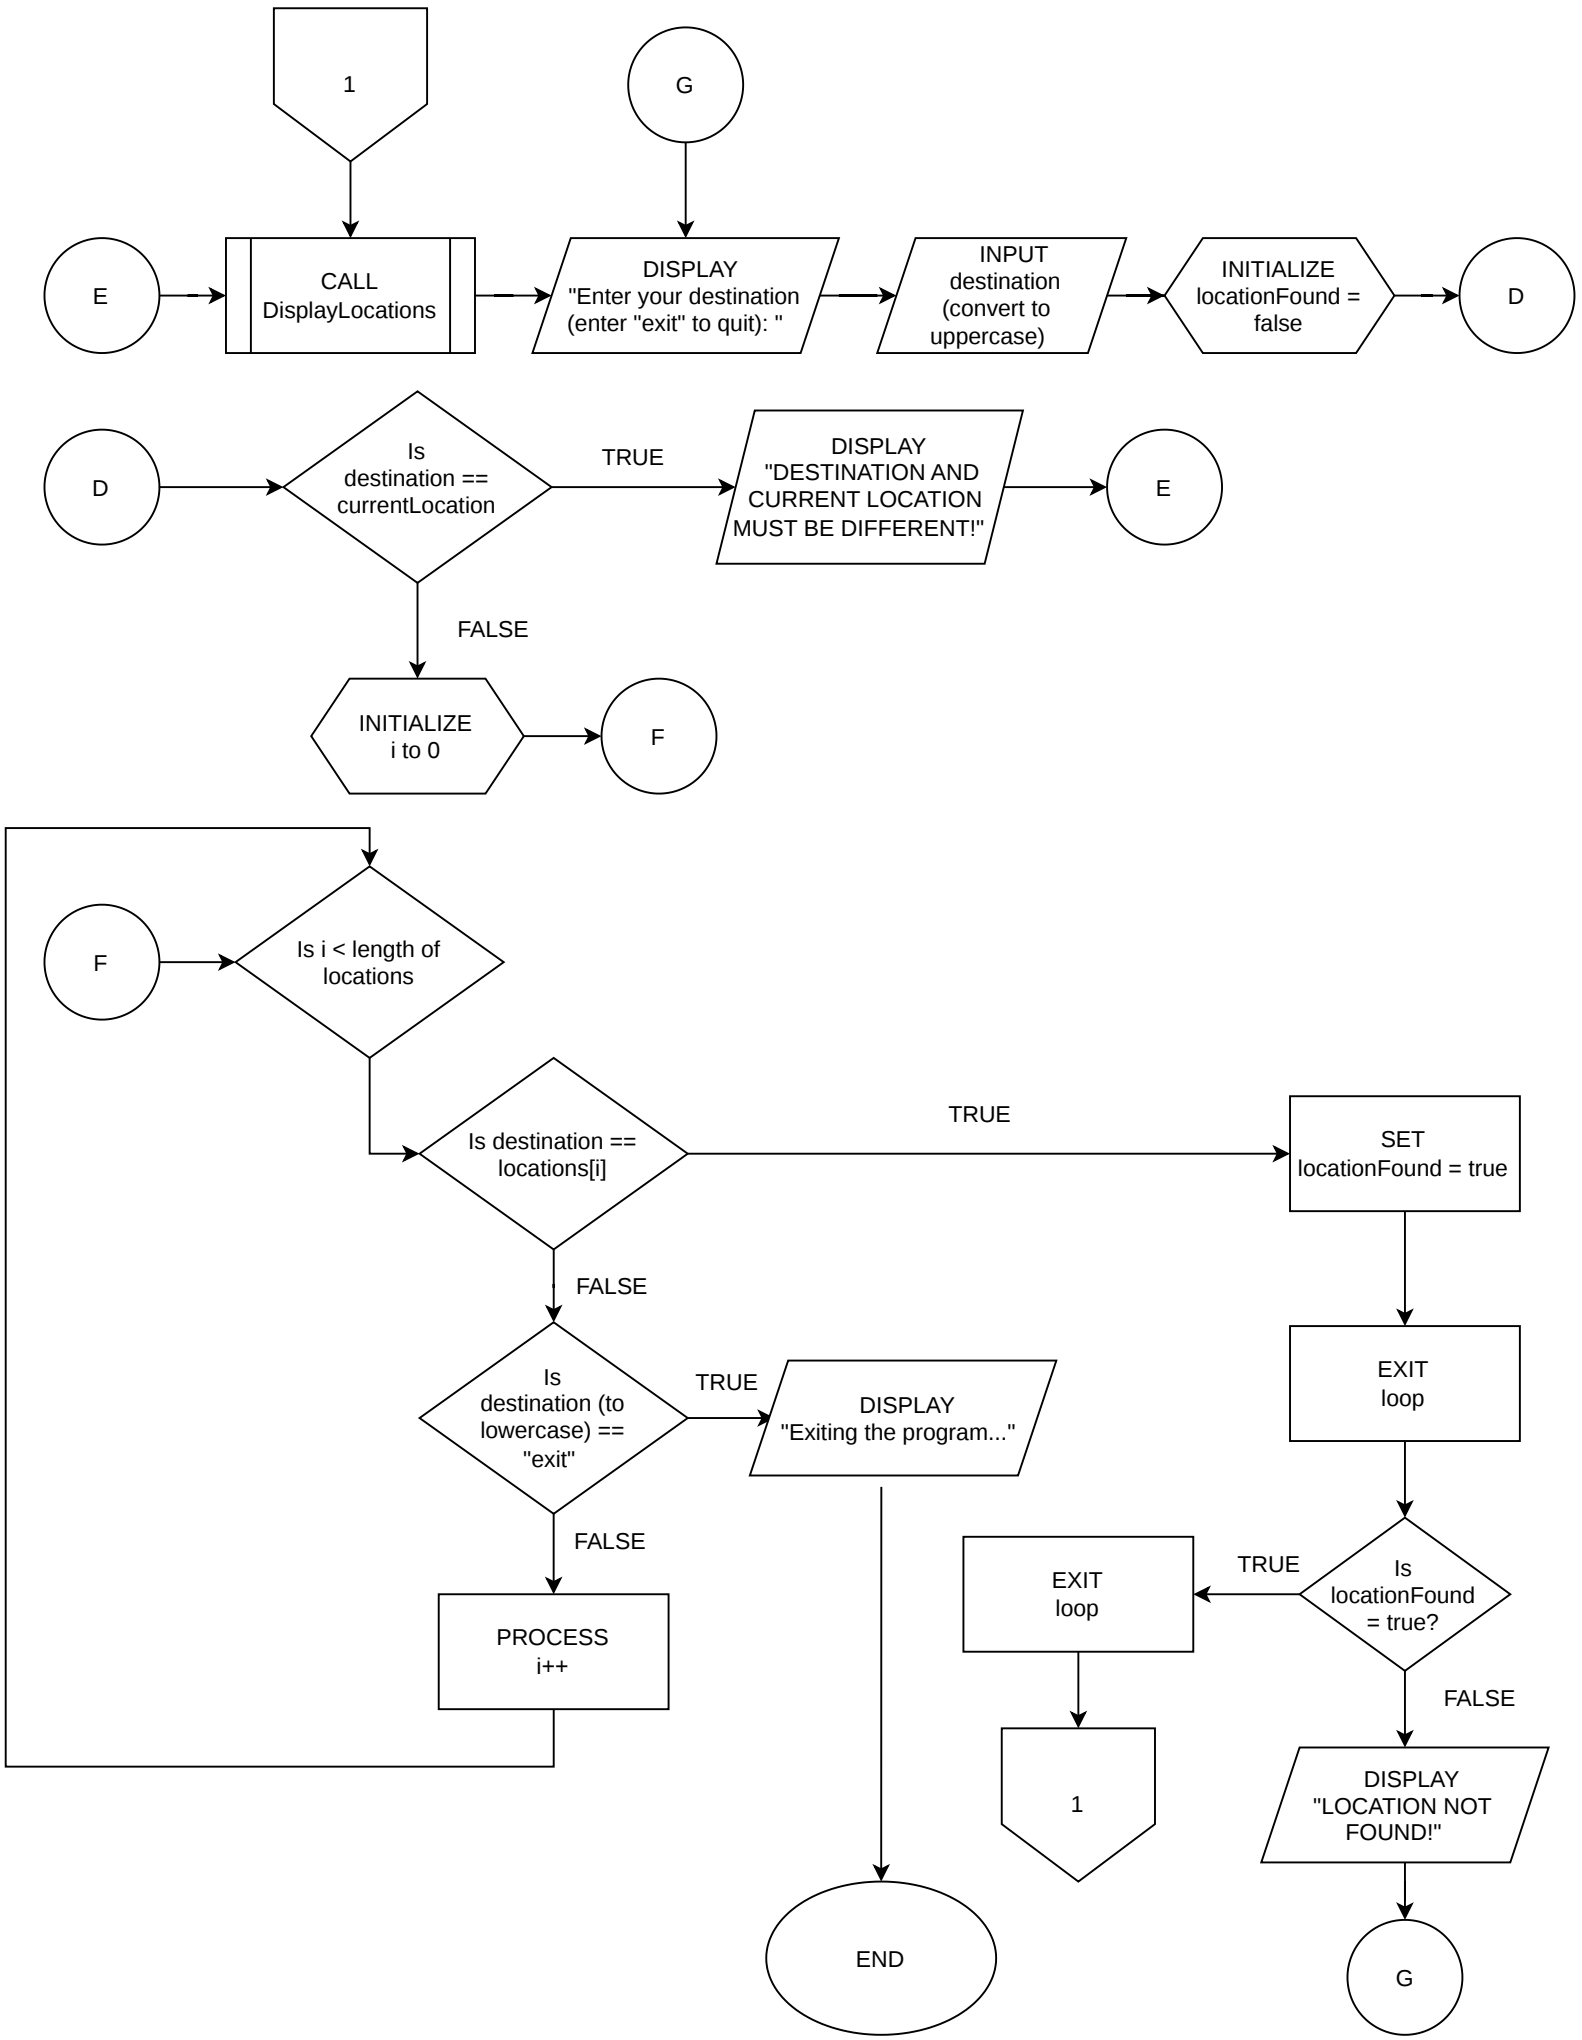
DisplayLocations

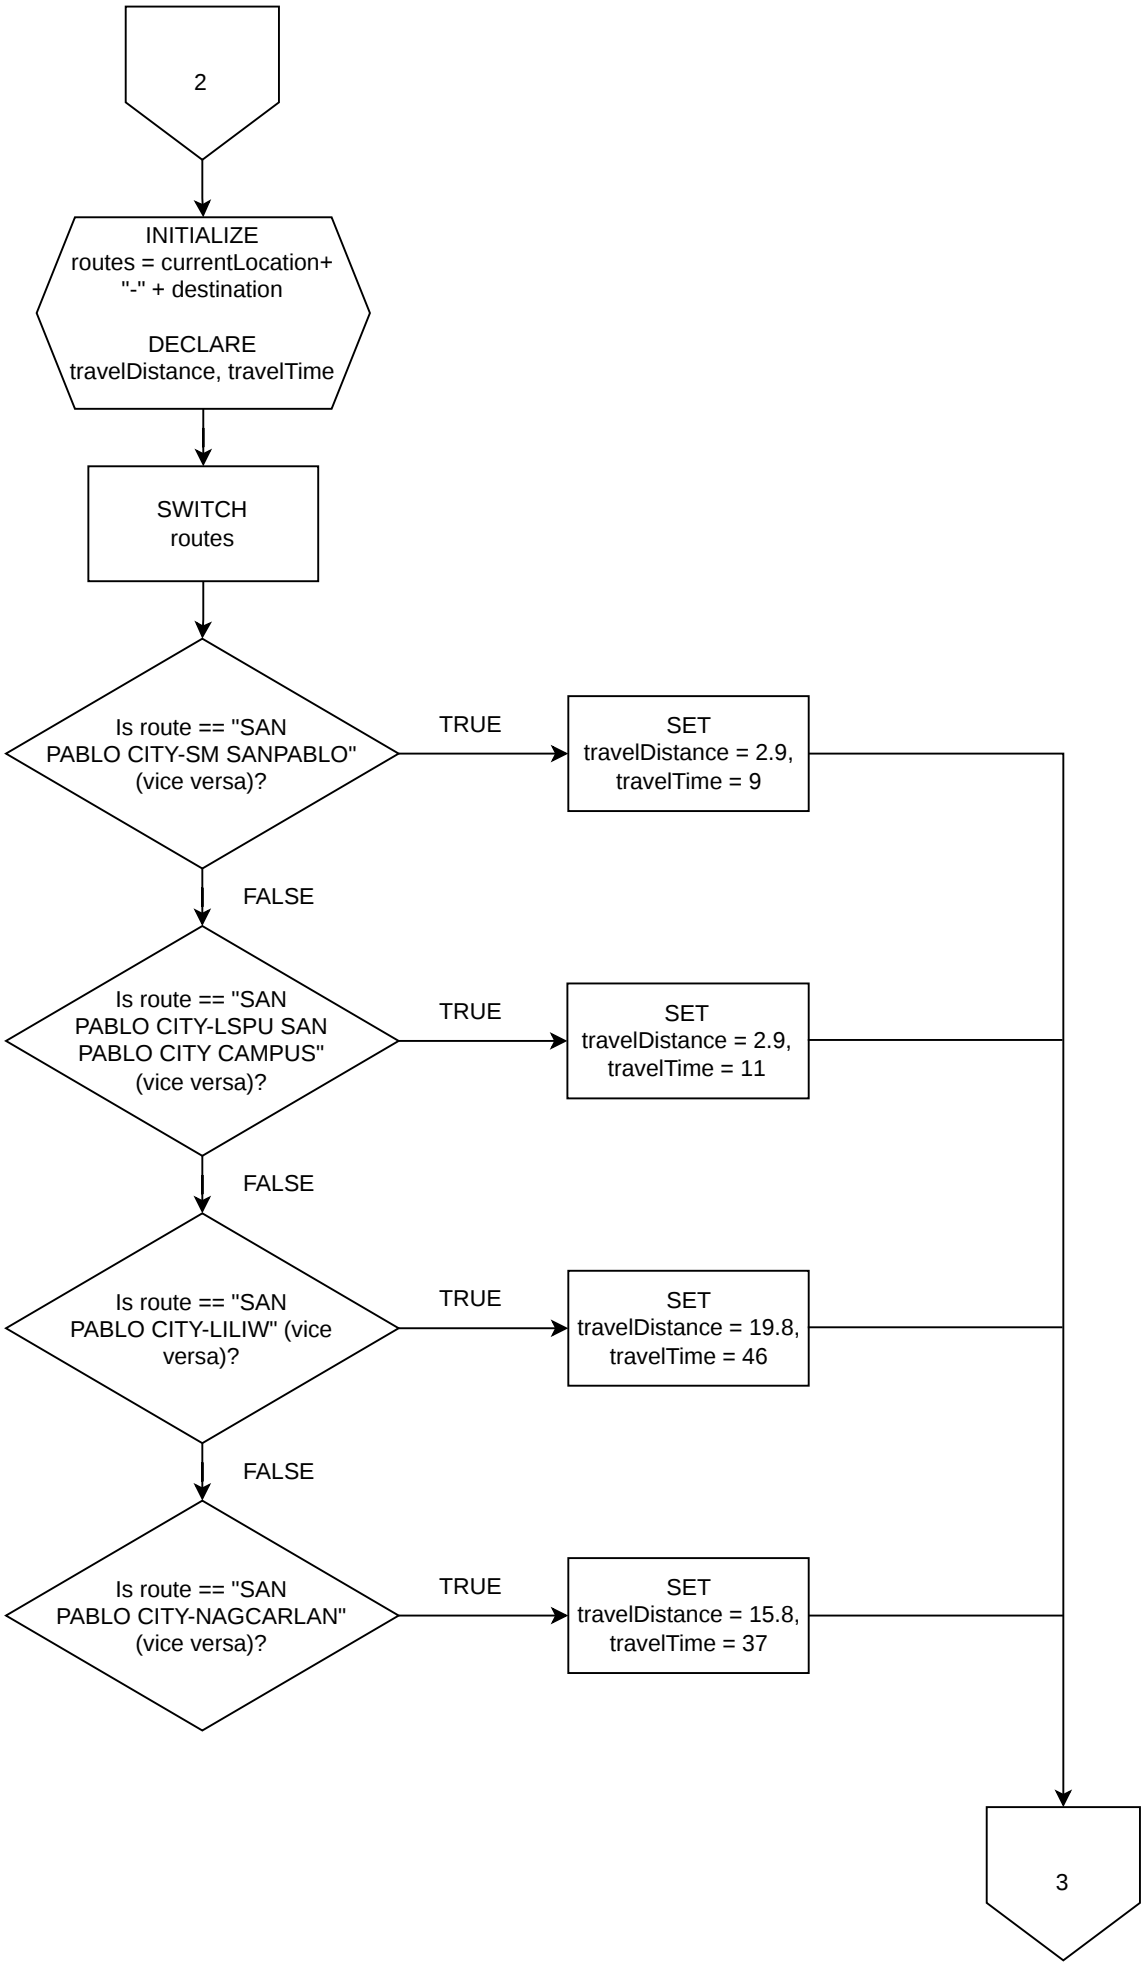


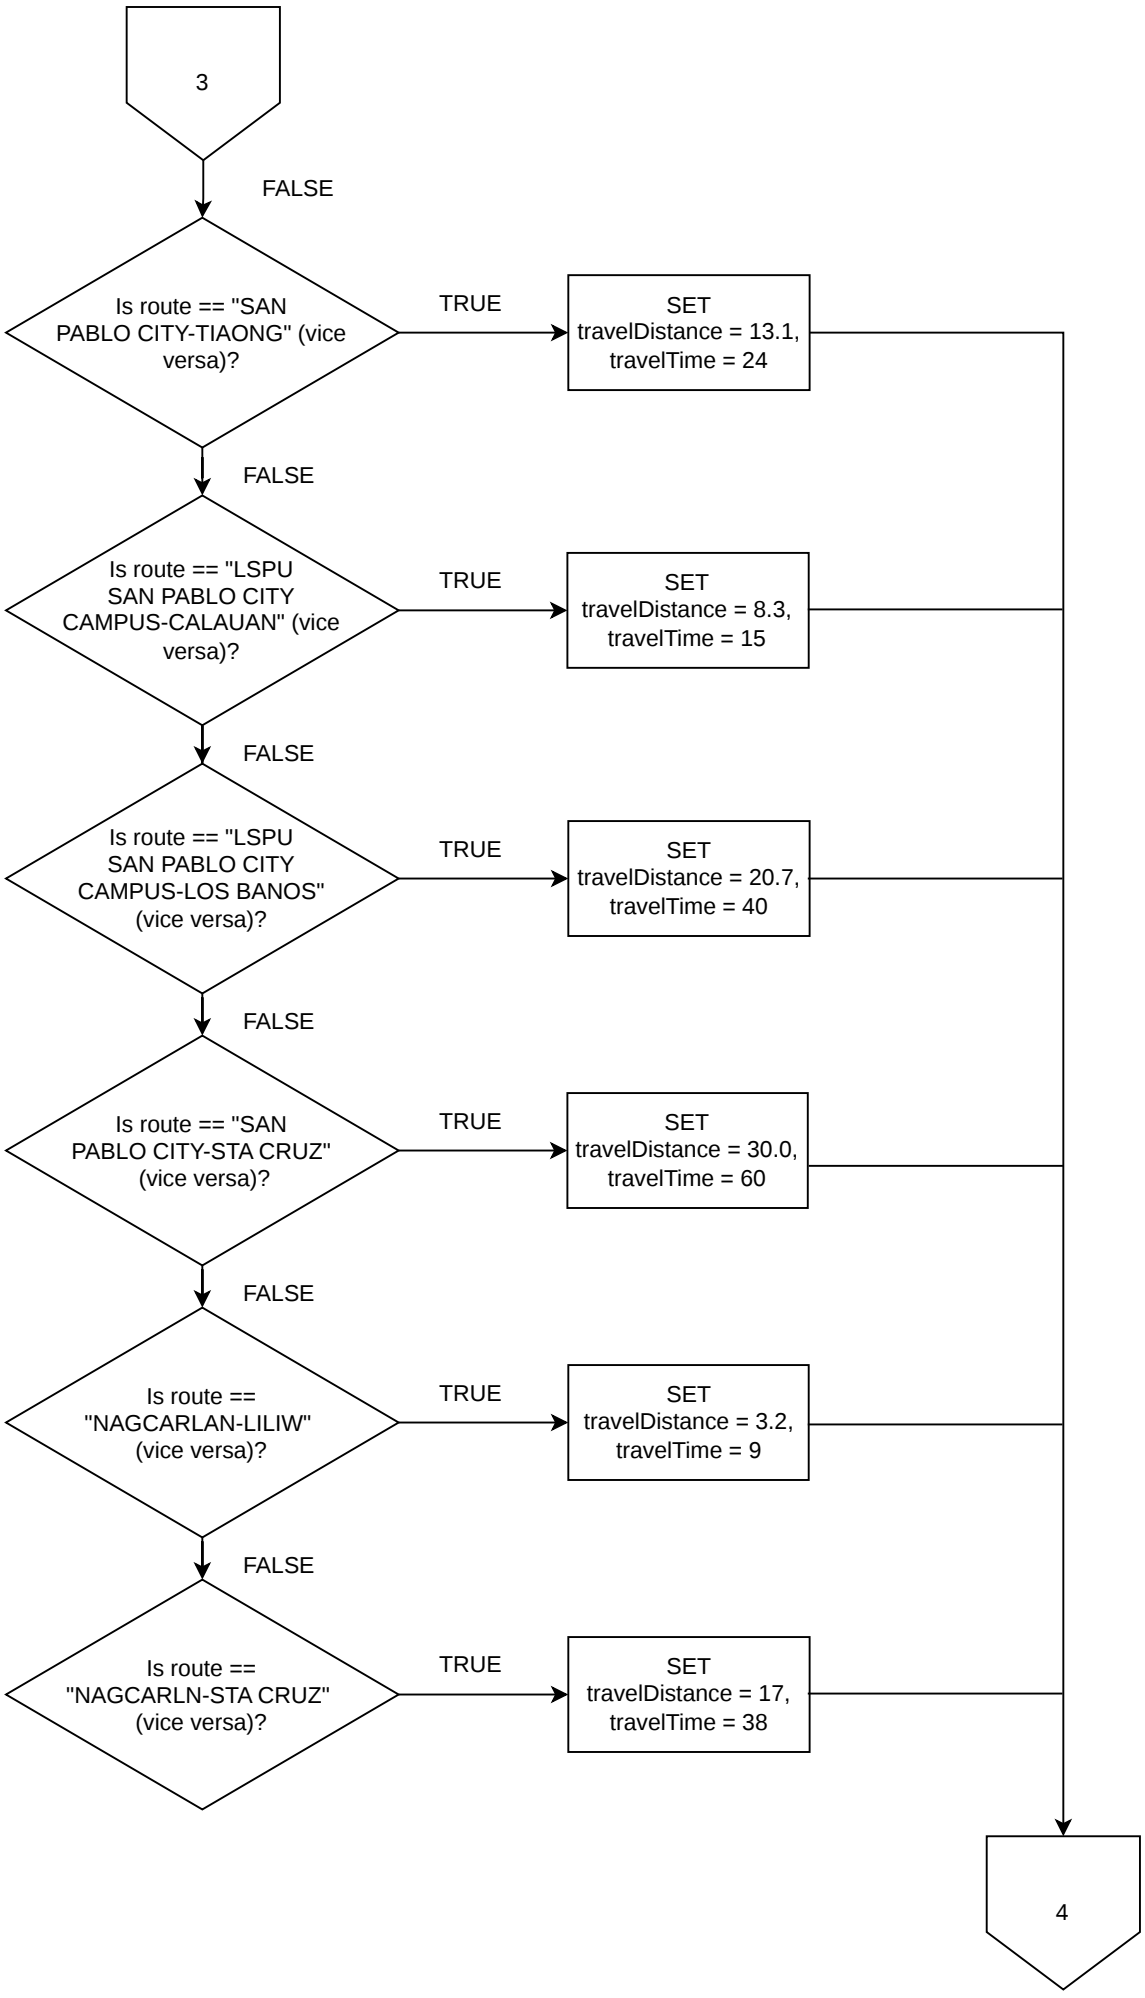
PassengerTypes

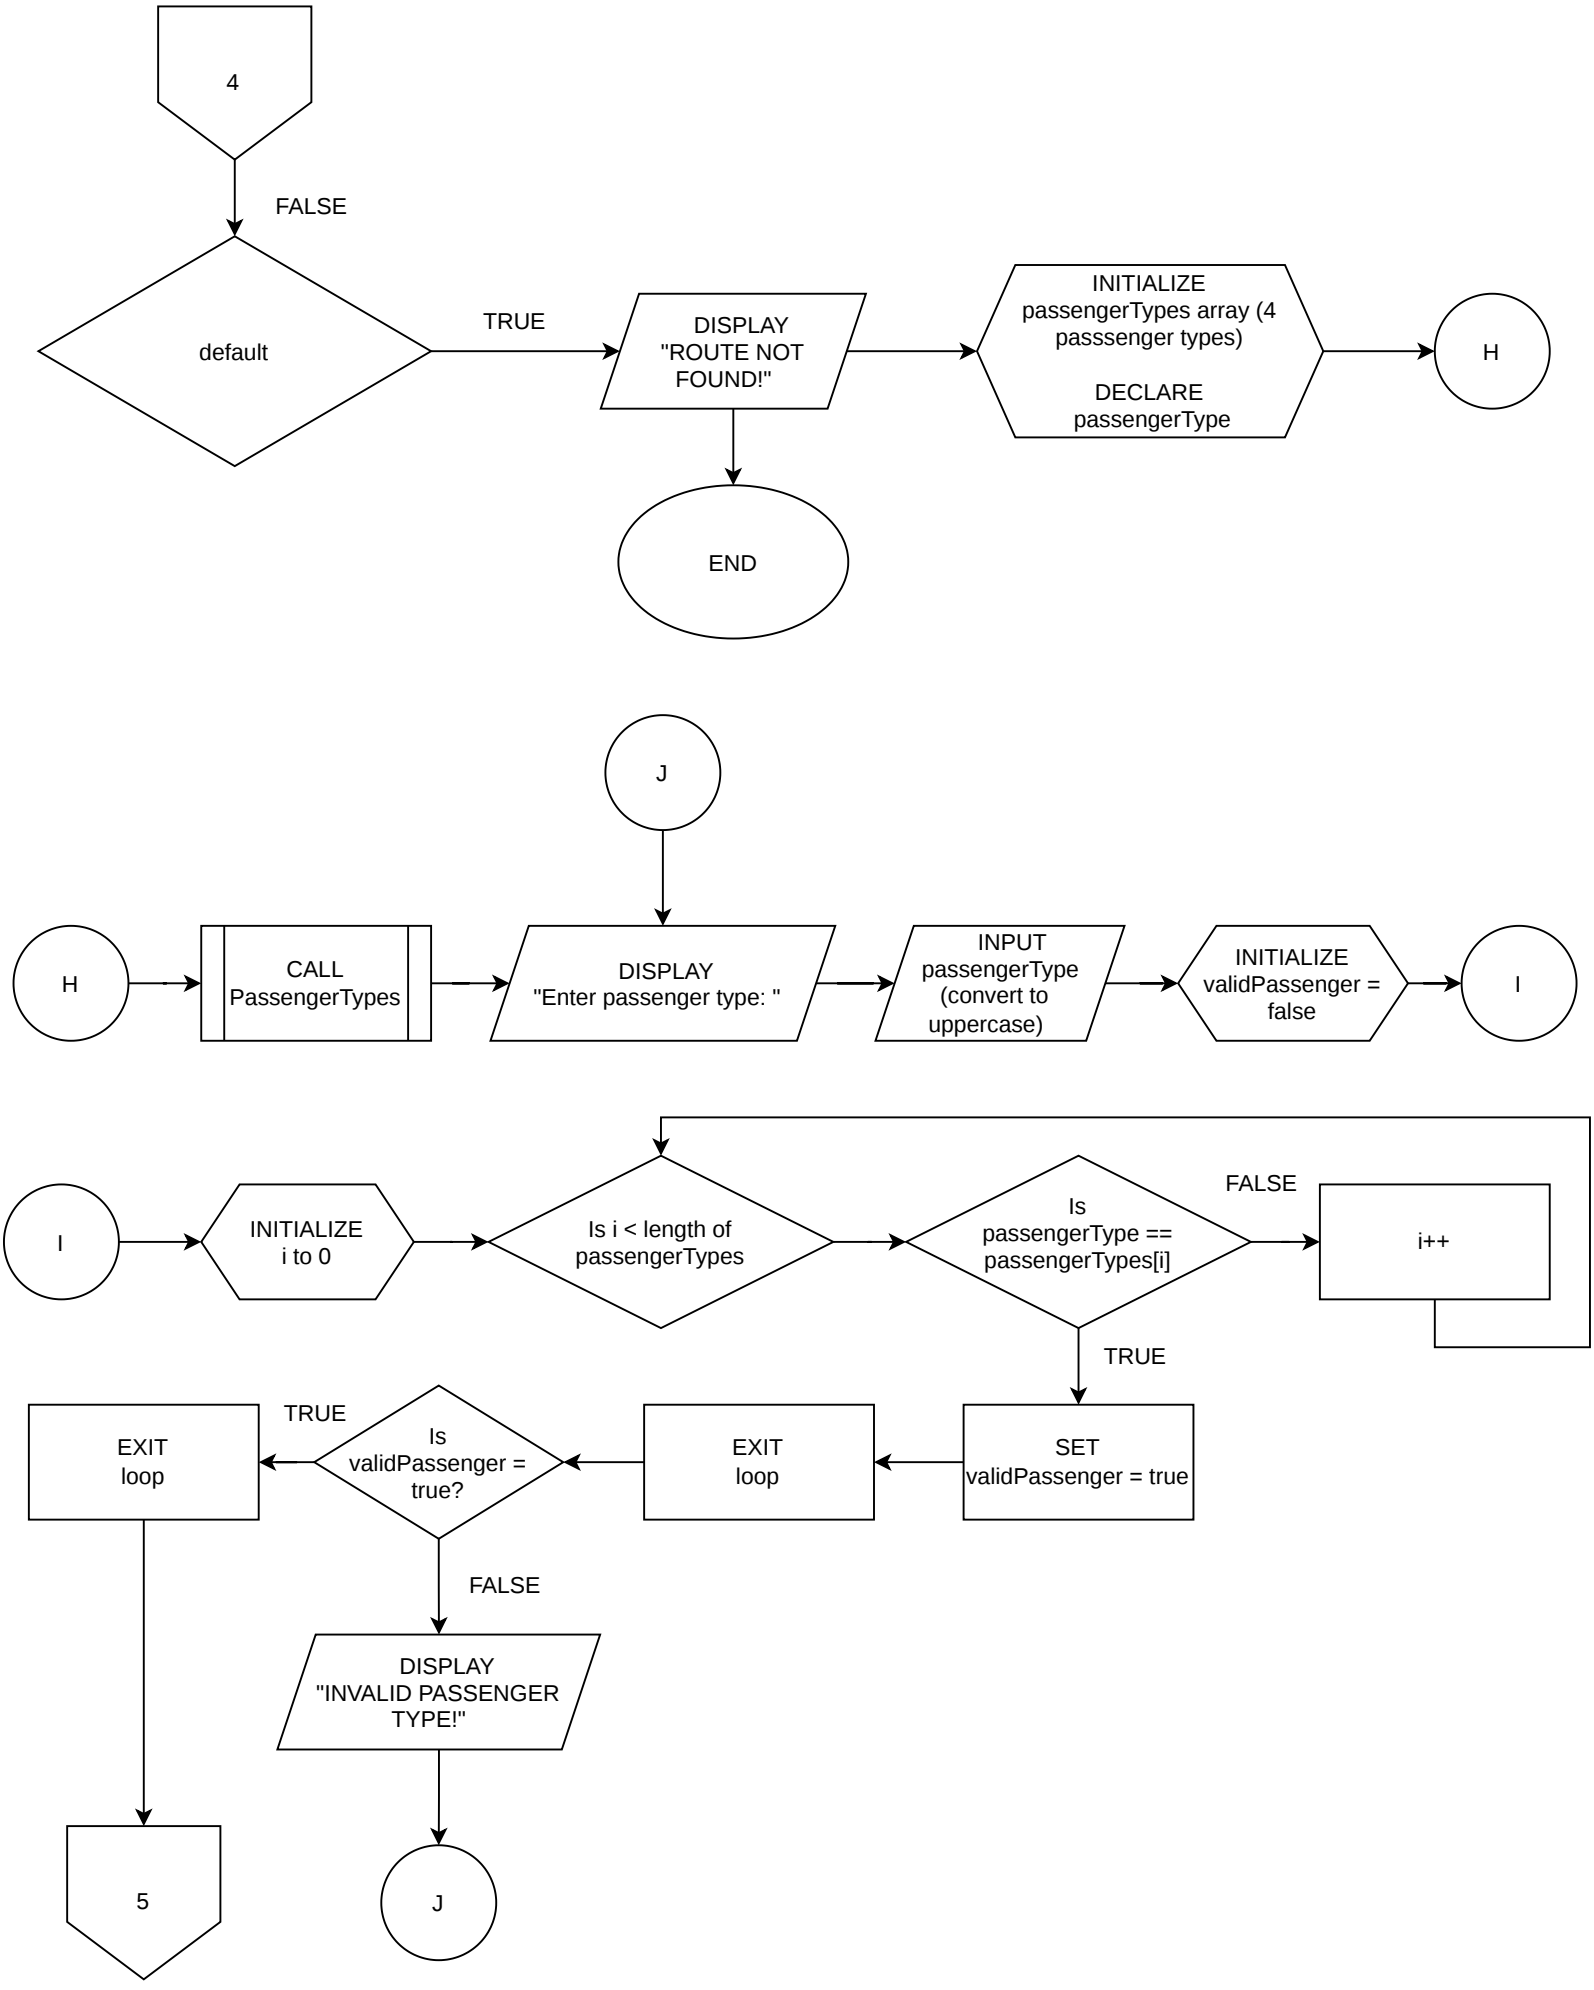


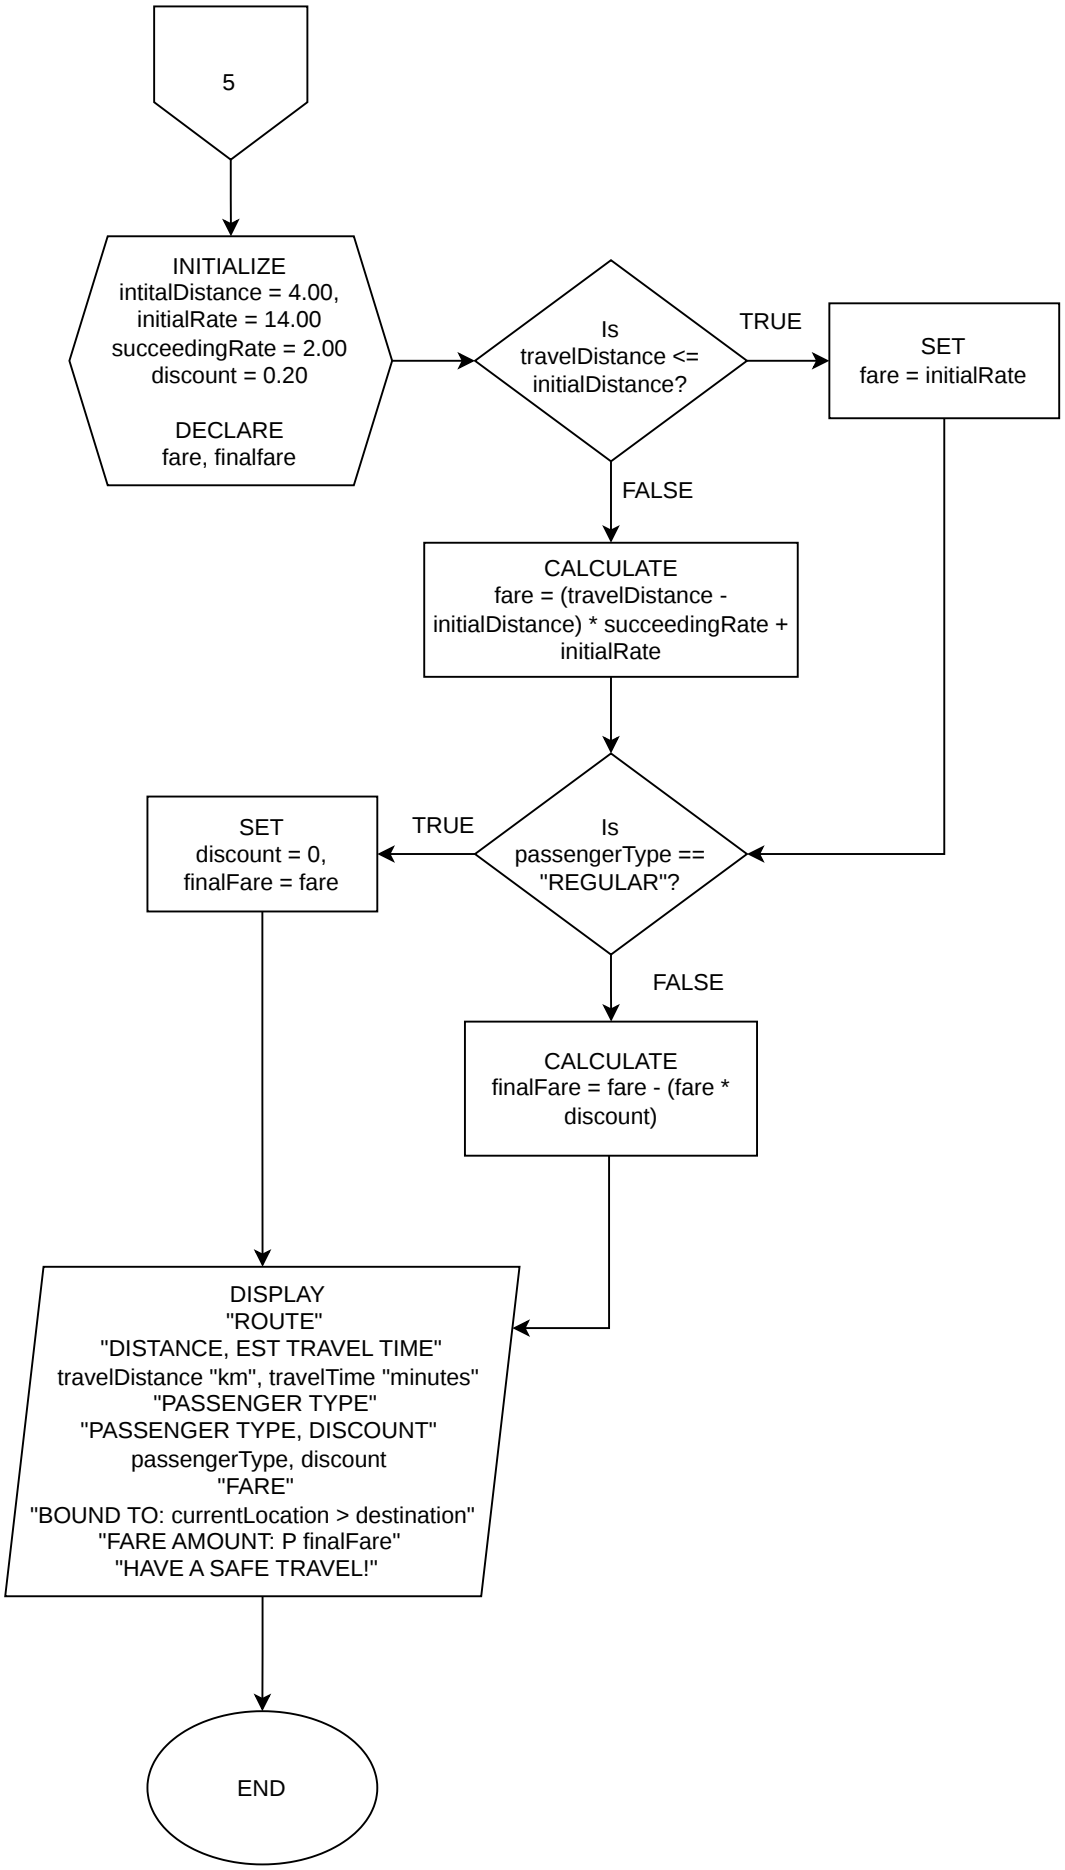

START
CALL WelcomeMessage
INITIALIZE Initialize locations array (9 locations)
DECLARE currentLocation, destination
CALL DisplayLocations
A
C
A
DISPLAY "Enter your current location (enter "exit" to quit): "
INPUT currentLocation (convert to uppercase)
INITIALIZE locationFound = false
INITIALIZE i to 0
B
B
Is i < length of locations
Is currentLocation == locations[i]
TRUE
SET locationFound = true
FALSE
Is currentLocation (to lowercase) == "exit"
TRUE
DISPLAY "Exiting the program..."
EXIT loop
FALSE
PROCESS i++
EXIT loop
TRUE
Is locationFound = true?
FALSE
1
DISPLAY "LOCATION NOT FOUND!"
END
C


1
G
E
CALL
DisplayLocations
DISPLAY
"Enter your destination
(enter "exit" to quit): "
INPUT
destination
(convert to
uppercase)
INITIALIZE
locationFound =
false
D
D
Is
destination ==
currentLocation
TRUE
DISPLAY
"DESTINATION AND
CURRENT LOCATION
MUST BE DIFFERENT!"
E
FALSE
INITIALIZE
i to 0
F
F
Is i < length of
locations
Is destination ==
locations[i]
TRUE
SET
locationFound = true
FALSE
Is
destination (to
lowercase) ==
"exit"
TRUE
DISPLAY
"Exiting the program..."
EXIT
loop
FALSE
PROCESS
i++
EXIT
loop
TRUE
Is
locationFound
= true?
1
FALSE
DISPLAY
"LOCATION NOT
FOUND!"
END
G


2
INITIALIZE
routes = currentLocation+
"-" + destination
DECLARE
travelDistance, travelTime
SWITCH
routes
Is route == "SAN
PABLO CITY-SM SANPABLO"
(vice versa)?
TRUE
SET
travelDistance = 2.9,
travelTime = 9
FALSE
Is route == "SAN
PABLO CITY-LSPU SAN
PABLO CITY CAMPUS"
(vice versa)?
TRUE
SET
travelDistance = 2.9,
travelTime = 11
FALSE
Is route == "SAN
PABLO CITY-LILIW" (vice
versa)?
TRUE
SET
travelDistance = 19.8,
travelTime = 46
FALSE
Is route == "SAN
PABLO CITY-NAGCARLAN"
(vice versa)?
TRUE
SET
travelDistance = 15.8,
travelTime = 37
3


3
FALSE
Is route == "SAN PABLO CITY-TIAONG" (vice versa)?
TRUE
SET travelDistance = 13.1, travelTime = 24
FALSE
Is route == "LSPU SAN PABLO CITY CAMPUS-CALAUAN" (vice versa)?
TRUE
SET travelDistance = 8.3, travelTime = 15
FALSE
Is route == "LSPU SAN PABLO CITY CAMPUS-LOS BANOS" (vice versa)?
TRUE
SET travelDistance = 20.7, travelTime = 40
FALSE
Is route == "SAN PABLO CITY-STA CRUZ" (vice versa)?
TRUE
SET travelDistance = 30.0, travelTime = 60
FALSE
Is route == "NAGCARLAN-LILIW" (vice versa)?
TRUE
SET travelDistance = 3.2, travelTime = 9
FALSE
Is route == "NAGCARLN-STA CRUZ" (vice versa)?
TRUE
SET travelDistance = 17, travelTime = 38
4


4
FALSE
default
TRUE
DISPLAY "ROUTE NOT FOUND!"
INITIALIZE passengerTypes array (4 passsenger types)
DECLARE passengerType
H
END
J
H
CALL PassengerTypes
DISPLAY "Enter passenger type: "
INPUT passengerType (convert to uppercase)
INITIALIZE validPassenger = false
I
I
INITIALIZE i to 0
Is i < length of passengerTypes
Is passengerType == passengerTypes[i]
FALSE
i++
TRUE
SET validPassenger = true
EXIT loop
Is validPassenger = true?
TRUE
EXIT loop
FALSE
DISPLAY "INVALID PASSENGER TYPE!"
5
J


5
INITIALIZE
intitalDistance = 4.00,
initialRate = 14.00
succeedingRate = 2.00
discount = 0.20
DECLARE
fare, finalfare
Is
travelDistance <=
initialDistance?
TRUE
SET
fare = initialRate
FALSE
CALCULATE
fare = (travelDistance -
initialDistance) * succeedingRate +
initialRate
Is
passengerType ==
"REGULAR"?
TRUE
SET
discount = 0,
finalFare = fare
FALSE
CALCULATE
finalFare = fare - (fare *
discount)
DISPLAY
"ROUTE"
"DISTANCE, EST TRAVEL TIME"
travelDistance "km", travelTime "minutes"
"PASSENGER TYPE"
"PASSENGER TYPE, DISCOUNT"
passengerType, discount
"FARE"
"BOUND TO: currentLocation > destination"
"FARE AMOUNT: P finalFare"
"HAVE A SAFE TRAVEL!"
END