

Untitled

Andee Kaplan

2025-09-16

```
ggplot(diamonds) +  
  geom_point(aes(carat, price))
```

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed      dist  
##  Min.   : 4.0    Min.   :  2.00  
## 1st Qu.:12.0    1st Qu.: 26.00  
##  Median :15.0    Median : 36.00  
##   Mean  :15.4    Mean   : 42.98  
## 3rd Qu.:19.0    3rd Qu.: 56.00  
##   Max.  :25.0    Max.    :120.00
```

```
x <- 4
```

Here are my thoughts about cars. The mean speed of a car is 15.4. X is the values 4.

Including Plots

You can also embed plots, for example:


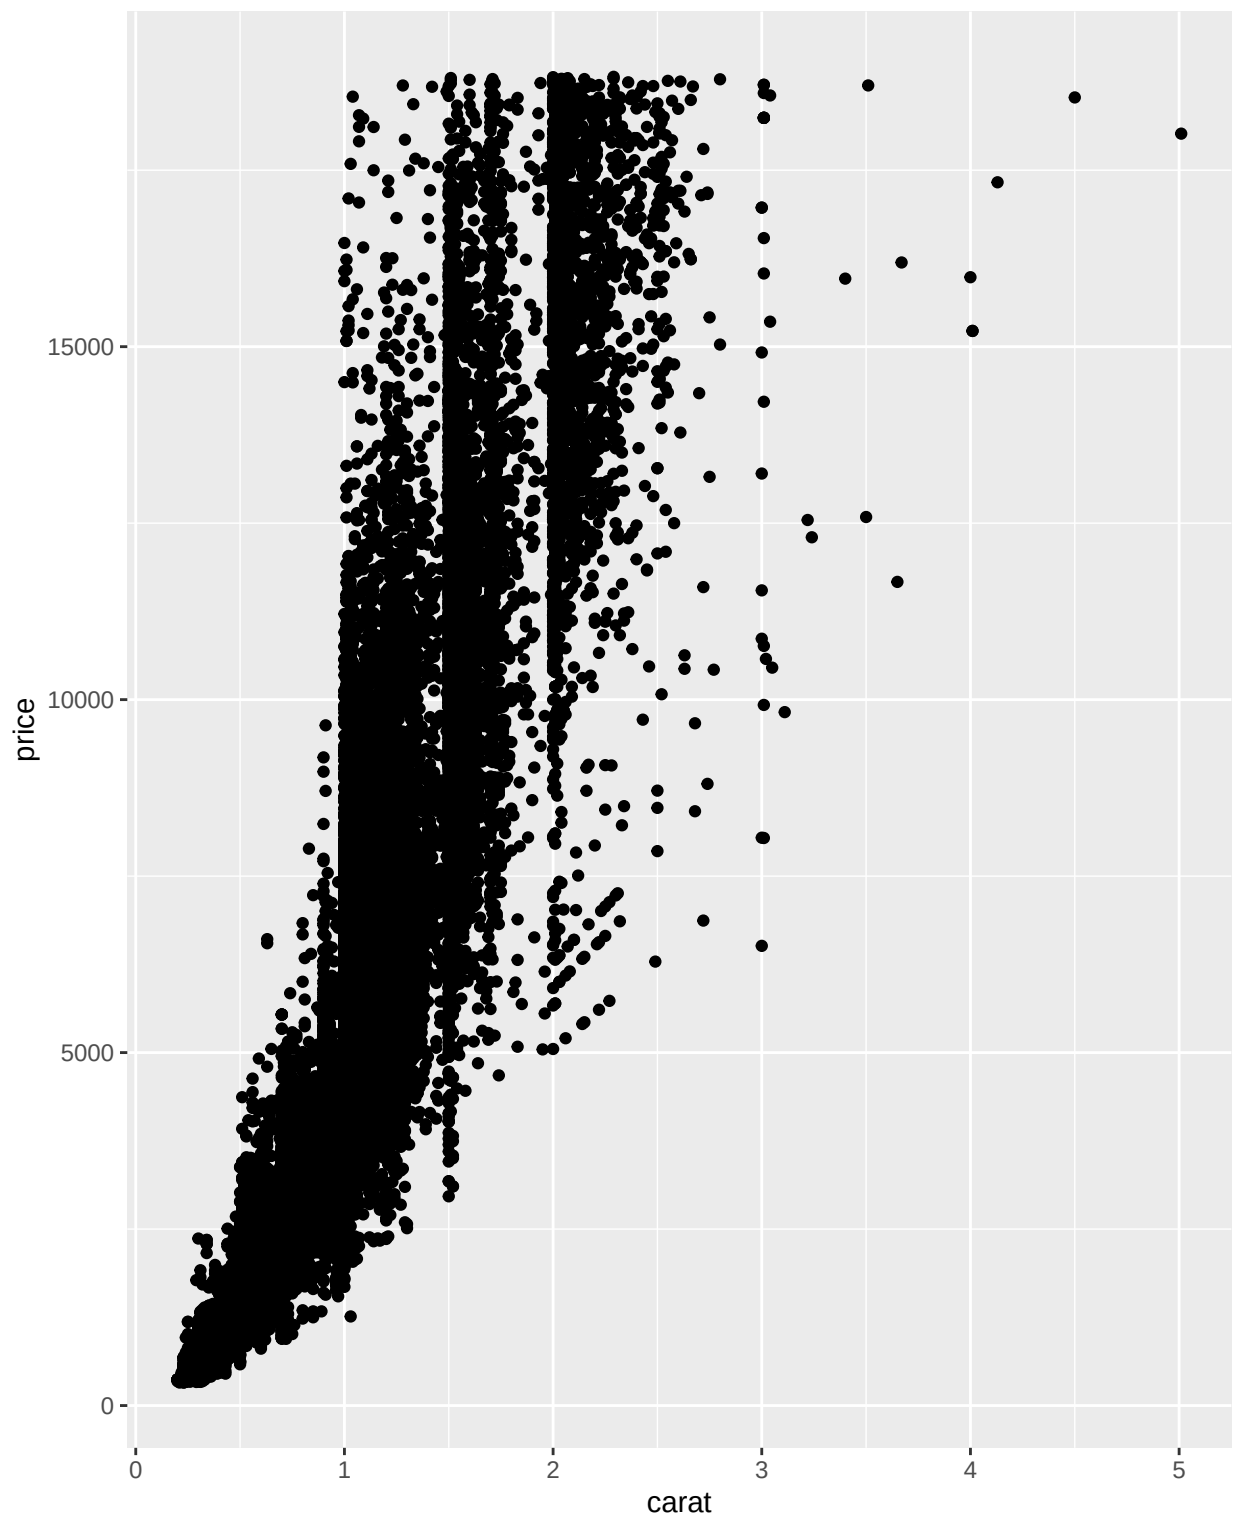


Figure 1: Scatterplot of diamond price and carat. There is a positive relationship between price and carat, although it may not be linear and has increasing noise as carat increases.

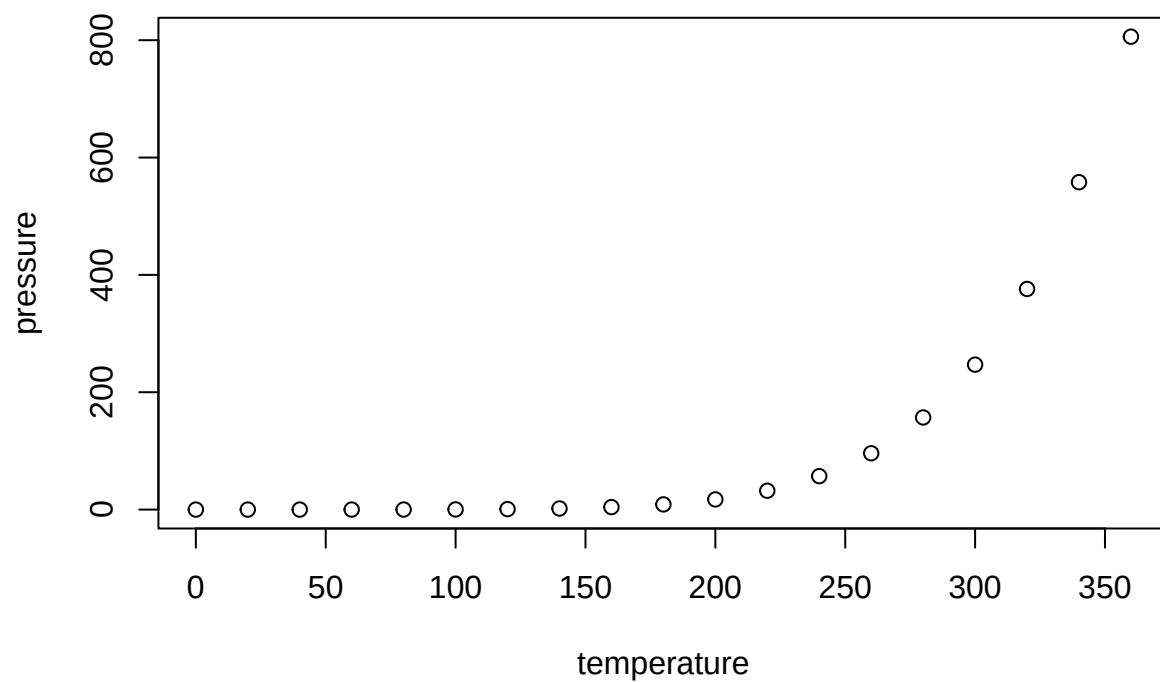

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.