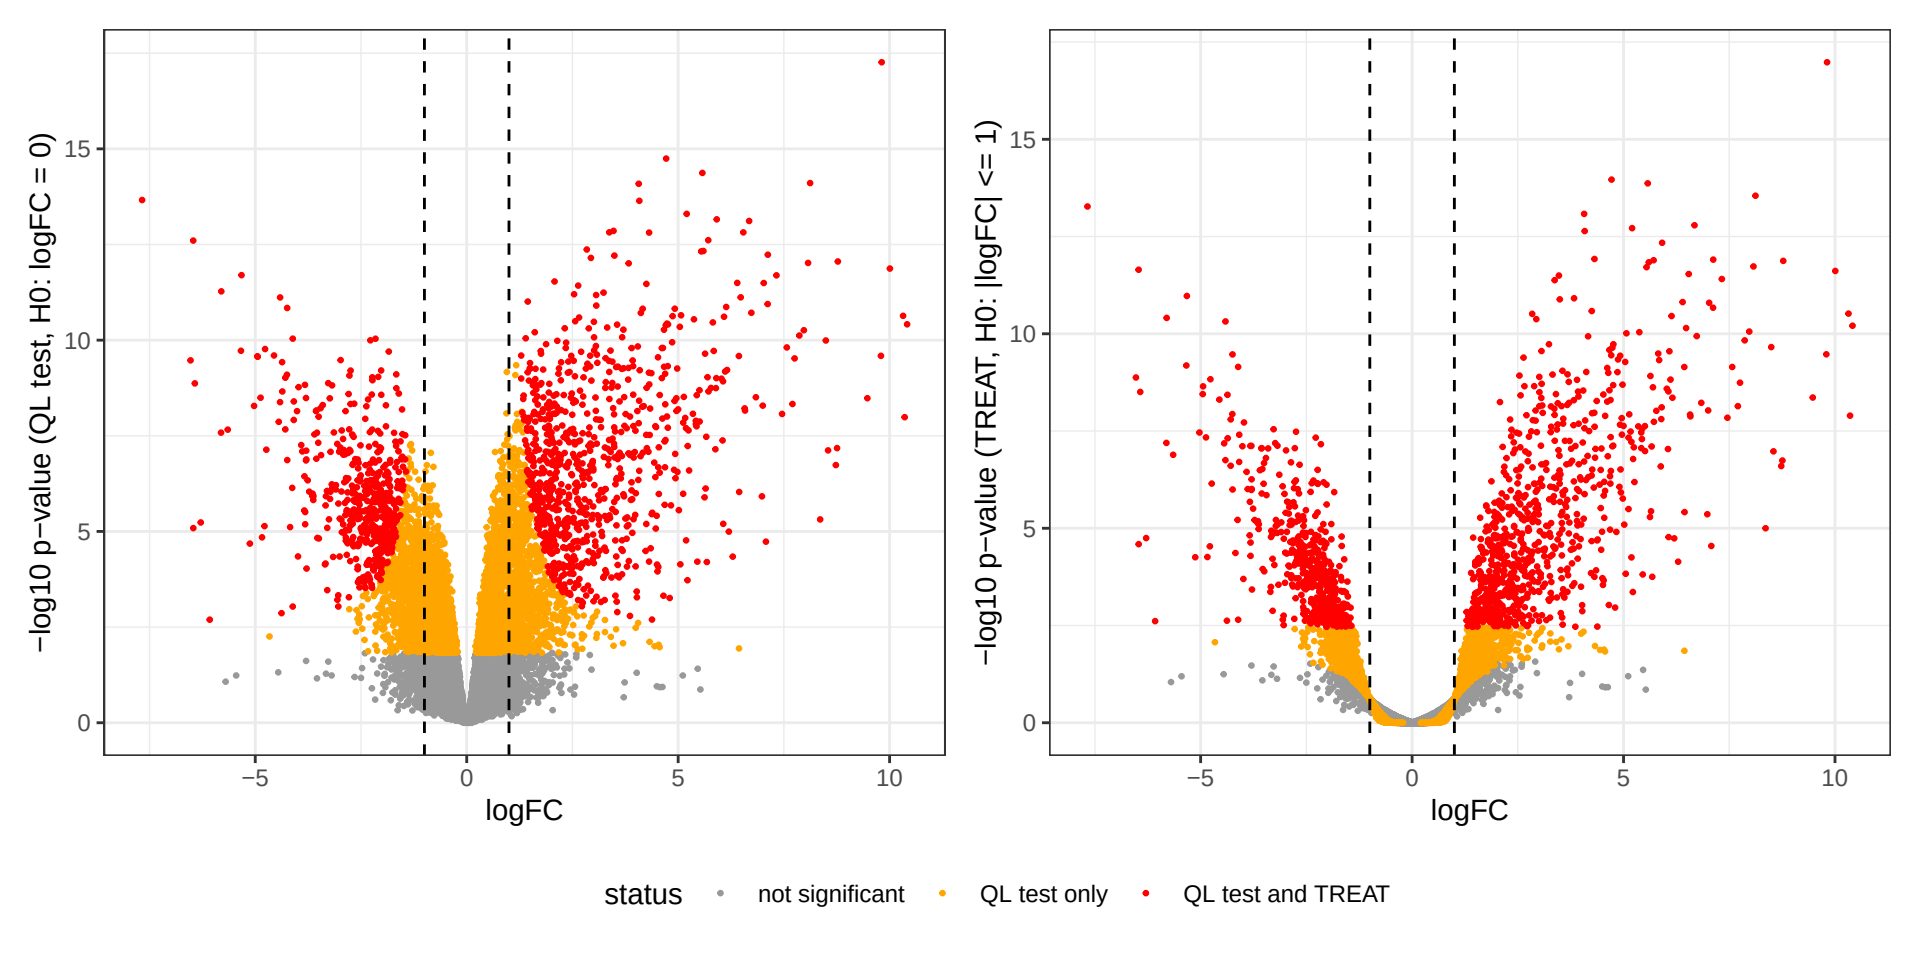

−log10 p−value (QL test, H0: logFC = 0)
15
10
5
0
−5
0
5
10
logFC
−log10 p−value (TREAT, H0: |logFC| <= 1)
15
10
5
0
−5
0
5
10
logFC
status
not significant
QL test only
QL test and TREAT