

# Supplementary Figures: Quality control for the target decoy approach for peptide identification

Elke Debie,<sup>†</sup> Milan Malfait,<sup>†</sup> Ralf Gabriels,<sup>‡,¶</sup> Arthur Declercq,<sup>‡,¶</sup> Adriaan Sticker,<sup>†,‡,¶</sup> Lennart Martens,<sup>‡,¶</sup> and Lieven Clement<sup>\*,†</sup>

<sup>†</sup>*Department of Applied Mathematics, Computer Science and Statistics, Ghent University, Ghent University, Ghent, Belgium*

<sup>‡</sup>*VIB-UGent Center for Medical Biotechnology, VIB, Zwijnaarde, Belgium*

<sup>¶</sup>*Department of Biomolecular Medicine, Ghent University, Ghent, Belgium*

E-mail: [lieven.clement@ugent.be](mailto:lieven.clement@ugent.be)

```
## tlmgr install achemso
```

```
## tlmgr install caption
```

```
## tlmgr install setspace
```

## References

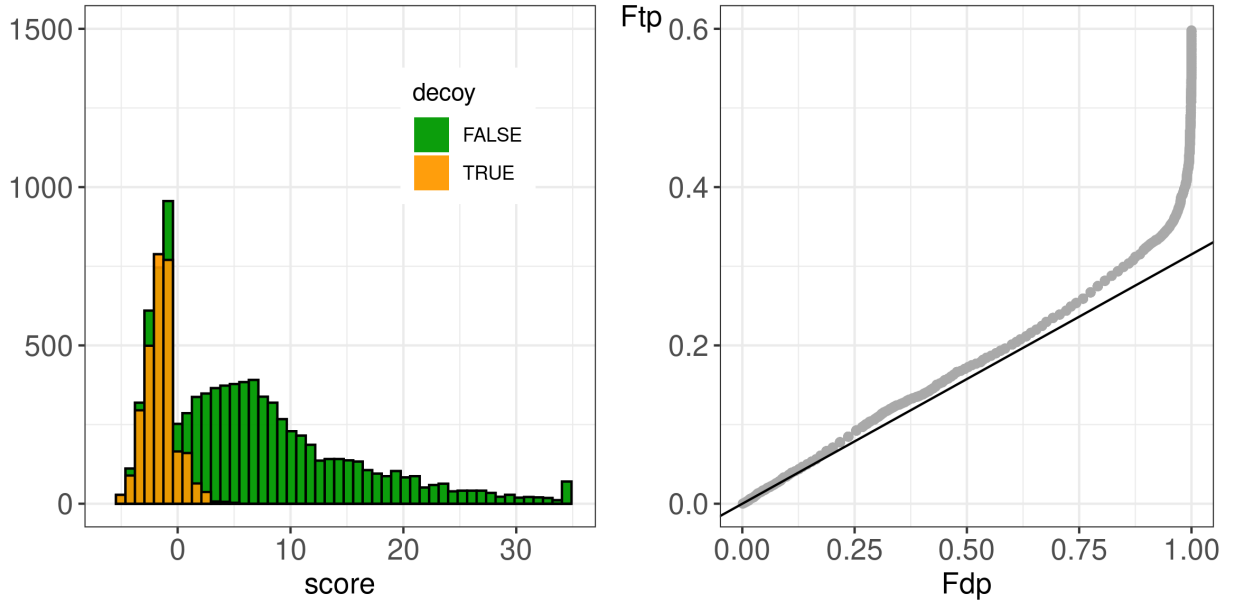


Figure 1: Histogram and PP-plot for a concatenated search on a *Pyrococcus* run against a database of canonical *P. furiosus* sequences from Swiss-Prot using X!Tandem without refinement. Both the histogram and the P-P plot show no violation of the TDA assumptions.

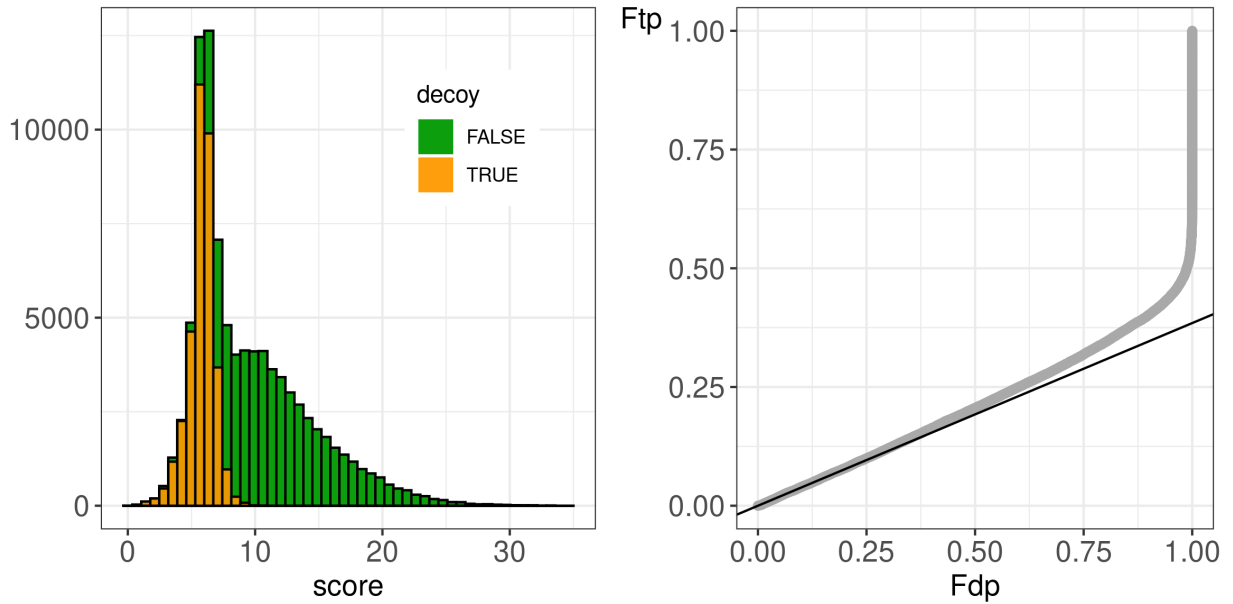


Figure 2: Histogram and PP-plot for a concatenated search on a *H. sapiens* run against a database of *H. Sapiens* sequences from UniProt using MS-GF+. Both the histogram and the P-P plot show no violation of the TDA assumptions.

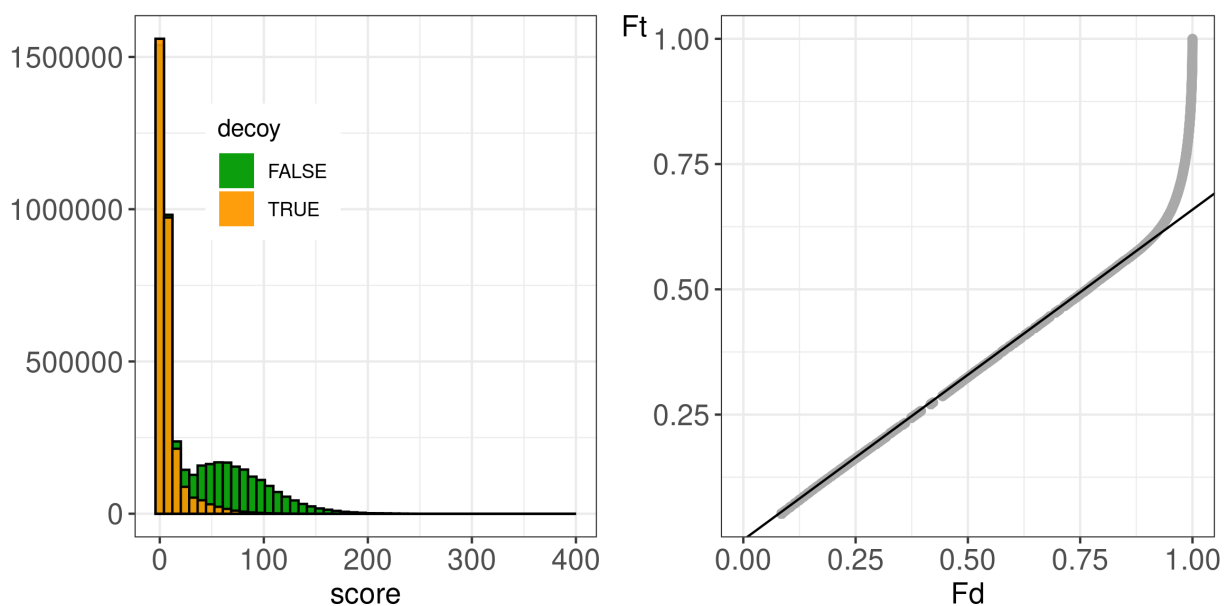


Figure 3: Histogram and PP-plot for a concatenated search on an immunopeptidomics run using Andromeda. Both the histogram and the P-P plot show no violation of the TDA assumptions.

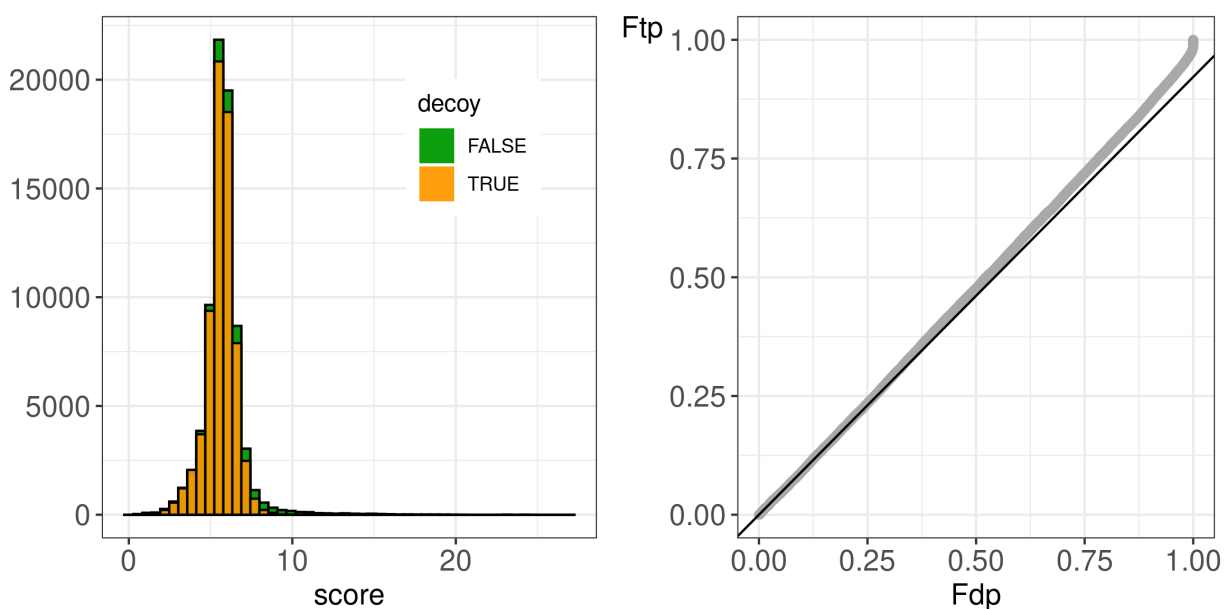


Figure 4: Histogram and PP-plot for rank 2 target and decoy PSM scores of a concatenated search on a *H. sapiens* run against a database of *H. Sapiens* sequences from UniProt using MS-GF+.