

Introduction to R: practical 1

This practical aims at introducing you to the R interface. By the end of this practical you should be able to load in data, calculate some summary statistics and construct some basic plots.

If you have brought your own data, then I would recommend that you quickly work through this practical first, then try to load in your own data.

1 Getting started

1. Open Rstudio
2. Now open a new R script:

```
File -> New File -> R Script
```

3. In Rstudio, type a basic R command, say

```
x = 5
```

4. Press Ctrl + Enter anywhere on the line with `x = 5`. This should send the command `x = 5` to the R console in the bottom left hand window.
5. In Rstudio, save the file you are currently working on. Rstudio will (correctly) add the file extension `.R`

In Rstudio click on **Help** and **Keyboard short cuts** to see other short cuts.

Other Rstudio commands are:

- If the cursor is at the beginning of the line, pressing Ctrl + Enter will send that line to the R console.
- If you highlight a few lines of R code, pressing Ctrl + Enter will send that code to the R console.
- Pressing Ctrl + Shift + S sends the entire file to R console.

It's probably worth creating a directory to store any R files that you create.

1.1 Course R package

Installing the the course R package¹ is straightforward. First install drat:

```
install.packages("drat")
```

Then

```
drat::addRepo("rcourses")
install.packages("nclRintroduction")
```

This R package contains copies of the practicals, solutions and data sets that we require. To load the package, use

¹ A package is an *add-on* or a *module*. It provides with additional functions and data.

```
library("nclRintroduction")
```

2 The data set

We are going to investigate the IMDB data set described in chapter 1. Movies were selected for inclusion if they had a known length, had been rated by at least one IMDB user and had an mpaa rating. This gives 4847 films, where each film has 24 associated variables. The first few rows are given in Table 1.1 in the notes. This is **only a subset** of the data, the actual data set contains information on over 50,000 movies.

2.1 Retrieving the data

To access the data into R, we use the following command:

You can enter the url into your web browser and view the data directly.

```
library("nclRintroduction")
data(movies)
d = movies
```

We can inspect the column names using:

```
## d is a data frame
colnames(d)
```

We can change the column names, for example,

```
colnames(d)[17]
## [1] "mpaa"
colnames(d)[17] = "MPAA"
```

We can select individual columns, using either their column name:

```
d$Year
```

or their column number:

```
d[,2]
```

When vectors or data frames are too large to manage, we use the function `head` to take a peek at the data:

```
head(d$Title, 5)
## [1] "A.k.a. Cassius Clay"
## [2] "AKA"
## [3] "AVP: Alien Vs. Predator"
## [4] "Abandon"
## [5] "Abendland"
```

- In the above function call, what does “5” specify? What happens if you omit it?
- Another useful function is `tail`. What does this function do?

Using the `dim` function, how many columns and rows does `d` have?

3 Scatter plots (chapter 5.1 of the notes)

Let’s start with some simple scatter plots:

```
plot(d$Length, d$Rating)
```

which gives figure 1.

Now,

- When you call `plot`, R guesses at suitable axis labels. Use the `xlab` and `ylab` arguments to specify better axis labels. For example,

```
plot(d$Length, d$Rating, xlab="Length", ylab="Rating")
```

gives figure 2.

- Use the `ylim` argument to specify a y-axis range from 1 to 10.
- Use the `col` argument to change the colour of the points.
- Use the `main` argument to give the plot a title.
- I tend to alter the default plot command using:²

```
op = par(mar=c(3,3,2,1), mgp=c(2,.7,0),
        tck=-.01, las=1)
```

What do you think? Can you determine what `mar`, `mgp`, `tck` and `las` mean?

To reset the plotting device, run the command

```
par(op)
```

4 Summary Statistics

Use the commands `mean`, `median`, and `sd` to calculate the summary statistics for the movie length.

Statistics	Value
Mean	
Median	
Std. dev	

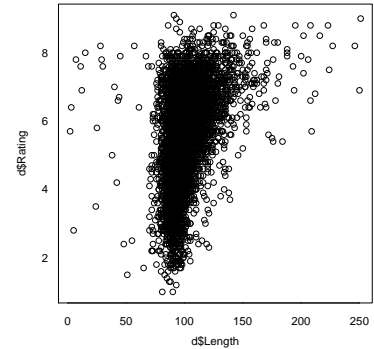


Figure 1: Scatter plot of movie length against rating.

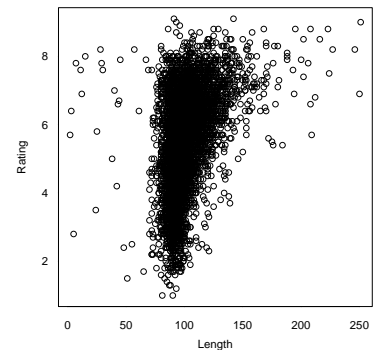


Figure 2: Scatter plot of movie length against rating with axis labels.

² An explanation of `op` and `par` are given at the end of this practical.

Table 1: Summary statistics for the movie data set.

5 Histograms

We will now investigate the distribution of movie years using histograms. Use the `hist` function to plot a histogram of the movie years:

```
hist(d$Year)
```

which gives figure 3. The default method for determining the number of bins used in your histogram isn't that great. So you can use different rules³

```
hist(d$Year, breaks="FD")
```

The arguments that we encountered when looking at scatter plots can be used with histograms.

Try the shiny demo for an illustration of the different rules

```
## Requires the shiny package
demo("hist", ask=FALSE)
```

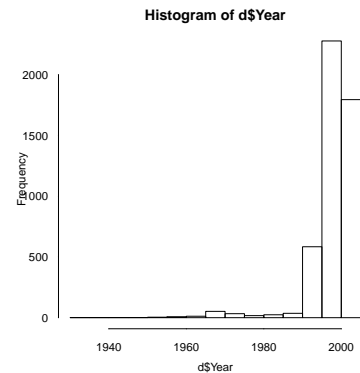


Figure 3: Histogram of movie year.

³ There are three named values for the `breaks` argument: `Sturges`, `Scott`, `FD`. You can also pass a numeric value, to specify the number of bins

6 Boxplots

Let's generate a boxplot for the ratings data:

```
boxplot(d$Rating)
```

All the usual arguments, such as `xlab`, can be used here. Now let's, separate the movie data by whether it's a romantic movie:

```
boxplot(d$Rating ~ d$Romance)
```

Try generating a similar boxplot, but for other variables. What happens when you condition on more than one variable?




Figure 4: Boxplot of movie ratings.

Discussion of the `par` function

The `par` function is used to set or query graphical parameters. You can see a list of available parameters by looking at the help file `?par` or by just typing `par()` in the console. All of the available parameters have default settings (see the help page).

When we run the command

```
(op = par(cex.lab=0.9))
## $cex.lab
## [1] 0.95
```

The axis label size is reduced to 90% of the base size. The parameter `op` is set to the *previous* value of `cex.axis`, i.e.

```
op
## $cex.lab
## [1] 0.95
```

By setting `op` to the *previous* value, we can easily reset the graphical parameters via

```
par(op)
```

Solutions

Solutions are contained within this package:

```
library("nclRintroduction")
vignette("solutions1", package="nclRintroduction")
```