

Something neat

2025-04-09

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com> (<http://rmarkdown.rstudio.com>).


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   :  2.00
##  1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##  Mean   :15.4    Mean   : 42.98
##  3rd Qu.:19.0    3rd Qu.: 56.00
##  Max.   :25.0    Max.   :120.00
```

Including Plots

You can also embed plots, for example:

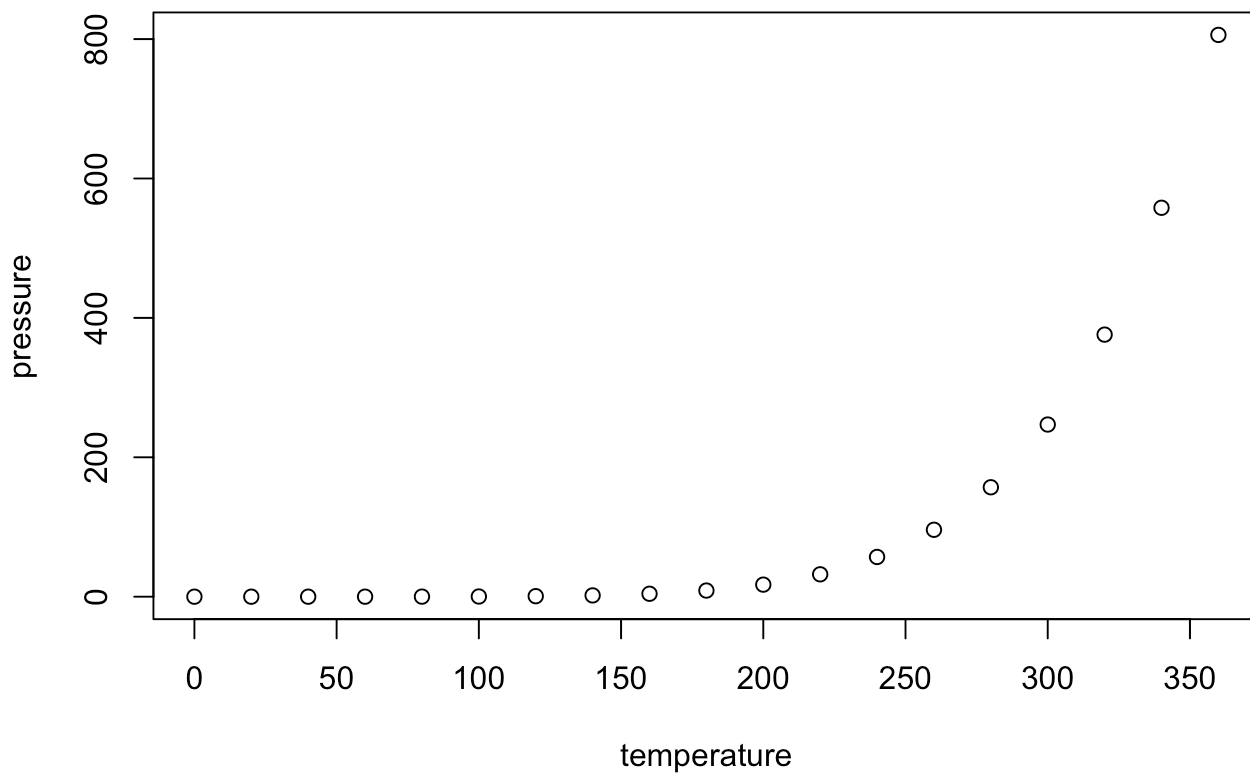

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.

Tables with `gt()`

```
library(gt)
library(tidyverse)
```

```
## — Attaching core tidyverse packages ————— tidyverse 2.0.0 —
## ✓ dplyr      1.1.4      ✓ readr      2.1.5
## ✓ forcats    1.0.0      ✓ stringr    1.5.1
## ✓ ggplot2     3.5.1      ✓ tibble     3.2.1
## ✓ lubridate  1.9.3      ✓ tidyr      1.3.1
## ✓ purrr      1.0.2
## — Conflicts ————— tidyverse_conflicts() —
## ✖ dplyr::filter() masks stats::filter()
## ✖ dplyr::lag()     masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
library(gt)
```

```
cars %>%  
  gt()
```

speed	dist
4	2
4	10
7	4
7	22
8	16
9	10
10	18
10	26
10	34
11	17
11	28
12	14
12	20
12	24
12	28
13	26
13	34
13	34
13	46
14	26
14	36
14	60
14	80

speed	dist
15	20
15	26
15	54
16	32
16	40
17	32
17	40
17	50
18	42
18	56
18	76
18	84
19	36
19	46
19	68
20	32
20	48
20	52
20	56
20	64
22	66
23	54
24	70
24	92
24	93
24	120
25	85

