

This manual describes the usage of the **foryouandyo** **urcustomers mapping manager** AddOn, improving the Oracle Data Modeler.

General

Before you can use the mapping manager, it has to be installed into your Oracle Data Modeler (ODM) environment. See [ODM-Scripting-Installation.pdf](#) for the installation process.


Mapping manager

Usage - short description

The mapping-manager are a few script allowing you:


- to export the ODM mapping between entities/attributes and tables/columns
- to import changes in the mapping from the exported files.

Start a script via right-click on logical model, choose Apply Custom Transformation Scripts

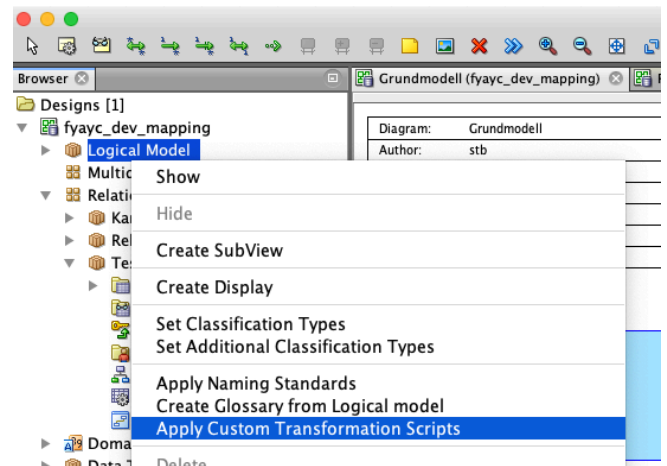


Select one of

importMapping	Import changed mapping information from a csv-file
print1Mapping	print the mapping for one relational model into an csv-file
printXMapping	print the existence of a mapping for all entities to all relational models
printNameMapping	print the mapping of all entities, m:n Relationships, attributes to tables and columns for all relational models.
printDevMapping	prints a list of all attributes of one relational model together with definitions and mappings to IM and all other models

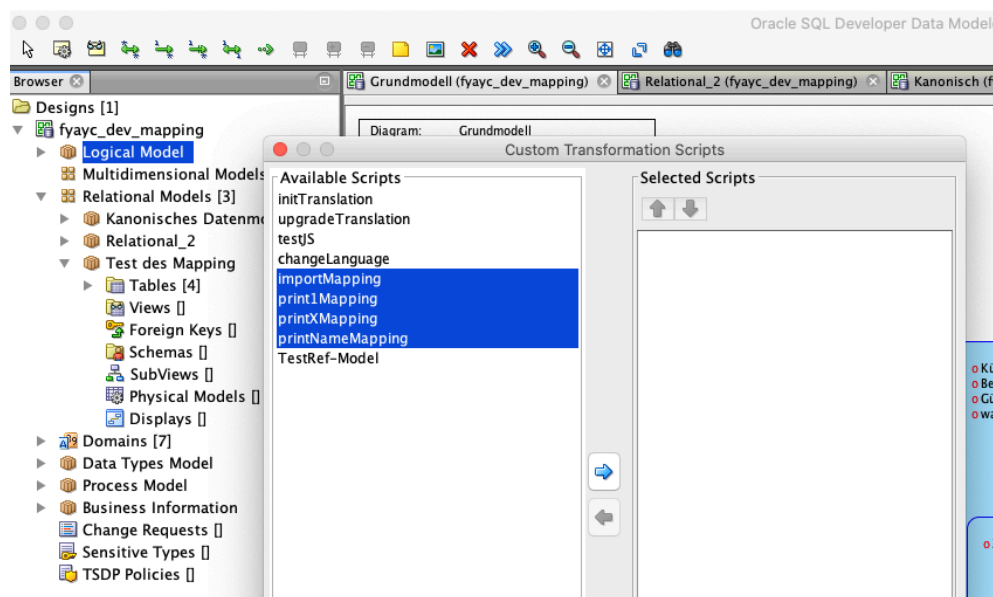

Source of Information

When developping the logical model to relational models (1), ODM keeps track of the mapping of source (entity/relationships/attribute) and target (table/column). (2). The same information is managed by the modeler when reverse engineering a relational model to the logical model.

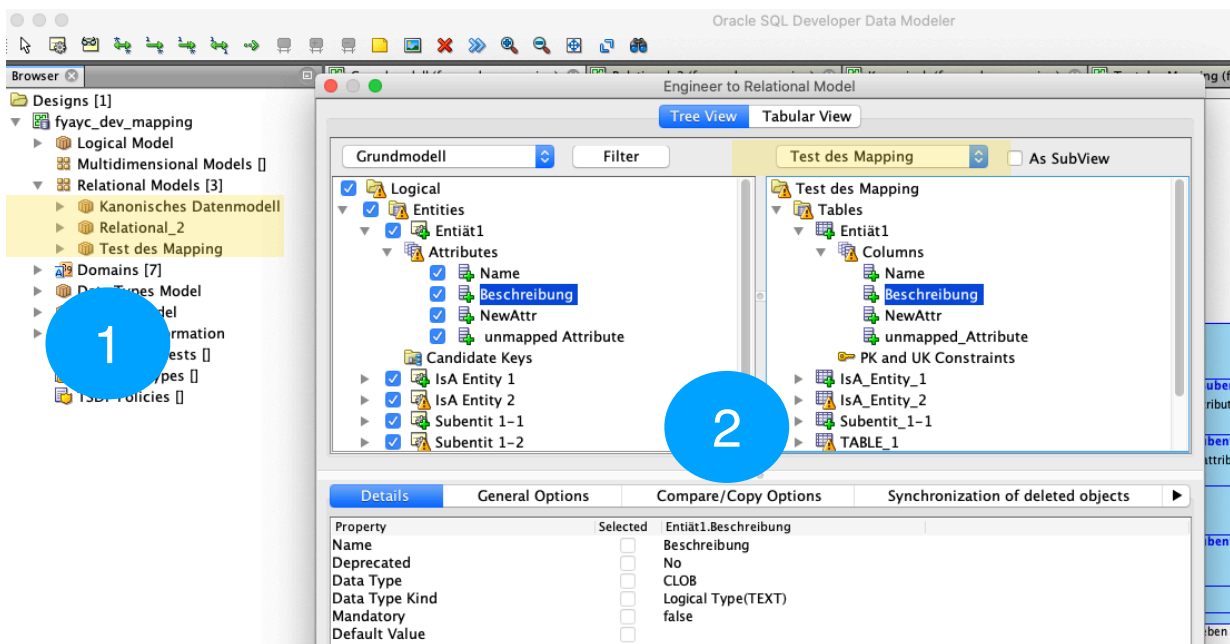

Functionality

printXMapping	print the existence of a mapping for all entities and attributes to all relational models into a file called <logicalmodelname>.js or .csv
printNameMapping	print the mapping of all entities, m:n Relationships and attributes to tables and columns for all relational models into a file called <logicalmodelname>.js or .csv
print1Mapping	prints the mapping for all tables/columns from one relational model into a file called <relationalmodelname>.js or .csv
printDevMapping	prints a list of all attributes of one relational model together with definitions and mappings to IM and all other models
importMapping	Import changed mapping information from csv-file generated by print1Mapping.

All generated files are in UTF-8 character code. csv-Files are in UTF-8 (BOM) (containing leading hexcharacters EF BB BF). This allows proper import into Excel on mac-os.

You have the choice of two output formats (JSON and CVS).

Elements are separated by ";". Make sure, when importing into / exporting from Excel oder Numbers to set the correct parameters.

Importing

The name in the first column/row is the name of the relational model in ODM. It must be identical or it will lead to an error.

To import a new mapping, add the entity-name into the column *entityName* and the attrName into the column *attrName*, the table name into *tableName* and column name into *columnName*.

The names must be exactly as defined in the modeler. No unprintable characters are allowed. Beware of trailing blanks!

The screenshot shows an Excel spreadsheet with the following data:

	A	B	C	D
1	Kanonisches Datenmodell			
2	tableName	columnName	entityName	attrName
3	Entität1	NewAttr	IsA Entity 2	NewAttr
4	Entität1	Name	IsA Entity 2	Name
5	Entität1	Name	otherEntity	Name
6	Entität1	Beschreibung		
7	newTable		Entität1	
8	newTable	newColumn	Entität1	NewAttr
9	Relation_4		Relation_4	
10	Relation_4	Subentität_2-2_Super_Entität_Super_Entität_ID		
11	Relation_4	Subentit_1-2_Subentit_1-2_ID		
12	Relation_9		Relation_9	
13	Relation_9		Relation_9	

If an entity or attribute name is not found, it is ignored during importing.

If a table or column name is not found, the table or column is inserted into the modeler. (Nice possibility to import tables and columns, isn't it?)

Table-columns-entries can exist several times. This allows the mapping of one relational column to several logical attributes.

Deleting mappings

We haven't found yet a way to delete mappings programmatically in the modeler. The way we suggest is:

- print a mappinglist with `print1Mapping`
- copy an element in the ODM,
delete the original element and
rename the copy to the old element.
- delete the mappings in the csv-file (e.g. the entity - attribute-names)
- import the changed csv file.

This will work because the scripts rely on the names, not on ID's.

Versions

Version	Released	Remarks
1.0	2020-03-21	First Version released beta
1.1	2020-03-23	Separated manual from installation manual
2.0	2020-05-20	Added Json export. Added BOM-prefix in .csv file
2.1	2020-06-15	Leerzeilen werden jetzt erkannt und ignoriert
3.0	2020-08-10	Added developer view of mapping. Internal code improvements (declarations)
3.1	2021-03-01	Added ID column in <code>printDevMapping</code> , corrected error in multivalued Mappings from column to attribute (<code>printDevMapping</code>)