


This manual describes the installation of the **foryouandyourcustomers** tools improving the Oracle Data Modeler.

General

Before you install any add-ons in your Oracle Data Modeler (ODM) - Environment, make sure, you have a backup of your current model and all the configuration files. Scripts for the ODM are kept in the configuration file named *dl_settings.xml*. Make sure you keep a copy of this file as backup.

Scripts loaded (from *dl_settings.xml*) into the ODM are kept and changed in libraries (1) and in transformation scripts (2). They can be invoked from the transformation script pane (2) or directly from the right-click menu Apply Customer Transformation Scripts (3).

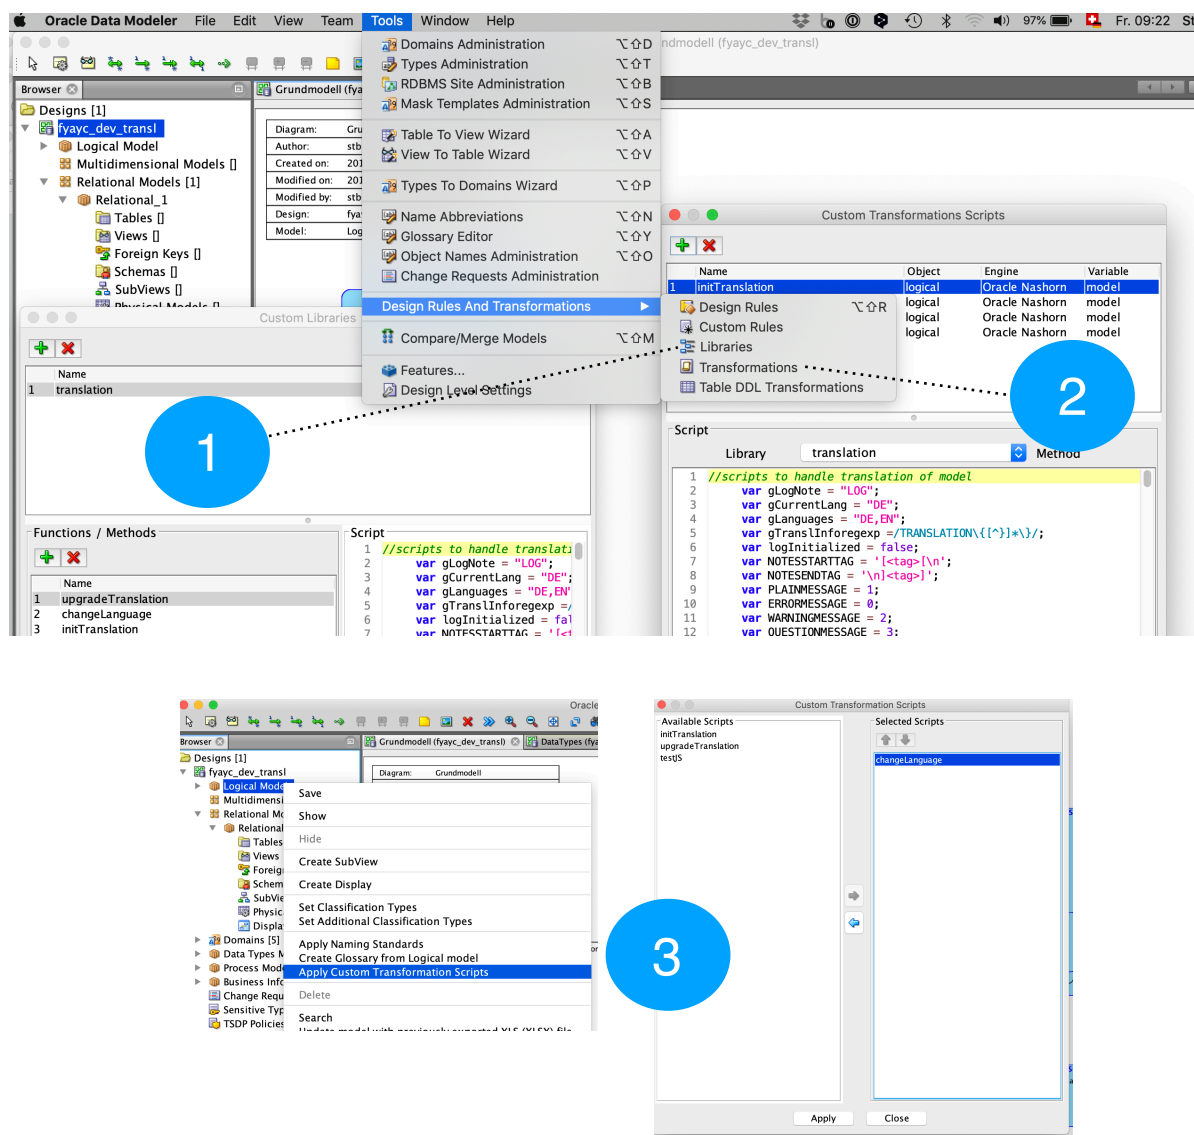

Every script you want to launch has to be installed in the Custom Transformations Scripts pane (2). In this pane, press the + Button, give your script a name, assign it to *logical* or *relational*. Choose the engine (Oracle Nashorn is the standard choice). Make sure to test the scripts if selecting a different engine). If the script comes from a library, select the Library and the Method to be called.

Installing new version of a library.

Method 1

Close the modeler.

If you have no other libraries or scripts in your ODM-environment, copy the file *dr_customs_scripts.xml* into your configuration directory.

CAUTION: make sure you made a backup copy of the old file!

Reopen the modeler.

Method 2

If you have other libraries in your modeler:


Open the library pane (1).

Delete the library you want to replace.

Import the file *<addon-name>_library.xml* of the delivered package for your AddOn into your environment.

Go to the transformation pane (2)->(4).

Create (or verify if they are already defined) an entry for every of the 4 functions *importMapping*, *print1Mapping*, *printXMapping*, *printNameMapping*.

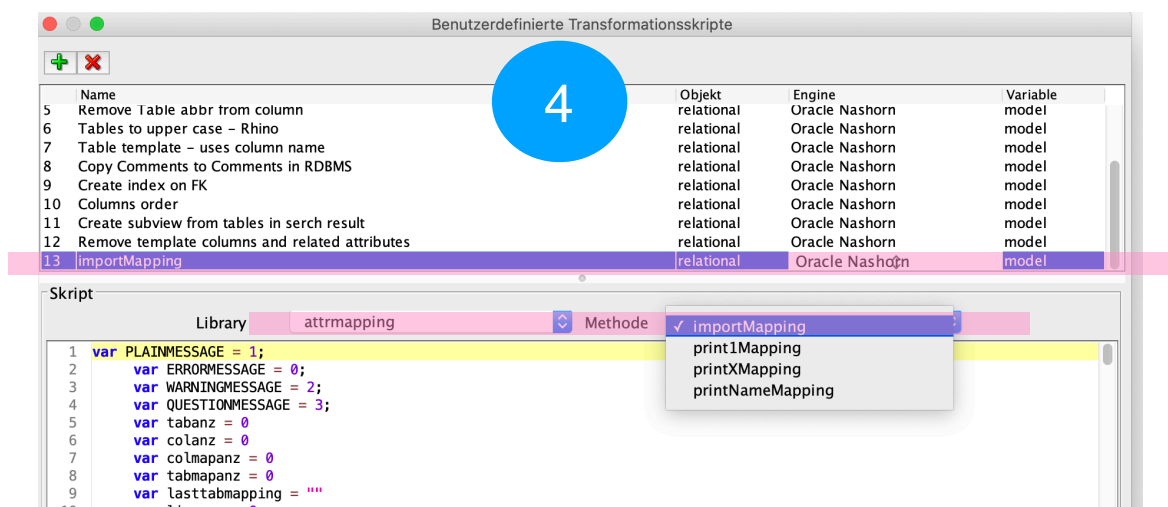

CAUTION: make sure you made a backup copy of the old *dr_customs_scripts.xml* file in your configuration!

All the others transformation methods (installed by default in the ODM, mostly for generation of database models) you can delete, if not needed.


Sometimes the import does not function properly. In this case, apply method 3.

Method 3

If you have own libraries or you the others methods did not work

Open library pane (1)->(5).

Select the library you want to change or create a new library with the + button. Select the engine (Oracle Nashorn)

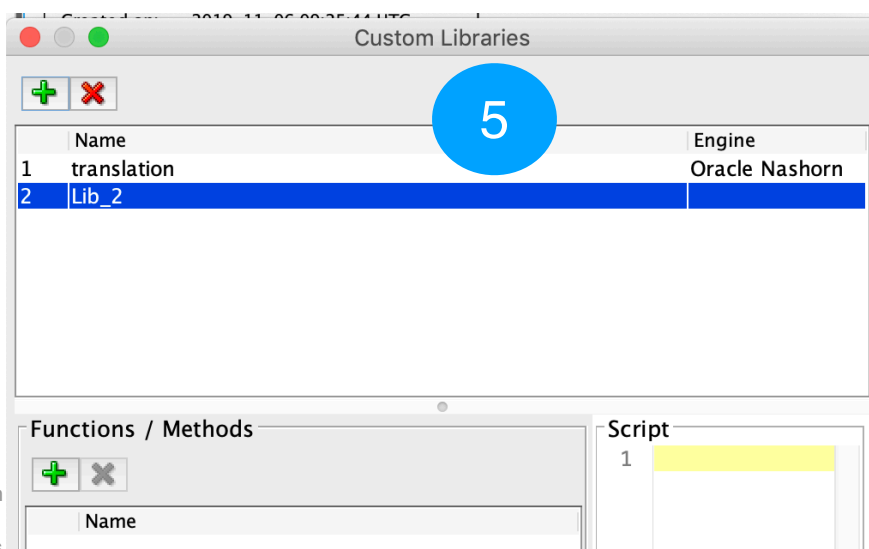

Open the delivery file *dr_customs_scripts.xml* in a text editor.


Search for the library name you want to replace / create (6).

Copy the code between `<![CDATA[` and `]]>` (7) into script section of the library pane.

In the Functions / Methods section of the library pane add all the methods listed in (8)

Save and close the library pane.


Go to the transformation pane (2)->(4). Add the function (see Method 2, second part)

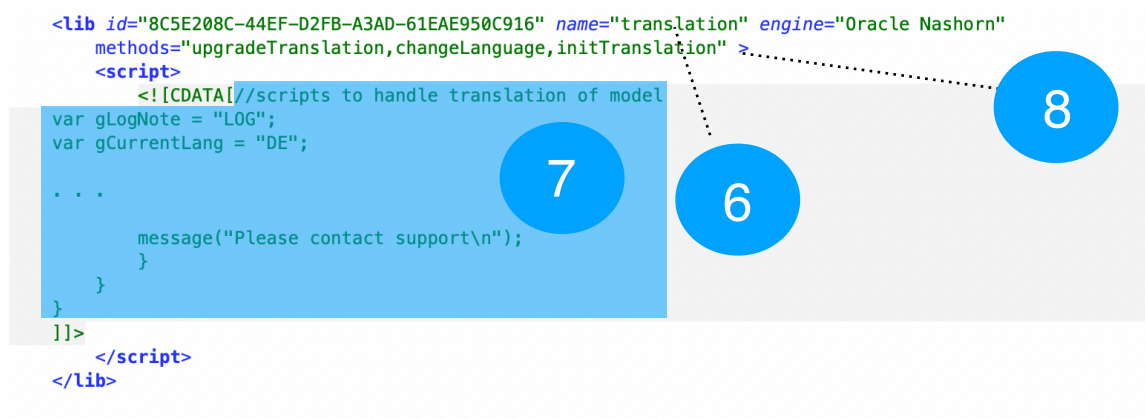

Applying scripts

Right click on Logical Model (for all scripts applicable for the logical model) or on a relational model (for scripts specific to one relational model)

In the Custom transformation script pane (9), move one or more functions to the right and press Apply.

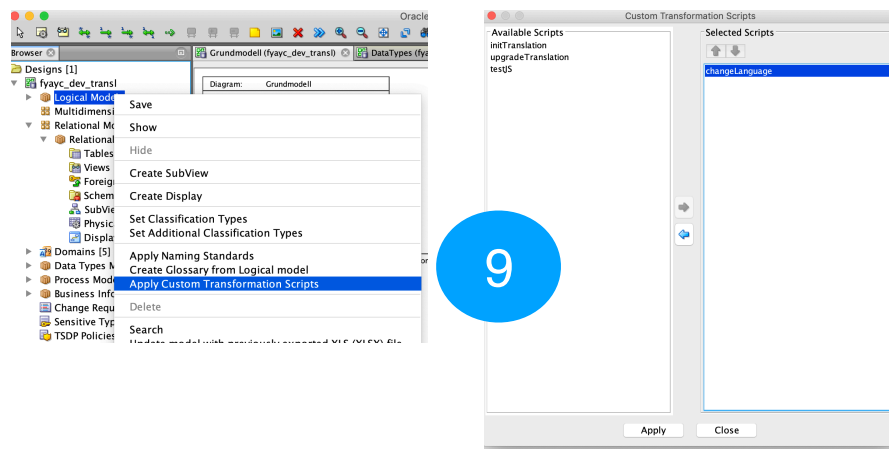

For more details see the manual for the individual AddOns.

Version	Released	Remarks
1.0	2019-11-08	First production release. Install and initialize as described above
1.1	2019-11-10	Corrected bug in replacing language-content Run upgradeTranslation
1.2	2020-02-25	Moved the UDP for Relations from dynamic properties to translation.udposdm. CAUTION: requires ODM 19.4 Add the relationship UDP to translation.udposdm (see Adding a language above). Close and reopen the model. Run upgradeTranslation.
1.3	2020-03-23	detailed and separated from individual manuals