


Capturing Suprasegmental Features of a Voice with RNNs for Improved Speaker Clustering

8th IAPR TC3 Workshop on Artificial Neural Networks in Pattern Recognition, September 19-21, 2018, Siena, Italy


Thilo Stadelmann, Sebastian Glinski-Haefeli, Patrick Gerber & Oliver Dür




Agenda

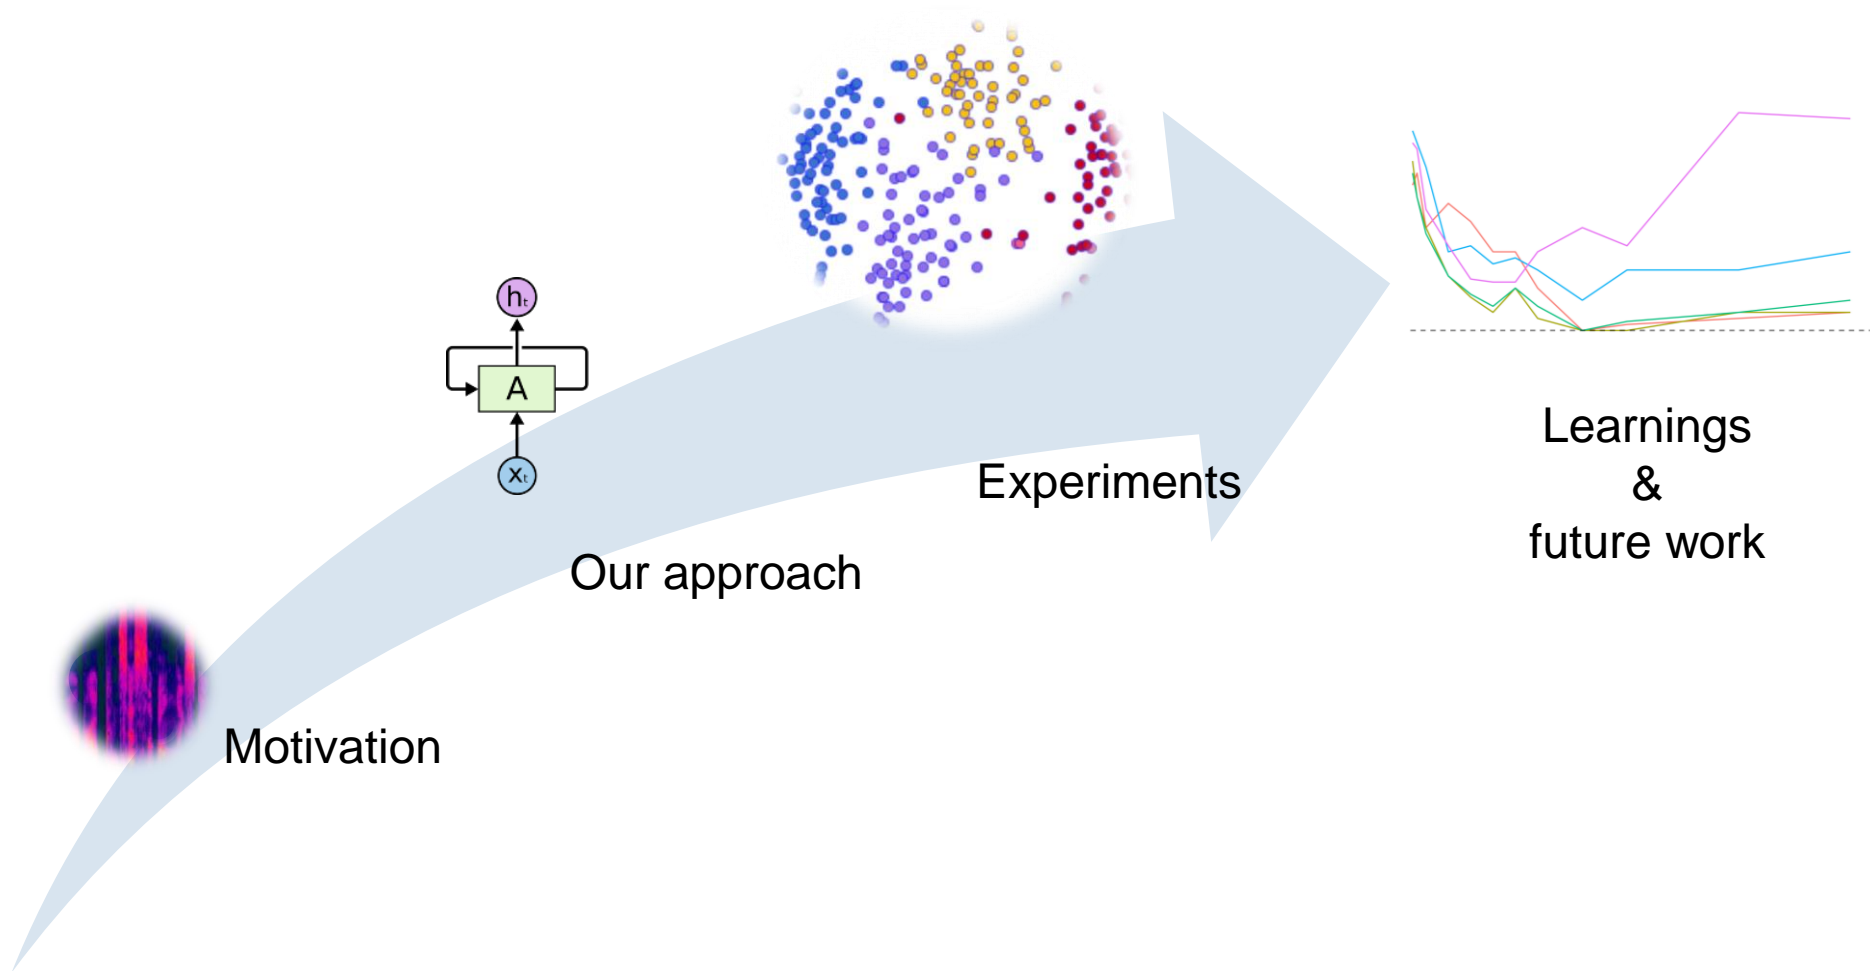

Motivation

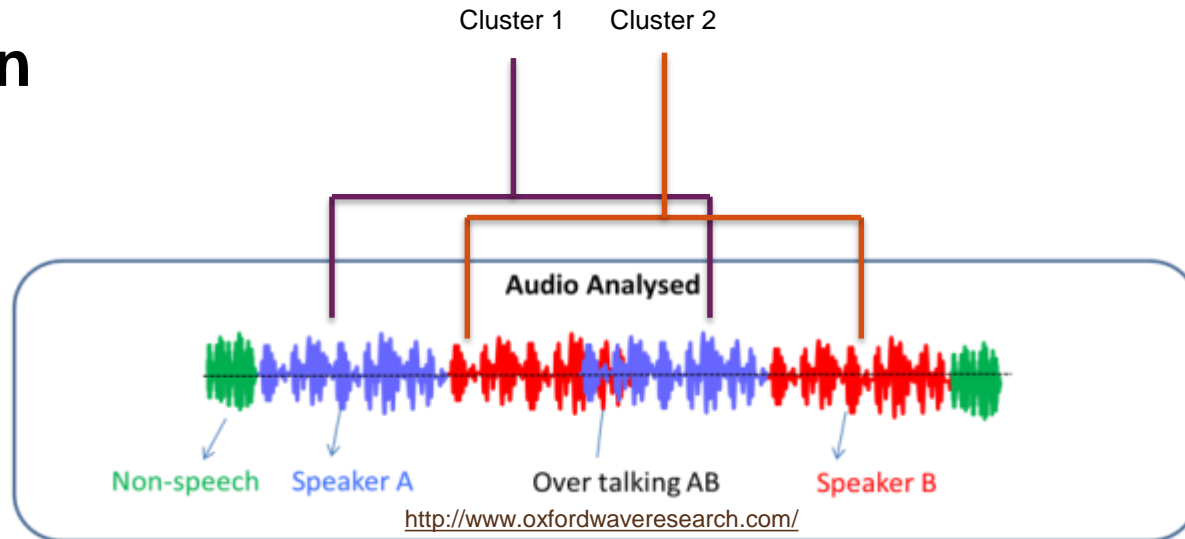

Motivation

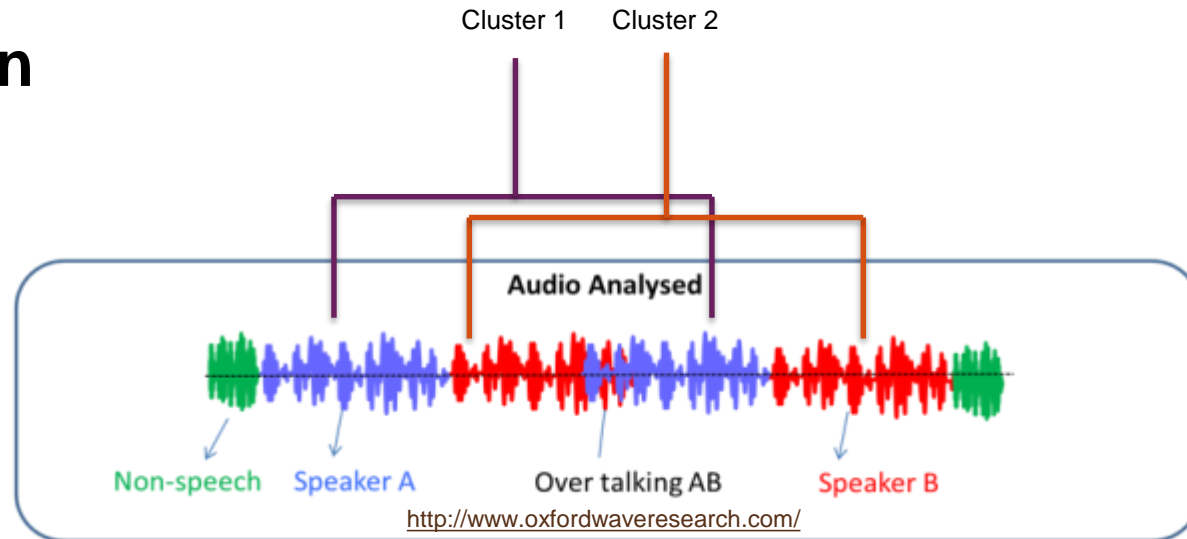


For the 630 training utterances, GMMs with 32 mixtures are built a priori, then an identification experiment is run for the 630 test utterances. It yields a satisfactory 0.5% closed set identification error.

[34]. Evaluations typically concentrate on data sets built from broadcast news/shows and meeting recordings, where diarization error rates ranging from 8% to 24% are reported [28][34][45]. These results are confirmed by more recent

Stadelmann & Freisleben (2009). «Unfolding Speaker Clustering Potential: A Biomimetic Approach». ACMMM'2009.

Motivation

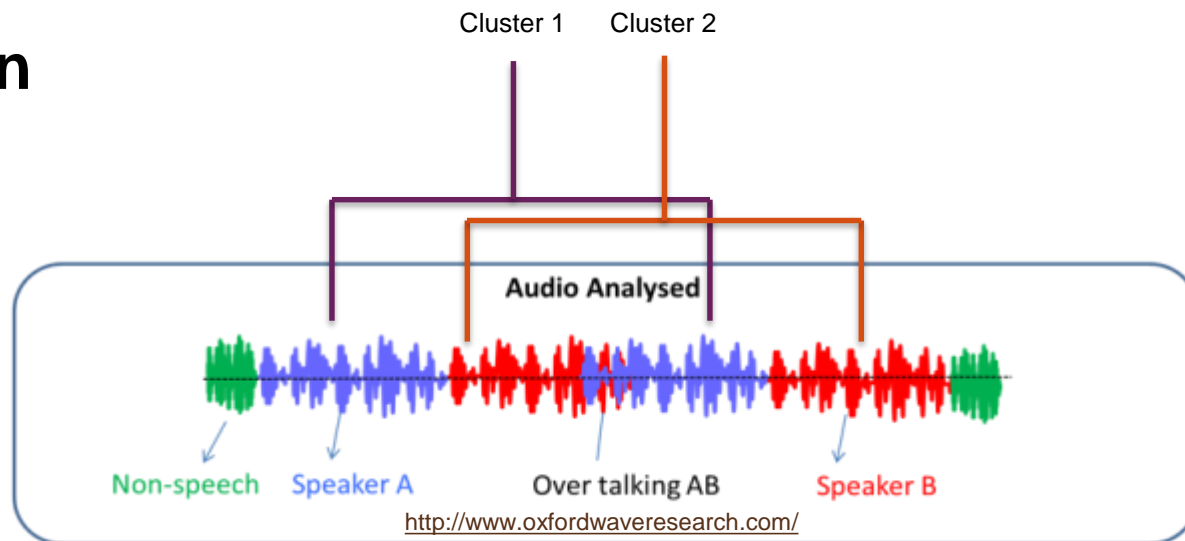

For the 630 training utterances, GMMs with 32 mixtures are built a priori, then an identification experiment is run for the 630 test utterances. It yields a satisfactory 0.5% closed set identification error.

[34]. Evaluations typically concentrate on data sets built from broadcast news/shows and meeting recordings, where diarization error rates ranging from 8% to 24% are reported [28][34][45]. These results are confirmed by more recent


The hypothesis of this paper is: the techniques originally developed for speaker verification and identification are not suitable for speaker clustering, taking into account the escalated difficulty of the latter task. However, the processing chain for speaker clustering is quite large – there are many potential areas for improvement. The question is: where should improvements be made to improve the final result?

Stadelmann & Freisleben (2009). «Unfolding Speaker Clustering Potential: A Biomimetic Approach». ACMMM'2009.

Motivation: temporal context & voice prosody

The interpretation of our results has shown that it is the stage of modeling that bears the highest potential: the inclusion of **temporal context information** among feature vectors is what is crucially missing there. Furthermore, the inclusion

context vector. This corresponds to a syllable length of 130 ms and is found to best capture speaker specific sounds in informal listening experiments over a range of **32–496 ms** (in intervals of 16 ms). Our context vector step is one orig-

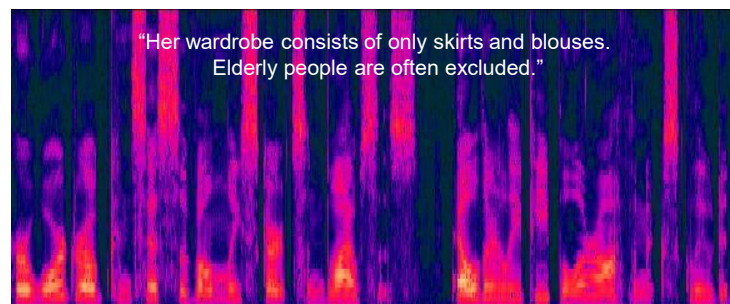


Stadelmann & Freisleben (2009). «*Unfolding Speaker Clustering Potential: A Biomimetic Approach*». ACMMM'2009.

Motivation: temporal context & voice prosody

The interpretation of our results has shown that it is the stage of modeling that bears the highest potential: the inclusion of **temporal context information** among feature vectors is what is crucially missing there. Furthermore, the inclusion

context vector. This corresponds to a syllable length of 130 ms and is found to best capture speaker specific sounds in informal listening experiments over a range of **32–496 ms** (in intervals of 16 ms). Our context vector step is one orig-

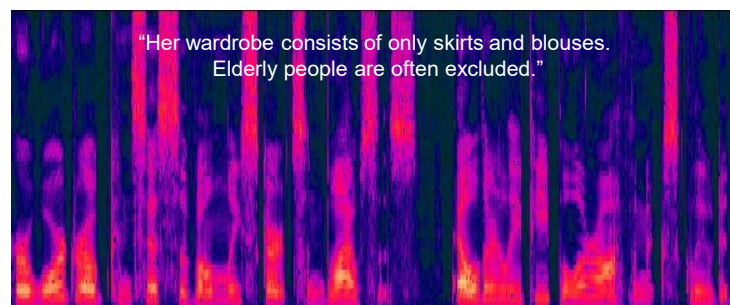

Prosody

- “*use of **suprasegmental features** to convey sentence-level pragmatic meanings*” *
- “*those **elements** of speech that are not [elements of] individual phonetic segments (vowels and consonants) but [...] of **syllables and larger units of speech***” **

Ladd (2008). «*Intonational phonology*». Cambridge University Press.

** [https://en.wikipedia.org/wiki/Prosody_\(linguistics\)](https://en.wikipedia.org/wiki/Prosody_(linguistics)).

Stadelmann & Freisleben (2009). «*Unfolding Speaker Clustering Potential: A Biomimetic Approach*». ACMMM'2009.

Our approach


Idea

- **Leverage** on recent success of **deep learning** in audio processing
- Use **RNN** for its known **sequence learning** capabilities
- **Extract** speaker **embeddings** for new utterance from trained RNN

Output: Embedding (speaker-specific representation)

Model: Deep recurrent neural net

Input: Audio snippet

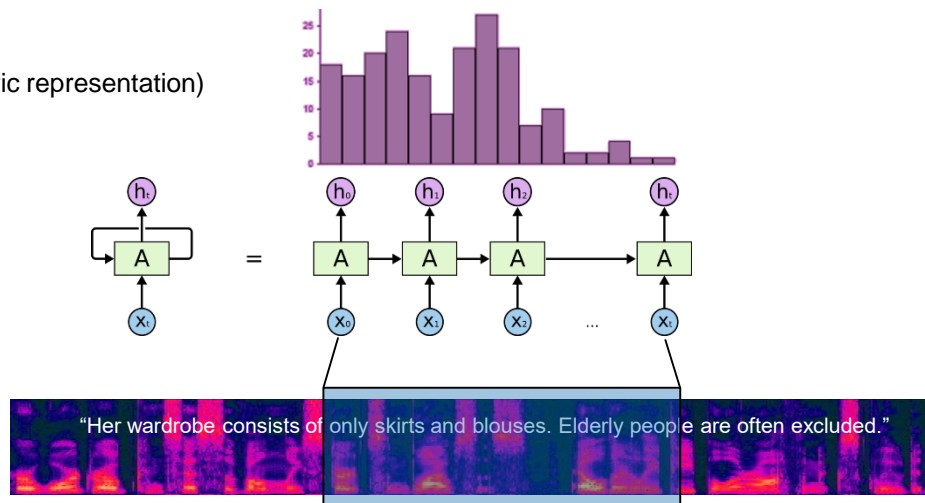

Our approach


Idea

- **Leverage** on recent success of **deep learning** in audio processing
- Use **RNN** for its known **sequence learning** capabilities
- **Extract** speaker **embeddings** for new utterance from trained RNN → cluster off-line

Output: Embedding (speaker-specific representation)

Model: Deep recurrent neural net

Input: Audio snippet

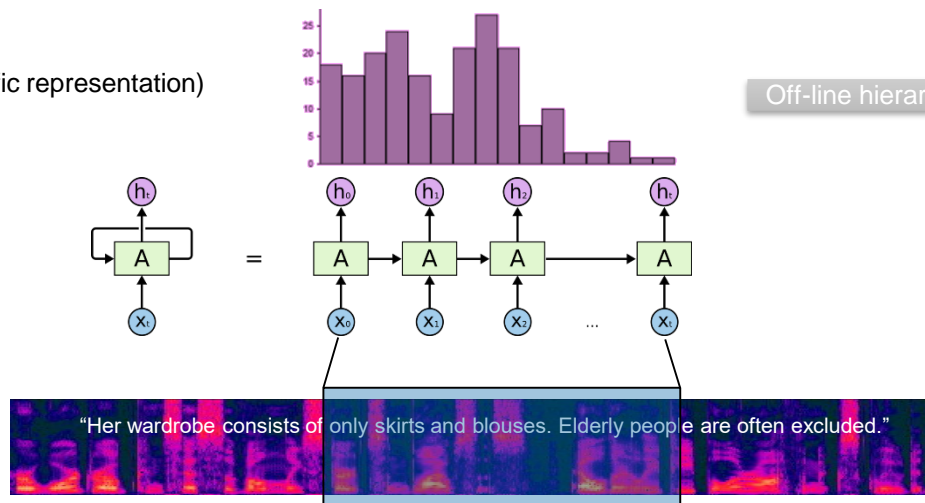

Our approach


Idea

- **Leverage** on recent success of **deep learning** in audio processing
- Use **RNN** for its known **sequence learning** capabilities
- **Extract** speaker **embeddings** for new utterance from trained RNN → cluster off-line

Output: Embedding (speaker-specific representation)

Model: Deep recurrent neural net



Input: Audio snippet

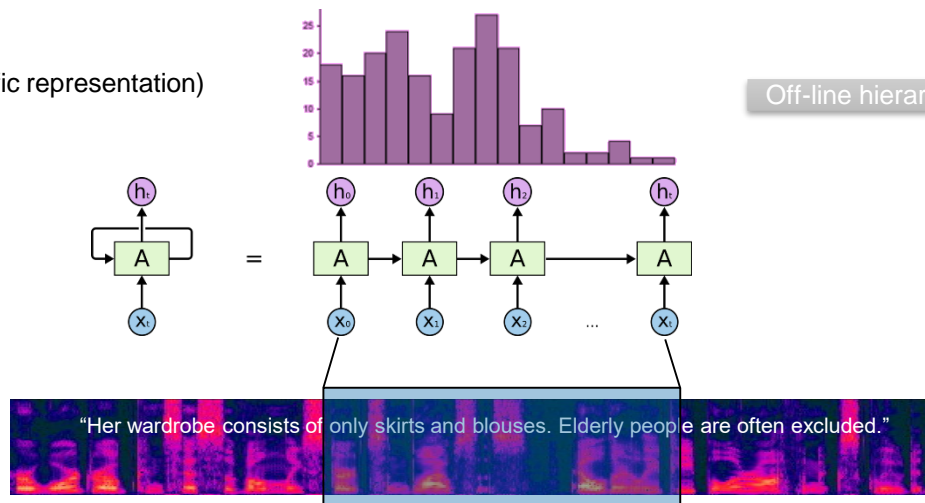

Challenges

- **RNNs** known to be **hard to train**
- Additionally: **no natural training target** → need surrogate task with hopefully helpful loss

Our approach: network architecture & training

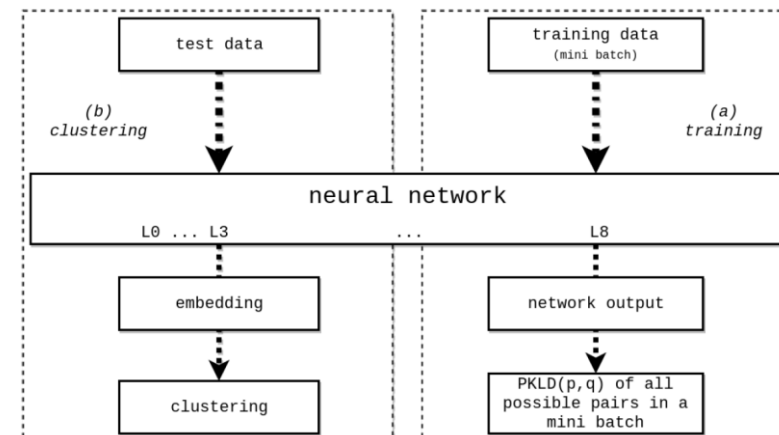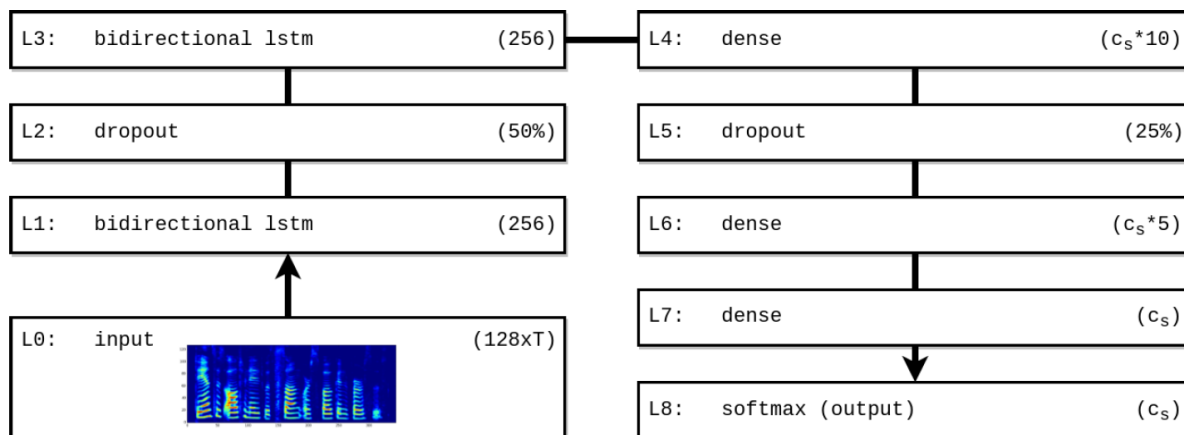

Learning target

- L8 to output a **distribution** (c_s = number of speakers in training set) that is similar for samples of the same speaker, dissimilar for different speakers

Loss

- For all pairs (p, q) of distributions in a mini batch:
 - **Pairwise Kullback-Leibler** distance between **same-speaker** pairs:
 - **Hinge** loss (with hyperparameter *margin*) between **different-speaker** pairs:
- (final loss gets symmetrized)

$$KL(\mathbf{p} \parallel \mathbf{q}) = \sum_i^{c_s} p_i \log \frac{p_i}{q_i}$$


$$HL(\mathbf{p} \parallel \mathbf{q}) = \max(0, \text{margin} - KL(\mathbf{p} \parallel \mathbf{q}))$$

Experiments

Setup

- Based on Stadelmann & Freisleben (2009) for **comparability**: TIMIT (630 speakers, studio quality)
- **Signal processing**: mel-spectrograms (128 freq. bins)
- **Training** on 100 speakers (20% of these for validation): snippets of varying length (see below)
Hyperparameters: standard Adam optimizer, $\text{margin} = 3$, 10'000 mini batches
- **Test** on distinct 40 speaker clustering test set: 1st utterance = 8 sentences, 2nd utterance = 2 sentences
(Bug in code made intermediate experiments leave out 2 uncritical speakers, and made assignments of sentences to utterances random instead of lexicographic)
- **Clustering** using agglomerative hierarchical clustering, complete linkage and cosine distance of mean embeddings per utterance


Intuitive hyperparameter justification of averaging & training time

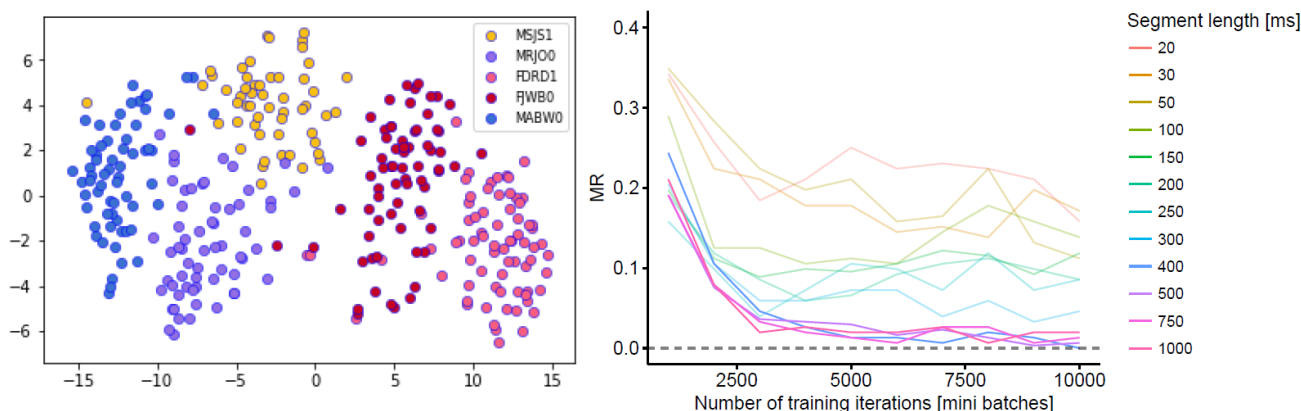

Experiments: tracing prosodic information


Intermediate experiment

- Misclassification rate (MR) as a function of input segment length (~temporal context)

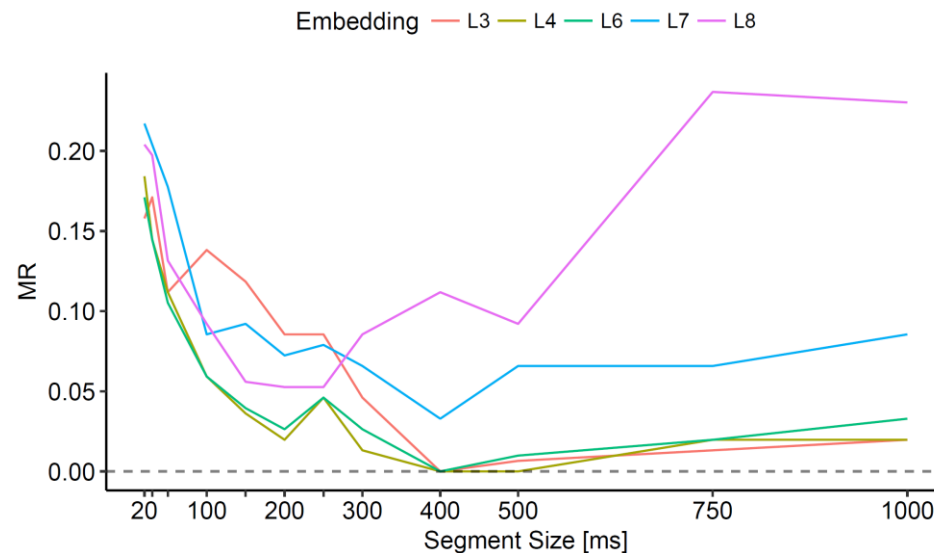

- ➔ All layers L3-L8 show a “sweet spot”
- ➔ Best performing layers have “sweet spot” around 400ms
- ➔ This is in the predicted range (on both axes) of Stadelmann & Freisleben (2009)

Experiments: visual clustering performance


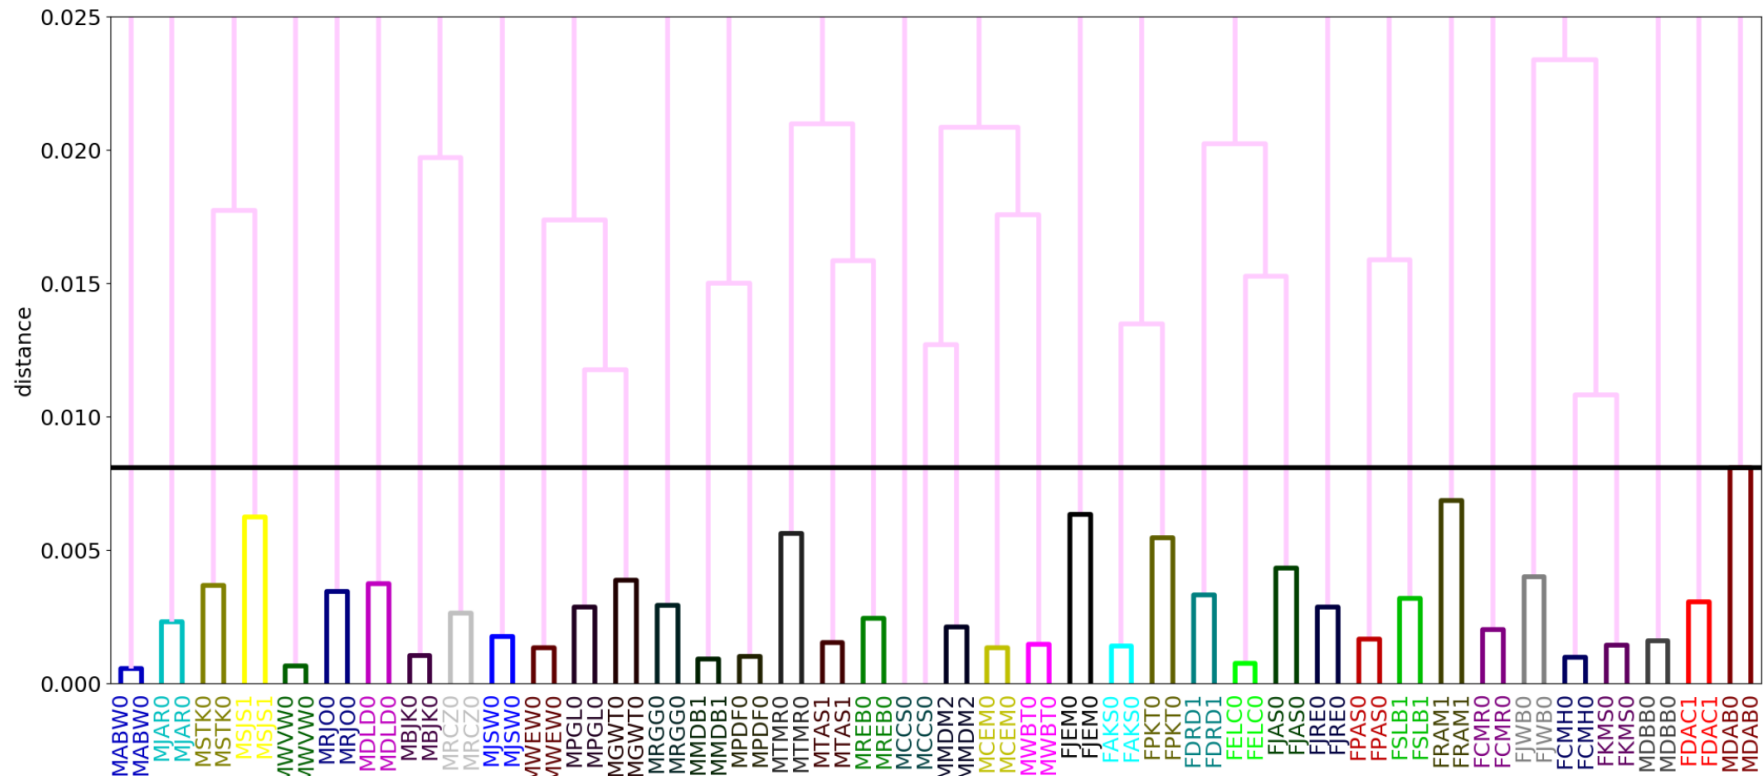


→ Misclassification only for **MCCS0**

Experiments: clustering performance vs. SotA

CNN (MLSP'16)

speaker labels



Method	MR	MR (legacy)
RNN /w PKLD	2.19% $\left(\frac{1.25\%+2.5\%+1.25\%+3.75\%}{4}\right)$	4.38% (average of 4 runs)
CNN /w PKLD [24]	-	5%
CNN /w cross entropy [23]	-	5%
ν -SVM [40]	6.25%	-
GMM/MFCC [40]	12.5%	-

Lukic, Vogt, Dürr & Stadelmann (2016). «Speaker Identification and Clustering using Convolutional Neural Networks». MLSP'2016.

Lukic, Vogt, Dürr & Stadelmann (2017). «Learning Embeddings for Speaker Clustering based on Voice Equality». MLSP'2017.



Stadelmann, Glinski-Haefeli, Gerber & Dürr (2018). «Capturing Suprasegmental Features of a Voice with RNNs for Improved Speaker Clustering». ANNPR'2018.

Zürcher Fachhochschule


Experiments: clustering performance vs. SotA

CNN (MLSP'16)

speaker labels



CNN & clustering-loss (MLSP'17)

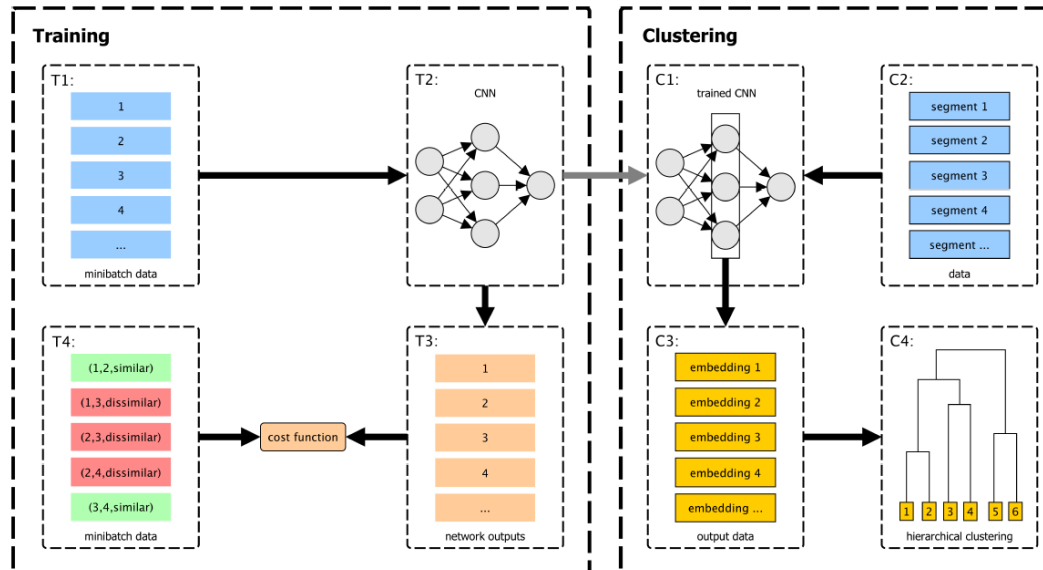

Method	MR	MR (legacy)
RNN /w PKLD	2.19% ($\frac{1.25\%+2.5\%+1.25\%+3.75\%}{4}$)	4.38% (average of 4 runs)
CNN /w PKLD [24]	-	5%
CNN /w cross entropy [23]	-	5%
ν -SVM [40]	6.25%	-
GMM/MFCC [40]	12.5%	-

Lukic, Vogt, Dürr & Stadelmann (2016). «Speaker Identification and Clustering using Convolutional Neural Networks». MLSP'2016.


Lukic, Vogt, Dürr & Stadelmann (2017). «Learning Embeddings for Speaker Clustering based on Voice Equality». MLSP'2017.

Stadelmann, Glinski-Haefeli, Gerber & Dürr (2018). «Capturing Suprasegmental Features of a Voice with RNNs for Improved Speaker Clustering». ANNPR'2018.


Zürcher Fachhochschule

Experiments: clustering performance vs. SotA


CNN (MLSP'16)

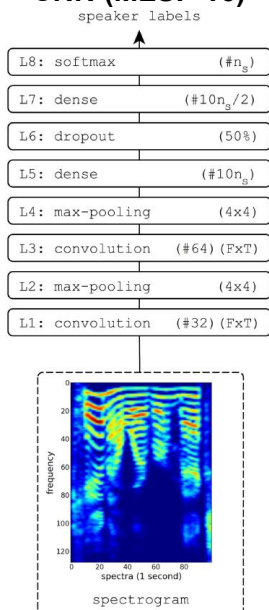

CNN & clustering-loss (MLSP'17)

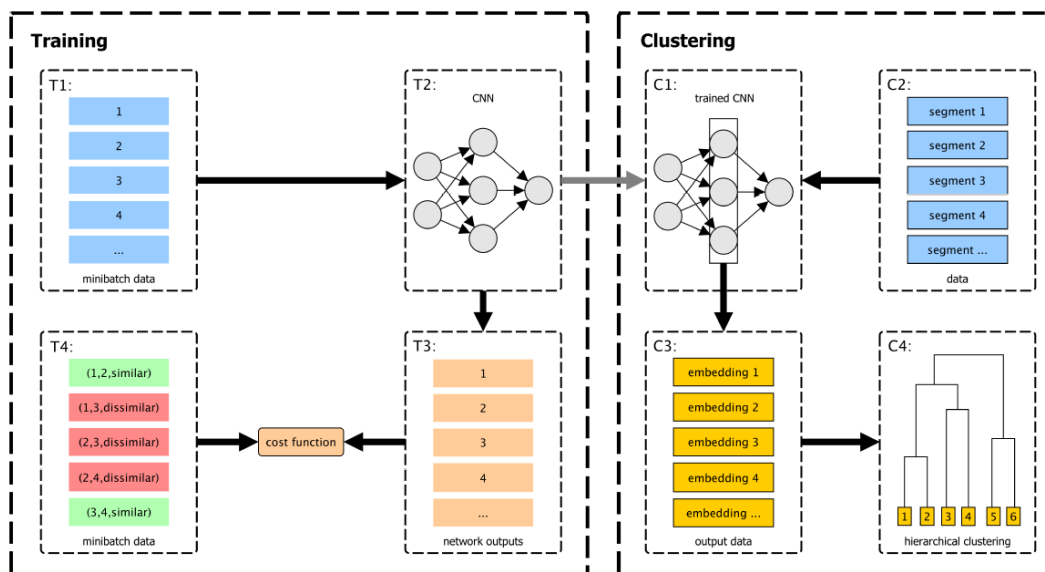

RNN & clustering-loss (ANNPR'18)

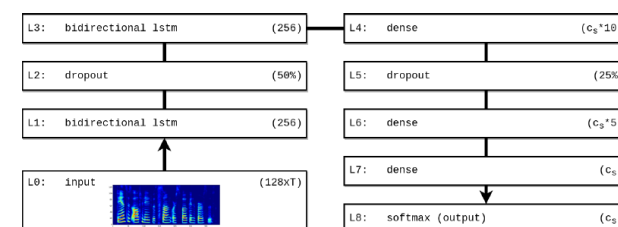

Method	MR	MR (legacy)
RNN /w PKLD	2.19% ($\frac{1.25\%+2.5\%+1.25\%+3.75\%}{4}$)	4.38% (average of 4 runs)
CNN /w PKLD [24]	-	5%
CNN /w cross entropy [23]	-	5%
ν -SVM [40]	6.25%	-
GMM/MFCC [40]	12.5%	-

Lukic, Vogt, Dürr & Stadelmann (2016). «Speaker Identification and Clustering using Convolutional Neural Networks». MLSP'2016.

Lukic, Vogt, Dürr & Stadelmann (2017). «Learning Embeddings for Speaker Clustering based on Voice Equality». MLSP'2017.

Stadelmann, Glinski-Haefeli, Gerber & Dürr (2018). «Capturing Suprasegmental Features of a Voice with RNNs for Improved Speaker Clustering». ANNPR'2018.

Zürcher Fachhochschule

Learnings & future work

«Pure» voice modeling seem largely solved

- RNN architecture is **very robust to hyperparameters** (different from earlier work)
- RNN model robustly exhibits *the predicted* «**sweet spot**» for the used **time information**
- Speaker clustering on clean & reasonably long input works **an order of magnitude better** (*as predicted*)
- Additionally, using a smarter clustering algorithm on top of embeddings makes **clustering on TIMIT as good as identification** (see ICPR'18 paper on dominant sets)

Future work

- Make models robust on **real-worldish data** (noise and more speakers/segments)
- Exploit findings for robust reliable **speaker diarization**
- **Learn** embeddings and the clustering algorithm **end to end** (we still pick embeddings from a lower layer, thus the surrogate task is not yet close enough to clustering despite PKLD)

swiss group for artificial intelligence
and cognitive science



On me:

- Prof. AI/ML, head ZHAW Datalab, board SGAICO
- thilo.stadelmann@zhaw.ch
- 058 934 72 08
- <https://stdm.github.io/>
- Collaboration: datalab@zhaw.ch

➔ Happy to answer questions & requests.

