

class13

Ann Truong (PID: A16028103)

Differential Section Analysis

```
library(DESeq2)
```

Loading required package: S4Vectors

Loading required package: stats4

Loading required package: BiocGenerics

Attaching package: 'BiocGenerics'

The following objects are masked from 'package:stats':

IQR, mad, sd, var, xtabs

The following objects are masked from 'package:base':

anyDuplicated, aperm, append, as.data.frame, basename, cbind,
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,
get, grep, grepl, intersect, is.unsorted, lapply, Map, mapply,
match, mget, order, paste, pmax, pmax.int, pmin, pmin.int,
Position, rank, rbind, Reduce, rownames, sapply, setdiff, sort,
table, tapply, union, unique, unsplit, which.max, which.min

Attaching package: 'S4Vectors'

The following objects are masked from 'package:base':

expand.grid, I, unname

Loading required package: IRanges

Loading required package: GenomicRanges

Loading required package: GenomeInfoDb

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

colAlls, colAnyNAs, colAnys, colAvgPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgPerColSet,
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars

Loading required package: Biobase

Welcome to Bioconductor

Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

rowMedians

The following objects are masked from 'package:matrixStats':

anyMissing, rowMedians

Let's load our data and take a look at it.

```
# Import metadata and take a peak
colData = read.csv("GSE37704_metadata.csv", row.names=1)
head(colData)
```

```
              condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```
# Import countdata
countData = read.csv("GSE37704_featurecounts.csv", row.names=1)
head(countData)
```

	length	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370
ENSG00000186092	918	0	0	0	0	0
ENSG00000279928	718	0	0	0	0	0
ENSG00000279457	1982	23	28	29	29	28

ENSG00000278566	939	0	0	0	0	0
ENSG00000273547	939	0	0	0	0	0
ENSG00000187634	3214	124	123	205	207	212
	SRR493371					
ENSG00000186092	0					
ENSG00000279928	0					
ENSG00000279457	46					
ENSG00000278566	0					
ENSG00000273547	0					
ENSG00000187634	258					

```
# Note we need to remove the odd first $length col
countData <- as.matrix(countData[,-1])
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000186092	0	0	0	0	0	0
ENSG00000279928	0	0	0	0	0	0
ENSG00000279457	23	28	29	29	28	46
ENSG00000278566	0	0	0	0	0	0
ENSG00000273547	0	0	0	0	0	0
ENSG00000187634	124	123	205	207	212	258

```
# Filter count data where you have 0 read count across all samples.
zerocounts <- rowSums(countData) == 0
head(zerocounts)
```

ENSG00000186092	ENSG00000279928	ENSG00000279457	ENSG00000278566	ENSG00000273547
TRUE	TRUE	FALSE	TRUE	TRUE
ENSG00000187634				
FALSE				

```
newcounts <- countData[ !zerocounts, ]
head(newcounts)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000279457	23	28	29	29	28	46
ENSG00000187634	124	123	205	207	212	258
ENSG00000188976	1637	1831	2383	1226	1326	1504

ENSG00000187961	120	153	180	236	255	357
ENSG00000187583	24	48	65	44	48	64
ENSG00000187642	4	9	16	14	16	16

```
nrow(newcounts)
```

```
[1] 15975
```

Running DESeq2

Nice now lets setup the DESeqDataSet object required for the DESeq() function and then run the DESeq pipeline.

```
dds = DESeqDataSetFromMatrix(countData=newcounts,
                              colData=colData,
                              design=~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
## estimating size factors
## estimating dispersions
```

```
## gene-wise dispersion estimates
## mean-dispersion relationship
## final dispersion estimates
## fitting model and testing
```

```
dds
```

```
class: DESeqDataSet
dim: 15975 6
metadata(1): version
assays(4): counts mu H cooks
rownames(15975): ENSG00000279457 ENSG00000187634 ... ENSG00000276345
               ENSG00000271254
rowData names(22): baseMean baseVar ... deviance maxCooks
colnames(6): SRR493366 SRR493367 ... SRR493370 SRR493371
colData names(2): condition sizeFactor
```


```
colData = read.csv("GSE37704_metadata.csv", row.names=1)
res = results(dds, contrast=c("condition", "hoxa1_kd", "control_sirna"))

summary(res)
```

```
out of 15975 with nonzero total read count
adjusted p-value < 0.1
LFC > 0 (up)      : 4349, 27%
LFC < 0 (down)    : 4396, 28%
outliers [1]      : 0, 0%
low counts [2]    : 1237, 7.7%
(mean count < 0)
[1] see 'cooksCutoff' argument of ?results
[2] see 'independentFiltering' argument of ?results
```

Volcano plot A plot of log2 fold change vs -log adjusted p-value.

```
plot( res$log2FoldChange, -log(res$padj) )
```

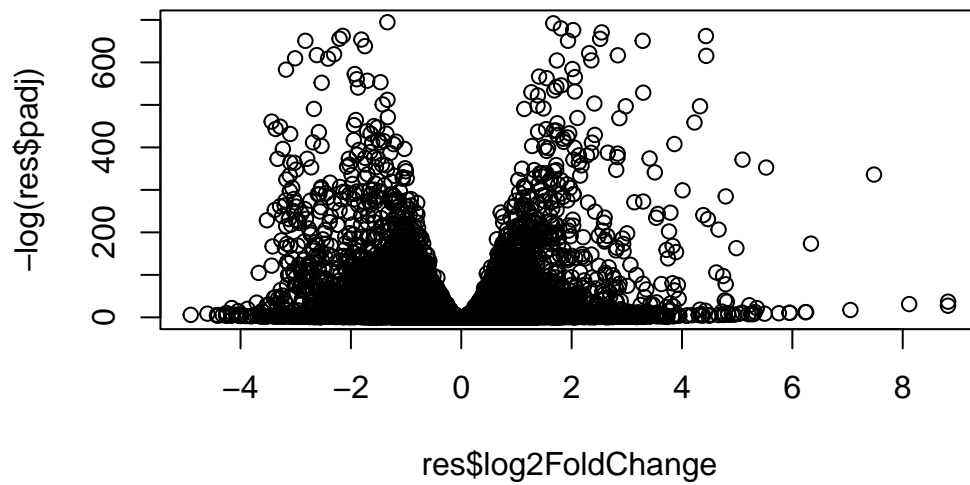


```
# Make a color vector for all genes
mycols <- rep("gray", nrow(res) )

# Color red the genes with absolute fold change above 2
mycols[ abs(res$log2FoldChange) > 2 ] <- "red"

# Color blue those with adjusted p-value less than 0.01
# and absolute fold change more than 2
mycols[ res$padj<0.05 & abs(res$log2FoldChange) > 2] <- "blue"

plot( res$log2FoldChange, -log(res$padj), col=mycols, xlab="Log2(FoldChange)", ylab="-Log(
```

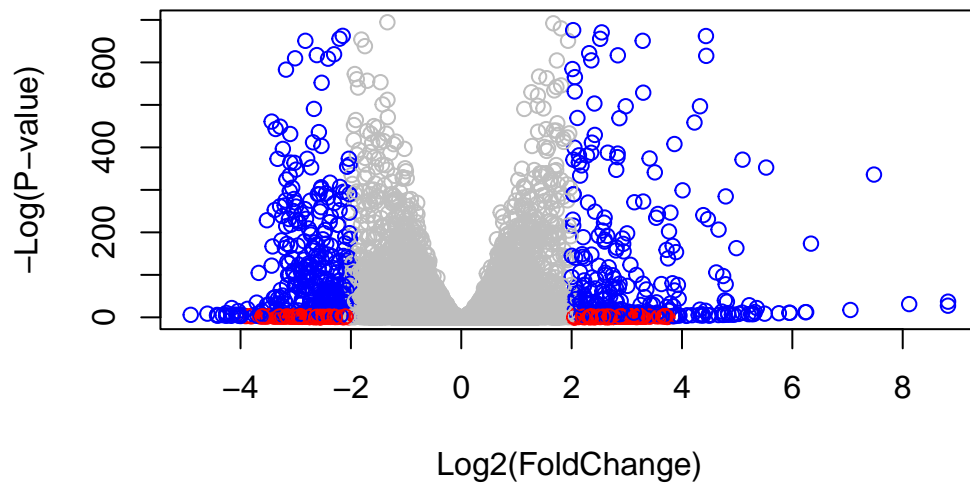

Adding gene annotation

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
[1] "ACCNUM"      "ALIAS"       "ENSEMBL"     "ENSEMBLPROT" "ENSEMBLTRANS"
[6] "ENTREZID"    "ENZYME"      "EVIDENCE"    "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"    "GO"          "GOALL"       "IPI"          "MAP"
[16] "OMIM"        "ONTOLOGY"    "ONTOLOGYALL" "PATH"         "PFAM"
[21] "PMID"        "PROSITE"     "REFSEQ"      "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```

```
res$symbol = mapIds(org.Hs.eg.db,
  keys=row.names(res),
  keytype="ENSEMBL",
  column="SYMBOL",
```



```
multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,
  keys=row.names(res),
  keytype="ENSEMBL",
  column="ENTREZID",
  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,
  keys=row.names(res),
  keytype="ENSEMBL",
  column="GENENAME",
  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1_kd vs control_sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 9 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.913579	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.229650	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.188076	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.637938	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.255123	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.979750	0.5428105	0.5215598	1.040744	2.97994e-01
ENSG00000188290	108.922128	2.0570638	0.1969053	10.446970	1.51282e-25
ENSG00000187608	350.716868	0.2573837	0.1027266	2.505522	1.22271e-02
ENSG00000188157	9128.439422	0.3899088	0.0467163	8.346304	7.04321e-17
ENSG00000237330	0.158192	0.7859552	4.0804729	0.192614	8.47261e-01

	padj	symbol	entrez	name
	<numeric>	<character>	<character>	<character>
ENSG00000279457	6.86555e-01	NA	NA	NA
ENSG00000187634	5.15718e-03	SAMD11	148398	sterile alpha motif ..
ENSG00000188976	1.76549e-35	NOC2L	26155	NOC2 like nucleolar ..
ENSG00000187961	1.13413e-07	KLHL17	339451	kelch like family me..
ENSG00000187583	9.19031e-01	PLEKHN1	84069	pleckstrin homology ..
ENSG00000187642	4.03379e-01	PERM1	84808	PPARGC1 and ESRR ind..
ENSG00000188290	1.30538e-24	HES4	57801	hes family bHLH tran..
ENSG00000187608	2.37452e-02	ISG15	9636	ISG15 ubiquitin like..
ENSG00000188157	4.21963e-16	AGRN	375790	agrin
ENSG00000237330	NA	RNF223	401934	ring finger protein ..

```
res = res[order(res$pvalue),]
write.csv(res, file="deseq_results.csv")
```

Pathway analysis

```
library(pathview)
```

#####

Pathview is an open source software package distributed under GNU General Public License version 3 (GPLv3). Details of GPLv3 is available at <http://www.gnu.org/licenses/gpl-3.0.html>. Particullary, users are required to formally cite the original Pathview paper (not just mention it) in publications or products. For details, do citation("pathview") within R.

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

#####

```
library(gage)
```

```
library(gageData)
```

```

data(kegg.sets.hs)
data(sigmet.idx.hs)

# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)

$`hsa00232 Caffeine metabolism`
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"

$`hsa00983 Drug metabolism - other enzymes`
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"
[49] "8824" "8833" "9" "978"

$`hsa00230 Purine metabolism`
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"
[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"

```

```
[161] "9583"    "9615"
```

The main `gage()` function requires a named vector of fold changes, where the names of the values are the Entrez gene IDs.

```
foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)
```

```
      1266      54855      1465      51232      2034      2317
-2.422719  3.201955 -2.313738 -2.059631 -1.888019 -1.649792
```

Now, let's run the `gage` pathway analysis.

```
# Get the results
keggres = gage(foldchanges, gsets=kegg.sets.hs)
attributes(keggres)
```

```
$names
[1] "greater" "less"    "stats"
```

```
# Look at the first few down (less) pathways
head(keggres$less)
```

	p.geomean	stat.mean	p.val
hsa04110 Cell cycle	8.995727e-06	-4.378644	8.995727e-06
hsa03030 DNA replication	9.424076e-05	-3.951803	9.424076e-05
hsa03013 RNA transport	1.375901e-03	-3.028500	1.375901e-03
hsa03440 Homologous recombination	3.066756e-03	-2.852899	3.066756e-03
hsa04114 Oocyte meiosis	3.784520e-03	-2.698128	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	8.961413e-03	-2.405398	8.961413e-03

	q.val	set.size	exp1
hsa04110 Cell cycle	0.001448312	121	8.995727e-06
hsa03030 DNA replication	0.007586381	36	9.424076e-05
hsa03013 RNA transport	0.073840037	144	1.375901e-03
hsa03440 Homologous recombination	0.121861535	28	3.066756e-03
hsa04114 Oocyte meiosis	0.121861535	102	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	0.212222694	53	8.961413e-03

Now, let's try out the `pathview()` function from the `pathview` package to make a pathway plot with our RNA-Seq expression results shown in color.

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/anntruong/class13

Info: Writing image file hsa04110.pathview.png

Now, let's process our results a bit more to automatically pull out the top 5 upregulated pathways, then further process that just to get the pathway IDs needed by the `pathview()` function.

```
## Focus on top 5 upregulated pathways here for demo purposes only
keggrespathways <- rownames(keggres$greater)[1:5]

# Extract the 8 character long IDs part of each string
keggresids = substr(keggrespathways, start=1, stop=8)
keggresids
```

```
[1] "hsa04640" "hsa04630" "hsa00140" "hsa04142" "hsa04330"
```

Finally, let's pass these IDs in `keggresids` to the `pathview()` function to draw plots for all the top 5 pathways.

```
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/anntruong/class13

Info: Writing image file hsa04640.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/anntruong/class13

Info: Writing image file hsa04630.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/anntruong/class13

Info: Writing image file hsa00140.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/anntruong/class13

Info: Writing image file hsa04142.pathview.png

Info: some node width is different from others, and hence adjusted!

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/anntruong/class13

Info: Writing image file hsa04330.pathview.png

Can you do the same procedure as above to plot the pathview figures for the top 5 down-regulated pathways? Yes, we can just manipulate the code chunk from `rownames(keggres$greater)` to `rownames(keggres$lesser)`.