


Take alternating samples from duration distributions for grouped and split percepts to construct simulated perceptual timecourse for a trial

Assign a value of 0 to timepoints from grouped durations and a value of 1 to timepoints from split durations

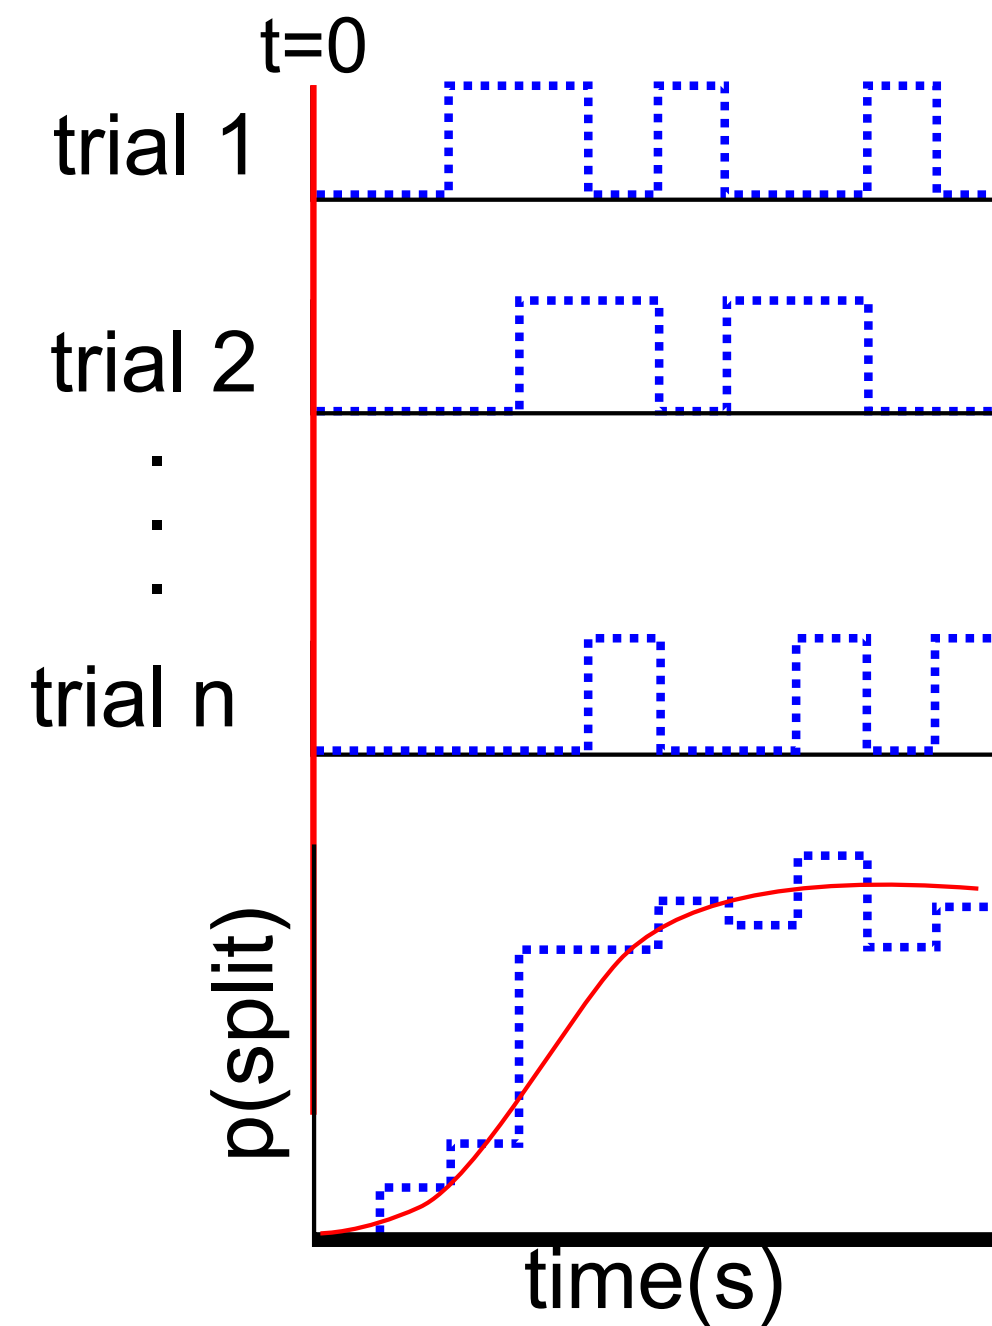

Take the average at each timepoint over many trials to obtain the buildup function