

B2 TP06 Installation GLPI :

Valentin Chaussegros.

1. Configuration de base :

J'ai installé une machine Ubuntu sur le serveur ESXI.

On configure bien le proxy comme dans le tuto :

```
# You can set the default proxies for Wget to use for http, https, ftp, and file.
# They will override the value in the environment.
https_proxy = http://172.16.63.130:3128/
http_proxy = http://172.16.63.130:3128/
ftp_proxy = http://172.16.63.130:3128/

# If you do not want to use proxy at all, set this to off.
use_proxy = on
```

Configuration :

IP : 172.30.15.27

Proxy : 172.16.63.130:3128

Je vais ensuite vérifier si elle est bien mise à jour :

```
valentin@valentinglpi:~$ sudo apt update
[sudo] password for valentin:
0% [Connexion à archive.ubuntu.com] [Connexion à security.ubuntu.com]
```

ET on l'update :

```
Préparation du dépaquetage de .../16-update-notifier-...
deb ...
Dépaquetage de ubuntu-pro-client (37.2ubuntu~24.04.1)
Préparation du dépaquetage de .../16-update-notifier-...
..
Dépaquetage de update-notifier-common (3.192.68.2) su
Progression : [ 29%] [#####.....]
```

2. Installation des prérequis :

On Install ensuite les paquets nécessaires :

```
sudo apt install apache2 mariadb-server php php-mysql php-curl php-gd php-mbstring php-xml php-zip php-bcmath php-intl php-apcu php-bz2 php-ldap -y :
```

```
root@valentinglpi:/home/valentin# php -v
PHP 8.3.6 (cli) (built: Sep  2 2026 12:56:02) (NTS)
Copyright (c) The PHP Group
Zend Engine v4.3.6, Copyright (c) Zend Technologies
    with Zend OPcache v8.3.6, Copyright (c), by Zend Technologies
root@valentinglpi:/home/valentin#
```

3. Configuration MariaDB :

MariaDB à d'abord été sécurisé avec : `sudo mysql_secure_installation`

```
Installation should now be secure.

Thanks for using MariaDB!
root@valentinglpi:/home/valentin# sudo mariadb
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 39
Server version: 10.11.14-MariaDB-0ubuntu0.24.04.1 Ubuntu 24.04

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]>
```

J'ai ensuite créer : la base de donné, un utilisateur, et attribué les droits :

```
MariaDB [(none)]> CREATE DATABASE glpi CHARACTER SET utf8mb4 COLLATE utf8mb4_unicode_ci;
Query OK, 1 row affected (0,042 sec)

MariaDB [(none)]> CREATE USER 'glpi'@'localhost' IDENTIFIED BY 'Glpil23!';
Query OK, 0 rows affected (0,007 sec)

MariaDB [(none)]> GRANT ALL PRIVILEGES ON glpi.* TO 'glpi'@'localhost';
Query OK, 0 rows affected (0,010 sec)

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0,001 sec)

MariaDB [(none)]>
```

```

root@valentinglpi:/home/valentin# sudo mariadb -e "SHOW DATABASES;"
+-----+
| Database                |
+-----+
| glpi                    |
| information_schema      |
| mysql                   |
| performance_schema     |
| sys                     |
+-----+

```

Liste des commandes utilisé :

- sudo mysql_secure_installation
- CREATE DATABASE glpi CHARACTER SET utf8mb4 COLLATE utf8mb4_unicode_ci;
- CREATE USER 'glpi'@'localhost' IDENTIFIED BY 'Glpi123!';
- GRANT ALL PRIVILEGES ON glpi.* TO 'glpi'@'localhost';
- FLUSH PRIVILEGES;
- sudo mariadb -e "SHOW DATABASES;"

4. Installation GLPI : cd /tmp

On a installé glpi dans /var/www/glpi

J'ai ensuite vérifier le fichier avec ls /var/www/glpi

```

Proxy request sent, awaiting response... 200 OK
Length: 96323922 (92M) [application/octet-stream]
Saving to: 'glpi-11.0.9.tgz'

glpi-11.0.9.tgz      90%[=====> ] 83,43M 1

```

```

root@valentinglpi:/tmp# ls -lh glpi-11.0.9.tgz
-rw-r--r-- 1 root root 92M sept. 16 09:00 glpi-11.0.9.tgz
root@valentinglpi:/tmp#

```

```

root@valentinglpi:/tmp# ls /var/www/glpi
ajax          css           install       plugins       src
apirest.md    dependency_injection INSTALL.md    public        SUPPORT.md
bin           files         lib           README.md    templates
CHANGELOG.md  front        LICENSE       resources     vendor
config        inc           locales       routes        version
CONTRIBUTING.md index.html    marketplace  SECURITY.md
root@valentinglpi:/tmp#

```

On constate bien que le répertoire contient : bin

config

files

public

src

vendor

5. Configuration APACHE :

On créer un fichier de configuration glpi /etc/apache2/sites-available/glpi.conf

On active le module sudo a2enmod rewrite

```

<VirtualHost *:80>
    ServerName glpi

    DocumentRoot /var/www/glpi/public

    <Directory /var/www/glpi/public>
        Require all granted

        RewriteEngine On

        RewriteCond %{HTTP:Authorization} ^(.+)$
        RewriteRule .* - [E=HTTP_AUTHORIZATION:%1]

        RewriteCond %{REQUEST_FILENAME} !-f
        RewriteRule ^(.*)$ index.php [QSA,L]
    </Directory>

    ErrorLog ${APACHE_LOG_DIR}/glpi_error.log
    CustomLog ${APACHE_LOG_DIR}/glpi_access.log combined
</VirtualHost>


```


J'ai ensuite activé glpi : sudo a2ensite glpi.conf

J'ai redémarré apache et vérifier le fonctionnement :

```
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/apache2.service; vendor preset: enabled)
   Active: active (running) since Fri 2026-09-25 10:00:00 CEST; 1min 1s ago
     Docs: https://httpd.apache.org/docs/2.4/
   Process: 50091 ExecStart=/usr/sbin/apachectl start (code=exited, status=0/SUCCESS)
   Main PID: 50094 (apache2)
     Tasks: 6 (limit: 1068)
```

6. Installation depuis l'interface :

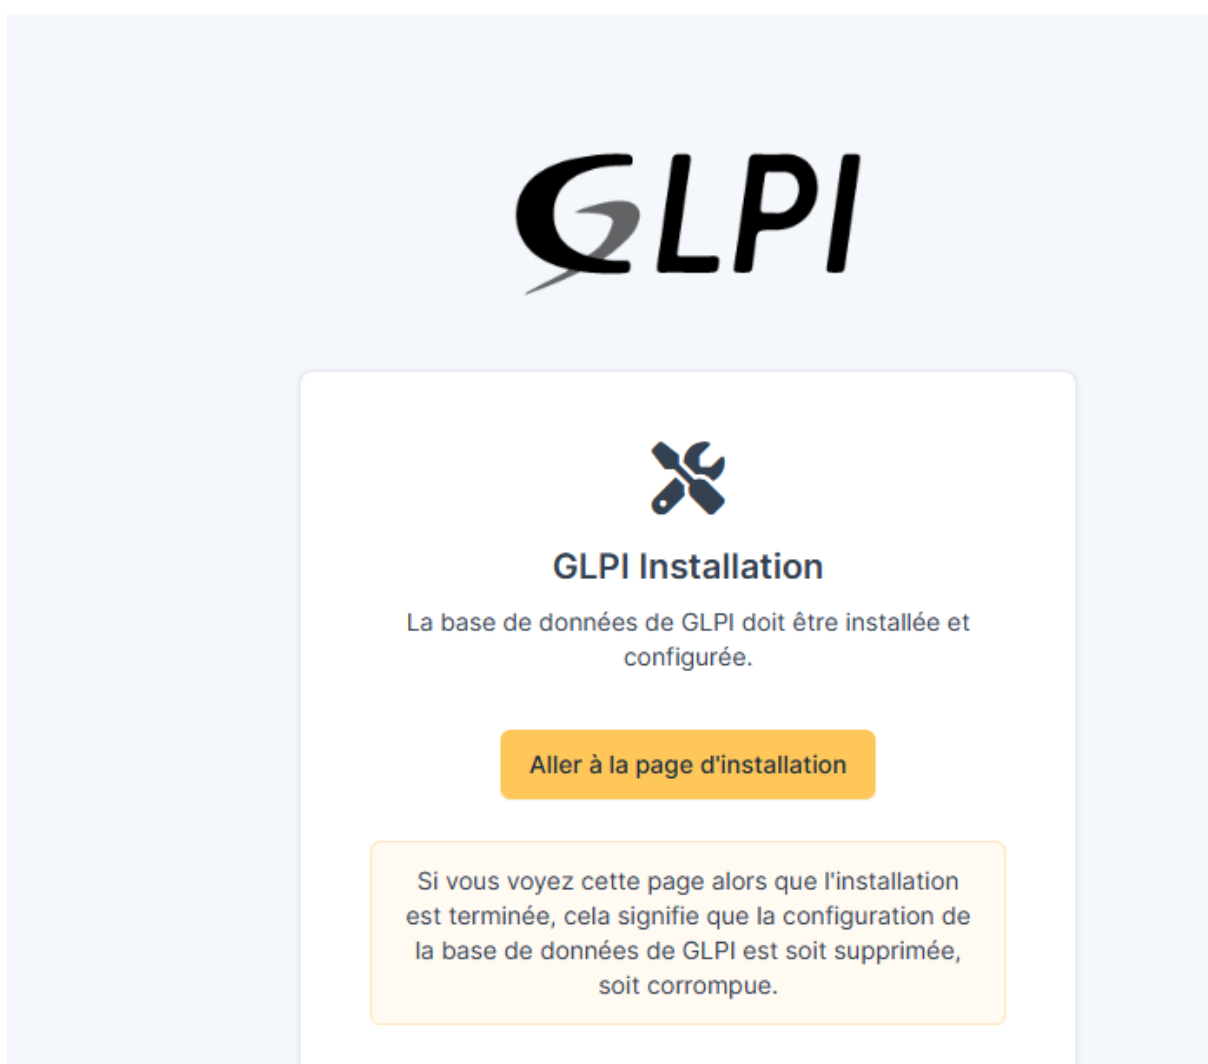

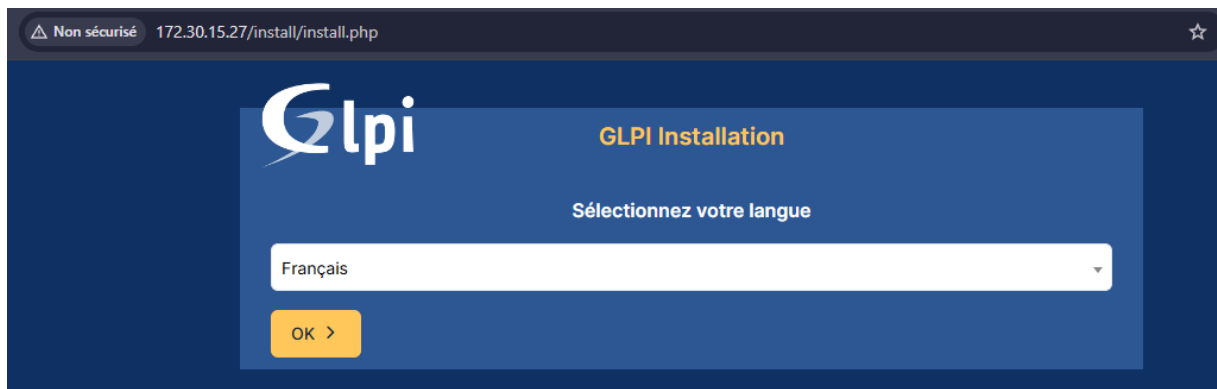

Dans l'écran Étape 1, mets :

- Serveur SQL : localhost
- Utilisateur SQL : glpi
- Mot de passe SQL : Glpi123!



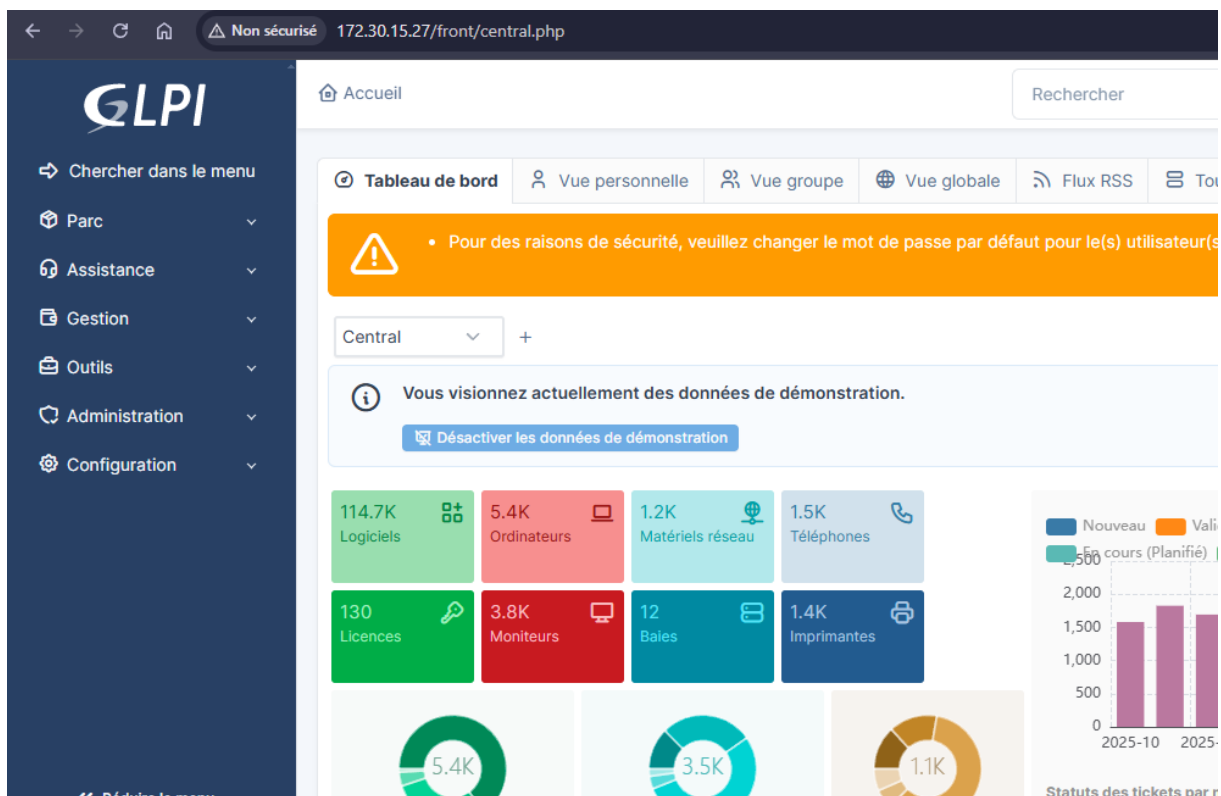


Tableau technique :

Information	Valeur
Base de données	glpi
Utilisateur MariaDB	glpi
Mot de passe MariaDB	Glpil23!
Serveur Web	Apache 2.4
Serveur BDD	MariaDB
Adresse IP	172.30.15.27
URL GLPI	http://172.30.15.27

Information	Valeur
Compte administrateur	glpi
Mot de passe administrateur	Glpisio!
Proxy	172.16.63.130:3128