

Faculty of Mathematics and Computer Science

Heidelberg University

Master thesis

in Computer Science

submitted by

Stefan Machmeier

born in Heidelberg

1996

Honeypot Implementation

in a

Cloud Environment

This Master thesis has been carried out by Stefan Machmeier

at the

Engineering Mathematics and Computing Lab

under the supervision of

Herrn Prof. Dr. Vincent Heuveline

(Titel der Masterarbeit - deutsch):

(Title of Master thesis - english):

Contents

Acronyms	III
List of Figures	IV
List of Tables	V
1 Introduction	1
1.1 Problem description	1
1.2 Justification, motivation and benefits	1
1.3 Research questions	1
1.4 Limitations	1
2 Background	2
2.1 Virtualization	2
2.2 Cloud Computing	2
2.3 Honeypots	6
2.4 Summary	9
3 Previous Work	10
3.1 The Bait'n'Switch Honeypot	10
3.2 Intrusion Trap System	10
3.3 Honeycomb	10
3.4 Honeypots in a cloud environment	10
3.5 T-Pot	10
3.6 Summary	10
4 Cloud Security with Honeypots	11
4.1 Summary	11
5 Concept	12
5.1 Introduction	12
5.2 Summary	12
6 Methods Used	13
6.1 Requirements and specification	13
6.2 Proposed Honeypots	13
6.3 Frameworks and technologies	13

7	Data Management	14
8	Data Analysis	15
9	Practical Work	16
9.1	Attack vectors	16
9.2	Concept	16
9.3	Implementation	16
9.4	Summary	16
10	Evaluation	17
10.1	Data Analyzation	17
10.2	Summary	17
11	Conclusion	18
11.1	Future work	18
	Bibliography	VI
	Appendices	VIII
A	Installation and Configuration	IX

Acronyms

CERT Computer Emergency Response Team

DaaS Data-as-a-Service

DTK Deception Toolkit

HaaS Hardware-as-a-Service

HTTP Hypertext Transfer Protocol

IaaS Infrastructure-as-a-Service

NIST National Institute of Standards and Technology

PaaS Platform-as-a-Service

SaaS Software-as-a-Service

List of Figures

2.1	Cloud functionalities (derived from [WvLY ⁺ 10])	4
2.2	Example of honeypots in a simplified network (derived from [Spi03]) .	8
2.3	Example of honeynets in a simplified network (derived from [Spi03]) .	9

List of Tables

2.1	Examples for cloud service models	5
2.2	Examples for cloud deployment models	5

1 Introduction

1.1 Problem description

1.2 Justification, motivation and benefits

1.3 Research questions

1.4 Limitations

2 Background

This chapter concludes the fundamental knowledge that is needed to comprehend the upcoming practical work. Firstly, an introduction to cloud computing will be held. Next, a thorough understanding of honeypots is given. Lastly, we introduce some concepts of intrusion detection systems.

2.1 Virtualization

2.1.1 Docker

2.2 Cloud Computing

Check cites

Nowadays it is one of the well-known keywords and has been used by vary large companies such as Google, or Amazon, however, the term “cloud computing” dates back to the late 1996, when a small group of technology executives of Compaq Computer framed new business ideas around the Internet.[Reg20] Starting from 2007 cloud computing evolved into a serious competitor and outnumbered the keywords “virtualization”, and “grid computing” reported by Google trends [WvLY⁺10]. Shortly, various cloud provider become publicly available, each with their own strengths and weaknesses. For example IBM’s Cloud¹, Amazon Web Services², and Google Cloud³. Why are clouds so attractive in practice?

- It offers major advantages in terms of cost and reliability. When demand is needed, consumers do not have to invest in hardware when launching new services. Pay-as-you-go allows flexibility.
- Consumer can easily scale with demand. When more computational resources are required due to more requests, scaling up instances in conjunction with a suited price model are straightforward.
- Geographically distributed capabilities supply the need for world-wide scattered services.

In this section, we want to give basic understandings of cloud computing. First, we exhibit the history and draw some motivation. Following, we look at some the definitions, and point out characteristics. Lastly, we give an short introduction to HeiCloud, a cloud service that is offered by Heidelberg University.

¹<https://www.ibm.com/cloud>

²<https://aws.amazon.com/>

³<https://cloud.google.com/>

2.2.1 Definition of Cloud Computing

Considering the definition of Brian Hayes, cloud computing is “a shift in the geography of computation” [Hay08]. Thus, computational workload is moved away from local instances towards services and datacenters that provide the need of users [AFG⁺10].

Considering the definition of the National Institute of Standards and Technology (NIST), cloud computing “is a model for enabling ubiquitous, convenient, on-demand network access to a shared pool of configurable computing resources (e.g., networks, servers, storage, applications, and services) that can be rapidly provisioned and released with minimal management effort or service provider interaction” [MG11]. NIST not only reflects the geographical shift of resources such as datacenters, but also mentions on-demand usage that contributes to a flexible resource management. Moreover, NIST composes the term in five essential characteristics, three service models (see subsection 2.2.2), and four deployment models (see subsection 2.2.3) [MG11]:

On-demand-self-service refers to the unilaterally provision computing capabilities. Consumers can acquire server time and network storage on demand without a human interaction.

Broad network access characterizes the access of capabilities of the network through standard protocols such as Hypertext Transfer Protocol (HTTP). Heterogeneous thin and thick client platforms should be supported.

Resource pooling allows the provider’s computing resources to be pooled across several consumers. A multi-tenant model with different physical and virtual resources are assigned on demand. Other aspects such as location are independent and cannot be controlled on a low-level by consumers. Moreover, high-level access to specify continent, state, or datacenter can be available.

Rapid elasticity offers consumers to extend and release capabilities easily. Further automization to quickly increase resources when demand skyrockets significantly can be supported regardless limit and quantity at any time.

Measured service handles resources in an automated and optimized manner. It uses additional metering capabilities to trace storage, processing, bandwidth, and active user accounts. This helps to monitor, and control resource usage. Thus, contributing to transparency between provider and consumer.

2.2.2 Service models

Service models are categorized by NIST into three basic models based on usage and abstraction level. Figure 2.1 shows the connection between each model whereas cloud resource are defined in subsection 2.2.3. Due to vast range of functionalities,

Fix image

Infrastructure-as-a-Service (IaaS) builds the foundation of service models. Each model on top represents a user-friendly abstraction with derated capabilities. Table 2.1 shows examples of such service models.

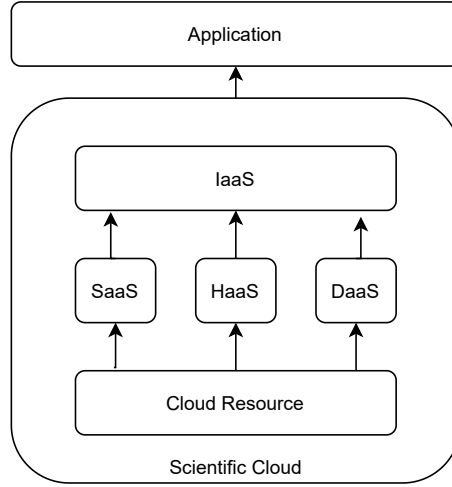


Figure 2.1: Cloud functionalities (derived from [WvLY⁺10])

Software-as-a-Service (SaaS) is a high-level abstraction to consumers. Controlling the underlying infrastructure is not supported. Often provider uses a multi-tenancy system architecture to organize each consumer’s application in a separate environment. It helps to employ scaling with respect to speed, security availability, disaster recovery, and maintenance. Main objective of SaaS is to host consumer’s software or application that can be accessed over the Internet using either a thin or rich client.[DWC10] “Limited user-specific application configuration settings” can be made [MG11].

Platform-as-a-Service (PaaS) pivots on the full “Software Lifecycle” of an application whereas SaaS distincts on hosting complete applications. PaaS offers ongoing development and includes programming environment, tools, configuration management, and other services. In addition, the underlying infrastructure is not managed by the consumer.

Infrastructure-as-a-Service (IaaS) offers a low-level abstraction to consumers with the ability to run arbitrary software regardless of operating system or application. In contrast to SaaS, IT infrastructures capabilities (such as storage, networks) can be used. It strongly depends on virtualization due to integration, or decomposition of physical resources.

Data-as-a-Service (DaaS) serves as a virtualized data storage service on demand. Motivations behind such services could be upfront costs of on-premise enterprise database systems.[DWC10] Mostly they require “dedicated server, software license,

post-delivery services, and in-house IT maintenance” [DWC10]. Whereas DaaS costs solely what consumer’s need. When dealing with a tremendous amount of data, file systems and RDBMS often lack in performance. DaaS outruns such weak links by employing a table-style abstraction that can be scaled.[DWC10]

Hardware-as-a-Service (HaaS) offers IT hardware, or datacenters to buy as a pay-as-you-go subscription service. The term dates back to 2006 during a time when hardware virtualization became more powerful. It is flexible, scalable and manageable.[WvLY⁺10]

Table 2.1: Examples for cloud service models

SaaS	PaaS	IaaS	Daas	HaaS
Google Mail	Google App Engine	HeiCloud	Adobe Buzzword	Amazon EC2
Google Docs	Windows Azure	Amazon EC2	ElasticDrive	Nimbus
Microsoft Drive	AWS Elastic Beanstalk		Google Big Table	Enomalism
			Amazon S3	Eucalyptus
			Apache HBase	

2.2.3 Deployment models

Deployment models are categorized by NIST into four basic models. Each differs in data privacy, location, and manageability [MG11]. Table 2.2 shows examples of such deployment models.

Table 2.2: Examples for cloud deployment models

Private Cloud	Community Cloud	Hybrid Cloud	Public Cloud
	Seafile		Amazon EC2
	Nextcloud		Google AppEngine

Private clouds offer the highest level of control in regard of data privacy, and utilization. Mostly, such clouds are deployed within in a single organization, either managed by in-house teams or third party suppliers. In addition, it can be on or off premise. Within private clouds consumers have full control of their data. Especially for European data privacy laws, it is not negligible when data is stored abroad and thus under law of foreign countries. However, the popularity has not been withdrawn due to immense costs when moving towards public clouds. [DWC10] [MG11]

Community clouds can be seen as a conglomerate of multiple organizations that merge their infrastructure with respect to a commonly defined policy, terms, and condition beforehand.

Public clouds represents the most used deployment models. In contradiction to private one, public clouds are fully owned by the service provider such as business, academics, or government organization. Consumers do not know where their data is distributed. In addition, contracts underlie custom policies.

Hybrid cloud is a mixture of two or more cloud infrastructures, such as private and public cloud. However, each entity keeps its core element. However, hybrid clouds defines “standardized or proprietary technology to enables data and application portability”[MG11].

2.2.4 HeiCloud

IaaS

Get information or paper about that

2.3 Honeypots

The term “honeypot” exists since more than a decade. 1997 was the first time that a free honeypot solution became public. Deception Toolkit (DTK), developed by Fred Cohen, released the first honeypot solution. However, the earliest drafts of honeypots are from 1990/91, and built the foundation for Fred Cohen’s DTK. Clifford Stoll’s book “The Cuckoo’s Egg”[Sto00], and Bill Cheswick’s whitepaper “An Evening With Berferd”[Che92] describe concepts that are consider nowadays as honeypots.[Spi03] A honeypot itself is a security instrument that collects information on buzzing attacks. It disguises itself as a system, or application with weaklinks, so that it gets exploited and gathers knowledge about the adversary. In 2002 a Solaris honeypot helped to detect an unknown dtspcd exploit. Interestingly, a year before in 2001 the Coordination Center of Computer Emergency Response Team (CERT), “an expert group that handles computer security incidents”, shared their concerns regarding the dtspcd. Communities were aware that the service could be exploited to get access and remotely compromise any Unix system. However, during this time such an exploit was not known, and experts did not expect any in the near future. Gladly, early instances based on honeypot technologies could detect new exploits and avoid further incidents. Such events lay emphasis on the importance of honeypots.

citation

2.3.1 Definition of a Honeypot

Dozen of definitions for honeypots circulate through the web that causes confusion, and misunderstandings. In general, the objective of a honeypot is to gather information about attacks, or attack patterns [NWS⁺16]. Thus, contributing as an additional source of security measure. See subsection 2.3.3 for a detailed view regarding honeypots in the security concept. As Spitzner et al. [Spi03] has listed, most misleading definitions are: honeypot is a tool for deception, it is a weapon to lure adversaries, or a part of an intrusion detection system. In order to get a basic understanding, we want to exhibit some of the key definitions. Spitzner et al. [Spi03] defines honeypots as a “security resource whose value lies in being probed, attacked, or compromised”. Independent of its source (e.g. server, application, or router), we expect that our instance is getting probed, attacked, and eventually exploited. If a honeypot does not match this behaviour, it will not provide any value. It is important to mention that honeypots do not have any production value, thus, any communication that is acquired is suspicious by nature [Spi03]. In addition, Spitzner et al. points out that honeypots are not bounded to solve a single problem, hence, they function as a generic perimeter, and fit into different situation. Such functions are attack detection,

Basically we differentiate two types of honeypots:

- Production honeypots
- Research honeypots

Production honeypots are

Research honeypots

Provos et al. [Pro03]

- physical honeypots
- virtual honeypots

physical honeypots

Virtual honeypots

In addition, we distinguish honeypots based on their level of interaction (see subsection 2.3.2):

1. Low-interaction honeypots
2. Medium-interaction honeypots
3. High-interaction honeypots

2.3.2 Classification of Honeypots

Honeypots

Low-interaction honeypots

Medium-interaction honeypots

High-interaction honeypots

Pure honeypots

2.3.3 Security concepts

1. Prevention
2. Detection
3. Reaction

[NWS⁺16]

Check honeypots in terms of security concepts

2.3.4 Value of Honeypots

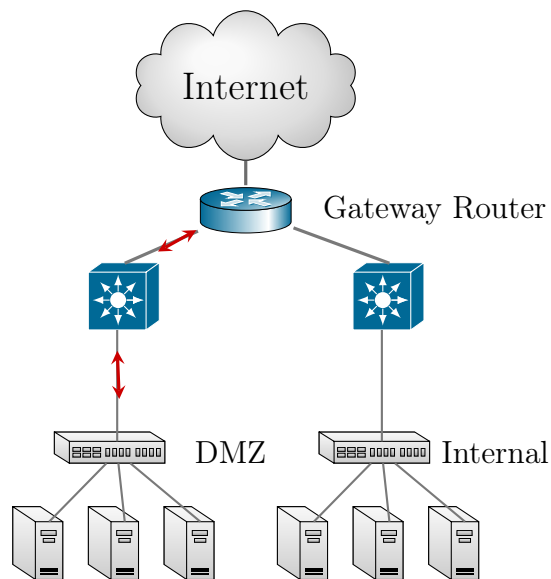


Figure 2.2: Example of honeypots in a simplified network (derived from [Spi03])

2.3.5 Honeynets

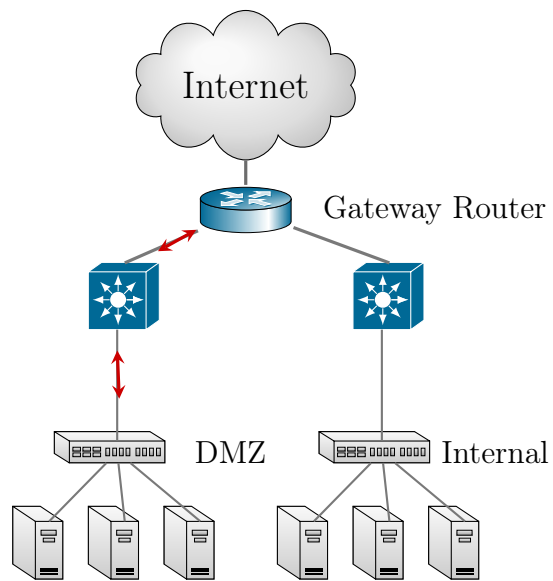


Figure 2.3: Example of honeynets in a simplified network (derived from [Spi03])

[Spi03]

2.3.6 Legal Issues

[Spi03]

2.4 Summary

3 Previous Work

3.1 The Bait'n'Switch Honeypot

[PD05]

3.2 Intrusion Trap System

[PD05]

3.3 Honeycomb

[PD05]

3.4 Honeypots in a cloud environment

[KPM⁺21]

3.5 T-Pot

3.6 Summary

4 Cloud Security with Honeypots

[NCM12]
[KPM⁺21]

4.1 Summary

5 Concept

5.1 Introduction

5.2 Summary

6 Methods Used

6.1 Requirements and specification

6.2 Proposed Honeypots

6.2.1 Cowire

6.2.2 Dionaea

6.2.3 Honeyd

6.3 Frameworks and technologies

6.3.1 HoneyTrap

7 Data Management

8 Data Analysis

9 Practical Work

9.1 Attack vectors

9.1.1 Primer

9.2 Concept

9.3 Implementation

9.4 Summary

10 Evaluation

10.1 Data Analyzation

10.2 Summary

11 Conclusion

11.1 Future work

Bibliography

- [AFG⁺10] Michael Armbrust, Armando Fox, Rean Griffith, Anthony D. Joseph, Randy Katz, Andy Konwinski, Gunho Lee, David Patterson, Ariel Rabkin, Ion Stoica, and Matei Zaharia. A view of cloud computing. *Communications of the ACM*, 53(4):50–58, April 2010.
- [Che92] Bill Cheswick. An evening with berferd in which a cracker is lured, endured, and studied. In *In Proc. Winter USENIX Conference*, pages 163–174, 1992.
- [DWC10] Tharam Dillon, Chen Wu, and Elizabeth Chang. Cloud computing: Issues and challenges. In *2010 24th IEEE International Conference on Advanced Information Networking and Applications*. IEEE, 2010.
- [Hay08] Brian Hayes. Cloud computing, 2008.
- [KPM⁺21] Christopher Kelly, Nikolaos Pitropakis, Alexios Mylonas, Sean McKeown, and William J. Buchanan. A comparative analysis of honeypots on different cloud platforms. *Sensors*, 21(7):2433, April 2021.
- [MG11] P M Mell and T Grance. The NIST definition of cloud computing. Technical report, National Institute of Standards and Technology, 2011.
- [NCM12] SR Nithin Chandra and TM Madhuri. Cloud security using honeypot systems. *International Journal of Scientific & Engineering Research*, 3(3):1, 2012.
- [NWS⁺16] Marcin Nawrocki, Matthias Wählich, Thomas C. Schmidt, Christian Keil, and Jochen Schönfelder. A survey on honeypot software and data analysis. *CoRR*, abs/1608.06249, 2016.
- [PD05] G. Schaefer P. Diebold, A. Hess. A honeypot architecture for detecting and analyzing unknown network attacks, Feburary 2005.
- [Pro03] Niels Provos. Honeyd: A virtual honeypot daemon (extended abstract). 01 2003.
- [Reg20] Antonio Regalado. Who coined 'cloud computing'?, Feb 2020.
- [Spi03] Lance Spitzner. *Honeypots - Tracking Hackers*. Addison-Wesley, Amsterdam, 2003.

- [Sto00] Clifford Stoll. *The Cuckoo's Egg: Tracking a Spy through the Maze of Computer Espionage*. Pocket Books, 2000.
- [WvLY⁺10] Lizhe Wang, Gregor von Laszewski, Andrew Younge, Xi He, Marcel Kunze, Jie Tao, and Cheng Fu. Cloud computing: a perspective study. *New Generation Computing*, 28(2):137–146, April 2010.

Appendices

A Installation and Configuration